

## SERVICE MANUAL

## AZ2-TK CHASSIS

<u>MODEL</u>	<u>COMMANDER</u>	<u>DESTINATION</u>	<b>LEVEL 3 CONFIDENTIAL</b>
<b>KDL-22BX325</b>	RM-YD066	CHILE	
<b>KDL-22BX325</b>	RM-YD066	VENEZUELA	
<b>KDL-32BX325</b>	RM-YD066	CHILE	
<b>KDL-32BX325</b>	RM-YD066	VENEZUELA	
<b>KDL-32BX326</b>	RM-YD066	CHILE	
<b>KDL-32BX326</b>	RM-YD066	VENEZUELA	
<b>KDL-32BX425</b>	RM-YD066	CHILE	
<b>KDL-40BX425</b>	RM-YD066	CHILE	
<b>KDL-40BX425</b>	RM-YD066	VENEZUELA	

**CONFIDENTIAL**  
**ELECTRICAL SERVICE MANUAL**  
**INTERNAL ONLY**

**ORIGINAL MANUAL ISSUE DATE: 3/2011**

## REVISION DATE

## SUBJECT

3/15/2011  
5/3/2011

No revisions or updates are applicable at this time.  
H1 and H2 Board PN's corrected. Replaced Page 45.

## TABLE OF CONTENTS

SECTION TITLE	PAGE
Safety-Related Component Warning .....	3
Safety Check-Out .....	5
<b>SECTION 1: DIAGRAMS.....</b>	<b>6</b>
1-1. Circuit Boards Location .....	6
1-2. Printed Wiring Boards and Schematic Diagrams Information .....	7
1-3. Block Diagram .....	9
1-4. Connector Diagrams .....	10
1-5. Schematics and Supporting Information .....	14
A Board Schematic Diagram (1 of 18) .....	14
A Board Schematic Diagram (2 of 18) .....	15
A Board Schematic Diagram (3 of 18) .....	16
A Board Schematic Diagram (4 of 18) .....	17
A Board Schematic Diagram (5 of 18) .....	18
A Board Schematic Diagram (6 of 18) .....	19
A Board Schematic Diagram (7 of 18) .....	20
A Board Schematic Diagram (8 of 18) .....	21
A Board Schematic Diagram (9 of 18) .....	22
A Board Schematic Diagram (10 of 18) .....	23
A Board Schematic Diagram (11 of 18) .....	24
A Board Schematic Diagram (12 of 18) .....	25
A Board Schematic Diagram (13 of 18) .....	26
A Board Schematic Diagram (14 of 18) .....	27
A Board Schematic Diagram (15 of 18) .....	28
A Board Schematic Diagram (16 of 18) .....	29
A Board Schematic Diagram (17 of 18) .....	30
A Board Schematic Diagram (18 of 18) .....	31
LIPS22 Board Schematic Diagram (KDL-22BX325 Only) .....	33
GT32 Board Schematic Diagram (KDL-32BX325/32BX326/32BX425 Only) (Page 1 of 2) .....	35
GT32 Board Schematic Diagram (KDL-32BX325/32BX326/32BX425 Only) (Page 2 of 2) .....	36
GT40 Board Schematic Diagram (KDL-40BX425 Only) (Page 1 of 2) .....	38
GT40 Board Schematic Diagram (KDL-40BX425 Only) (Page 2 of 2) .....	39
H1 Board Schematic Diagram .....	41
H2 Board Schematic Diagram .....	43
<b>SECTION 2: ELECTRICAL PARTS LIST .....</b>	<b>45</b>
<b>APPENDIX A: ENCRYPTION KEY COMPONENTS .....</b>	<b>A-1</b>

## SAFETY-RELATED COMPONENT WARNING

There are critical components used in LCD color TVs that are important for safety. These components are identified with shading and  $\triangle$  mark on the schematic diagrams and the electrical parts list. It is essential that these critical parts be replaced only with the part number specified in the electrical parts list to prevent electric shock, fire, or other hazard.

NOTE: Do not modify the original design without obtaining written permission from the manufacturer or you will void the original parts and labor guarantee.

### USE CAUTION WHEN HANDLING THE LCD PANEL


**When repairing the LCD panel, be sure you are grounded by using a wrist band.**

When installing the LCD panel on a wall, the LCD panel must be secured using the 4 mounting holes on the rear cover.


#### To avoid damaging the LCD panel:

- do not press on the panel or frame edge to avoid the risk of electric shock.
- do not scratch or press on the panel with any sharp objects.
- do not leave the module in high temperatures or in areas of high humidity for an extended period of time.
- do not expose the LCD panel to direct sunlight.
- avoid contact with water. It may cause a short circuit within the module.
- disconnect the AC adapter when replacing the backlight (CCFL) or inverter circuit.  
(High voltage occurs at the inverter circuit at 650Vrms.)
- always clean the LCD panel with a soft cloth material.
- use care when handling the wires or connectors of the inverter circuit. Damaging the wires may cause a short.
- protect the panel from ESD to avoid damaging the electronic circuit (C-MOS).

### LEAKAGE CURRENT HOT CHECK CIRCUIT

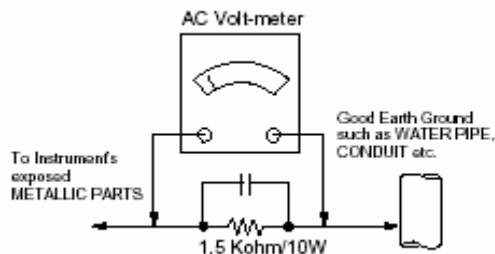

The circuit boards used in these models have been processed using Lead Free Solder. The boards are identified by the LF logo located close to the board designation e.g. H1 etc [ see example ]. The servicing of these boards requires special precautions to be taken as outlined below.

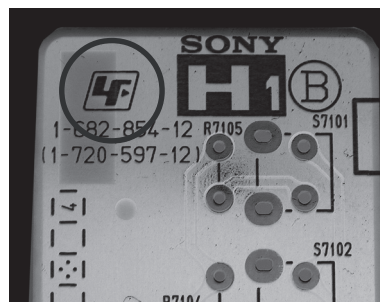

example

It is strongly recommended to use Lead Free Solder material in order to guarantee optimal quality of new solder joints. Lead Free Solder is available under the following part numbers :

Part number	Diameter	Remarks
7-640-005-19	0.3mm	0.25Kg
7-640-005-20	0.4mm	0.50Kg
7-640-005-21	0.5mm	0.50Kg
7-640-005-22	0.6mm	0.25Kg
7-640-005-23	0.8mm	1.00Kg
7-640-005-24	1.0mm	1.00Kg
7-640-005-25	1.2mm	1.00Kg
7-640-005-26	1.6mm	1.00Kg

Due to the higher melting point of Lead Free Solder the soldering iron tip temperature needs to be set to 370 degrees centigrade. This requires soldering equipment capable of accurate temperature control coupled with a good heat recovery characteristics.

## SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are "pinched" or touching high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC leakage. Check leakage as described below.

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microamperes). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instructions.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low voltage scale. The Simpson's 250 and Sanwa SH-63TRD are examples of passive VOMs that are suitable. Nearly all battery-operated digital multimeters that have a 2 VAC range are suitable (see Figure A).

### How to Find a Good Earth Ground

A cold-water pipe is a guaranteed earth ground; the cover-plate retaining screw on most AC outlet boxes is also at earth ground. If the retaining screw is to be used as your earth ground, verify that it is at ground by measuring the resistance between it and a cold-water pipe with an ohmmeter. The reading should be zero ohms.

If a cold-water pipe is not accessible, connect a 60- to 100-watt trouble- light (not a neon lamp) between the hot side of the receptacle and the retaining screw. Try both slots, if necessary, to locate the hot side on the line; the lamp should light at normal brilliance if the screw is at ground potential (see Figure B).

### Leakage Test

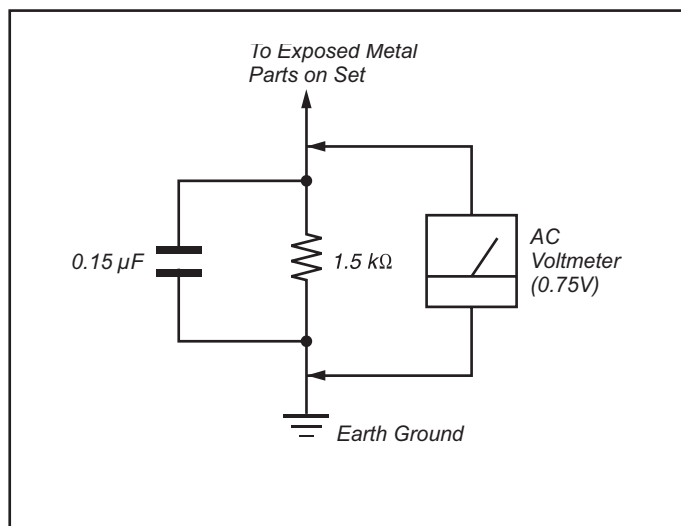


Figure A. Using an AC voltmeter to check AC leakage.

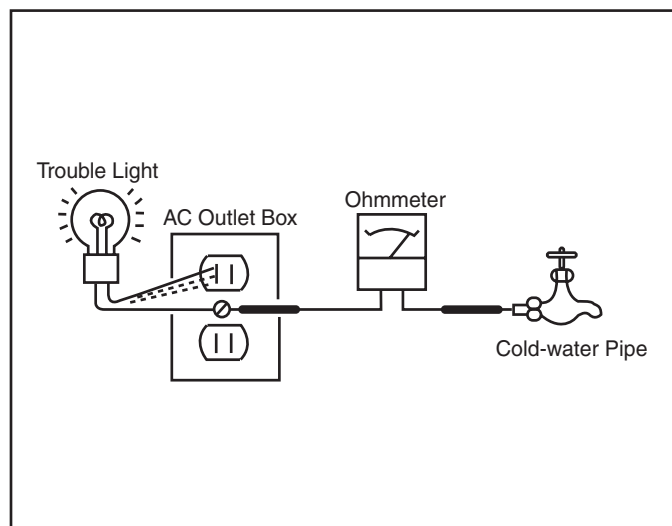


Figure B. Checking for earth ground.

## SECTION 1: DIAGRAMS

### 1-1. CIRCUIT BOARDS LOCATION

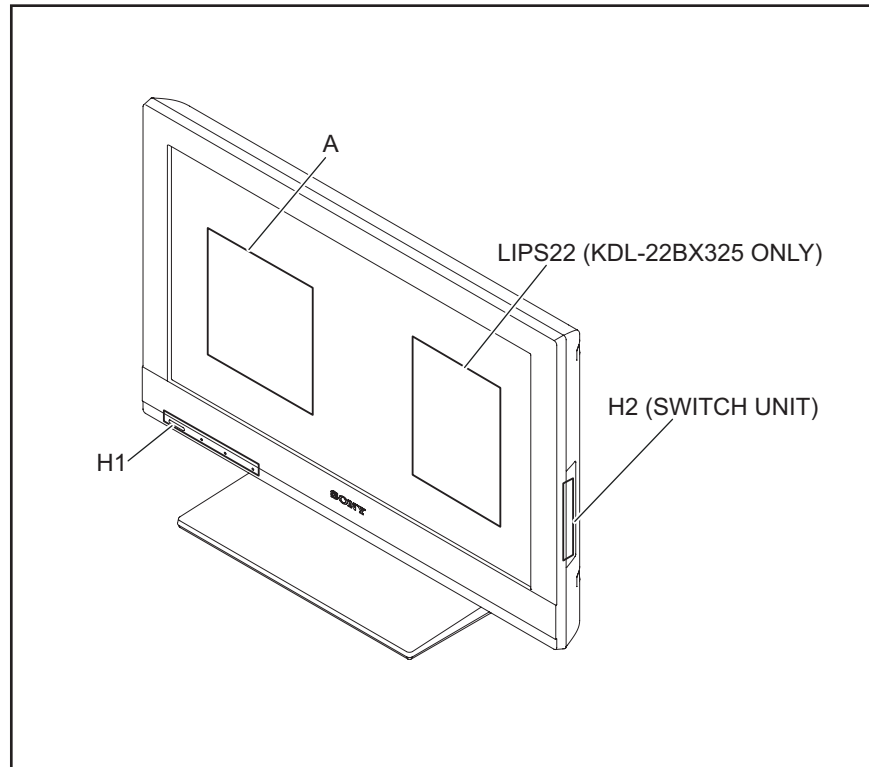


Figure 1-1. KDL-22BX325

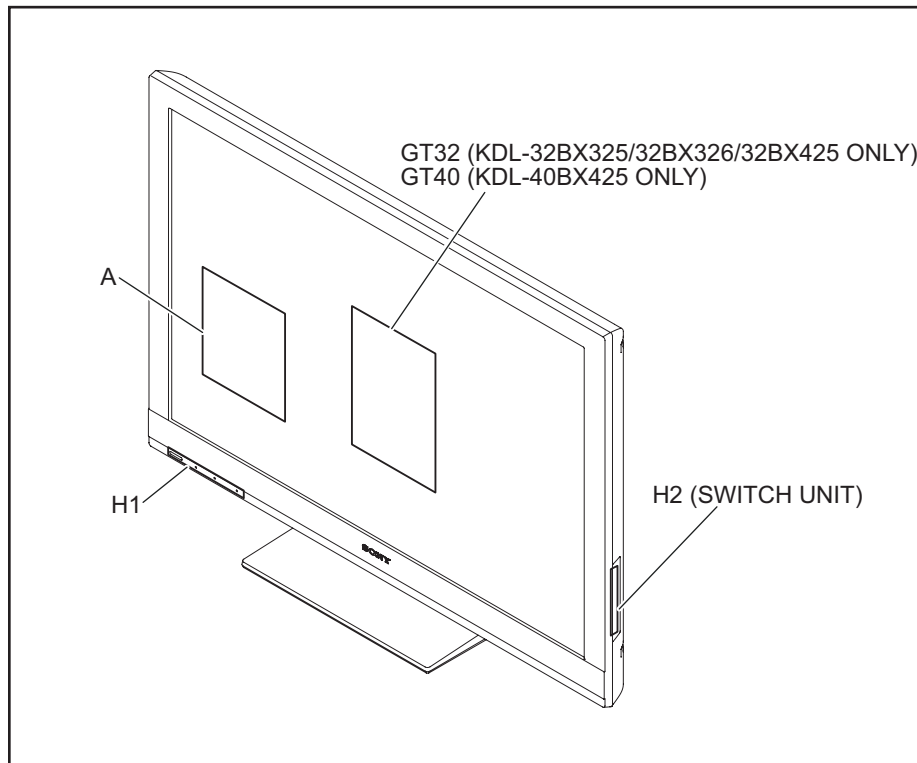


Figure 1-2. KDL-32BX325/32BX326/32BX425/40BX425

## 1-2. PRINTED WIRING BOARDS AND SCHEMATIC DIAGRAMS INFORMATION

All capacitors are in  $\mu\text{F}$  unless otherwise noted.  $\text{pF}$  :  $\mu\text{F}$  50WV or less are not indicated except for electrolytics and tantalums.

All electrolytics are in 50V unless otherwise specified.

All resistors are in ohms.  $\text{k}\Omega=1000\Omega$ ,  $\text{M}\Omega=1000\text{k}\Omega$

Indication of resistance, which does not have one for rating electrical power, is as follows: Pitch : 5mm

Rating electrical power :  $\frac{1}{4}$  W

$\frac{1}{4}$  W in resistance,  $\frac{1}{10}$  W and  $\frac{1}{16}$  W in chip resistance.

 : nonflammable resistor

 : fusible resistor

$\triangle$  : internal component

 : panel designation and adjustment for repair

$\perp$  : earth ground

$\uparrow\uparrow$  : earth-chassis

All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

Readings are taken with a color-bar signal input.

Readings are taken with a  $10\text{M}\Omega$  digital multimeter.

Voltages are DC with respect to ground unless otherwise noted.

Voltage variations may be noted due to normal production tolerances.

All voltages are in V.

S : Measurement impossibility.


 : B+line.


 : B-line. (Actual measured value may be different).

 : signal path. (RF)

Circled numbers are waveform references.

The components identified by shading and  $\triangle$  symbol are critical for safety. Replace only with part number specified.

The symbol  indicates a fast operating fuse and is displayed on the component side of the board. Replace only with fuse of the same rating as marked.

**NOTE:** The components identified by a red outline and a  mark contain confidential information. Specific instructions must be adhered to whenever these components are repaired and/or replaced.  
See Appendix A: Encryption Key Components in the back of this manual.

## REFERENCE INFORMATION

## RESISTOR

: RN METAL FILM

: RC SOLID

: FPRD NONFLAMMABLE CARBON

: FUSE NONFLAMMABLE FUSIBLE

: RW NONFLAMMABLE WIREWOUND

: RS NONFLAMMABLE METAL OXIDE

: RB NONFLAMMABLE CEMENT

: ※ ADJUSTMENT RESISTOR

## CAPACITOR

: TA TANTALUM

: PS STYROL

: PP POLYPROPYLENE

: PT MYLAR

: MPS METALIZED POLYESTER

: MPP METALIZED POLYPROPYLENE

: ALB BIPOLAR

: ALT HIGH TEMPERATURE

: ALR HIGH RIPPLE

## COIL

: LF-8L MICRO INDUCTOR

Terminal name of semiconductors in silk screen  
printed circuit (※)


	Device	Printed symbol	Terminal name	Circuit
1	Transistor		Collector Base Emitter	
2	Transistor		Collector Base Emitter	
3	Diode		Cathode Anode	
4	Diode		Cathode Anode (NC)	
5	Diode		Cathode Anode (NC)	
6	Diode		Common Anode Cathode	
7	Diode		Common Anode Cathode	
8	Diode		Common Anode Anode	
9	Diode		Common Anode Anode	
10	Diode		Common Cathode Cathode	
11	Diode		Common Cathode Cathode	
12	Diode		Anode Cathode Anode Anode	
13	Transistor (FET)		Drain Source Gate	
14	Transistor (FET)		Drain Source Gate	
15	Transistor (FET)		Source Drain Gate	
16	Transistor		Emitter Collector Base	
17	Transistor		C2(B1)E1 E2(B2)C1	
18	Transistor		C1(B2)E2 E1(B1)C2	
19	Transistor		C1 B2 E2 E1 B1 C2	
20	Transistor		C1 B2 E2 E1 B1 C2	
21	Transistor		E2 B1 E1 C2 C1(B2)	
22	Transistor		(B2) B1 E1 E2 C1 C2	
23	Transistor		(B2) E2 E1 B1 C2 C1	
—	Discrete semiconductor			

(Chip semiconductors that are not actually used are included.)

Ver.1.6



## 1-3. BLOCK DIAGRAM

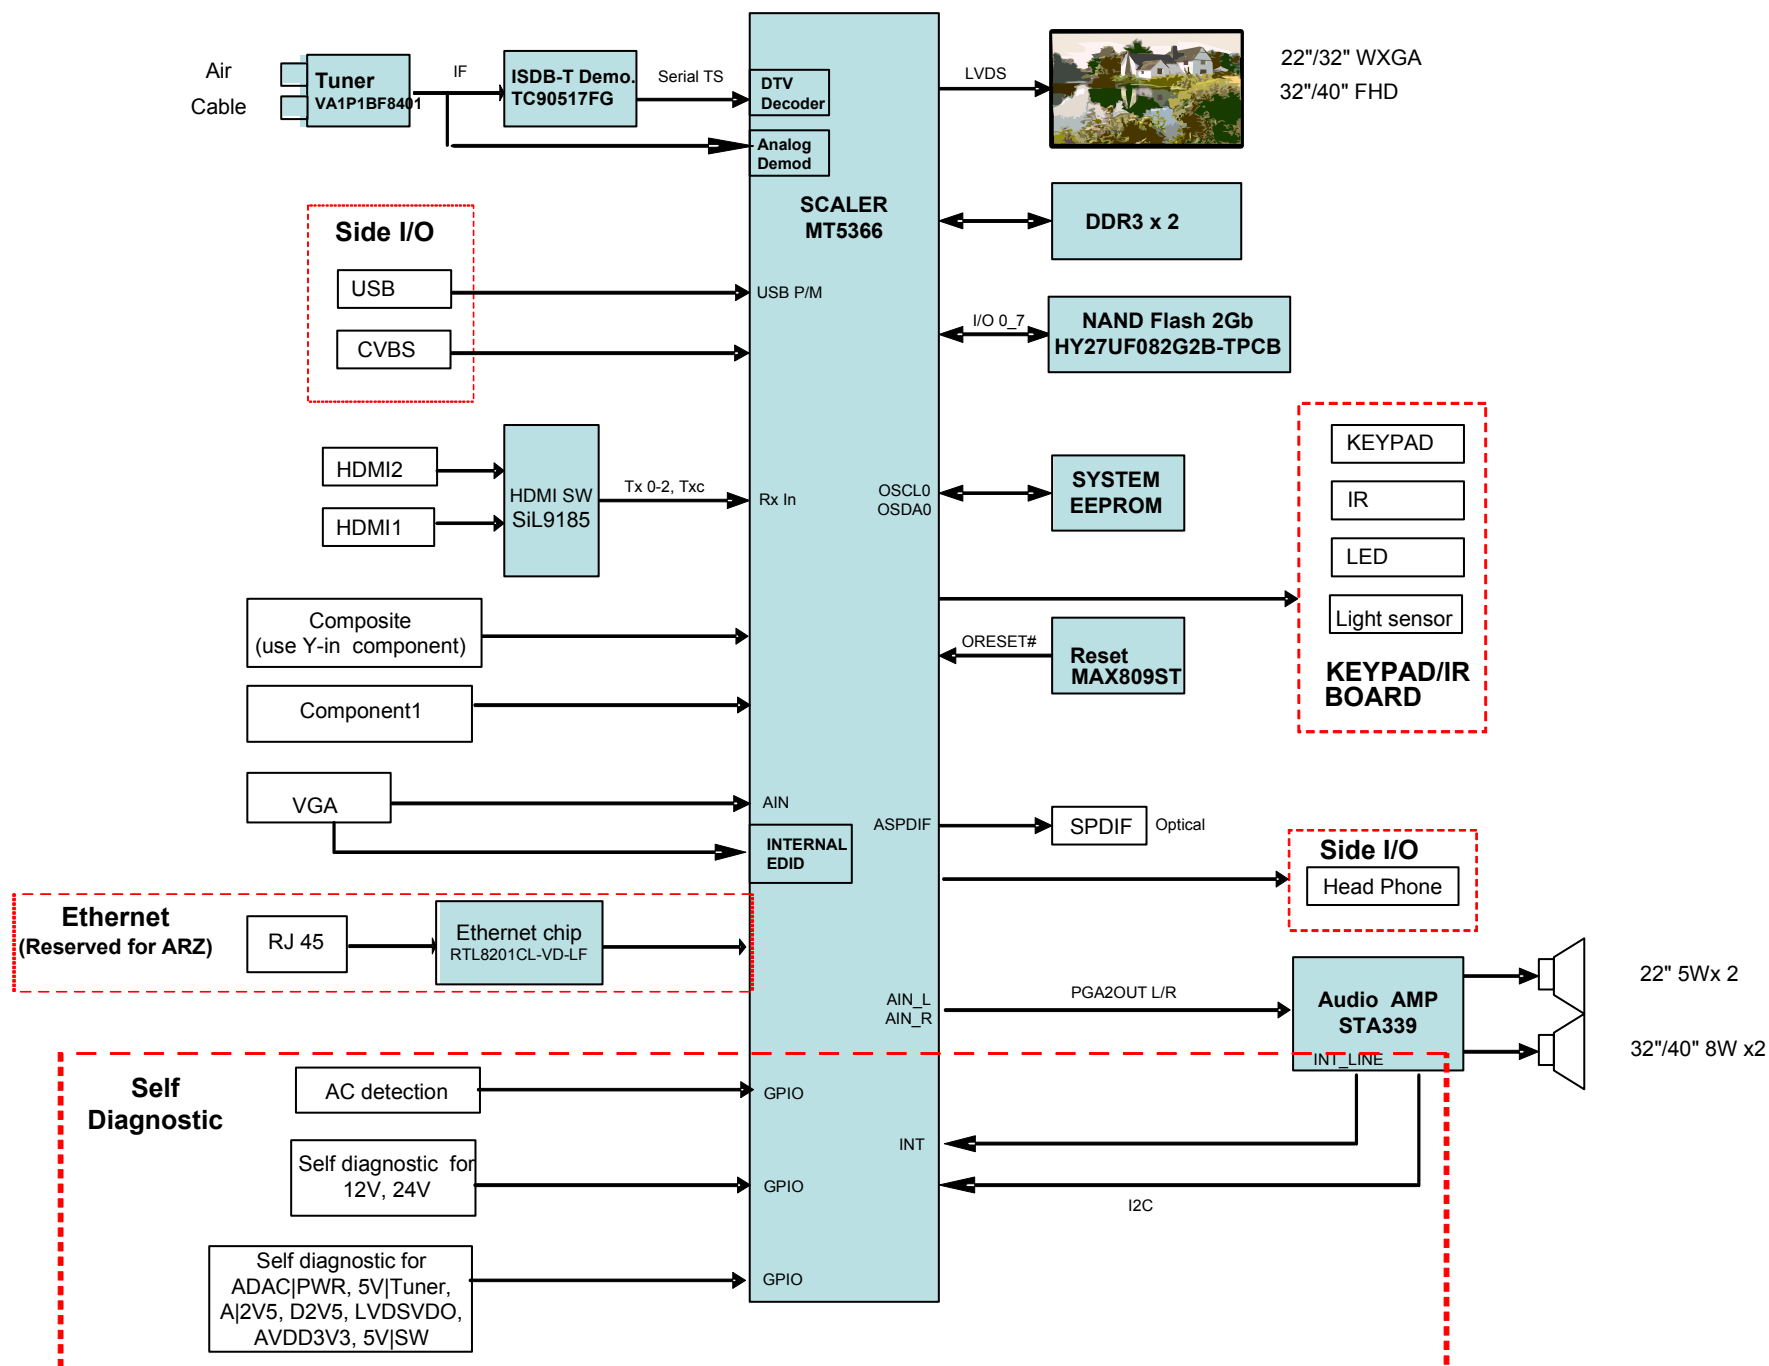

## 1-4. CONNECTOR DIAGRAMS

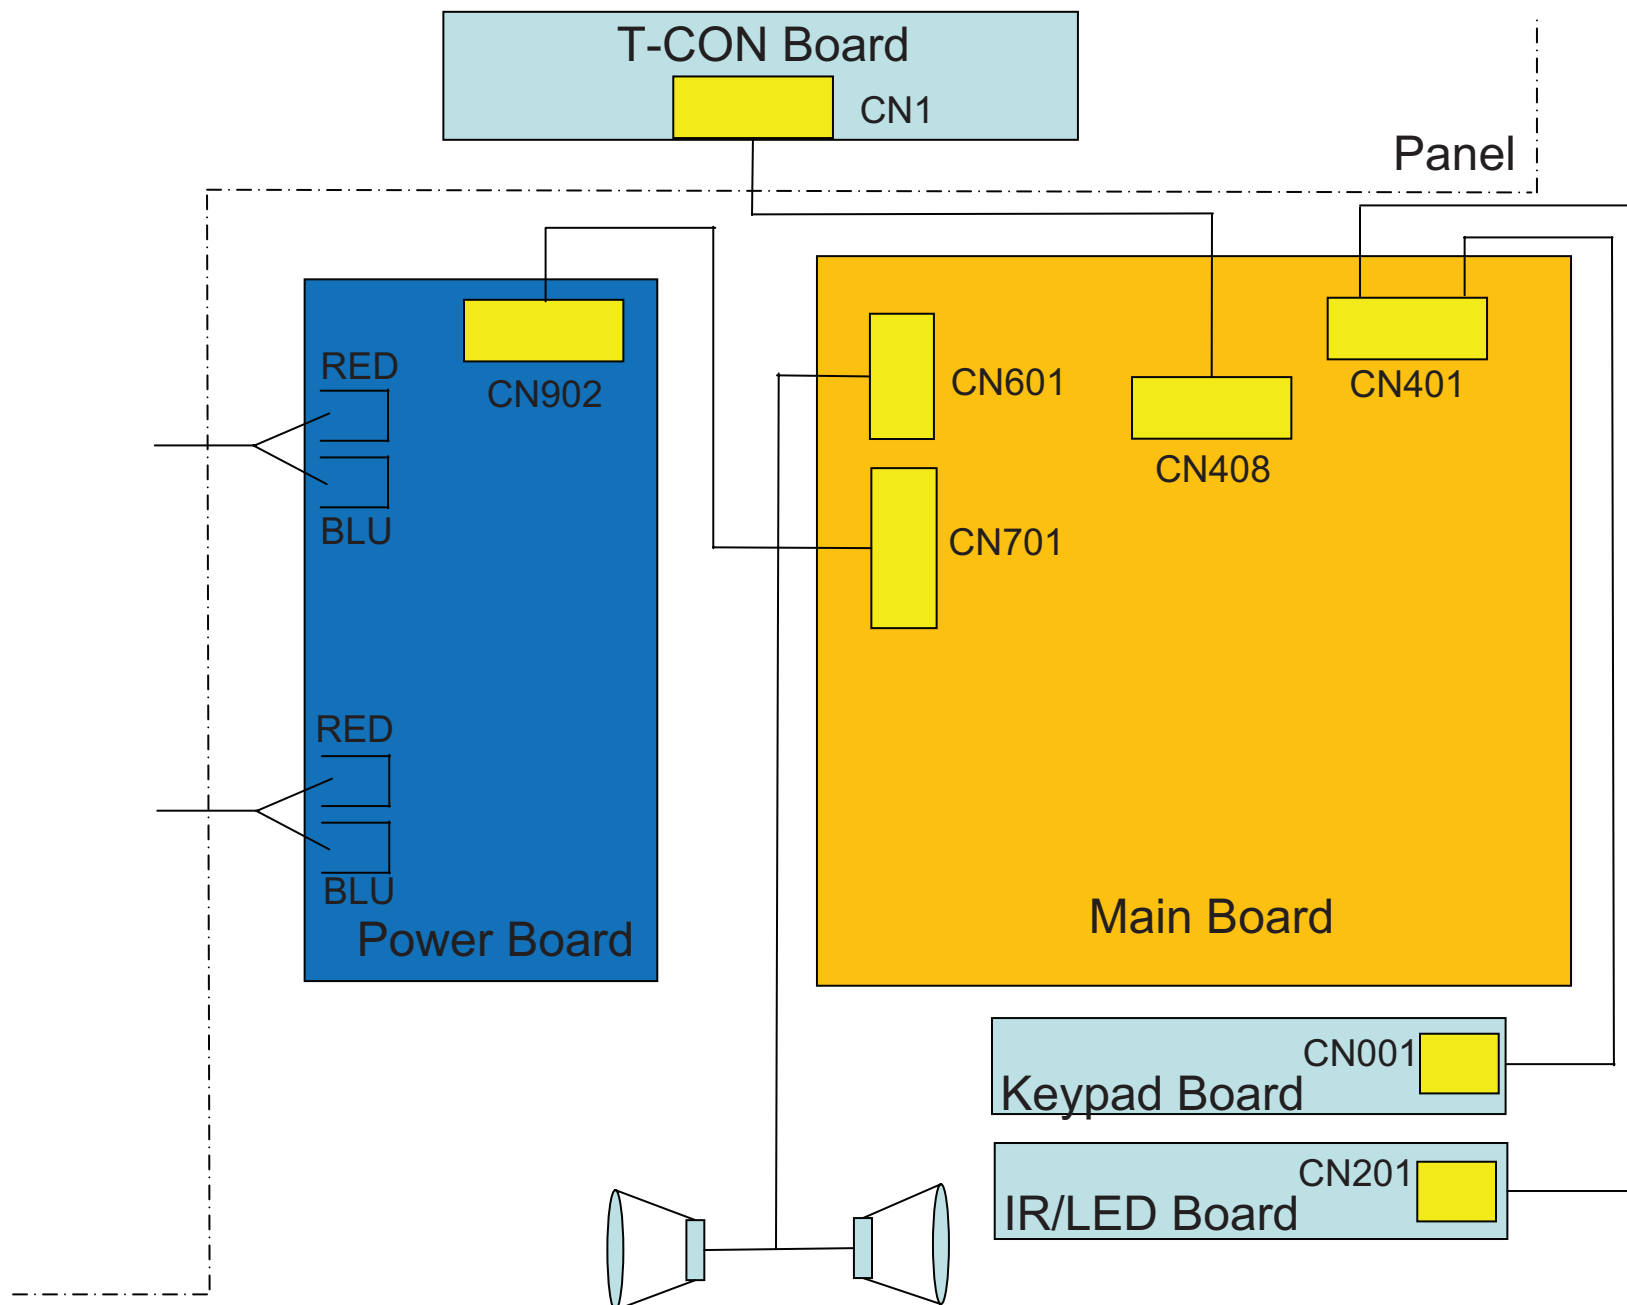


Figure 4-1. KDL-22BX325

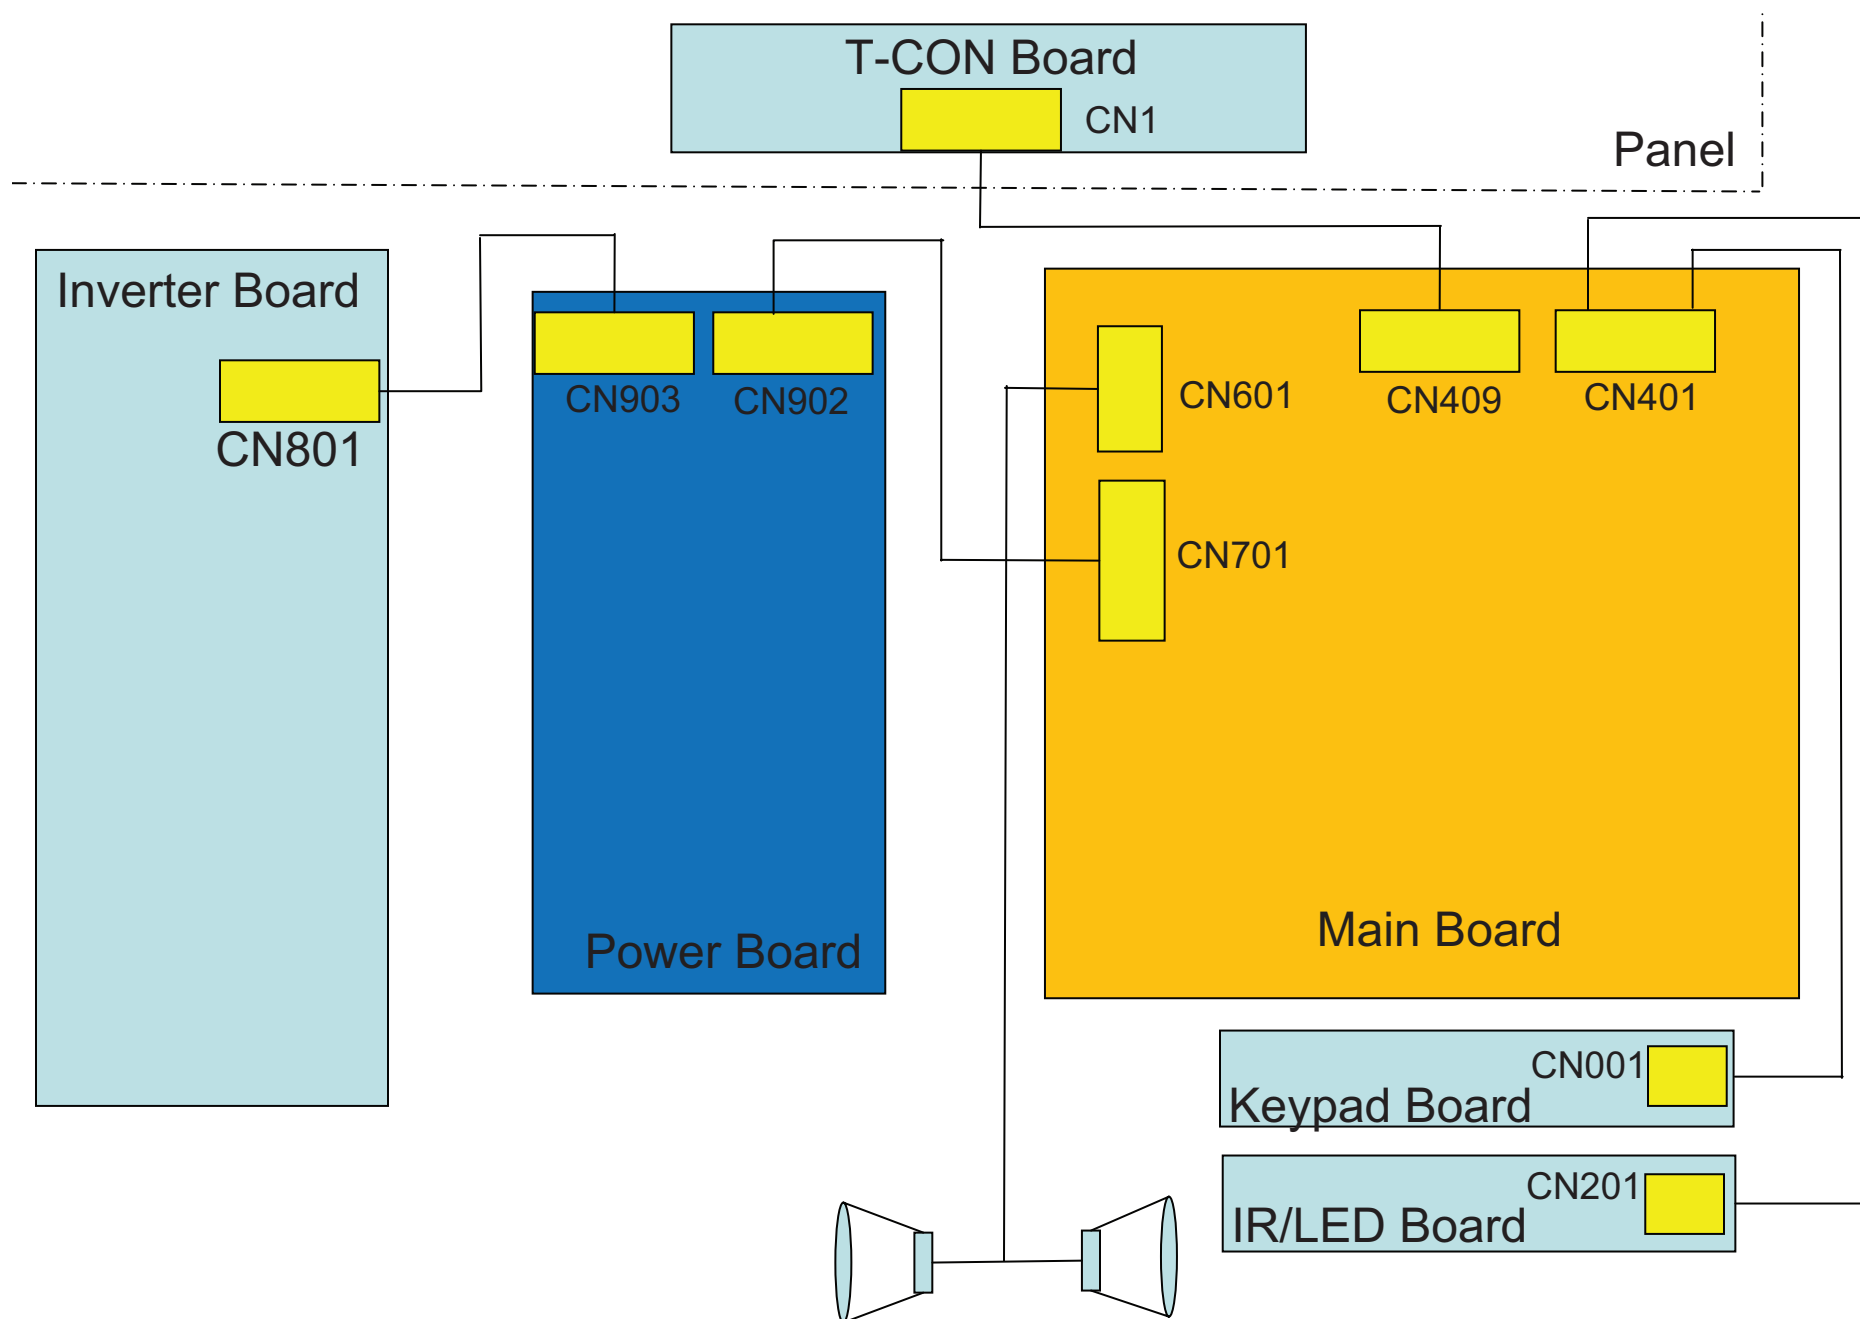


Figure 4-2. KDL-32BX325/32BX326

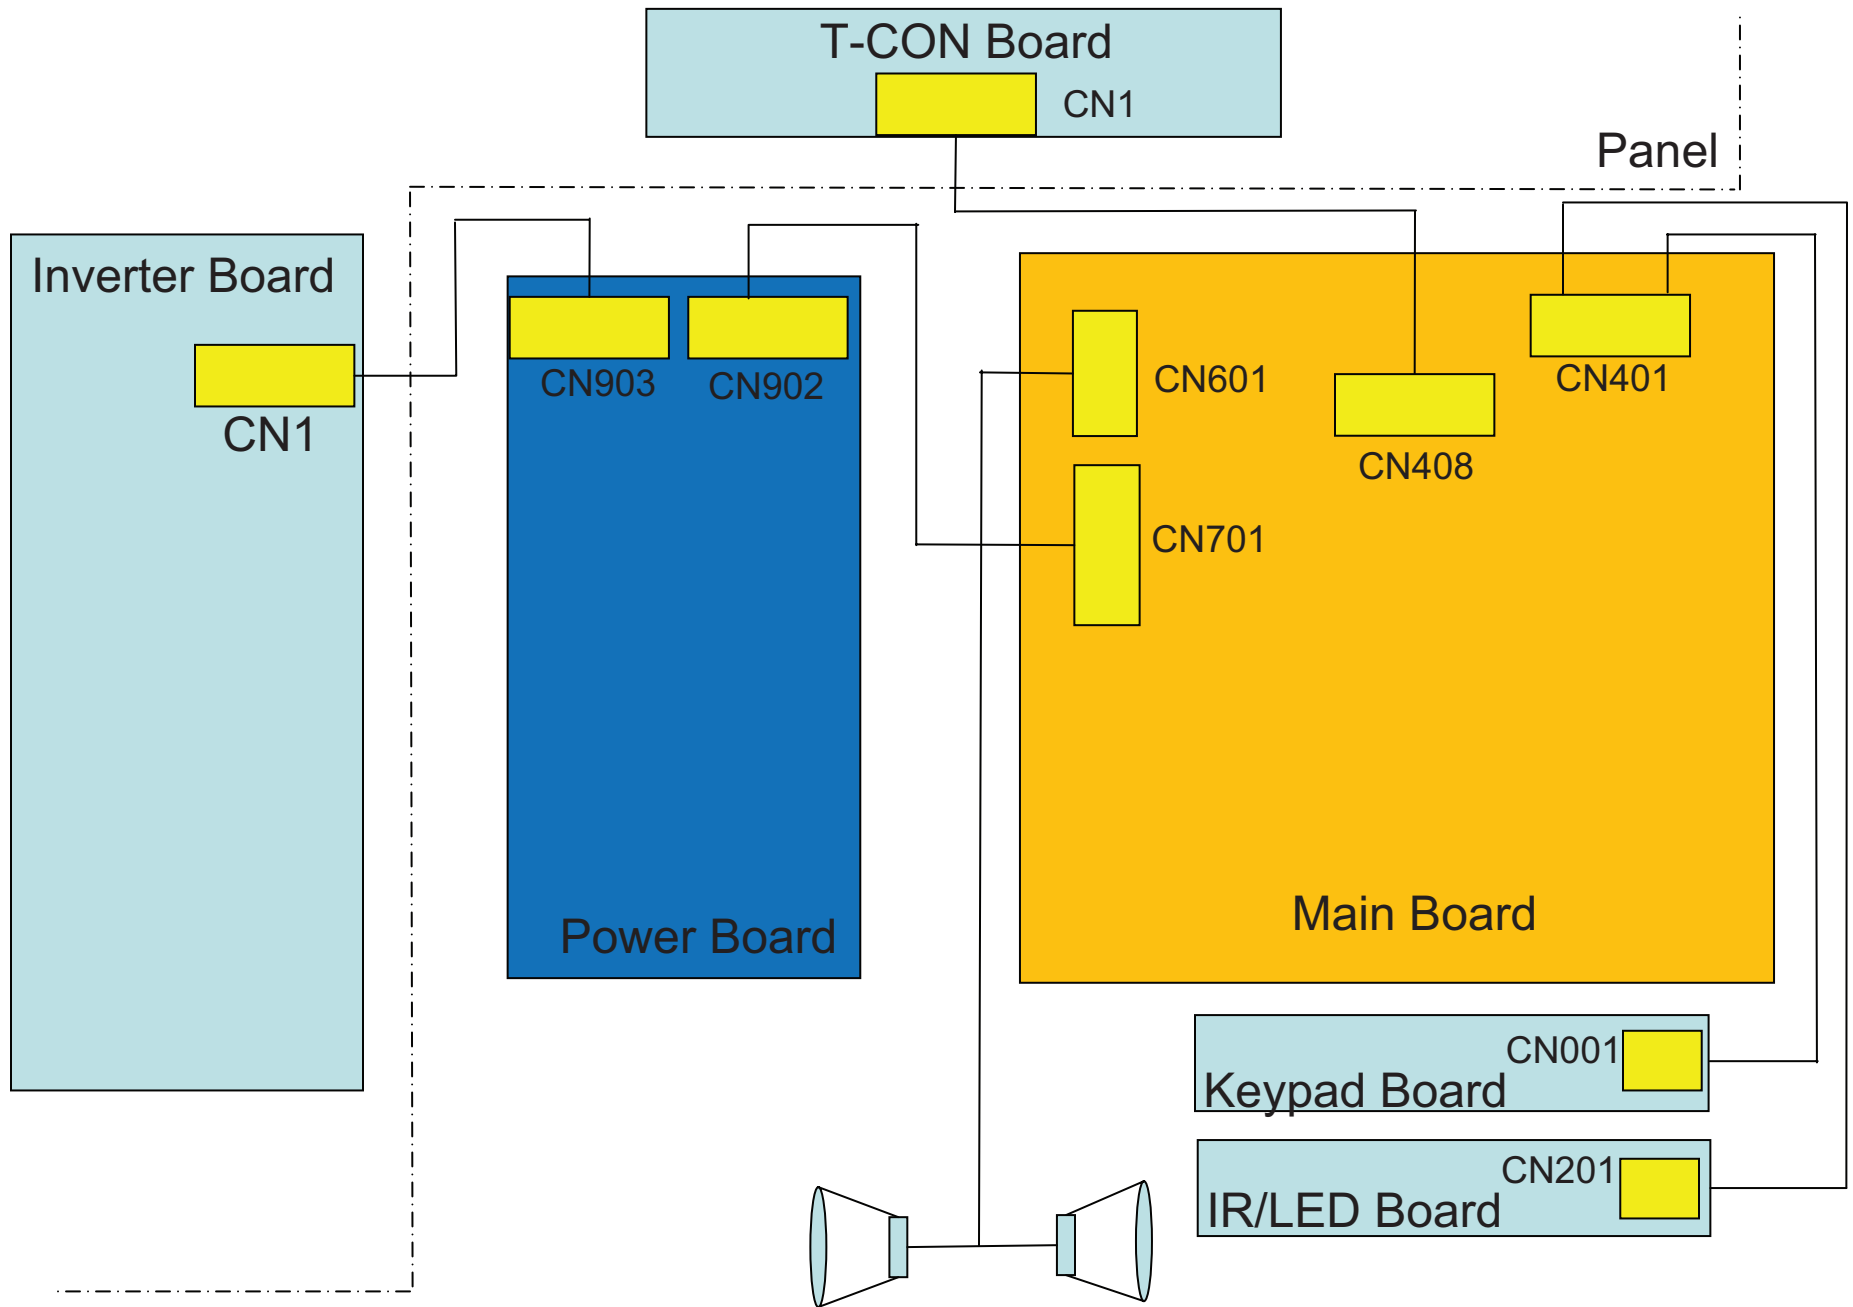


Figure 4-3. KDL-32BX425



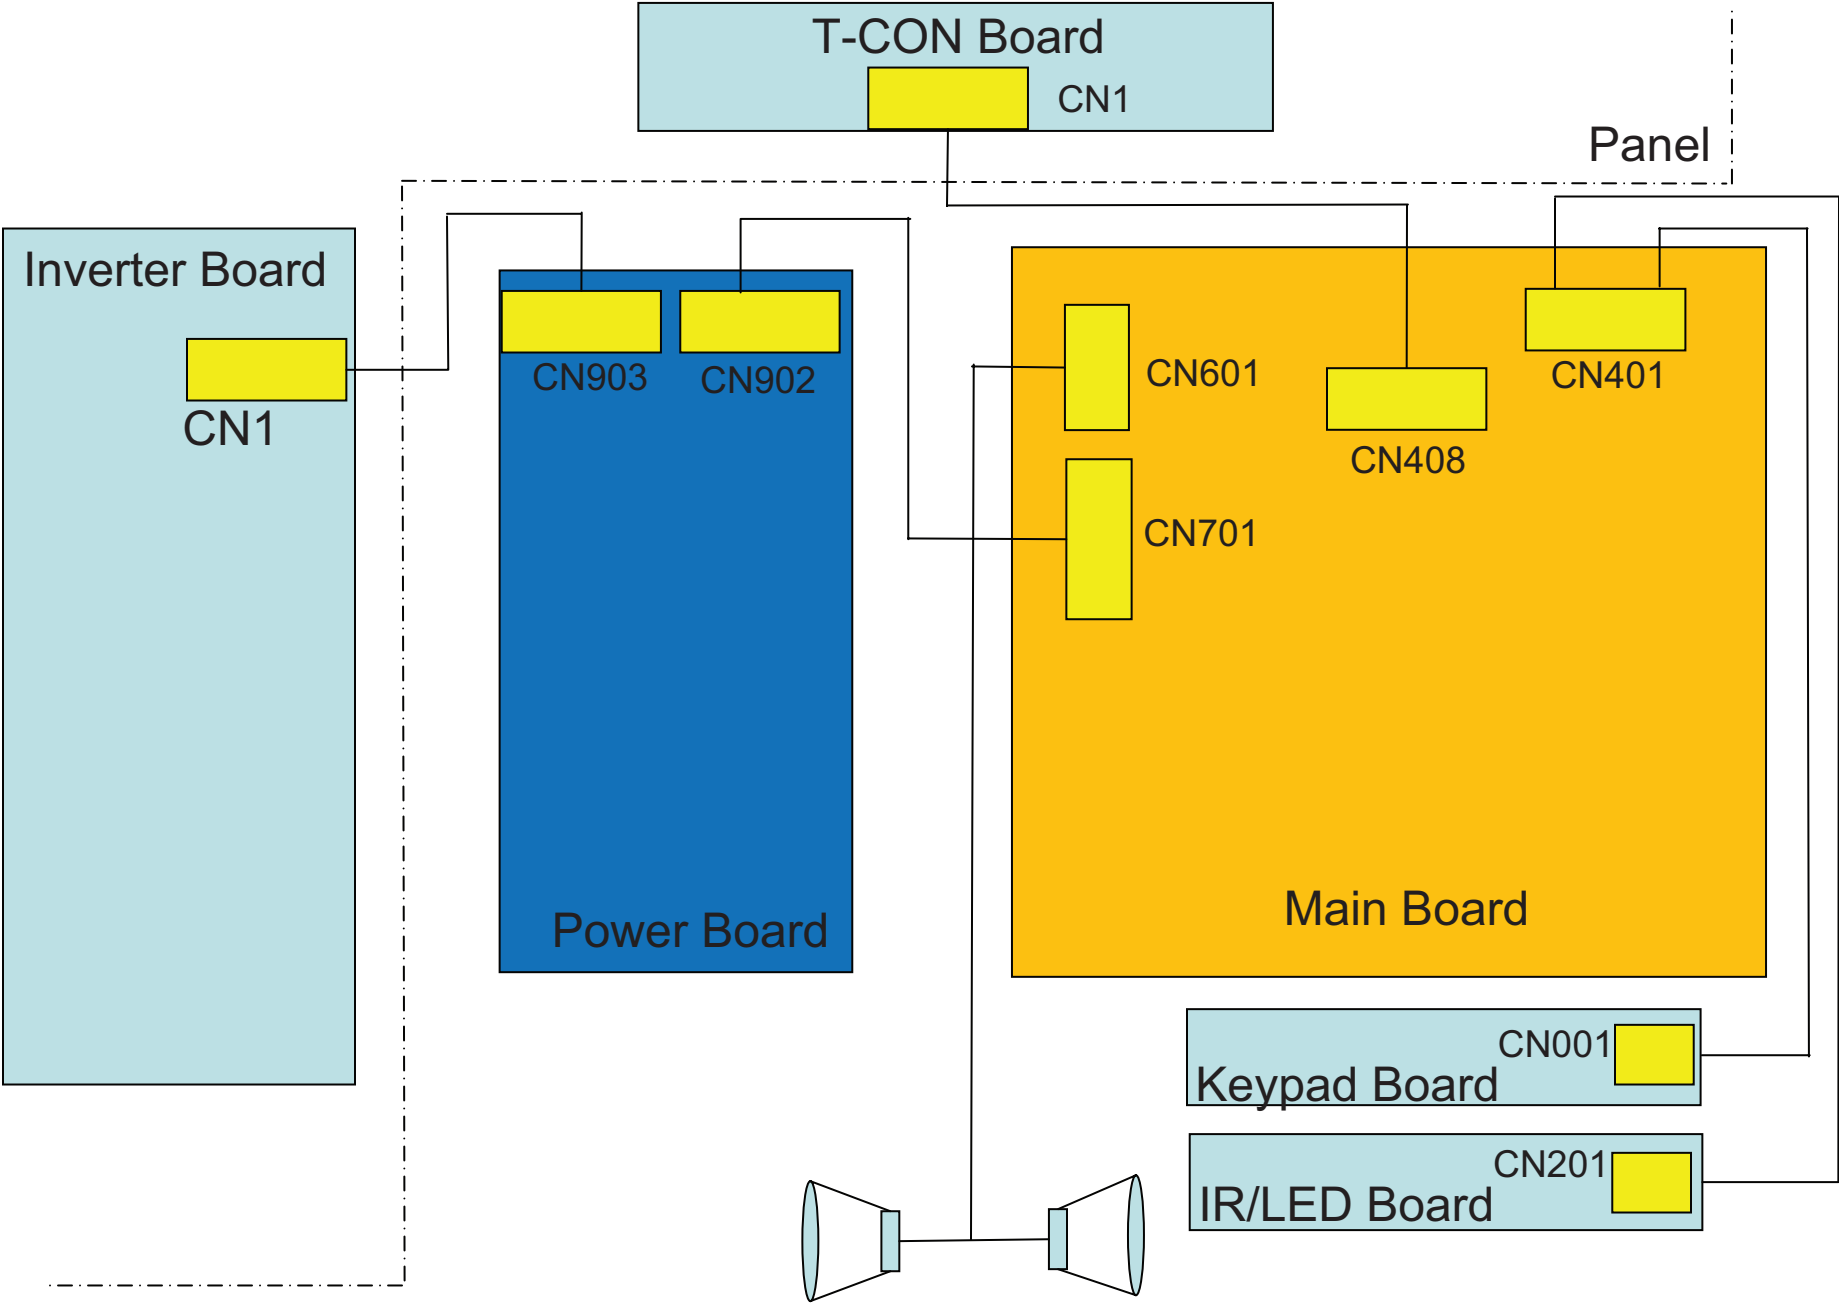


Figure 4-4. KDL-40BX425


1-5. SCHEMATICS AND SUPPORTING INFORMATION  
A BOARD SCHEMATIC DIAGRAM (1 OF 18)

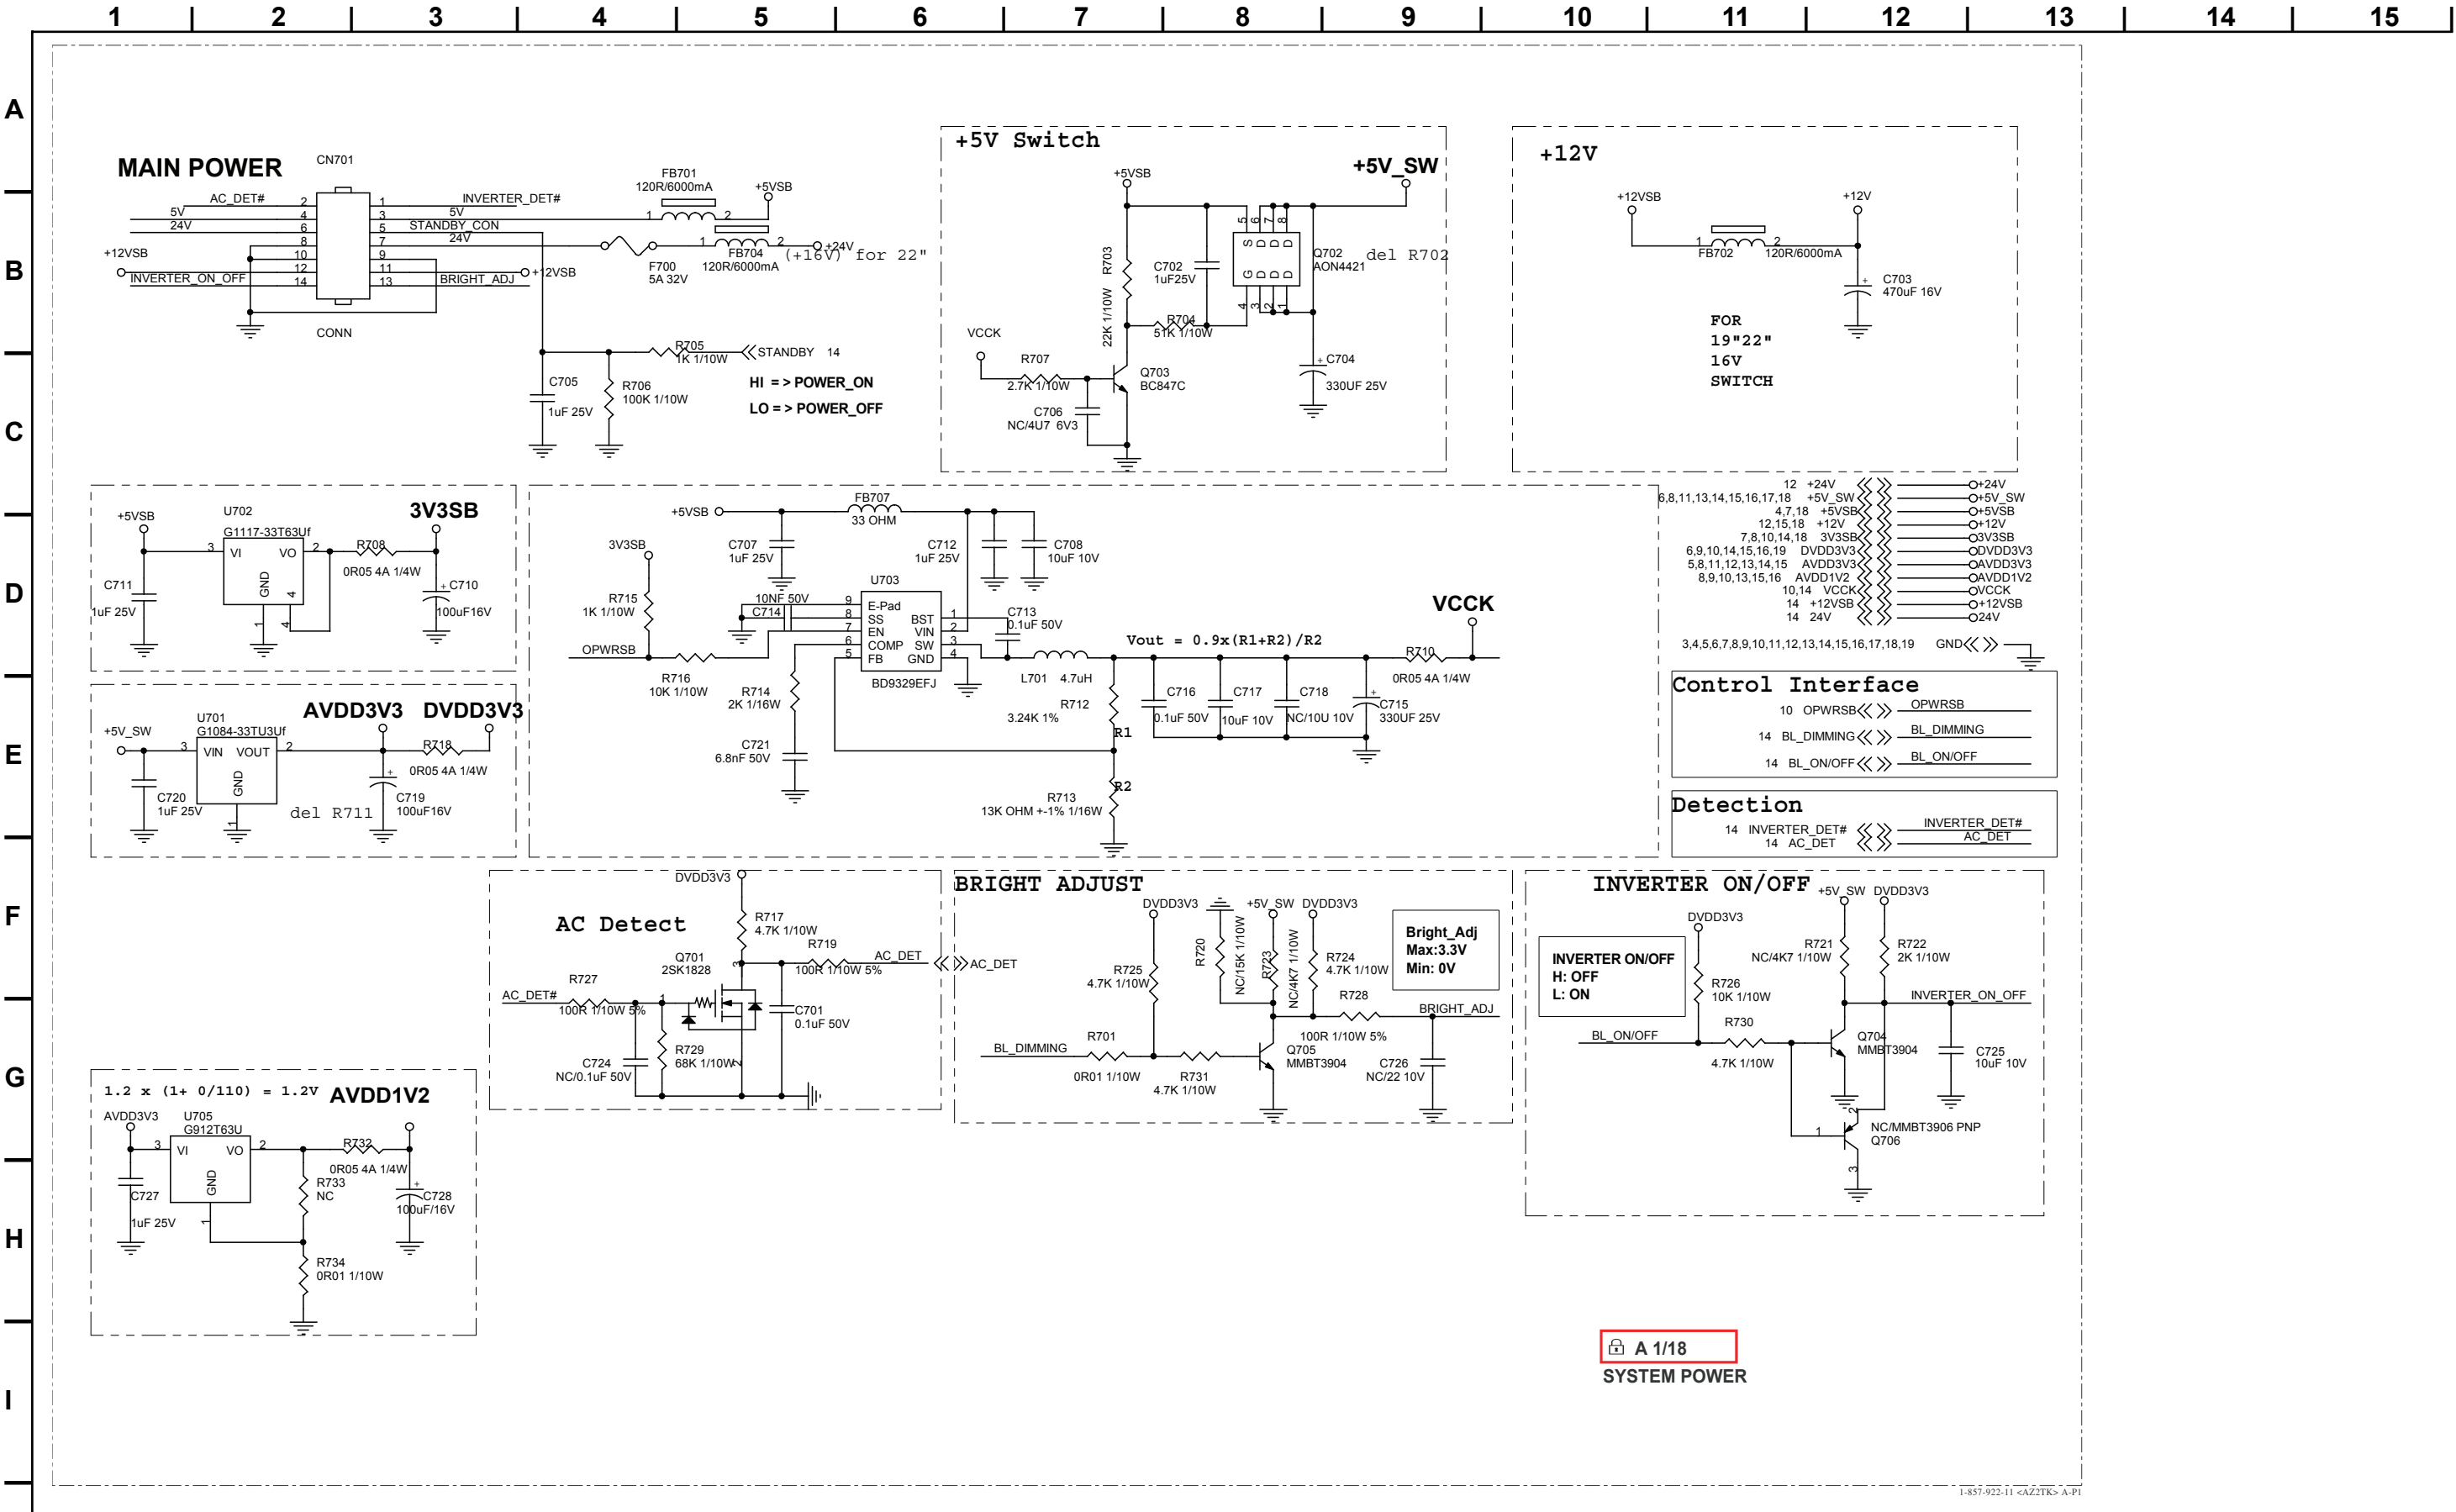

A BOARD SCHEMATIC DIAGRAM (2 OF 18)

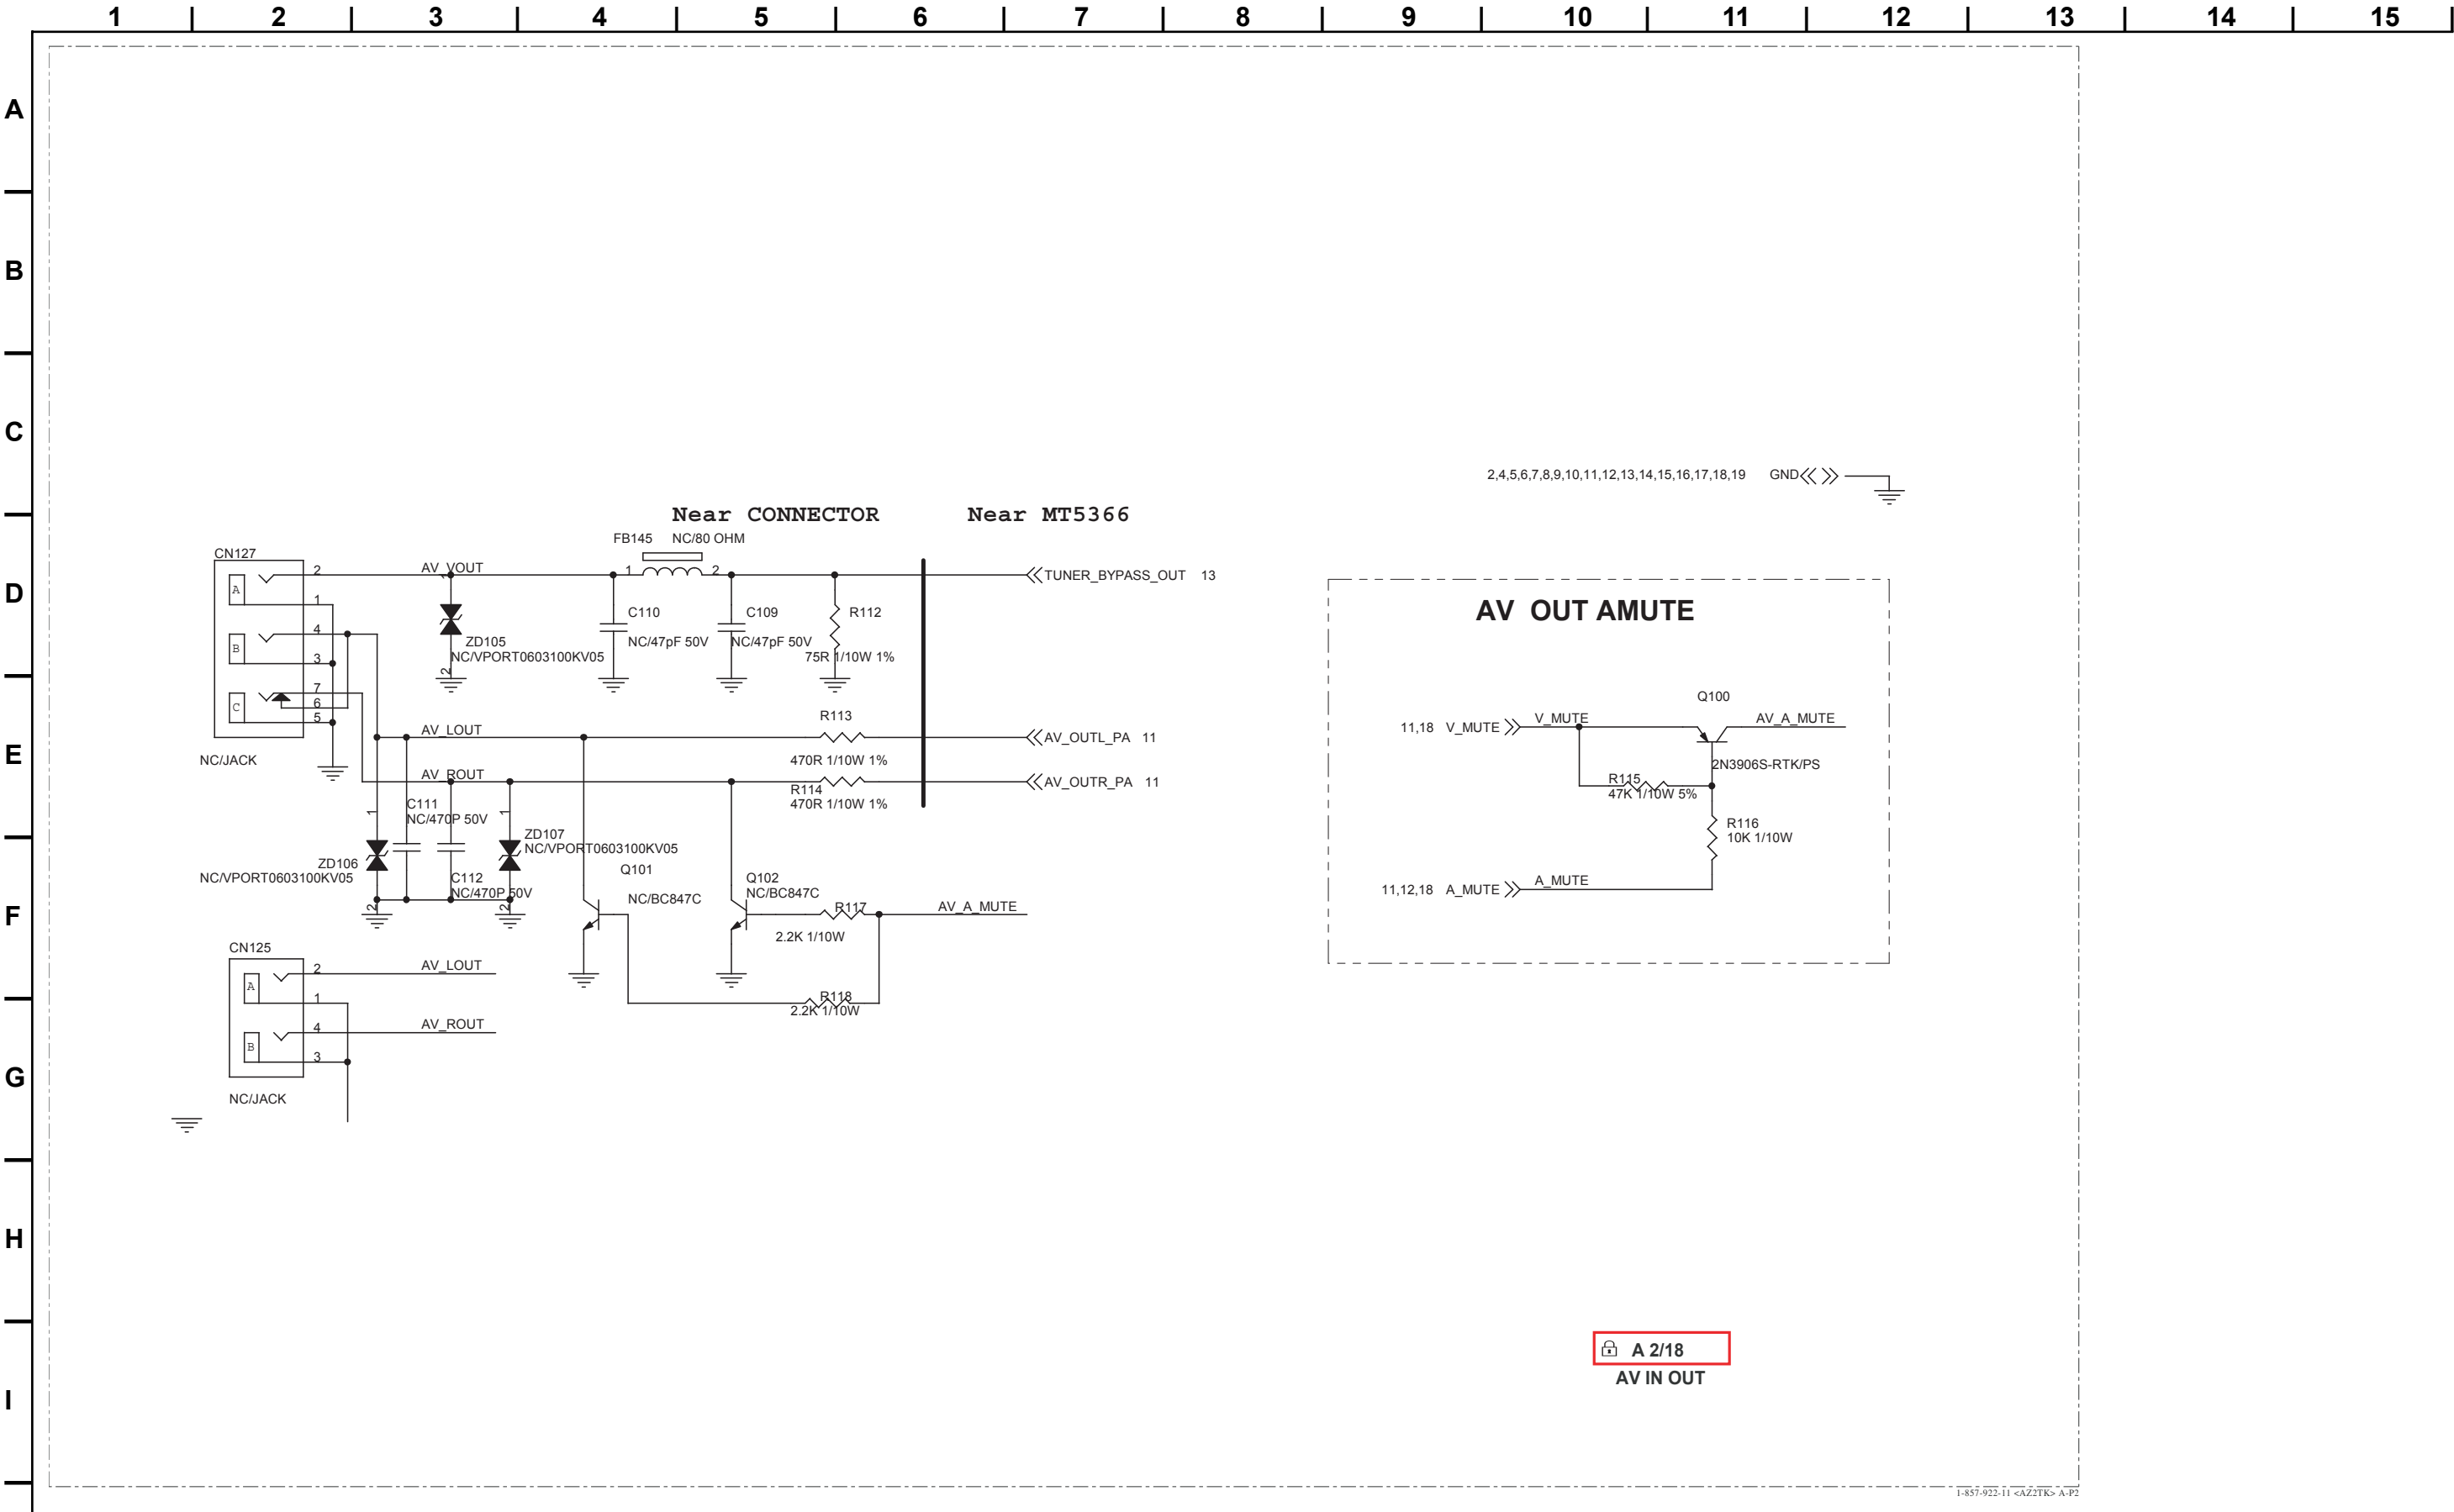


## 16






A BOARD SCHEMATIC DIAGRAM (4 OF 18)

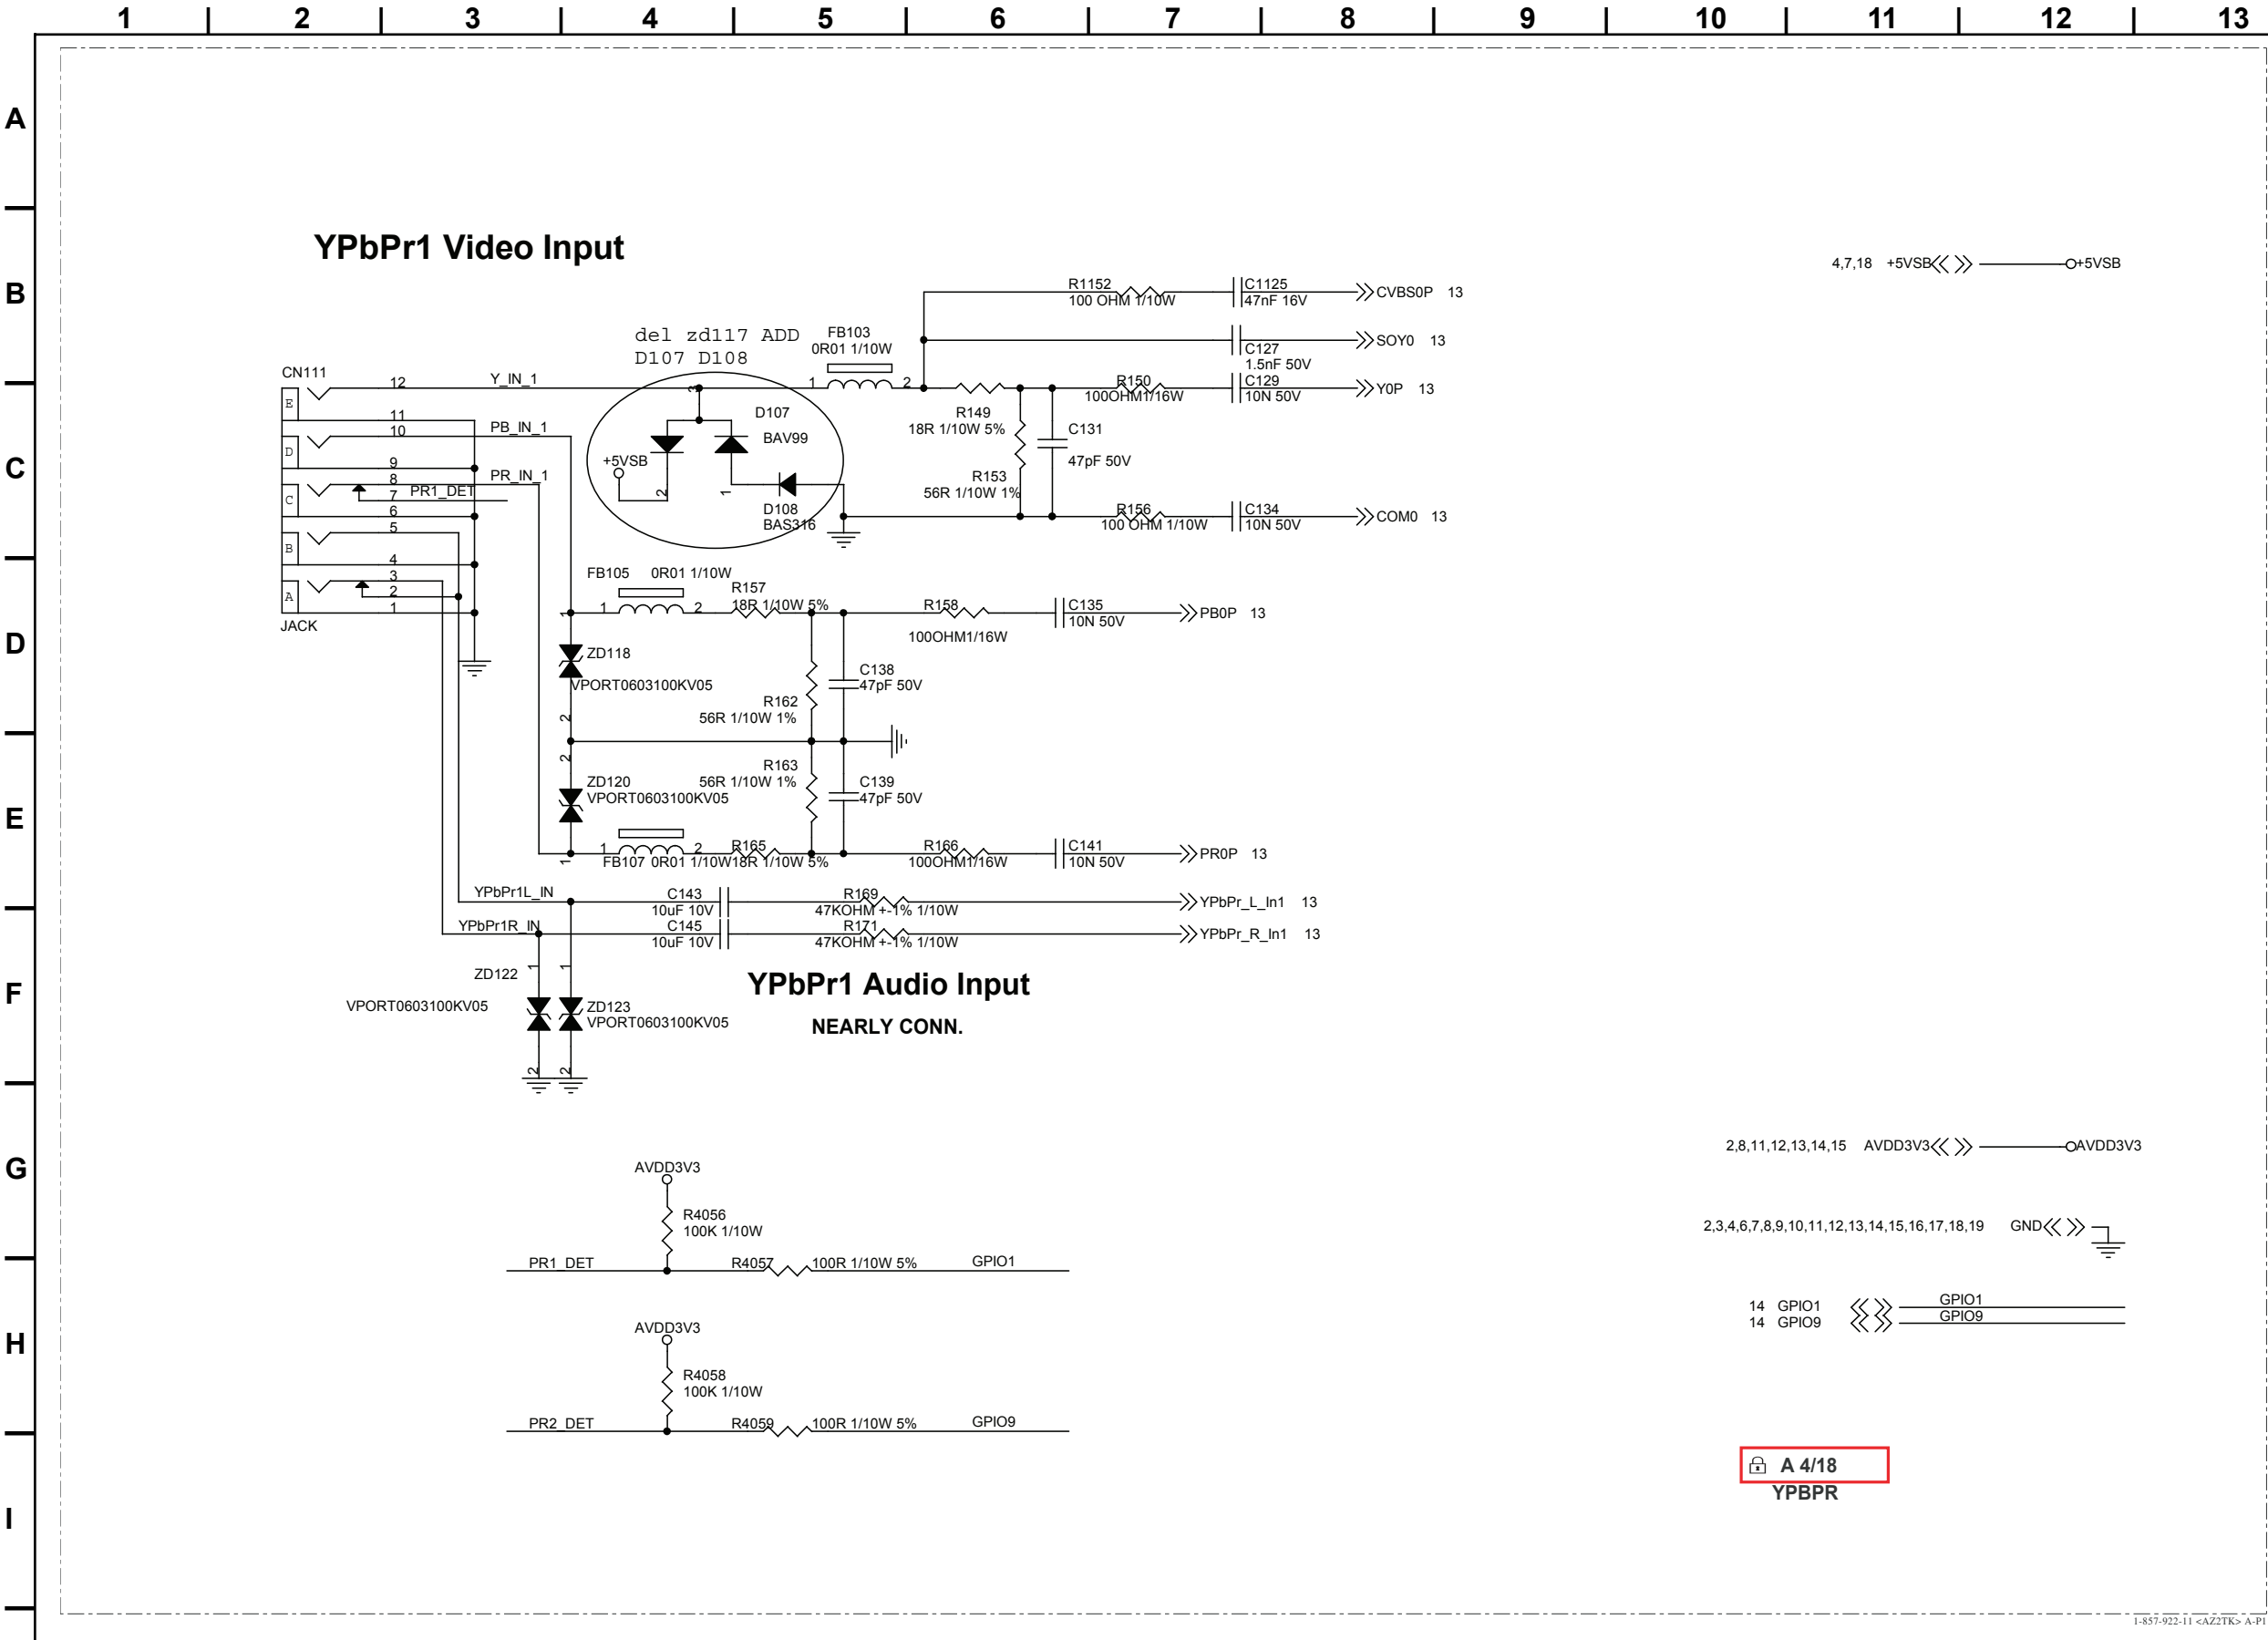


1-857-922-11 <AZ2TK> A-PI




A BOARD SCHEMATIC DIAGRAM (6 OF 18)

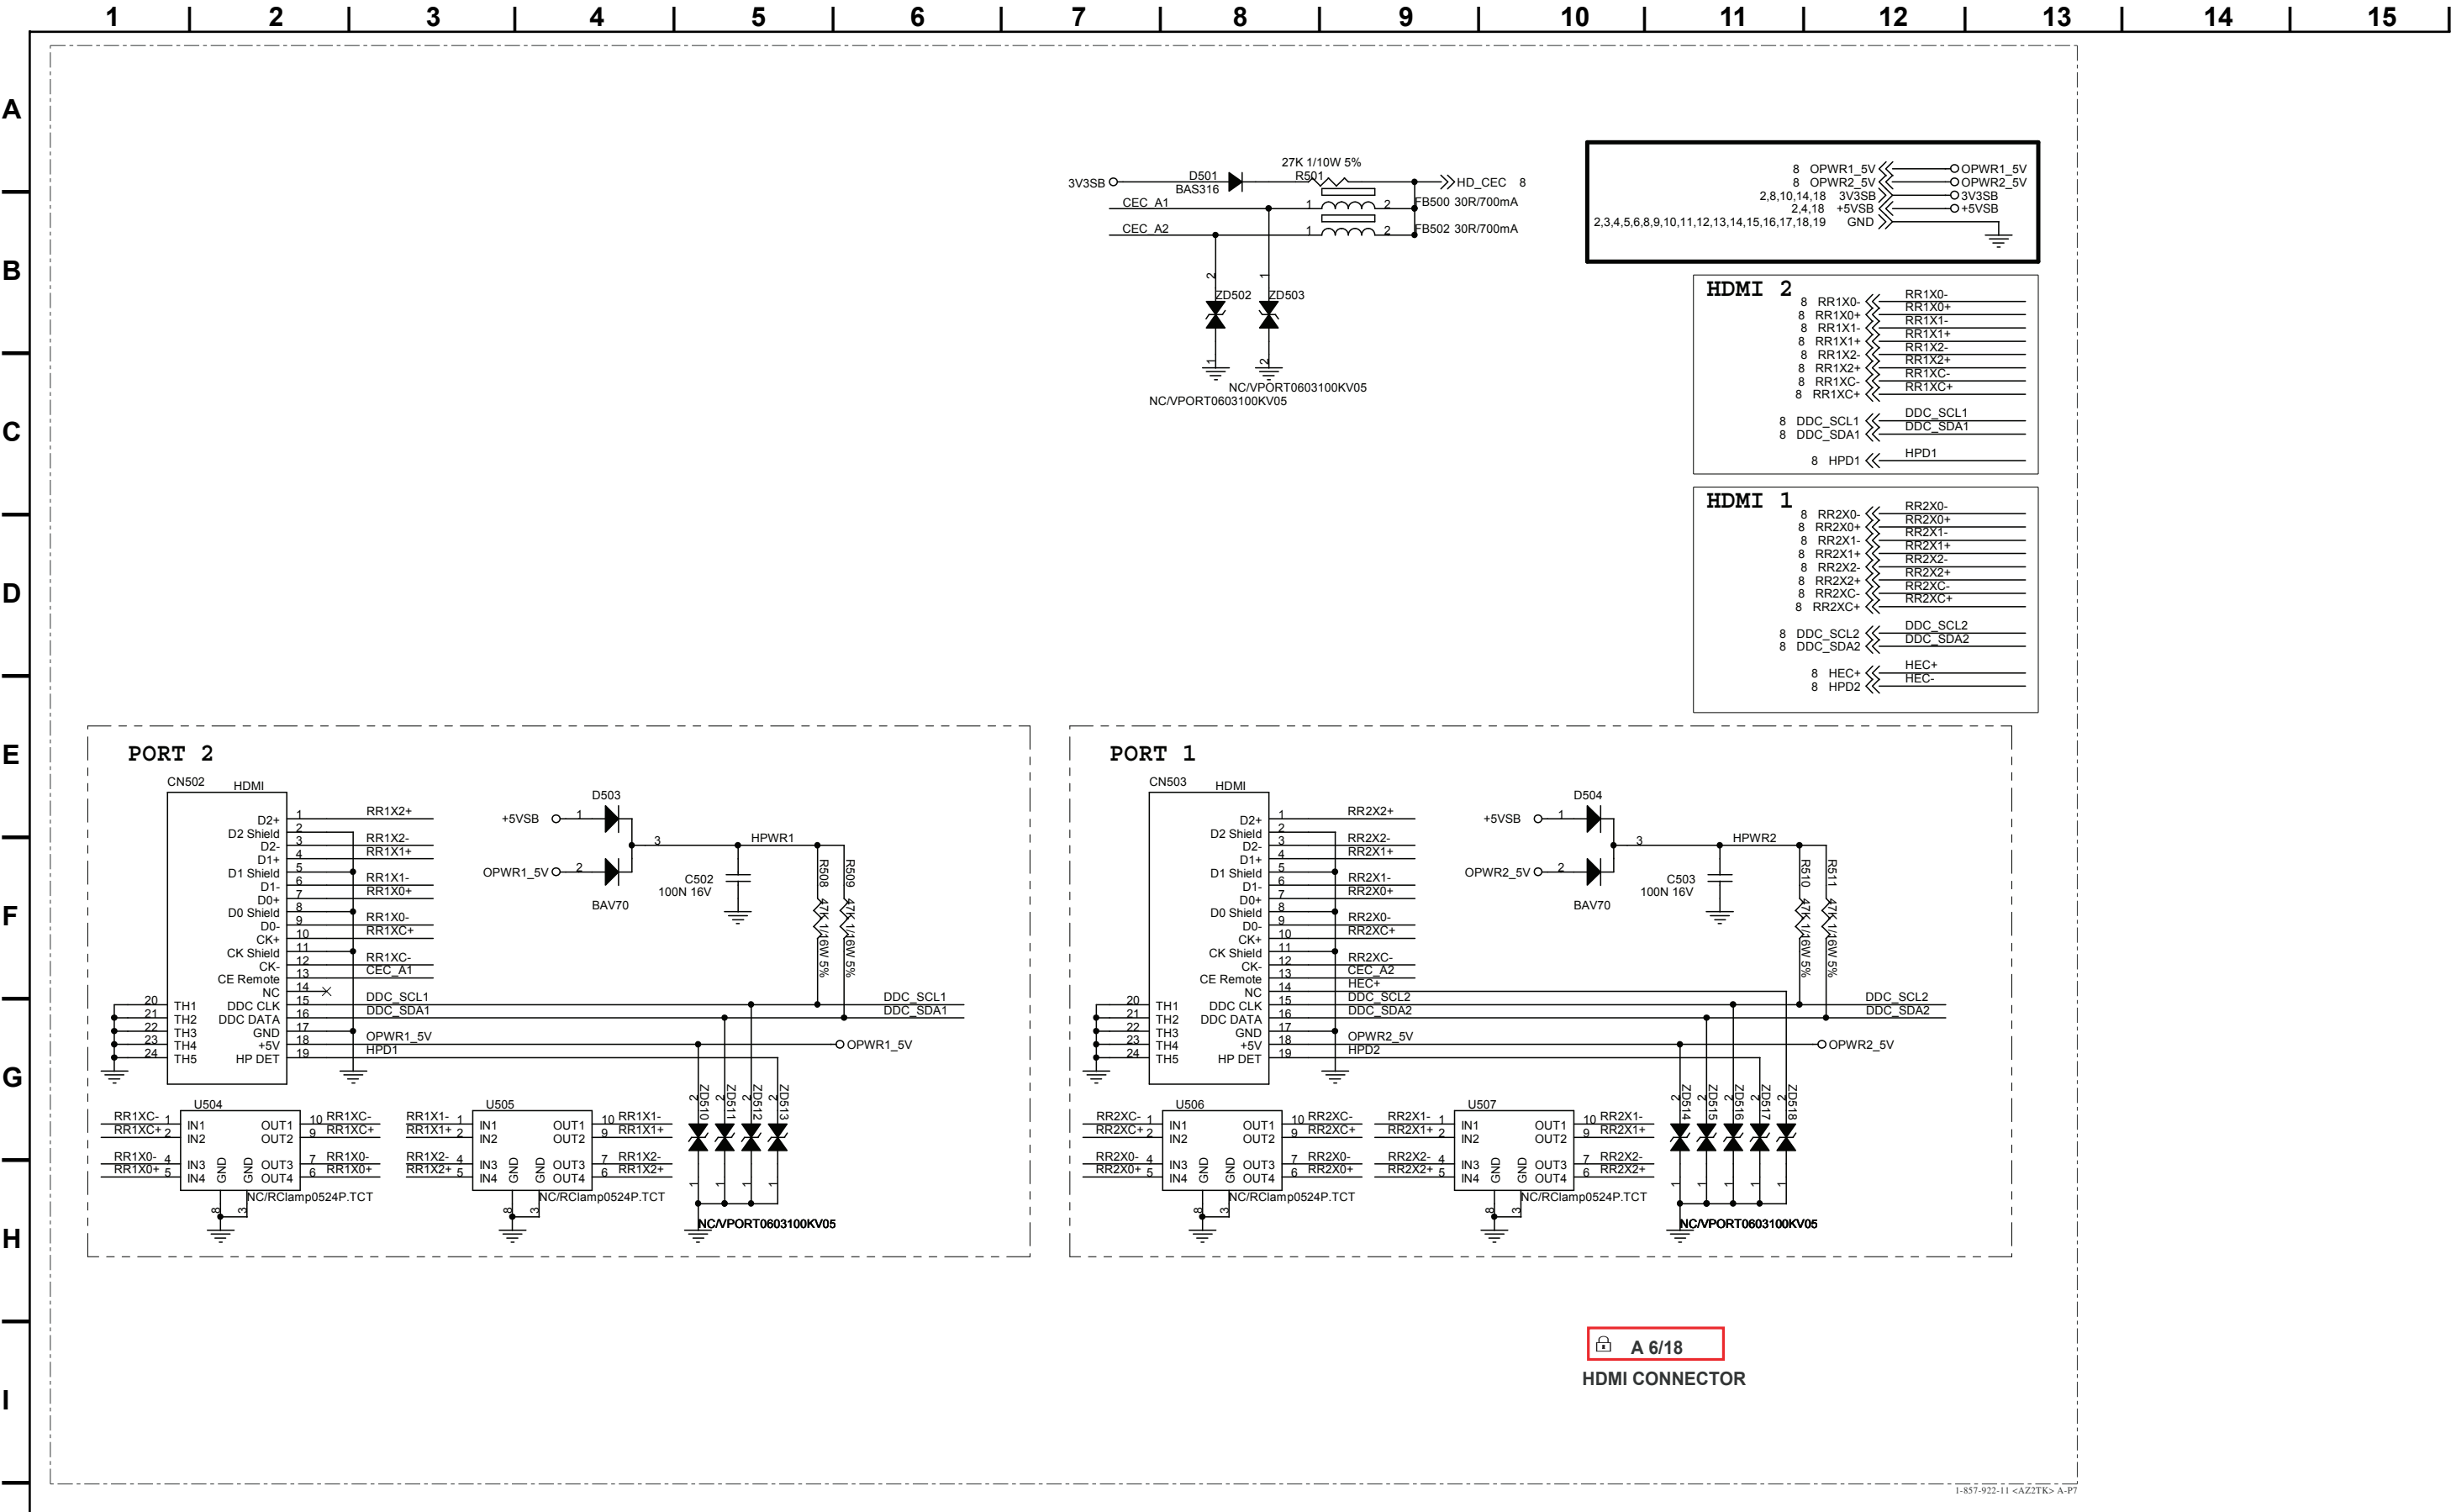

A BOARD SCHEMATIC DIAGRAM (7 OF 18)

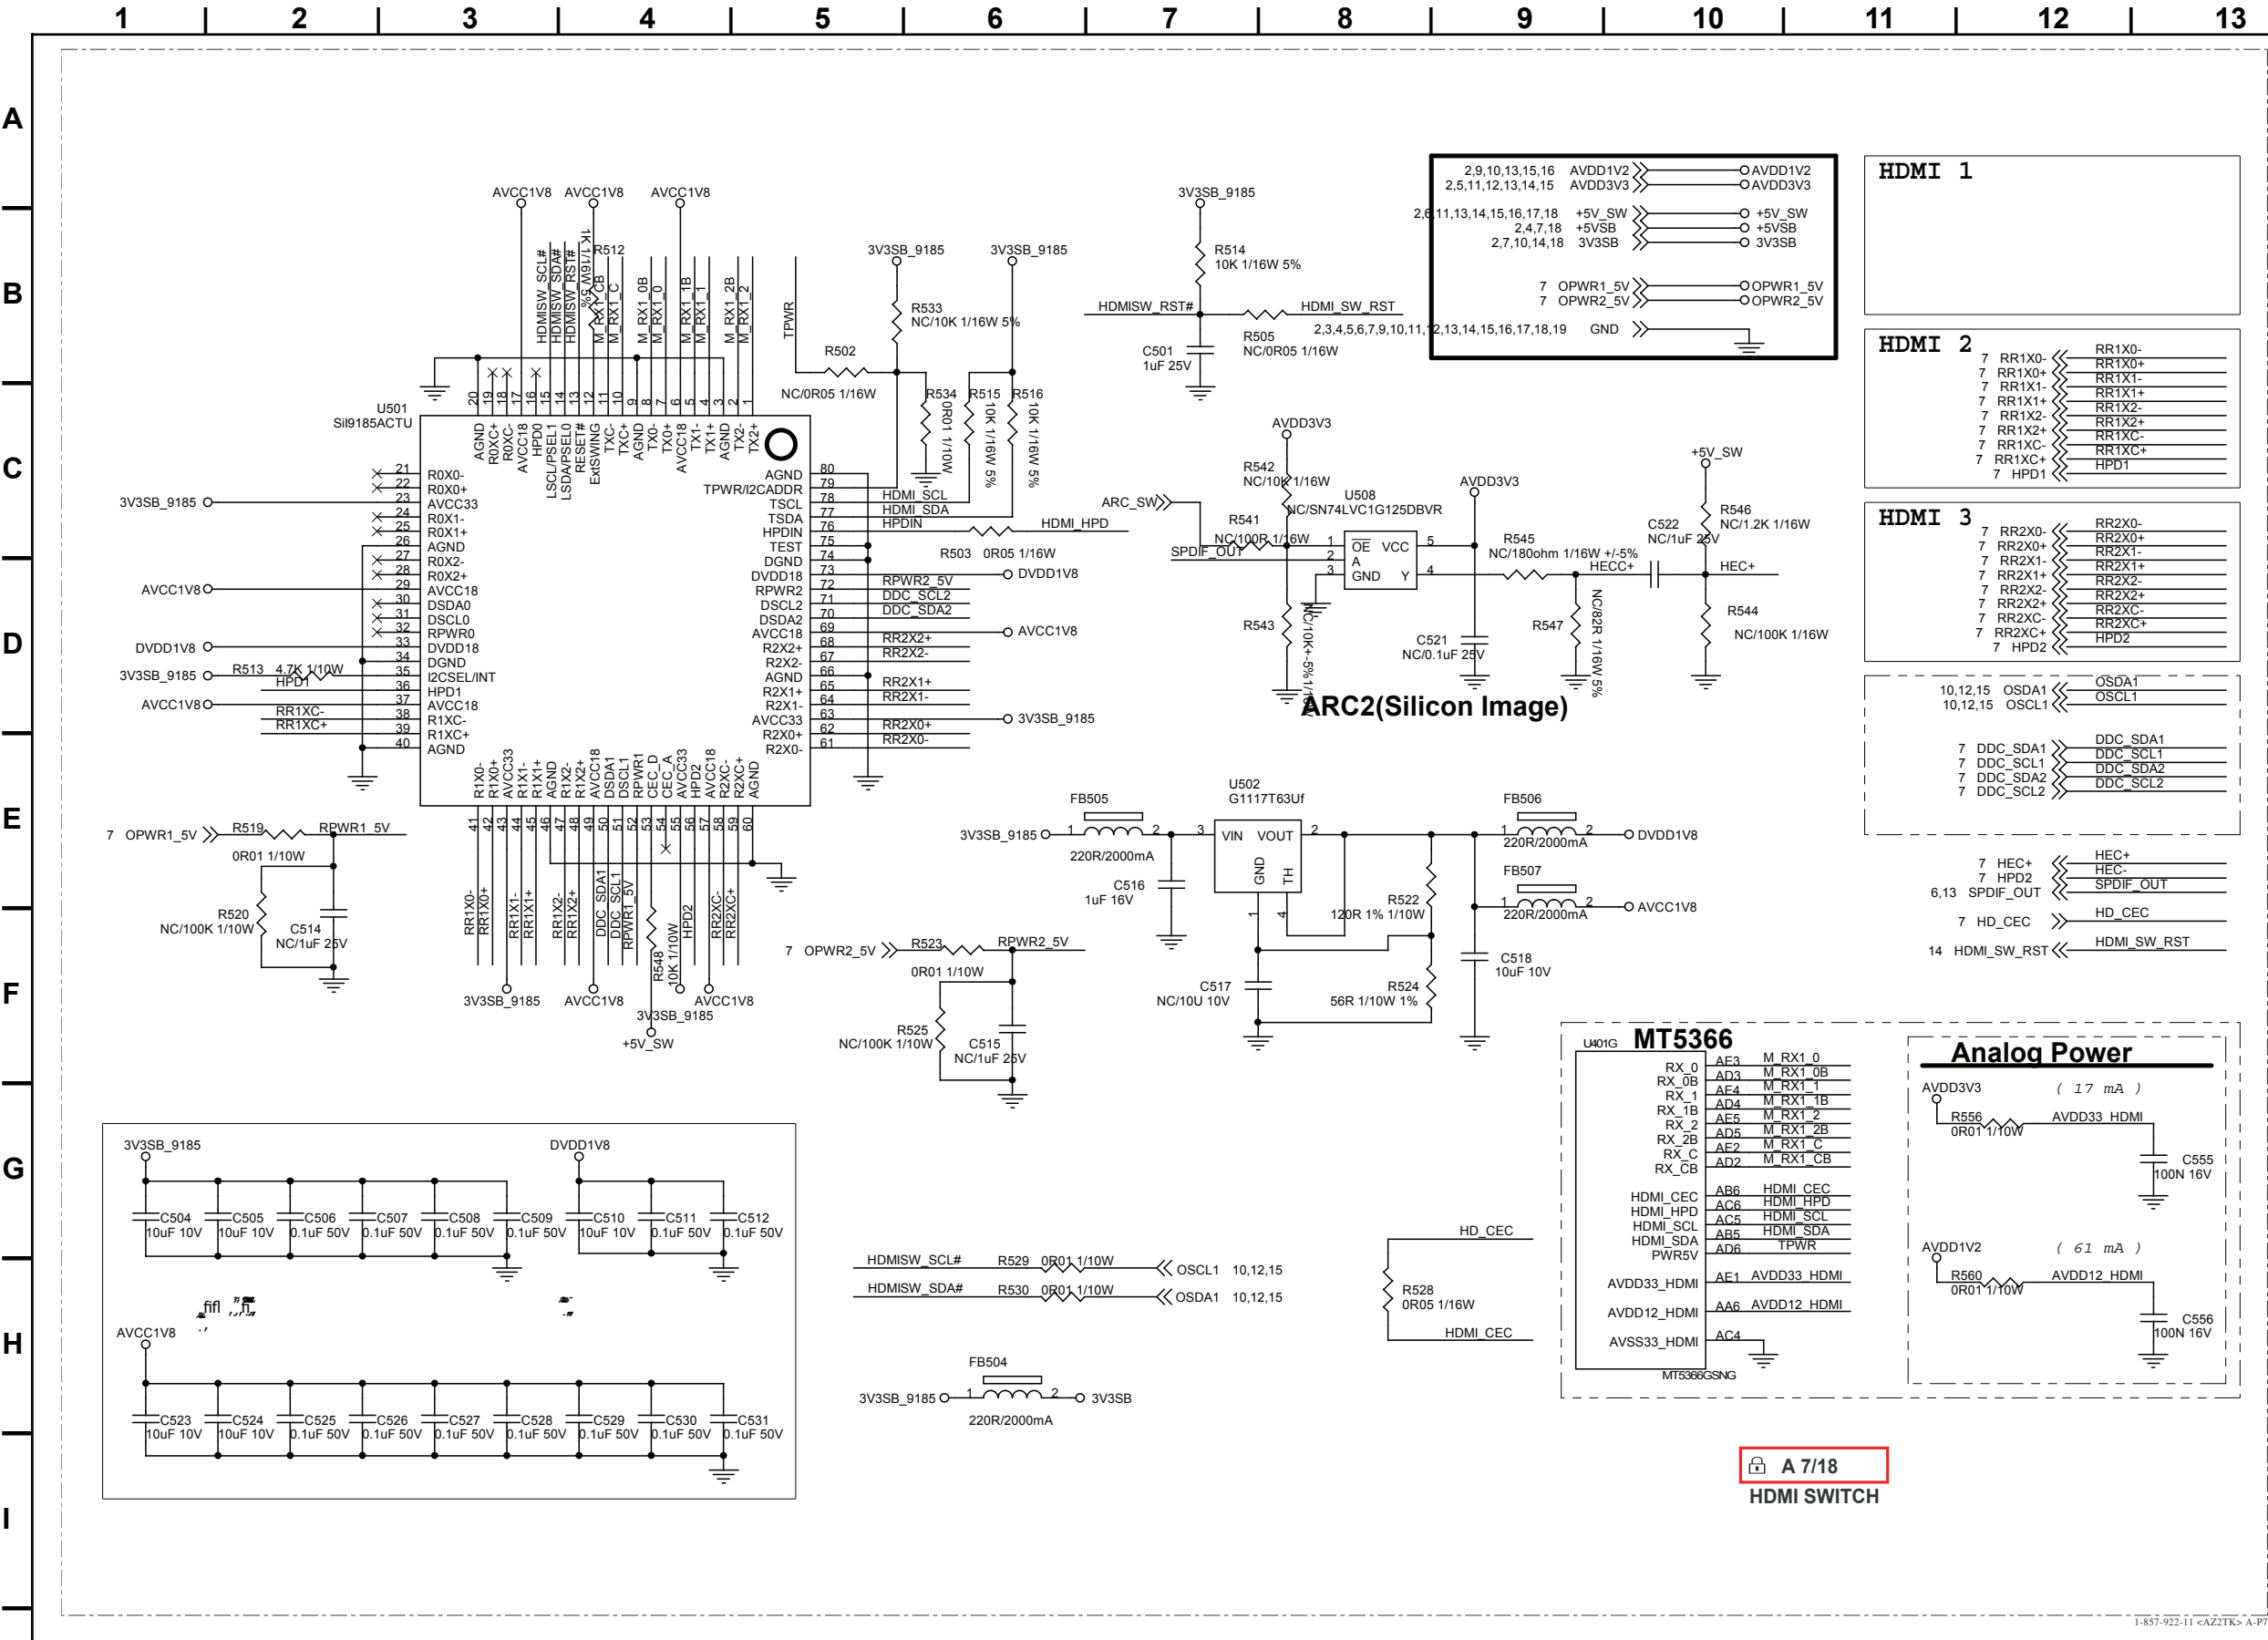






**A**




A BOARD SCHEMATIC DIAGRAM (10 OF 18)

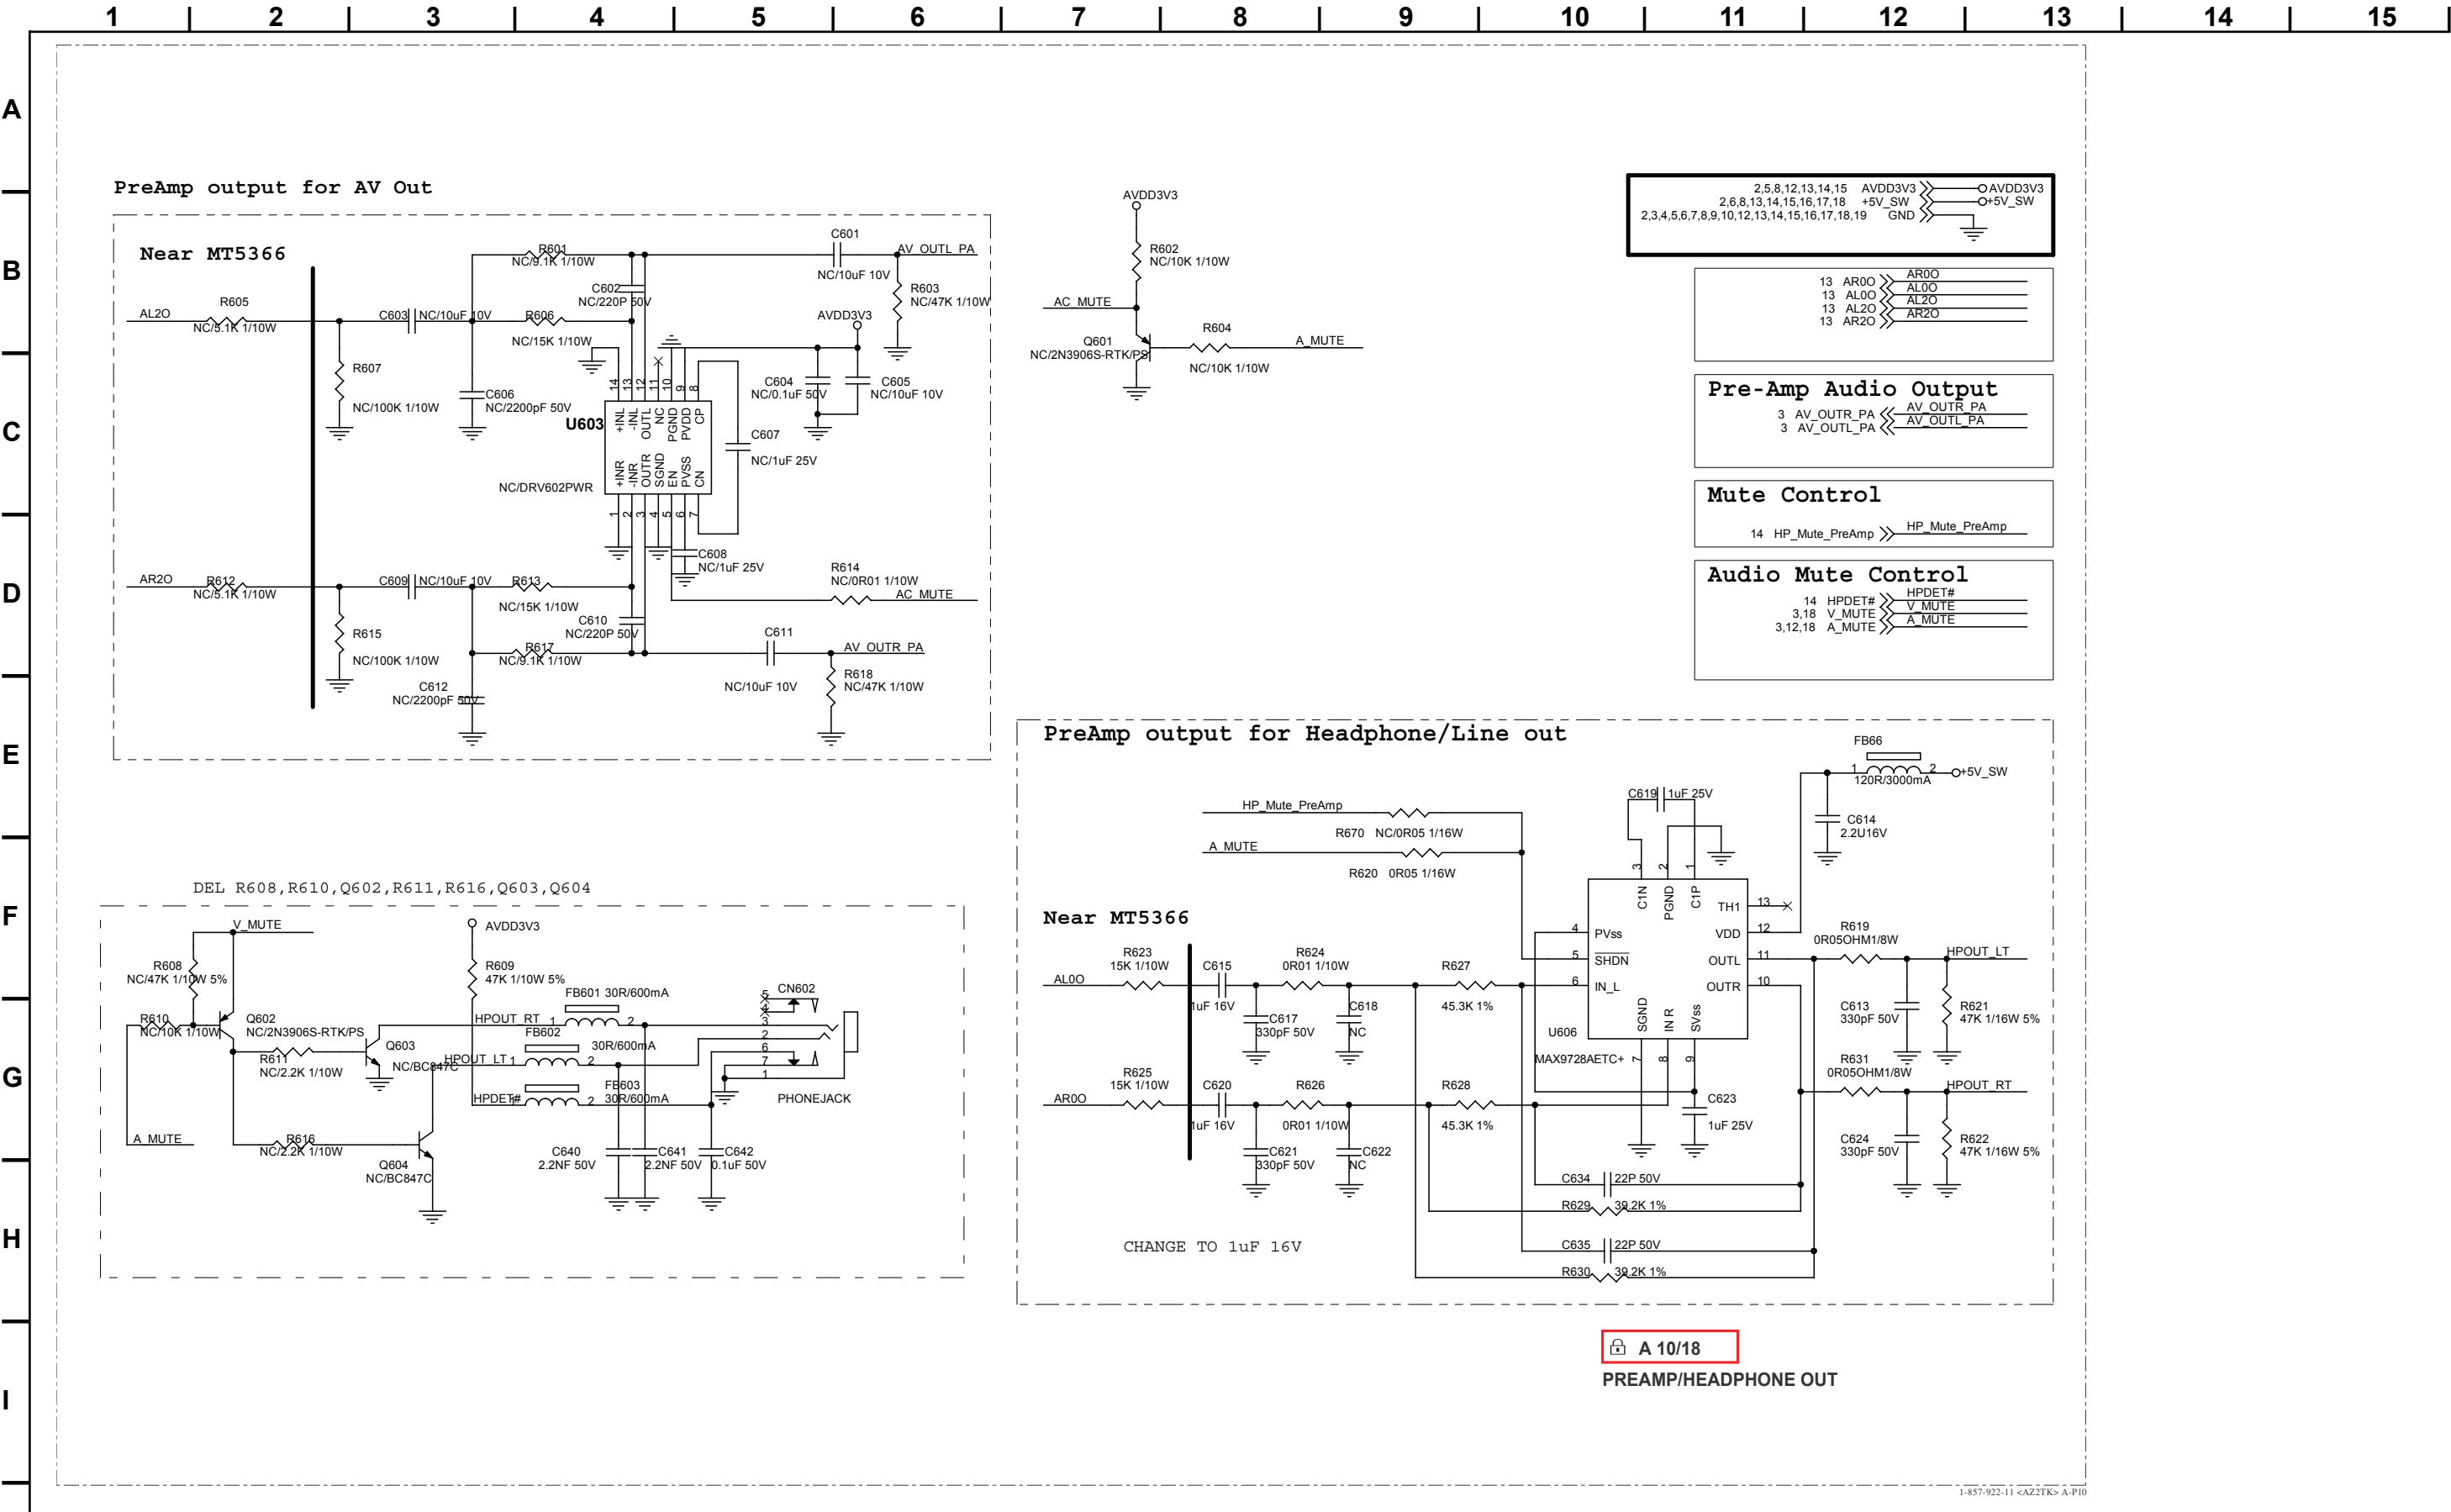






## A BOARD SCHEMATIC DIAGRAM (12 OF 18)

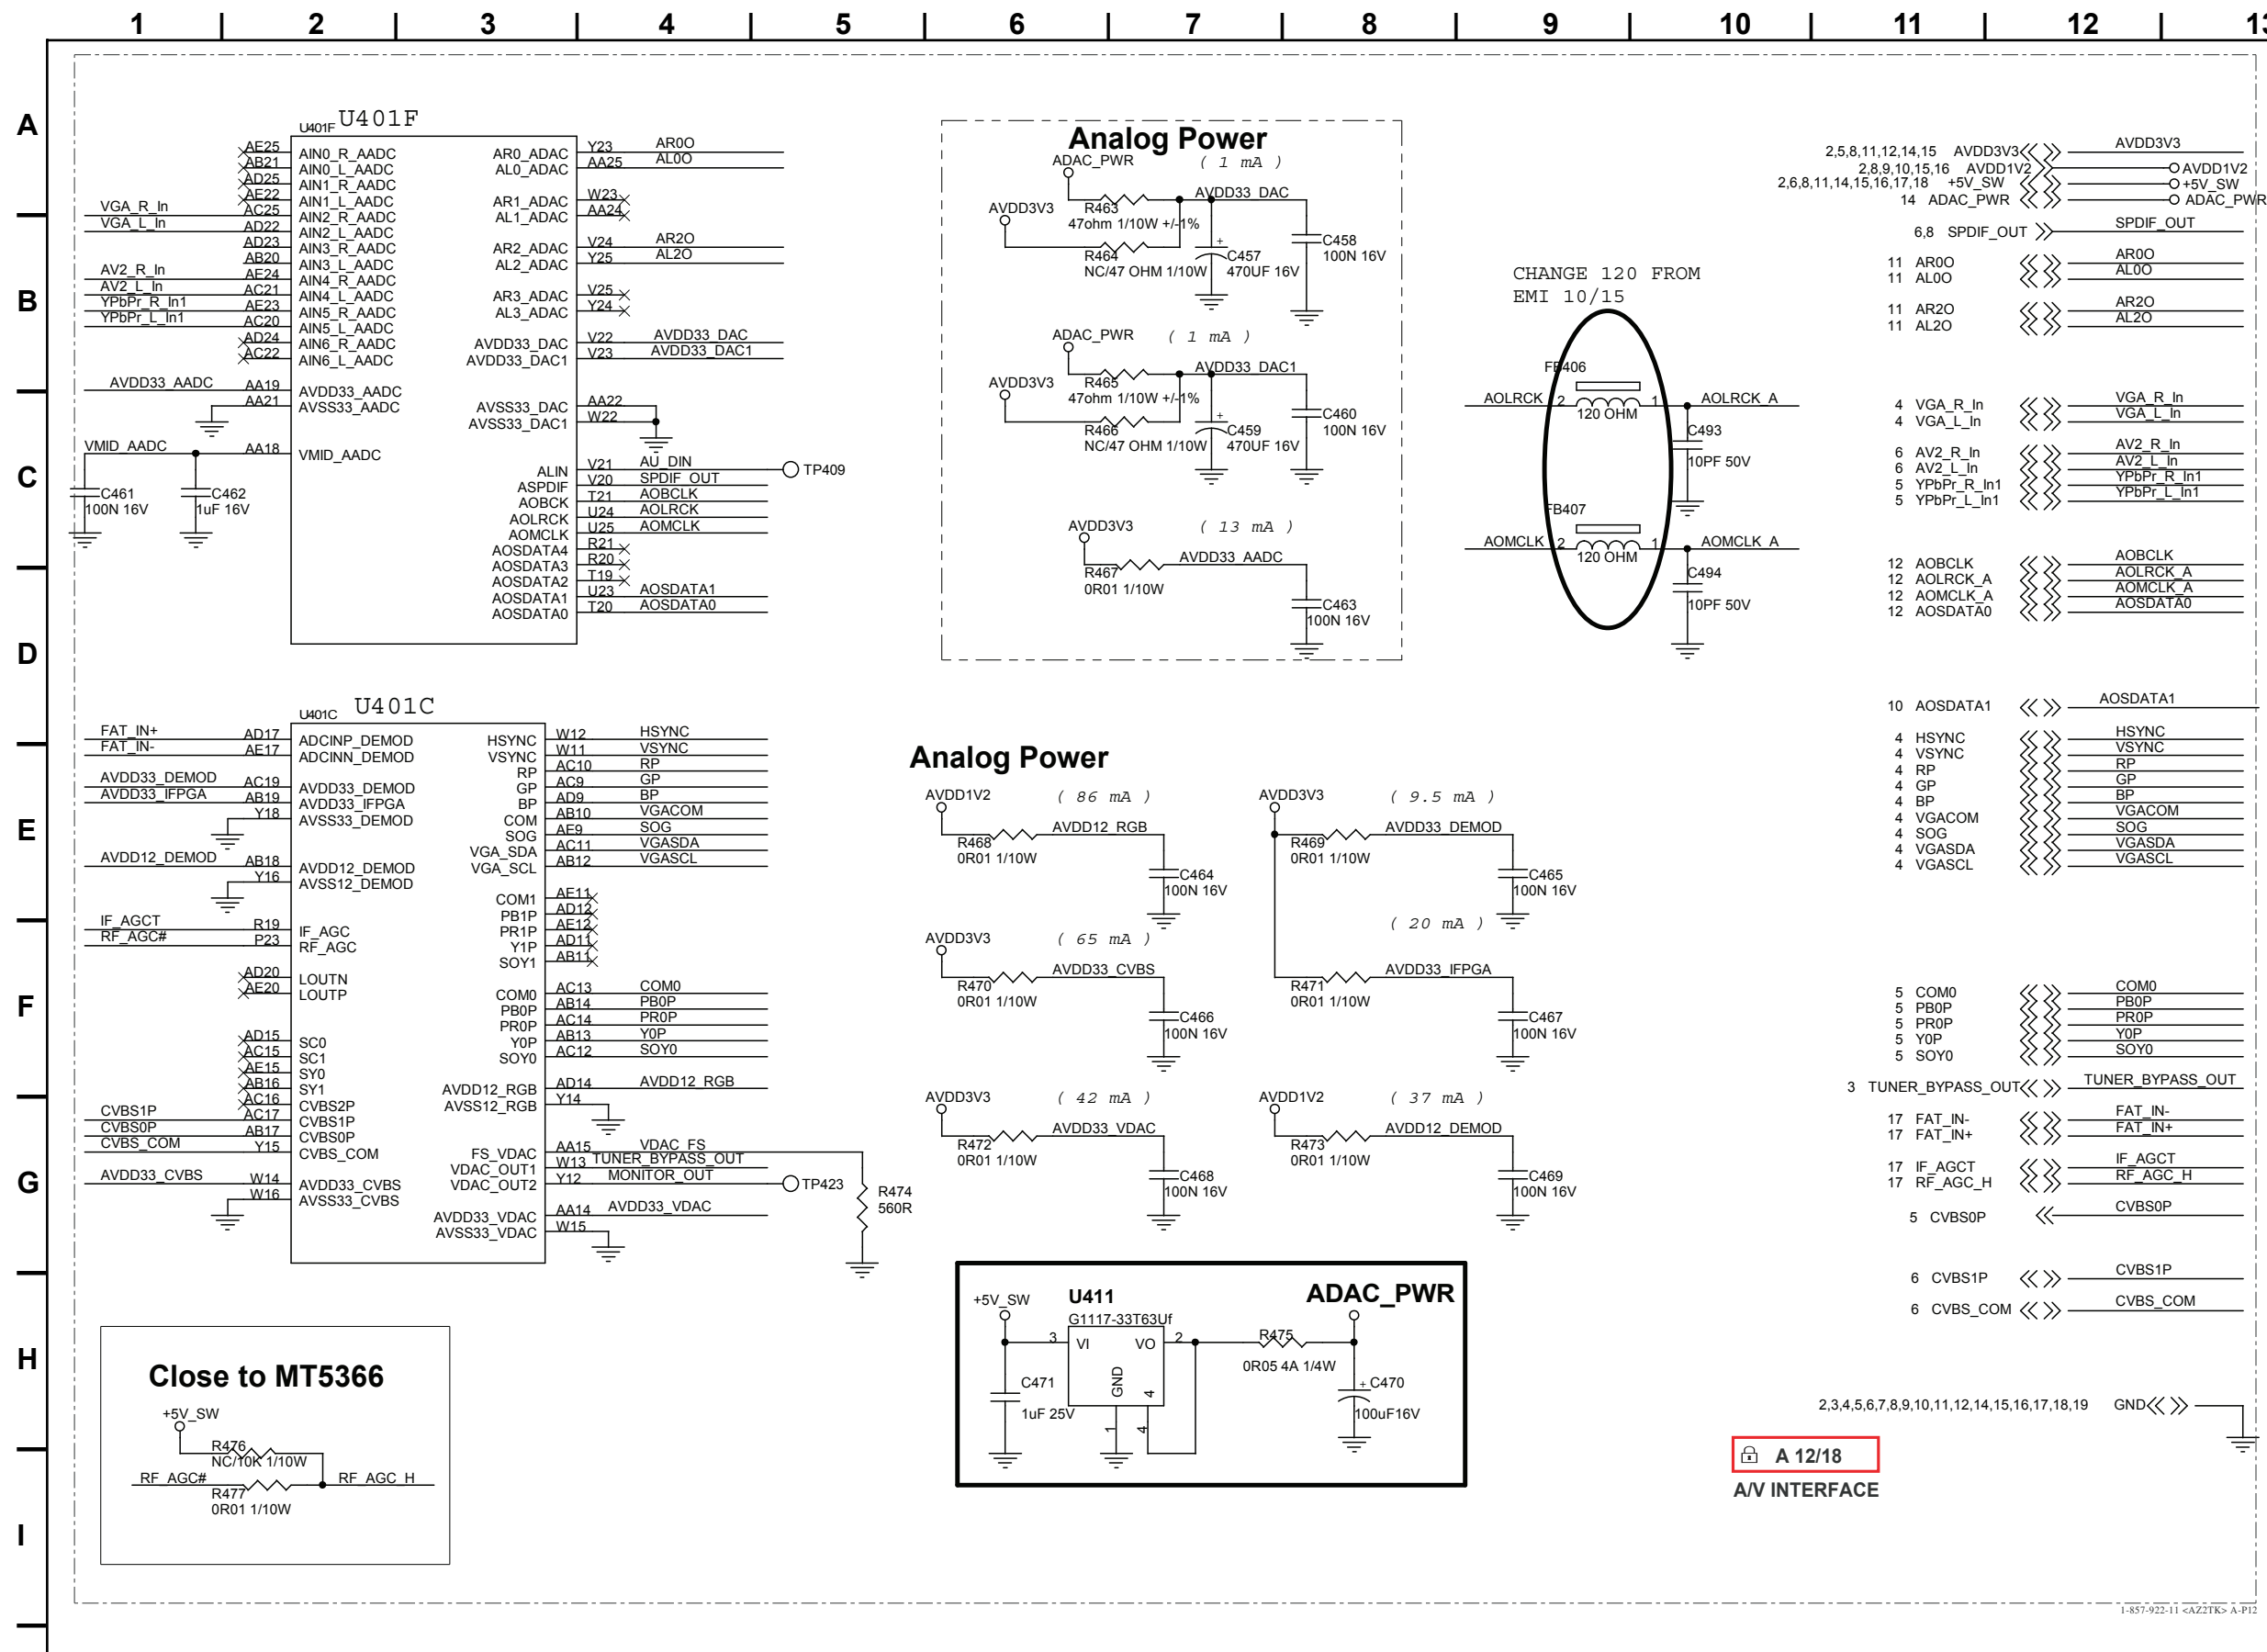






## 28





## 30









A

[SYSTEM POWER/AV IN OUT/GA/YPBRPR/SIDE AV/SPDIF/USB/SIDE HDMI/HDMI CONNECTOR/HDMI SWITCH/DDR3 DRAM/FLASH/XTAL/JTAG/UART/PREAMP/HEADPHONE OUT/AUDIO AMP/A/V INTERFACE/GPIO INTERFACE/LVDS INTERFACE/RS-32/ETHERNET MII]]


COMPONENT SIDE

CONDUCTOR SIDE

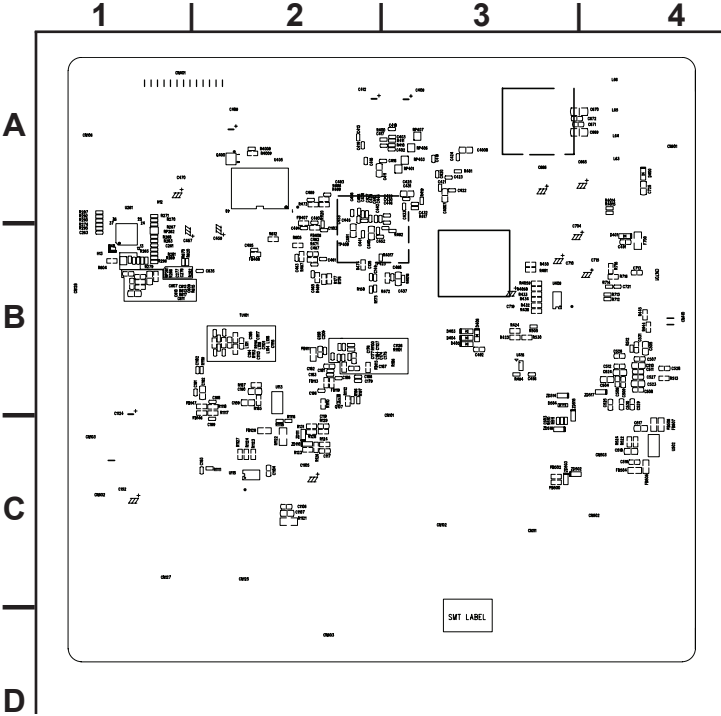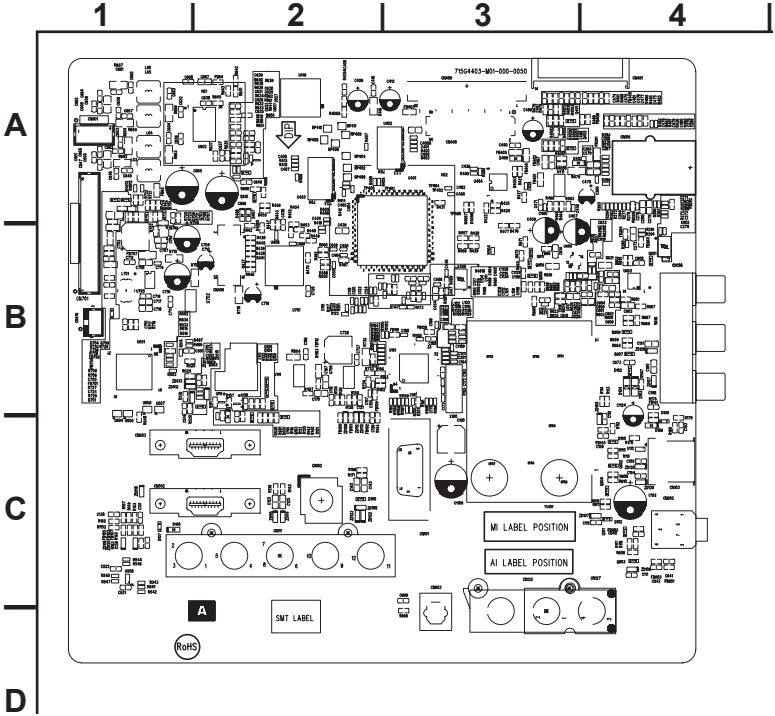



LIPS22 BOARD SCHEMATIC DIAGRAM (KDL-22BX325 ONLY)

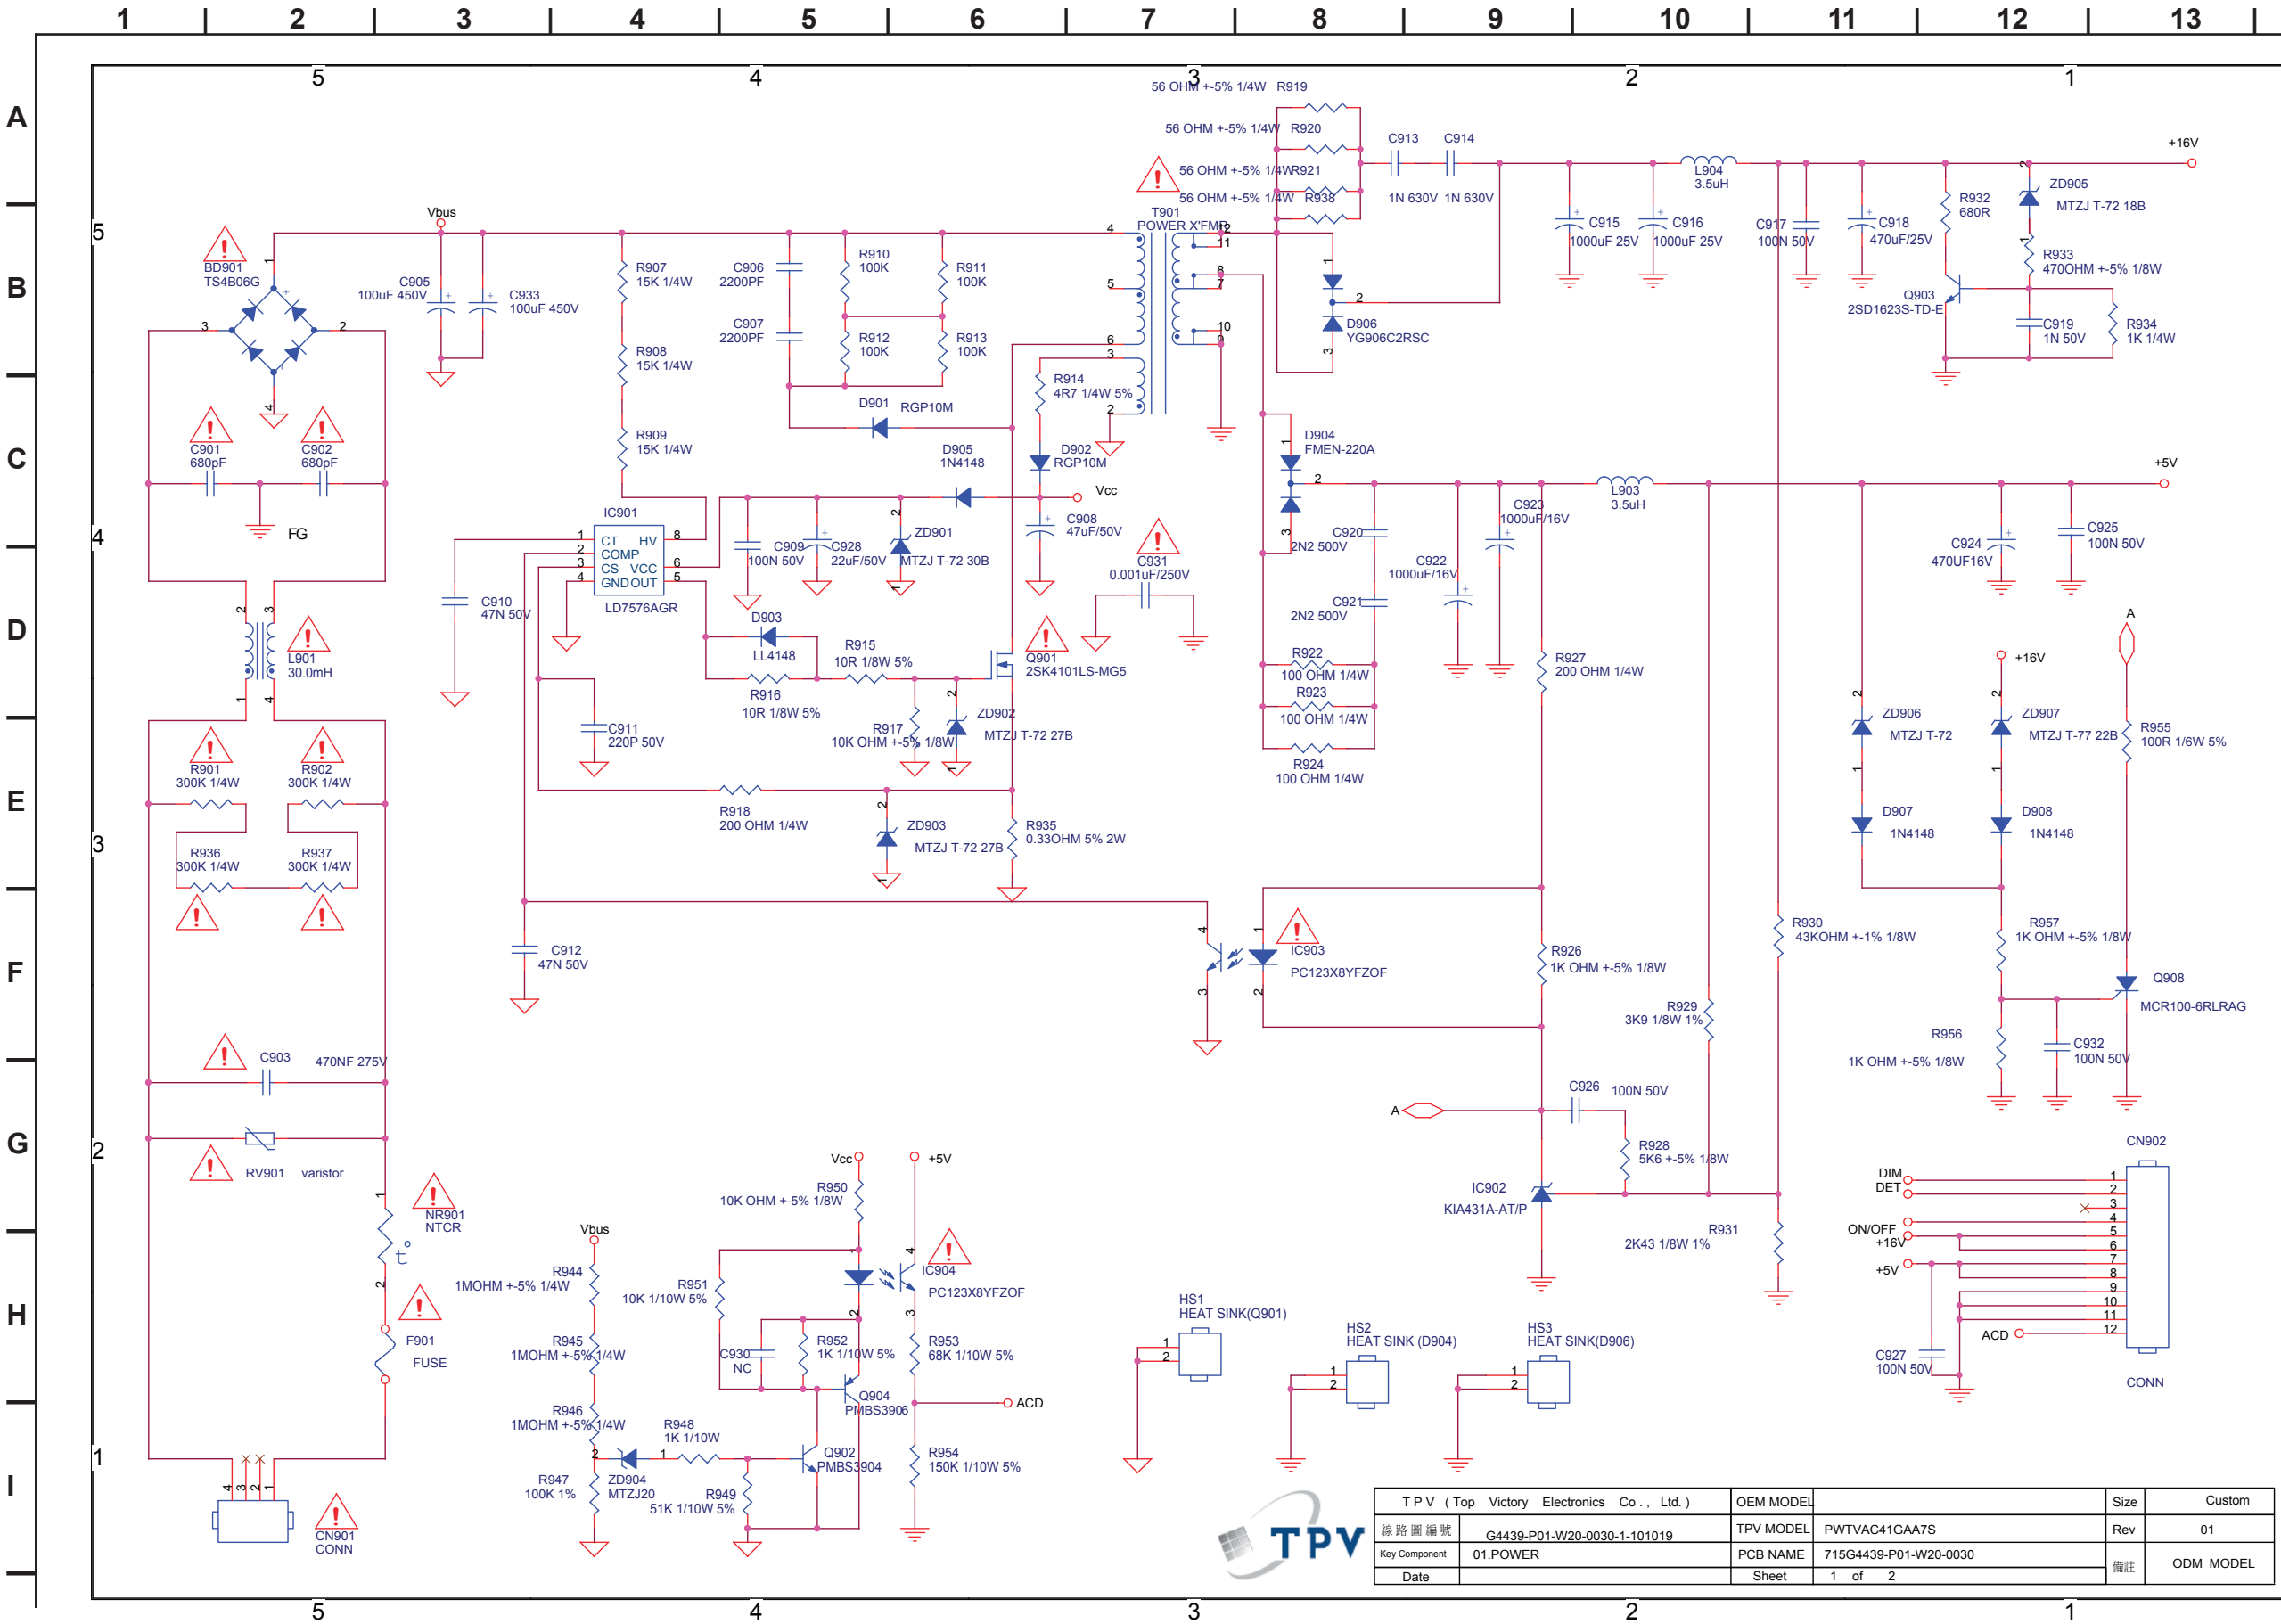

LIPS22



[POWER]

COMPONENT SIDE (KDL-22BX325 ONLY)


LIPS22

[POWER]


CONDUCTOR SIDE (KDL-22BX325 ONLY)

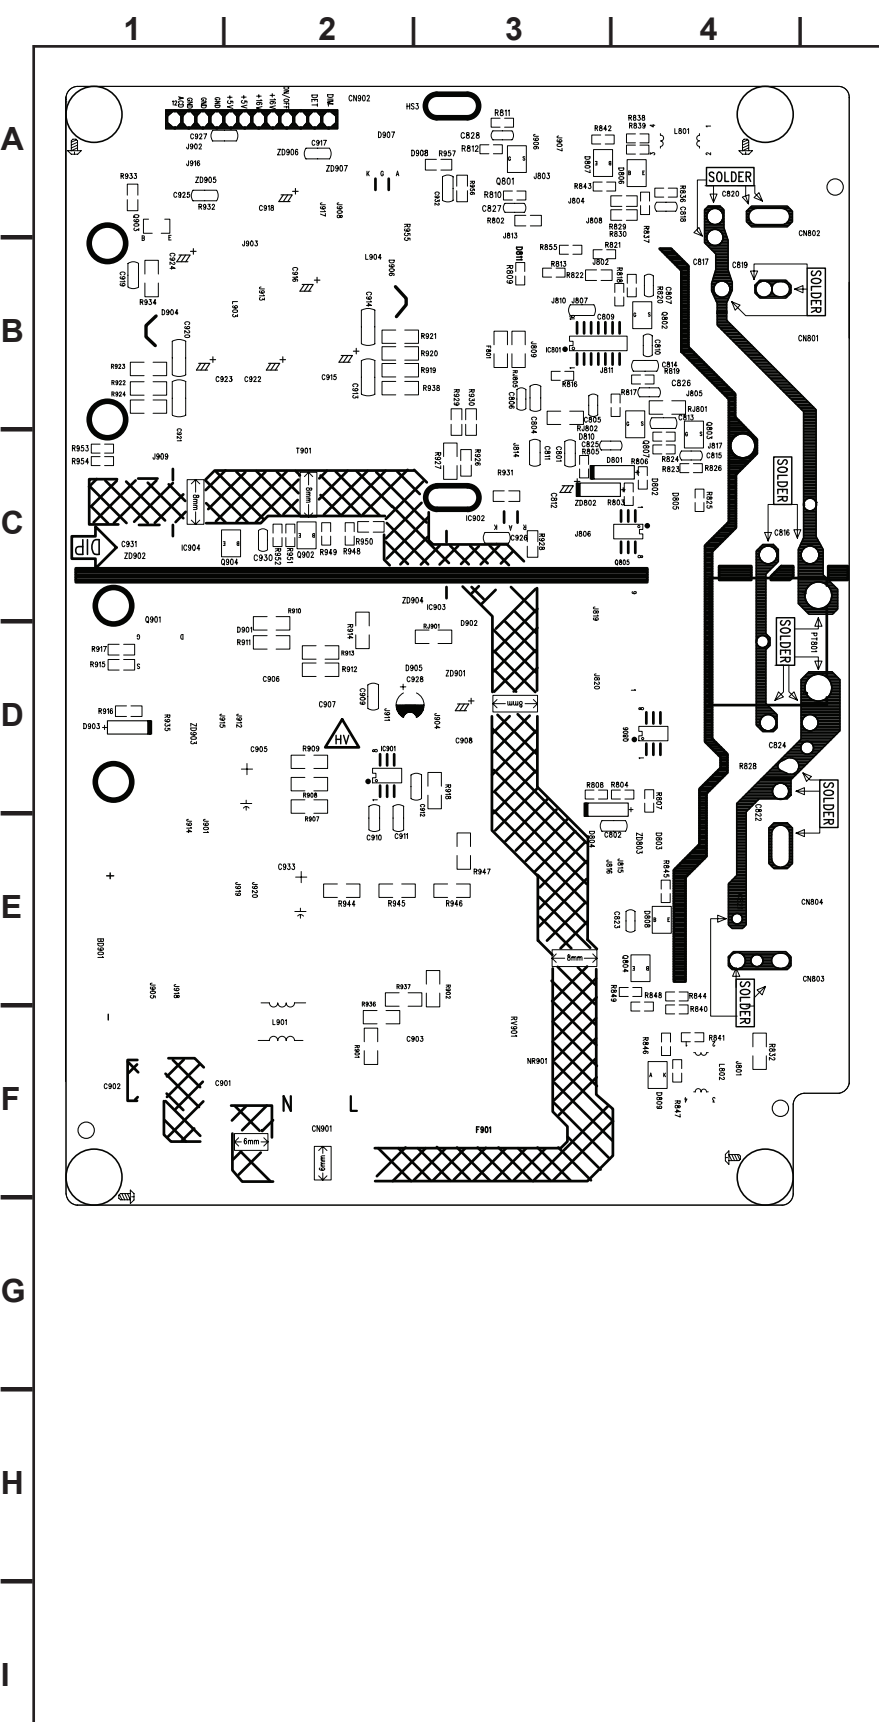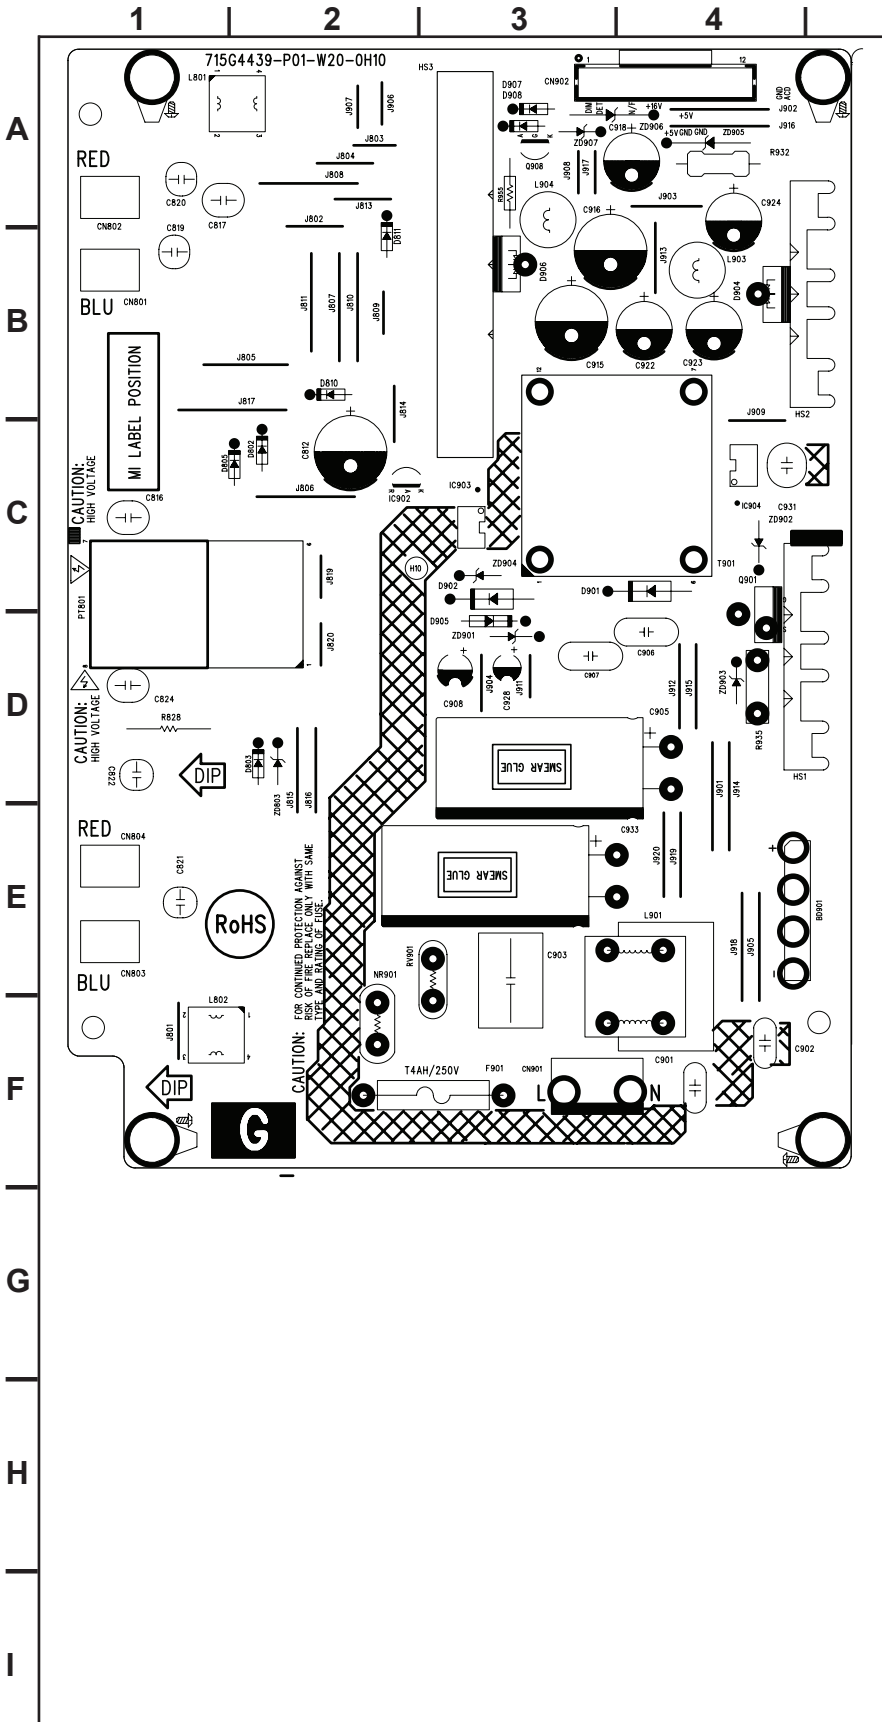

GT32 BOARD SCHEMATIC DIAGRAM (KDL-32BX325/32BX326/32BX425 ONLY) (PAGE 1 OF 2)

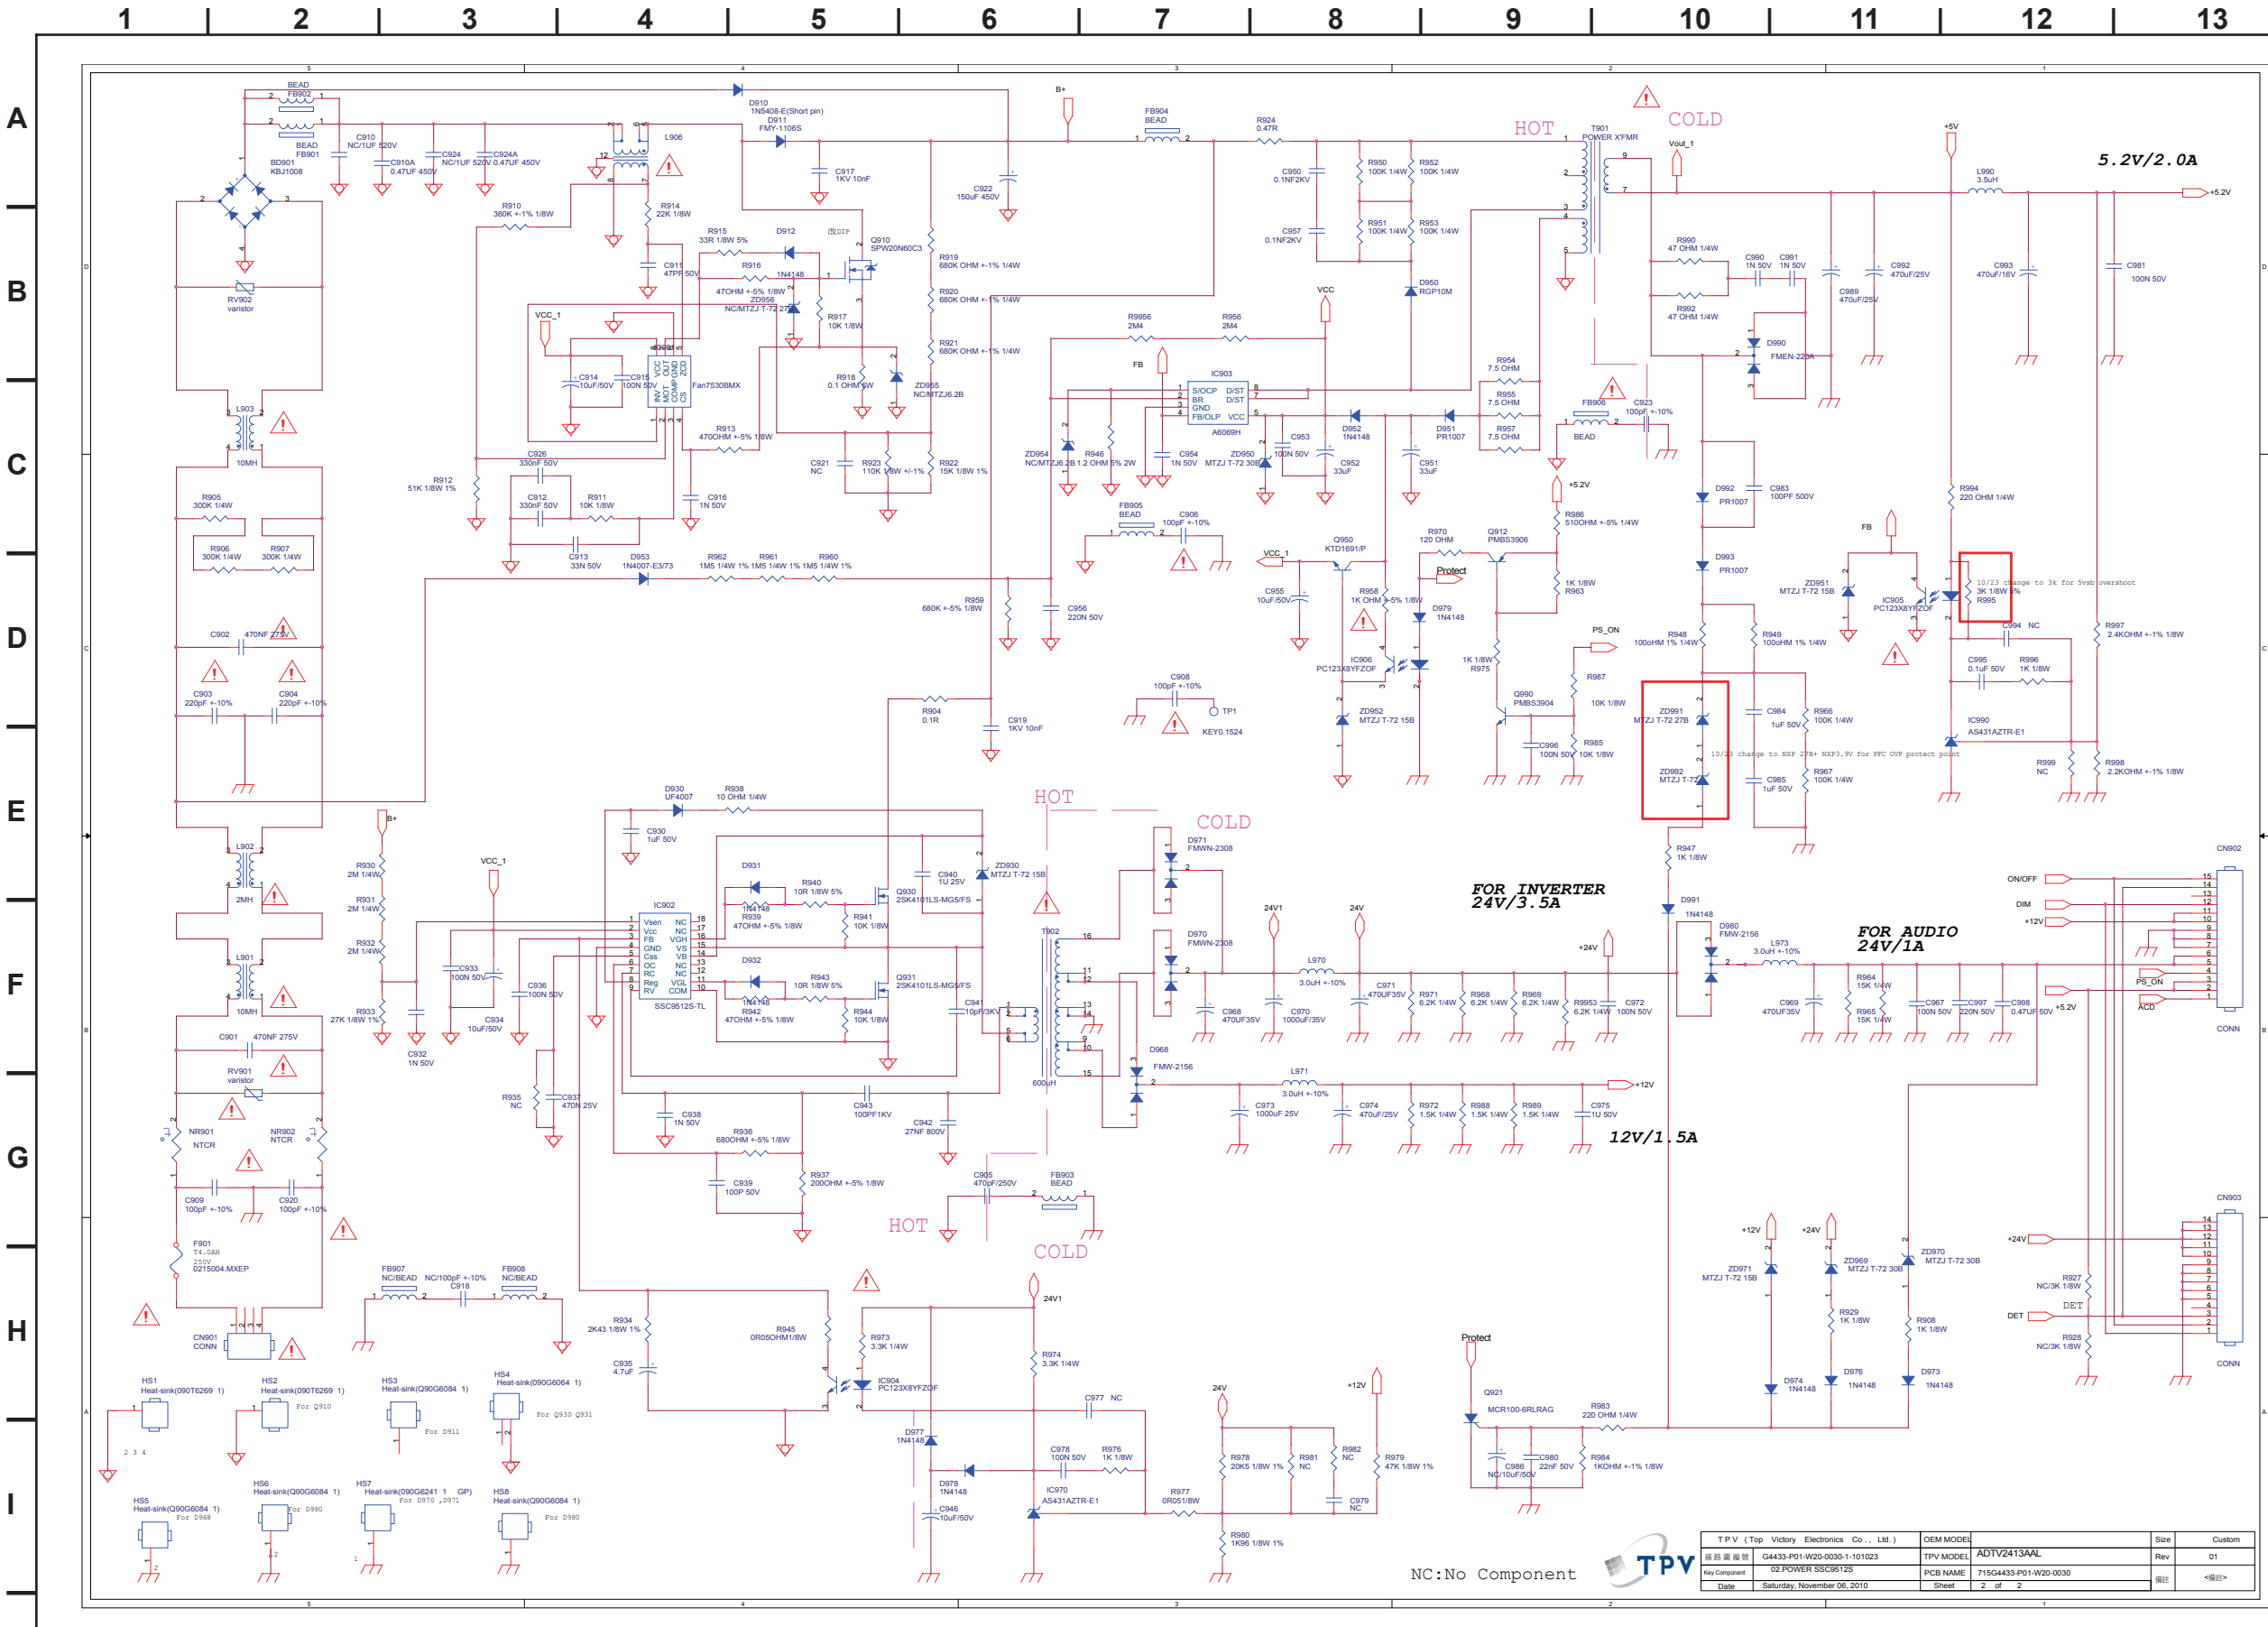

GT32 BOARD SCHEMATIC DIAGRAM (KDL-32BX325/32BX326/32BX425 ONLY) (PAGE 2 OF 2)

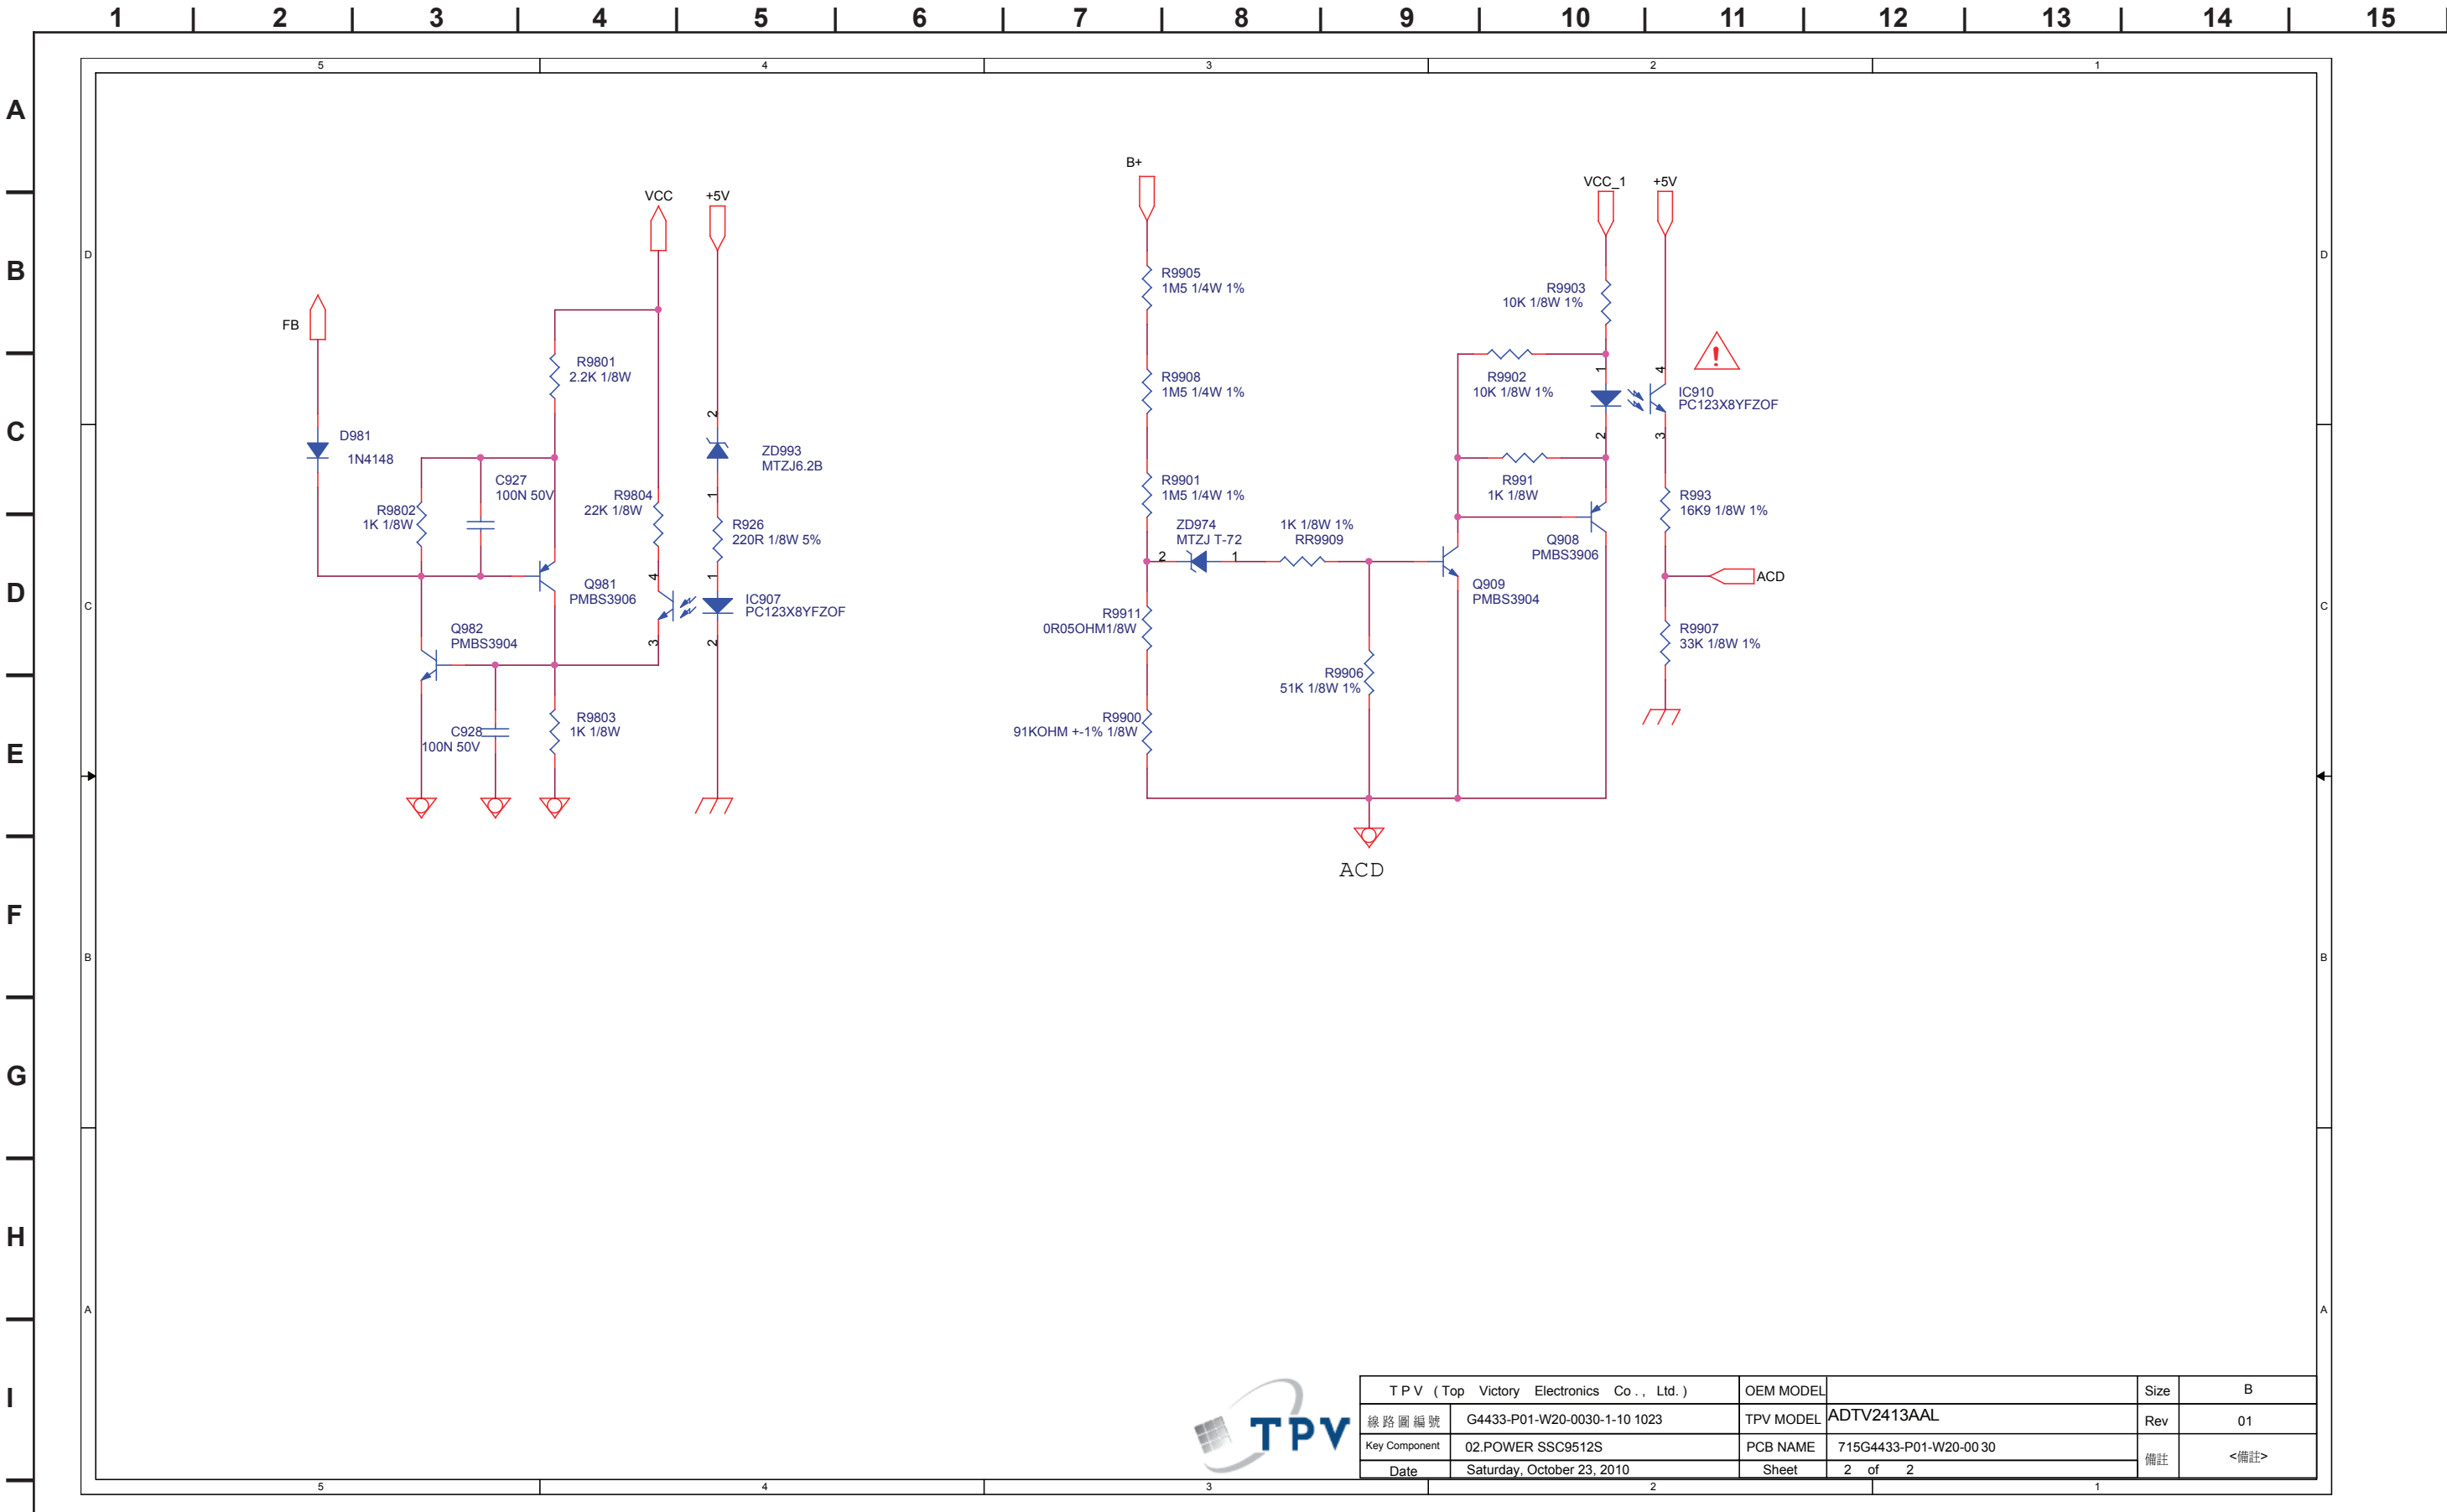


T P V ( Top Victory Electronics Co., Ltd. )		OEM MODEL		Size	B
線路圖編號	G4433-P01-W20-0030-1-10 1023	TPV MODEL	ADTV2413AAL	Rev	01
Key Component	02.POWER SSC9512S	PCB NAME	715G4433-P01-W20-00 30	備註	<備註>
Date	Saturday, October 23, 2010	Sheet	2 of 2		

## GT32

[POWER]


### COMPONENT SIDE (KDL-32BX325/32BX326/32BX425 ONLY)

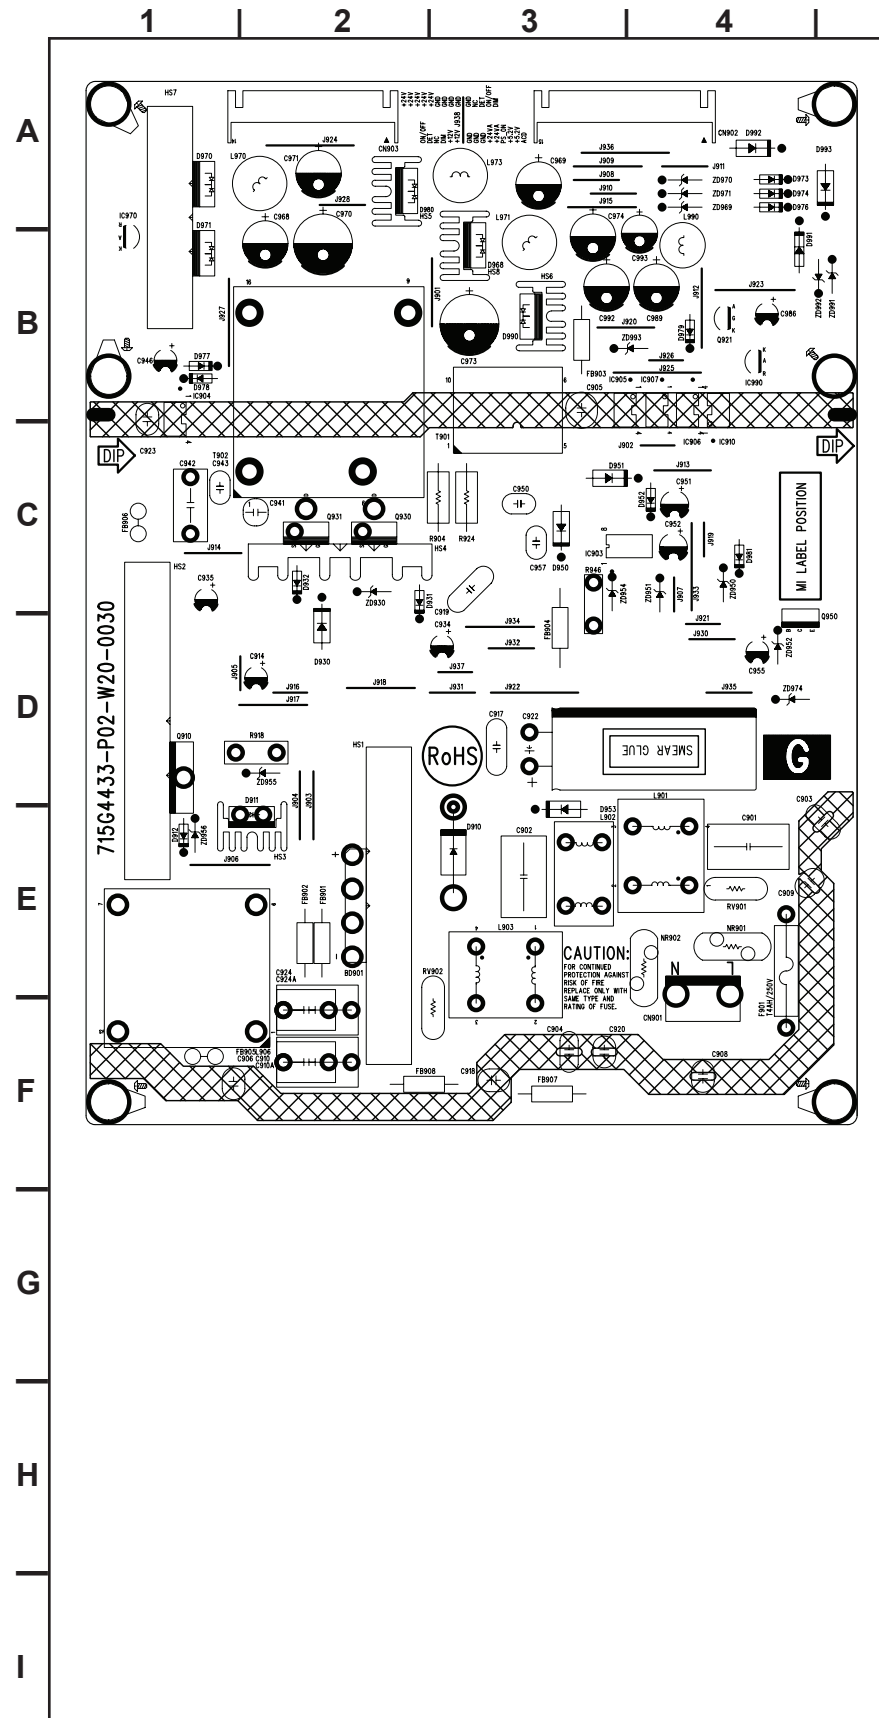


## GT32

[POWER]


### CONDUCTOR SIDE (KDL-32BX325/32BX326/32BX425 ONLY)

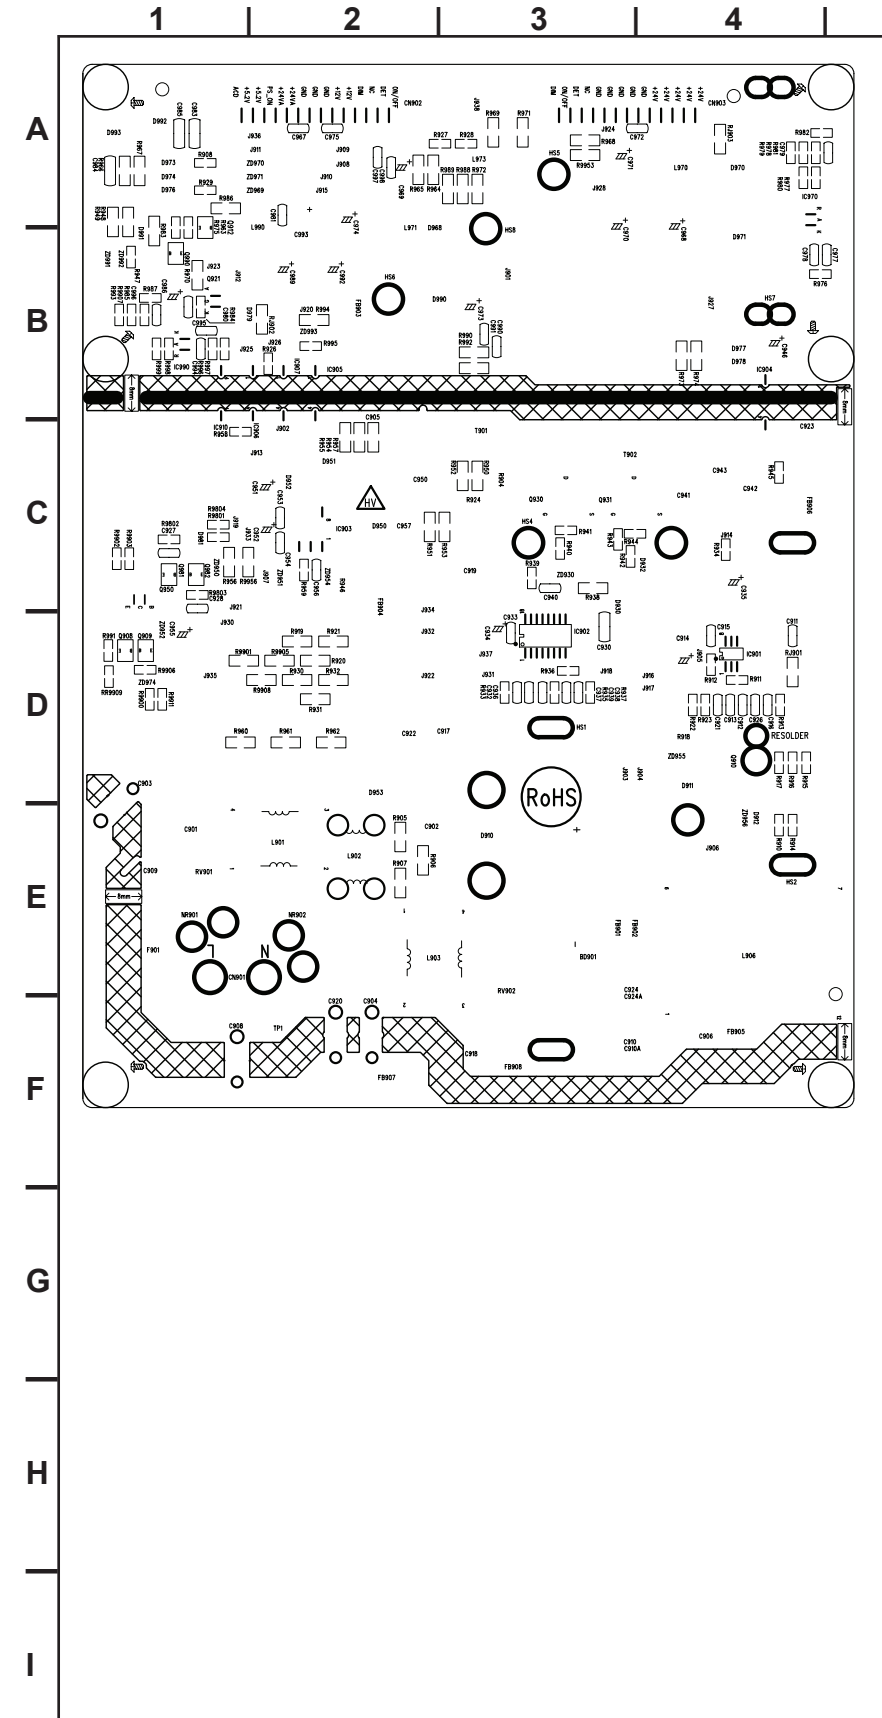

GT40 BOARD SCHEMATIC DIAGRAM (KDL-40BX425 ONLY) (PAGE 1 OF 2)

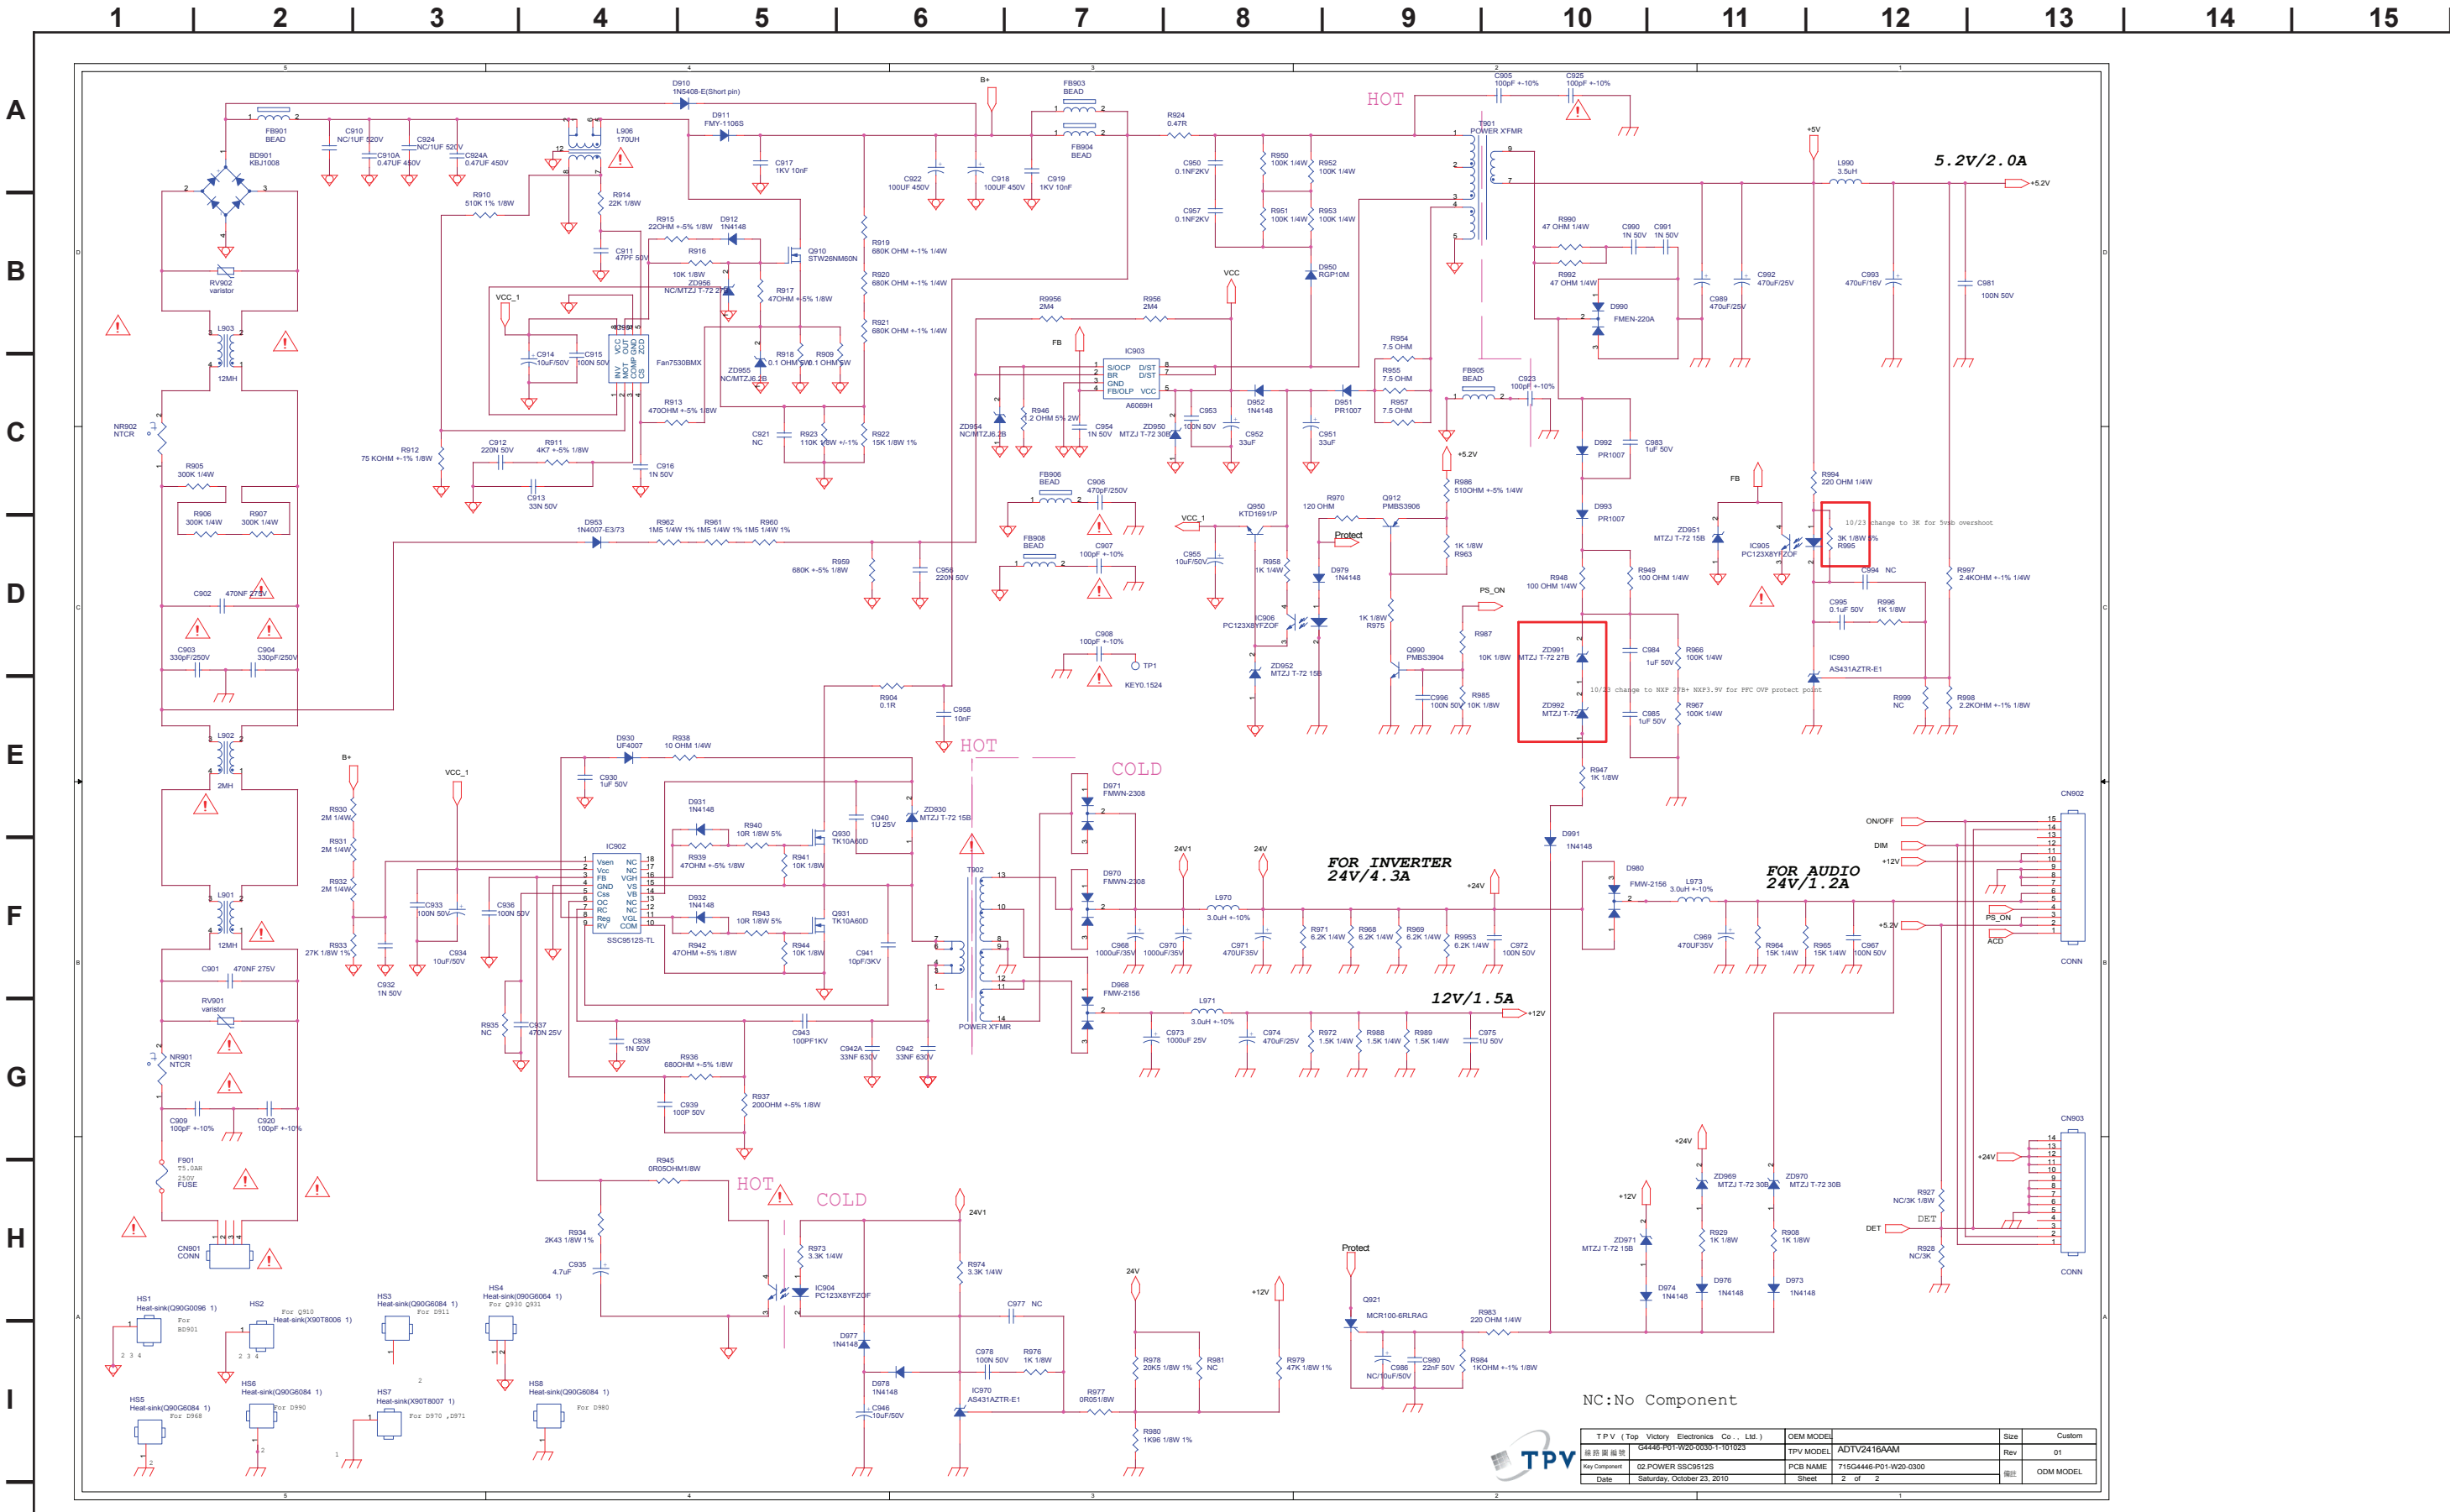

GT40 BOARD SCHEMATIC DIAGRAM (KDL-40BX425 ONLY) (PAGE 2 OF 2)

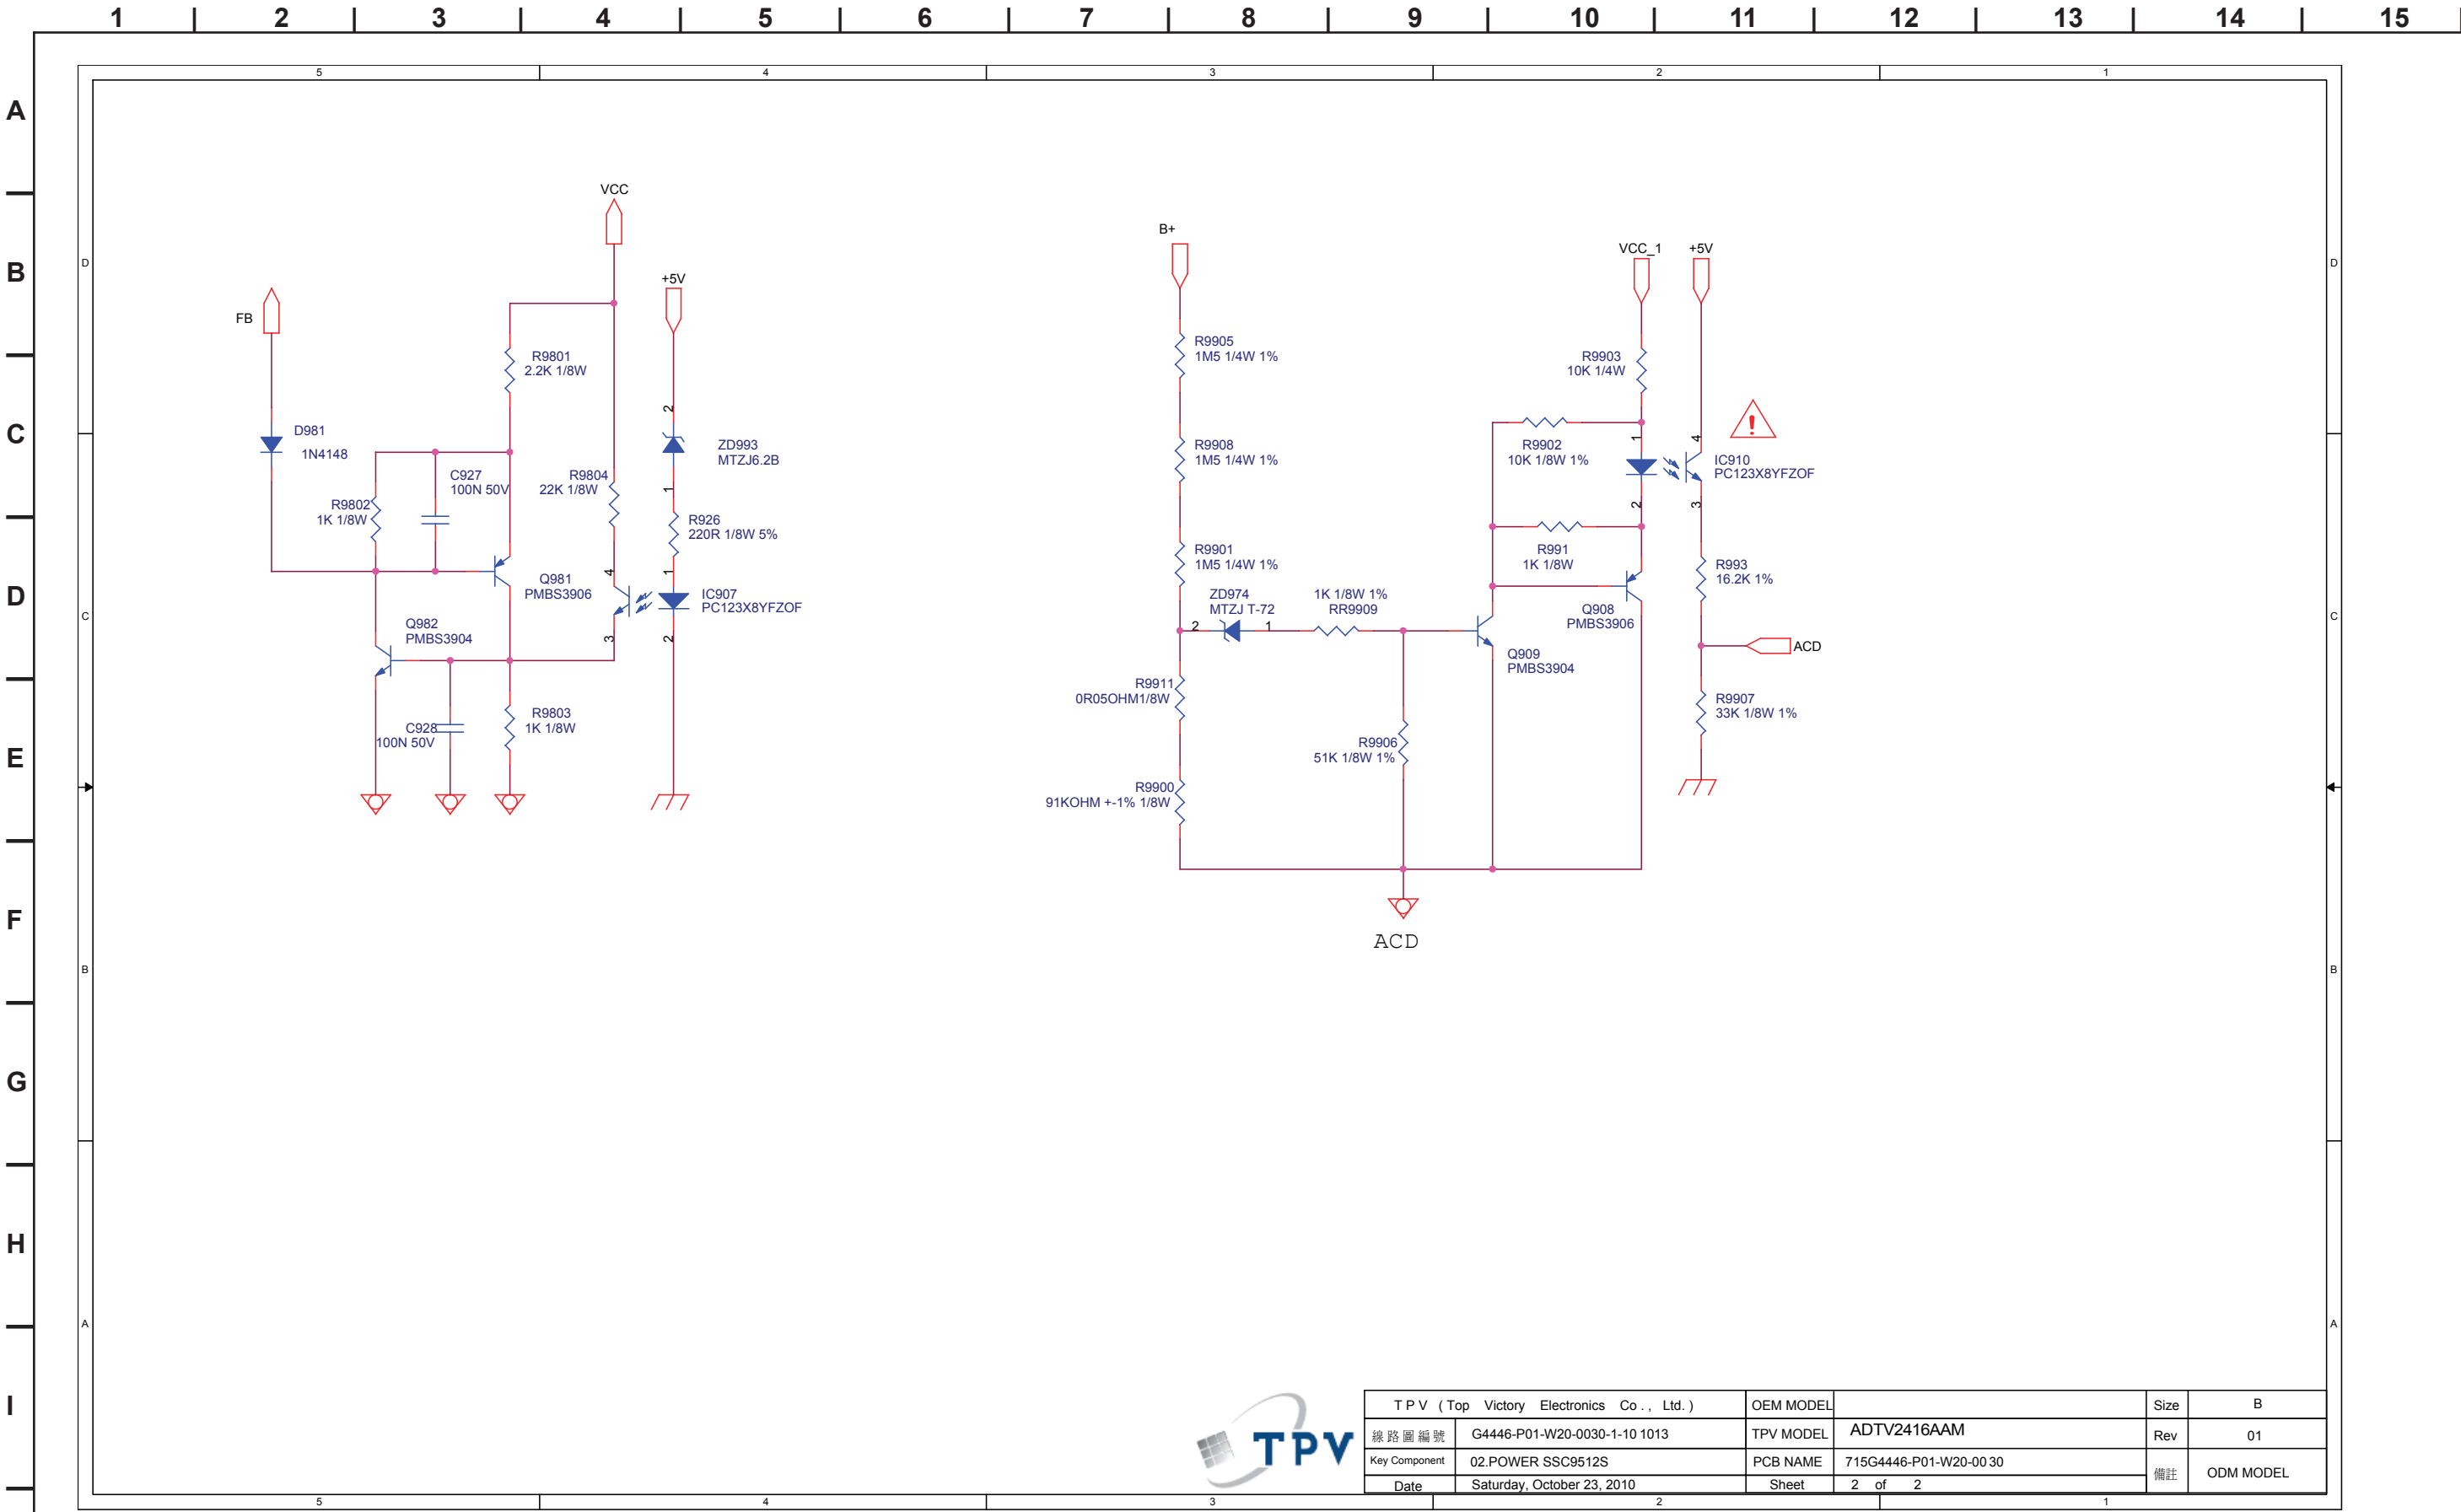

TPV ( Top Victory Electronics Co . , Ltd. )	OEM MODEL		Size	B
線路圖編號	G4446-P01-W20-0030-1-10 1013	TPV MODEL	ADTV2416AAM	Rev
Key Component	02.POWER SSC9512S	PCB NAME	715G4446-P01-W20-00 30	ODM MODEL
Date	Saturday, October 23, 2010	Sheet	2 of 2	備註



GT40



[POWER]

COMPONENT SIDE (KDL-40BX425 ONLY)

GT40


[POWER]



CONDUCTOR SIDE (KDL-40BX425 ONLY)

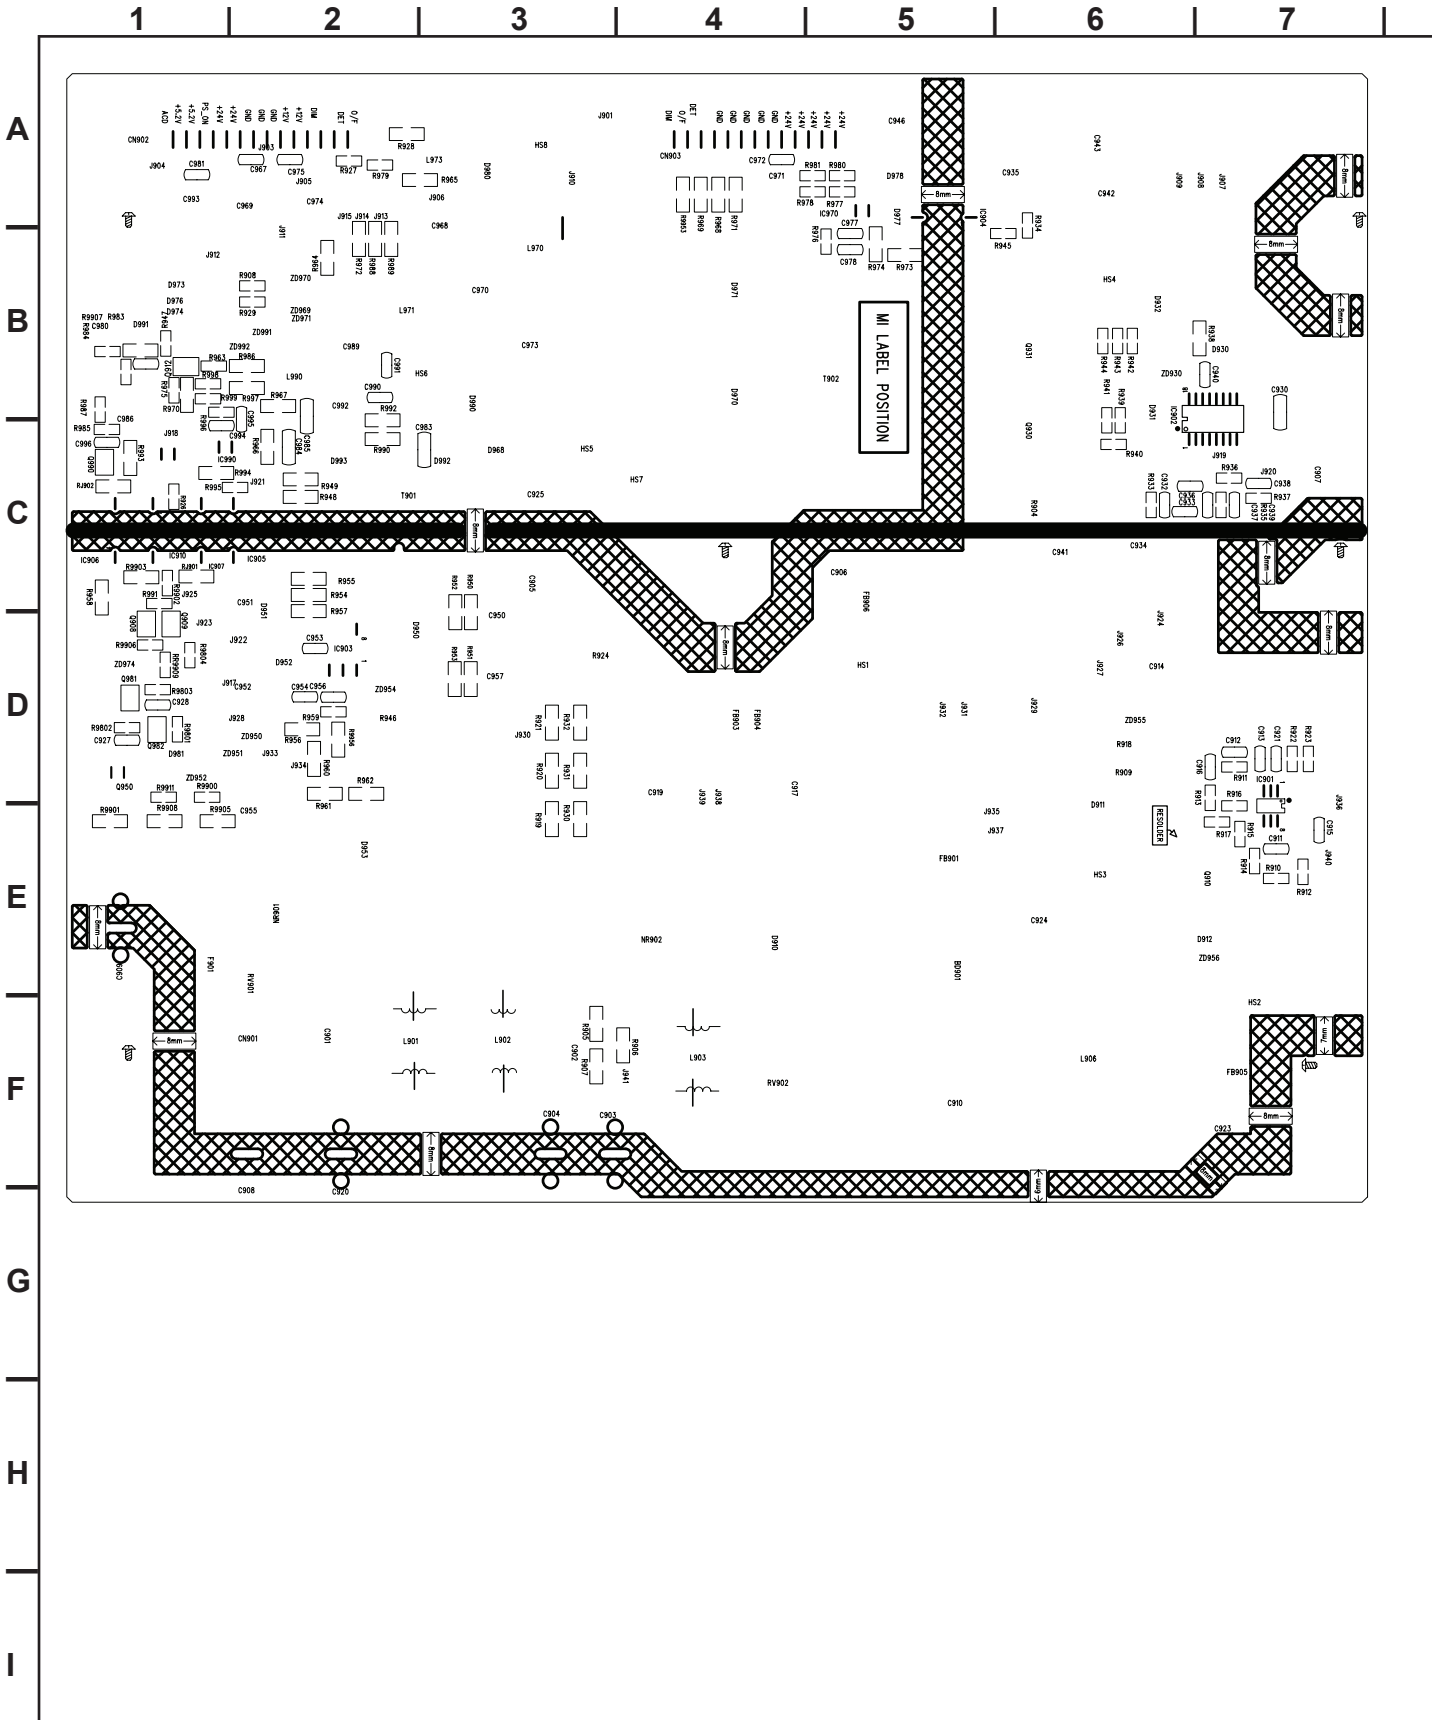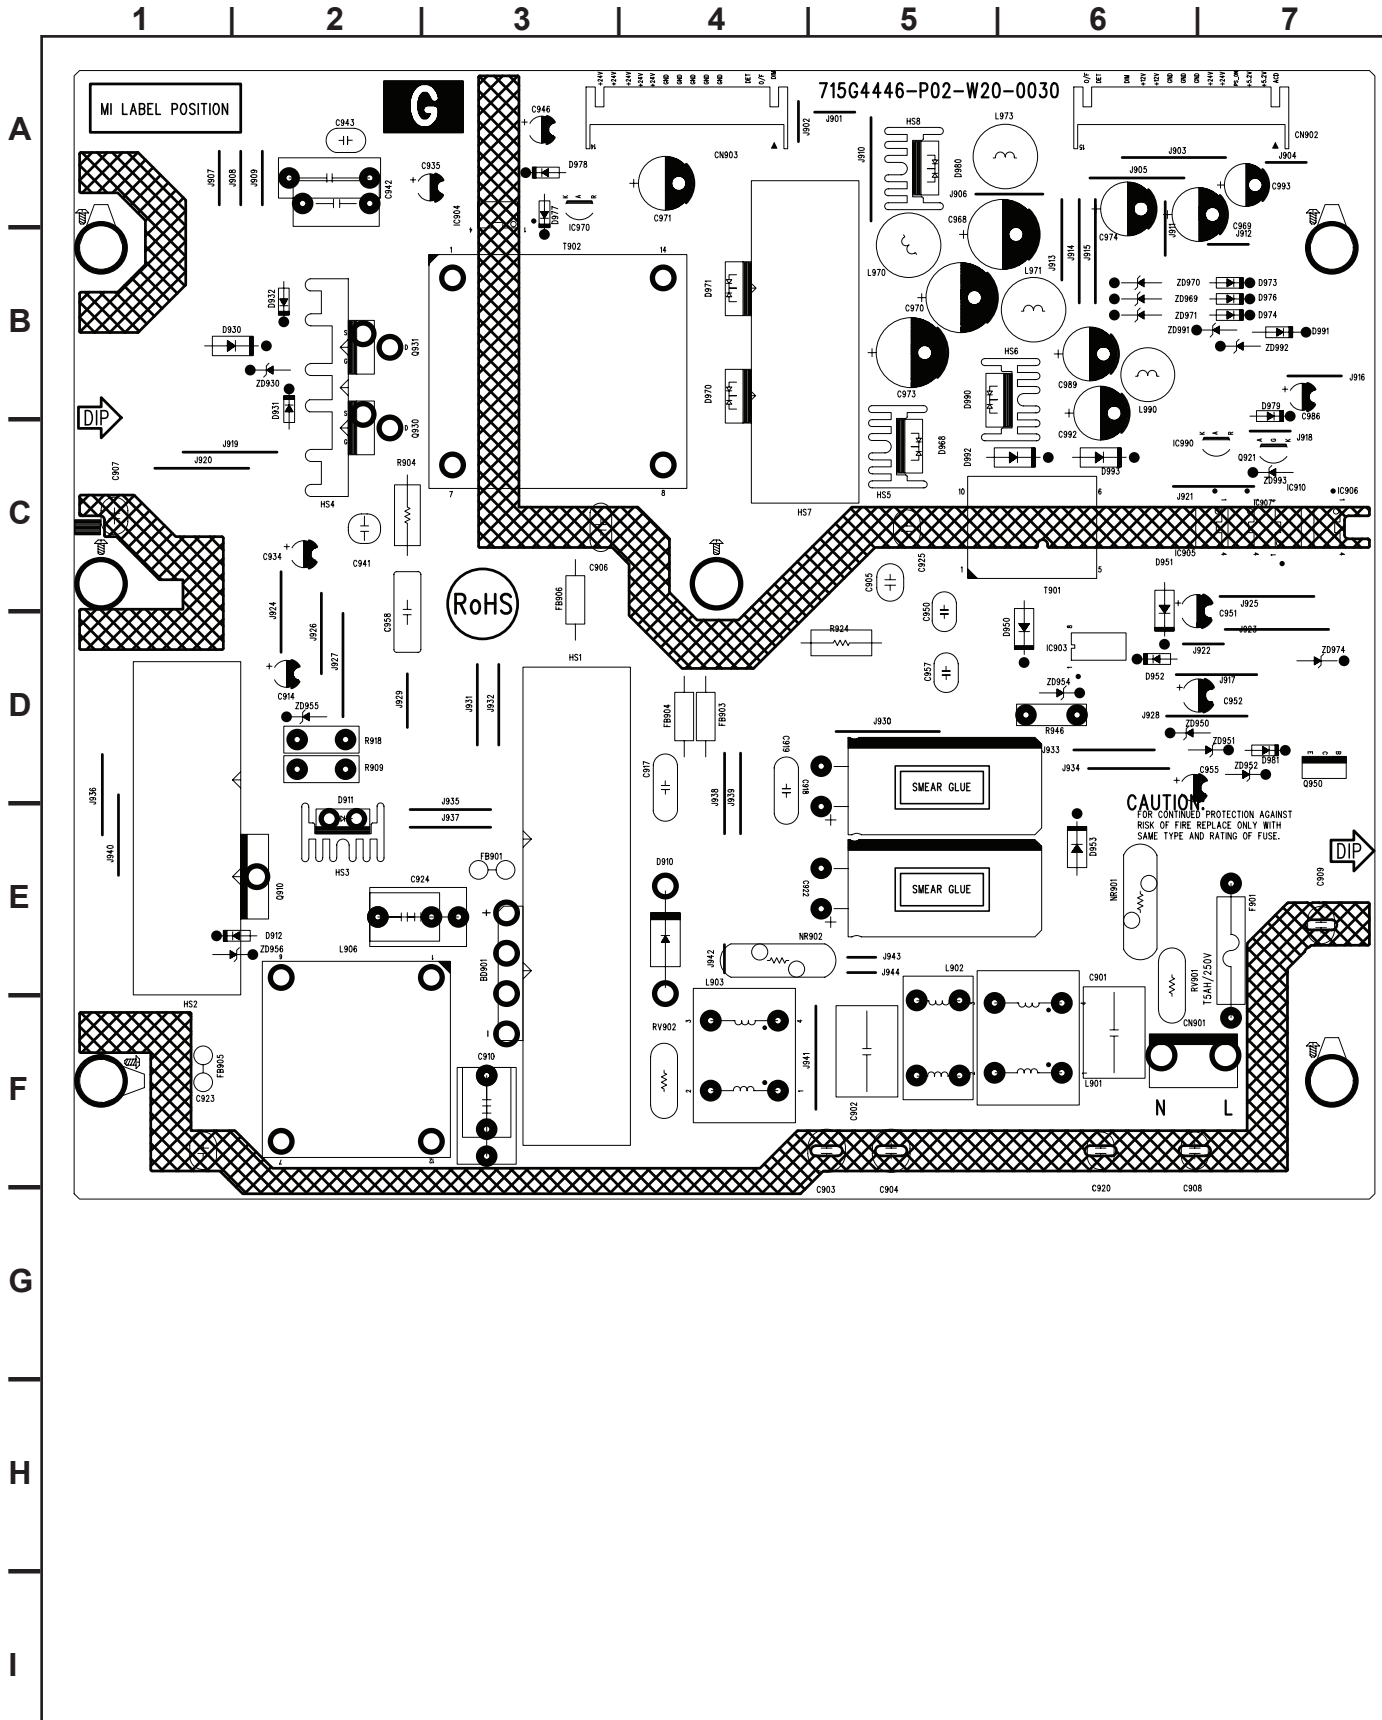






H1 BOARD SCHEMATIC DIAGRAM

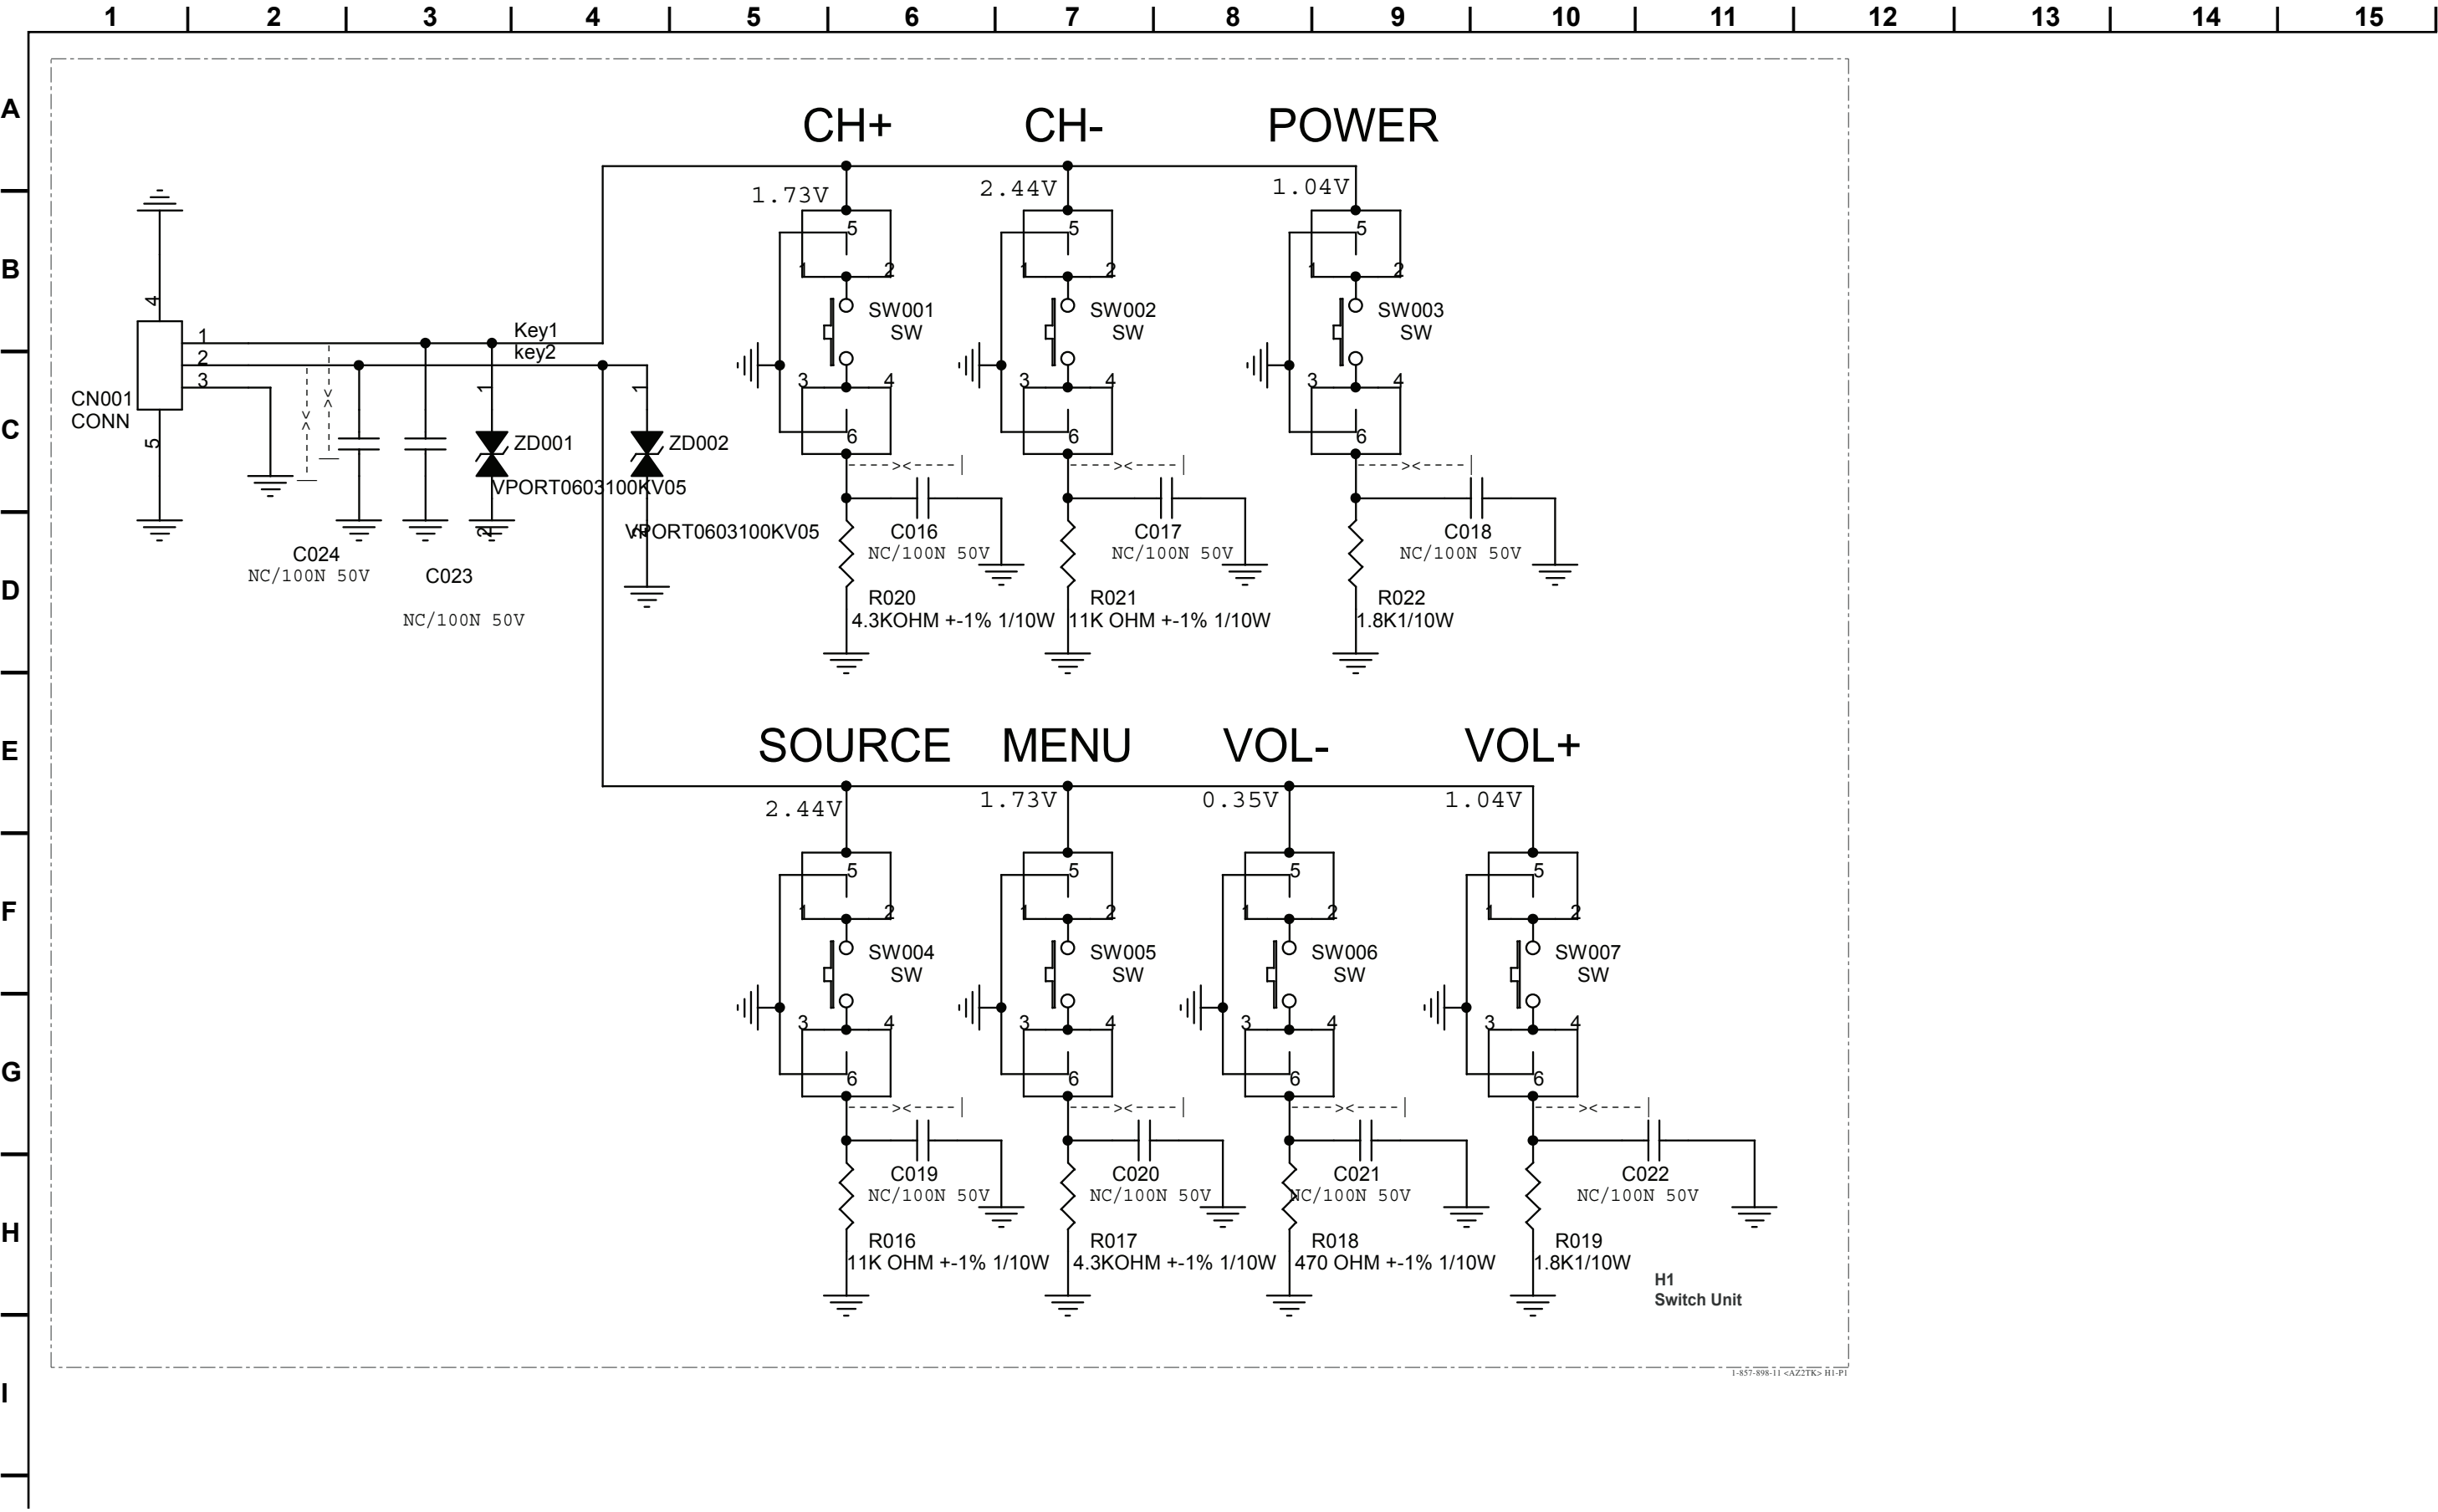

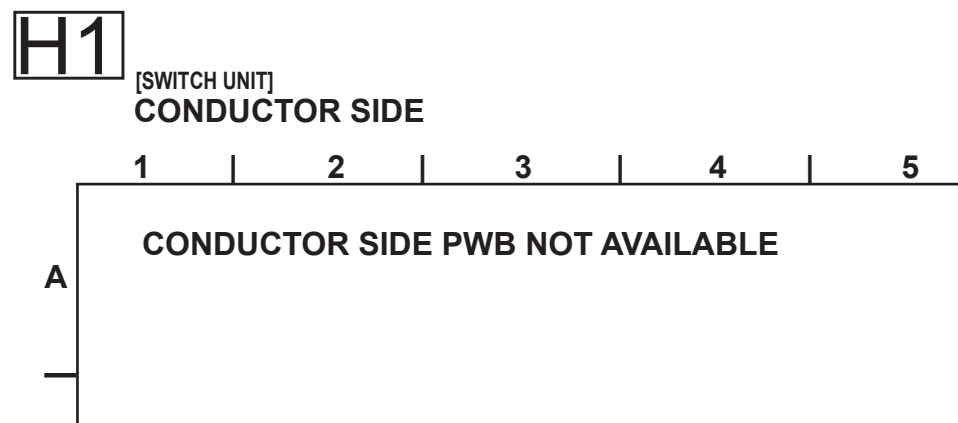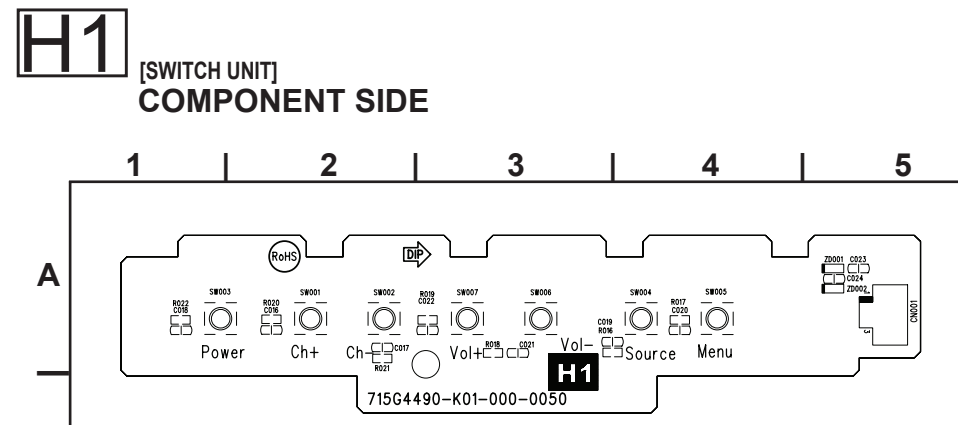


H2 BOARD SCHEMATIC DIAGRAM

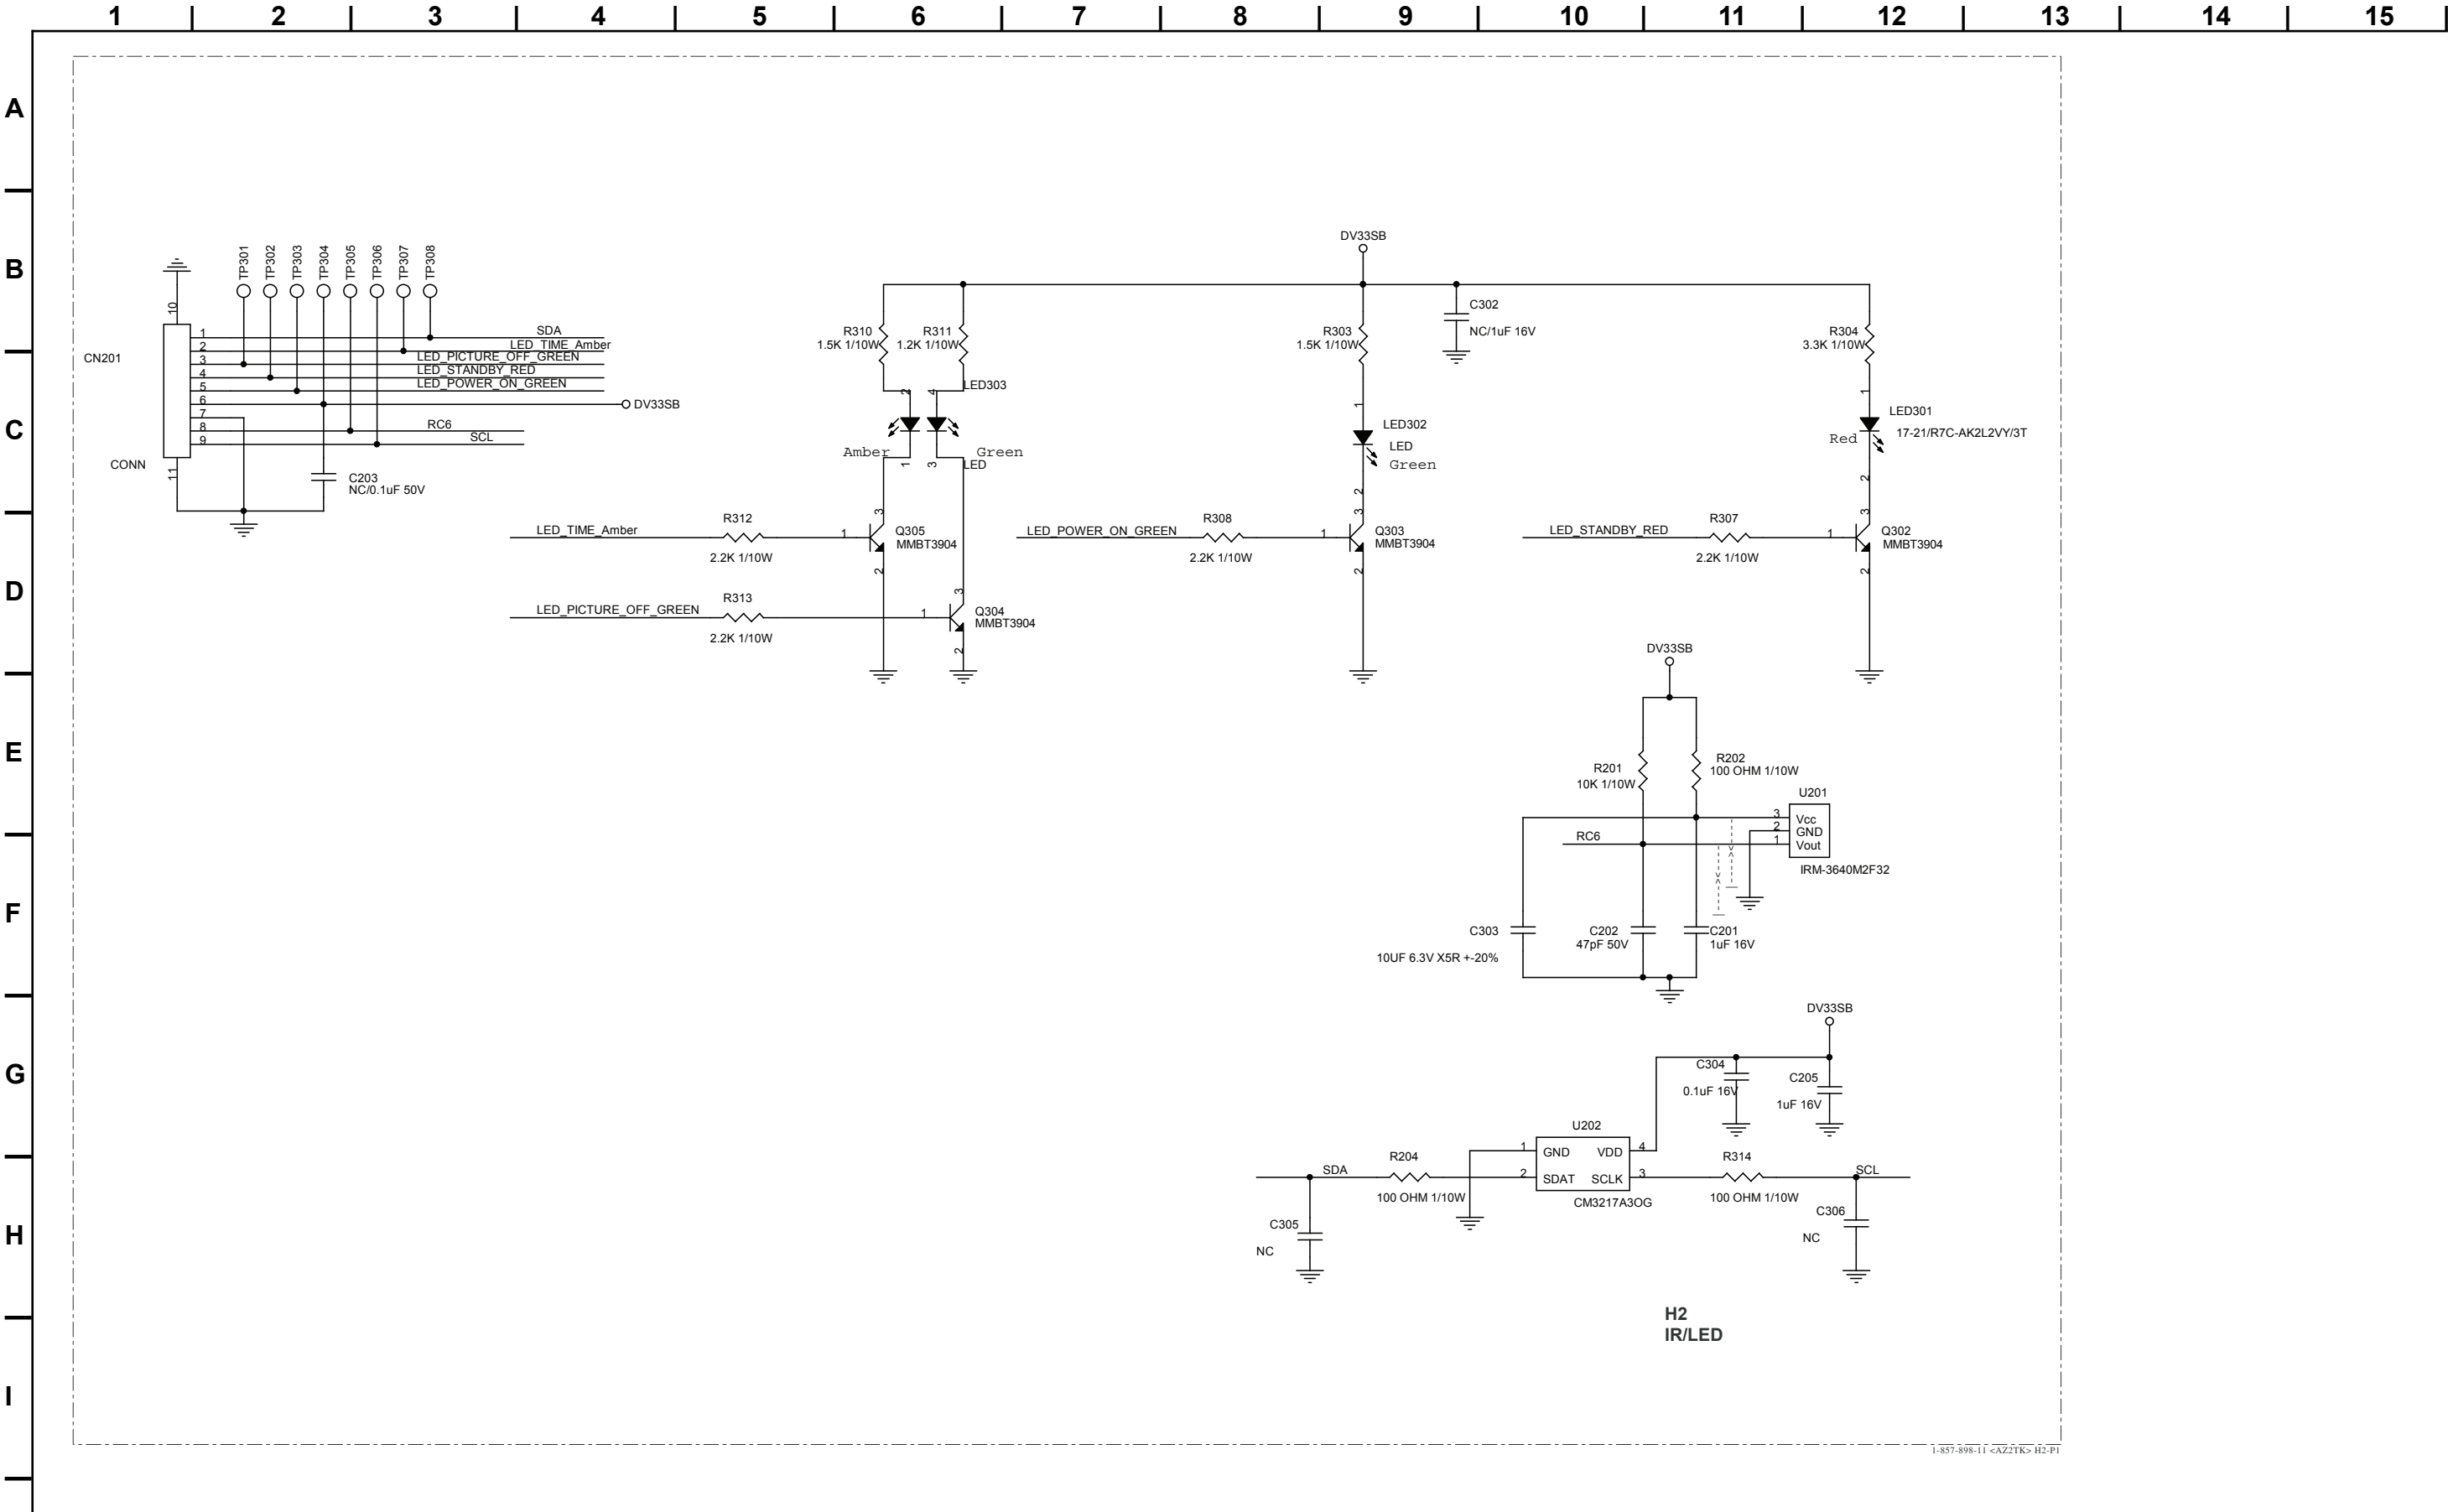

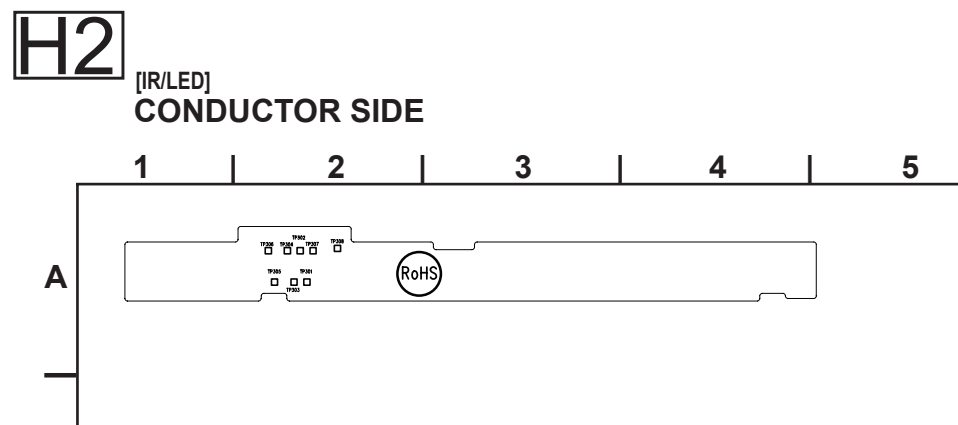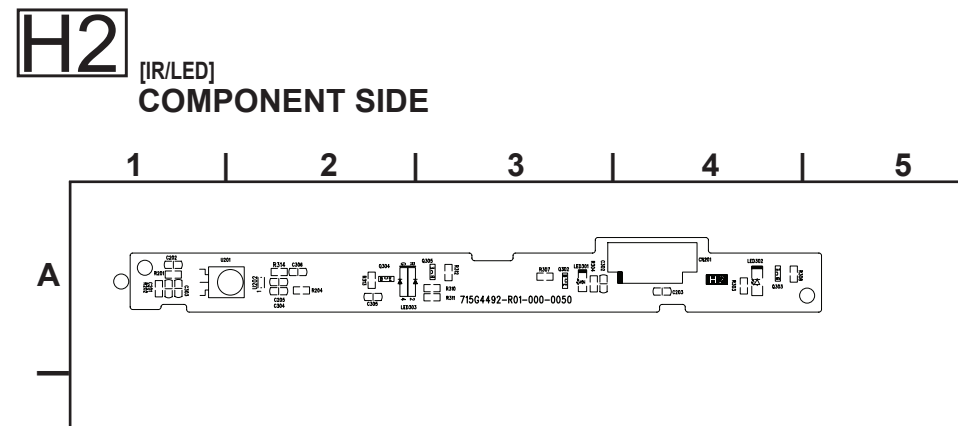


## SECTION 2: ELECTRICAL PARTS LIST

NOTE: The components identified by shading and  mark are critical for safety. Replace only with part number specified.

\* Items marked with an asterisk are not stocked since they are seldom required for routine service. Expect some delay when ordering these components.

### RESISTORS

- All resistors are in ohms
- F : nonflammable
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

NOTE: The components identified by a red outline and a  mark contain confidential information. Specific instructions must be adhered to whenever these components are repaired and/or replaced.  
See Appendix A: Encryption Key Components in the back of this manual.




When ordering parts by reference number, please include the board name.

REF. NO.	PART NO.	DESCRIPTION	VALUES	REF. NO.	PART NO.	DESCRIPTION	VALUES
<b>A</b>	1-857-923-11	A BOARD, COMPLETE (KDL-22BX325 ONLY)	Component level repair information is not available.				
	1-857-922-11	A BOARD, COMPLETE (KDL-32BX325/32BX326 ONLY)	Component level repair information is not available.				
	1-857-921-11	A BOARD, COMPLETE (KDL-32B425/40BX425 ONLY)	Component level repair information is not available.				
<b>LIPS22</b>	1-857-927-11	LIPS22 POWER BOARD, COMPLETE (KDL-22BX325 ONLY)	Component level repair information is not available.				
<b>GT32</b>	1-857-928-11	GT32 POWER BOARD, COMPLETE (KDL-32BX325/32BX326/32BX425 ONLY)	Component level repair information is not available.				
<b>GT40</b>	1-857-929-11	GT40 POWER BOARD, COMPLETE (KDL-40BX425 ONLY)	Component level repair information is not available.				
<b>H1</b>	1-857-926-11	H1 BOARD, COMPLETE	Component level repair information is not available.				
<b>H2</b>	1-857-925-11	H2 BOARD, COMPLETE	Component level repair information is not available.				

## APPENDIX A: ENCRYPTION KEY COMPONENTS

Encryption key components developed by Sony Corporation contain confidential information, and shall be handled under the non-disclosure obligations provided in the applicable agreement with Sony Corporation (and/or its subsidiary).

As part of this agreement specific instructions must be adhered to whenever a Circuit Board containing encryption key components is repaired and/or replaced pursuant to the following:

- 1) In the service manual the Circuit Board(s) containing encryption key components shall be identified with a **red outline and a **.
- 2) Only repair boards or components listed in the service manual shall be utilized for replacement and/or repair.
- 3) Disassembly, decryption, or reverse-engineering component(s) is strictly prohibited.
- 4) Any board in which the Servicer replaces an encryption key component must be placed back into the set it originally came from and the replaced defective component **MUST BE DESTROYED**. Boards cannot be swapped.
- 5) If a Circuit Board identified with a **red outline and a ** in the service manual is deemed to be defective:
  - a) and if a core charge is imposed and is covered under the product warranty, the defective un-repaired or modified board **MUST BE RETURNED** to Sony.
  - b) and if the core charge is **NOT** covered under the product warranty, the defective un-repaired or modified board **MUST BE DESTROYED**.
- 6) If a unit is destroyed (such as field scrap), the Circuit Board identified with a **red outline and a ** in the service manual **MUST BE DESTROYED**.

**SONY**® is a trademark of Sony Electronics

Reproduction in whole or part without written permission is prohibited. All rights reserved

**Sony Corporation**  
 Sony Technology Center  
 Technical Services  
 Service Publication Department

English  
 2011CJ74WEB-1  
 Printed in USA  
 © 2011.03