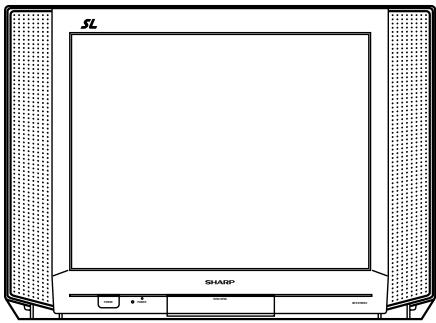


SHARP**SERVICE MANUAL**

S80G526SL41M/

**COLOR TELEVISION****Chassis No. SN-91A**
**26SL41M, 26SL71M
MODELS 29SL81M**

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

CONTENTS

	Page
• ELECTRICAL SPECIFICATIONS	1
• IMPORTANT SERVICE SAFETY PRECAUTION	2
• LOCATION OF USER'S CONTROL	4
• INSTALLATION AND SERVICE INSTRUCTIONS	5
• CHASSIS LAYOUT	11
• BLOCK DIAGRAM	12
• SCHEMATIC DIAGRAMS	15
• PRINTED WIRING BOARD ASSEMBLIES	32
• REPLACEMENT PARTS LIST	36
• PACKING OF THE SET	47

ELECTRICAL SPECIFICATIONS

POWER INPUT	110-220 V AC 50/60 Hz	AUDIO POWER	
POWER RATING		OUTPUT RATING	
26SL41M	120 W	26SL41M	1.5 W + 1.5 W
26SL71M	125 W	26SL71M, 29SL81M	5 W + 5 W
29SL81M	130 W	(at 5% distortion and Dual CH Operate)	
PICTURE SIZE		SPEAKER	
26SL41M, 26SL71M	2,032 cm ² (315 sq inch)	SIZE	12 × 6 cm (2 pcs.)
29SL81M	2,193 cm ² (340 sq inch)	VOICE COIL IMPEDANCE	
CONVERGENCE	Magnetic	26SL41M	32 ohm at 400 Hz
SWEEP DEFLECTION	Magnetic	26SL71M, 29SL81M	8 ohm at 400 Hz
FOCUS	Hi-Bi-Potential Electrostatic	ANTENNA INPUT IMPEDANCE	
INTERMEDIATE FREQUENCIES		VHF/UHF	75 ohm Unbalanced
Picture IF Carrier Frequency	45.75 MHz	TUNING RANGES	
Sound IF Carrier Frequency	41.25 MHz	VHF-Channels	2 thru 13
Color Sub-Carrier Frequency	42.17 MHz (Nominal)	UHF-Channels	14 thru 69
		CATV Channels	1 thru 125

Specifications are subject to change without prior notice.

IMPORTANT SERVICE SAFETY PRECAUTION

- Service work should be performed only by qualified service technicians who are thoroughly familiar with all safety checks and the servicing guidelines which follow:

WARNING

1. For continued safety, no modification of any circuit should be attempted.
2. Disconnect AC power before servicing.
3. Semiconductor heat sinks are potential shock hazards when the chassis is operating.
4. The chassis in this receiver has two ground systems which are separated by insulating material. The non-isolated (hot) ground system is for the B+ voltage regulator circuit and the horizontal output circuit. The isolated ground system is for the low B+ DC voltages and the secondary circuit of the high voltage transformer.

To prevent electrical shock use an isolation transformer between the line cord and power receptacle, when servicing this chassis.

SERVICING OF HIGH VOLTAGE SYSTEM AND PICTURE TUBE

When servicing the high voltage system, remove the static charge by connecting a 10k ohm resistor in series with an insulated wire (such as a test probe) between the picture tube ground and the anode lead. (AC line cord should be disconnected from AC outlet.)

1. Picture tube in this receiver employs integral implosion protection.
2. Replace with tube of the same type number for continued safety.
3. Do not lift picture tube by the neck.
4. Handle the picture tube only when wearing shatterproof goggles and after discharging the high voltage anode completely.

X-RADIATION AND HIGH VOLTAGE LIMITS

1. Be sure all service personnel are aware of the procedures and instructions covering X-radiation. The only potential source of X-ray in current solid state TV receivers is the picture tube. However, the picture tube does not emit measurable X-Ray radiation, if the high voltage is as specified in the "High Voltage Check" instructions.
It is only when high voltage is excessive that X-radiation is capable of penetrating the shell of the picture tube including the lead in the glass material. The important precaution is to keep the high voltage below the maximum level specified.
2. It is essential that servicemen have available at all times an accurate high voltage meter.
The calibration of this meter should be checked periodically.
3. High voltage should always be kept at the rated value –no higher. Operation at higher voltages may cause a failure of the picture tube or high voltage circuitry and;also, under certain conditions, may produce radiation in exceeding of desirable levels.
4. When the high voltage regulator is operating properly there is no possibility of an X-radiation problem. Every time a color chassis is serviced, the brightness should be tested while monitoring the high voltage with a meter to be certain that the high voltage does not exceed the specified value and that it is regulating correctly.
5. Do not use a picture tube other than that specified or make unrecommended circuit modifications to the high voltage circuitry.
6. When trouble shooting and taking test measurements on a receiver with excessive high voltage, avoid being unnecessarily close to the receiver.
Do not operate the receiver longer than is necessary to locate the cause of excessive voltage.

IMPORTANT SERVICE SAFETY PRECAUTION

(Continued)


BEFORE RETURNING THE RECEIVER

(Fire & Shock Hazard)

Before returning the receiver to the user, perform the following safety checks.

1. Inspect all lead dress to make certain that leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the receiver.
 2. Inspect all protective devices such as non-metallic control knobs, insulating materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacity networks, mechanical insulators and etc.
 3. To be sure that no shock hazard exists, check for leakage current in the following manner.
- Plug the AC cord directly into a 127 volt AC outlet, (Do not use an isolation transformer for this test).
 - Using two clip leads, connect a 1.5k ohm, 10 watt resistor paralleled by a $0.15\mu\text{F}$ capacitor in series with all exposed metal cabinet parts and a known earth ground, such as electrical conduit or electrical ground connected to earth ground.
 - Use an AC voltmeter having with 5000 ohm per volt, or higher, sensitivity to measure the AC voltage drop across the resistor.

- Connect the resistor connection to all exposed metal parts having a return to the chassis (antenna, metal cabinet, screw heads, knobs and control shafts, escutcheon and etc.) and measure the AC voltage drop across the resistor.
- All checks must be repeated with the AC line cord plug connection reversed. (If necessary, a non-polarized adapter plug must be used only for the purpose of completing these check.) Any current measured must not exceed 0.5 milliamp. Any measurements not within the limits outlined above indicate of a potential shock hazard and corrective action must be taken before returning the instrument to the customer.

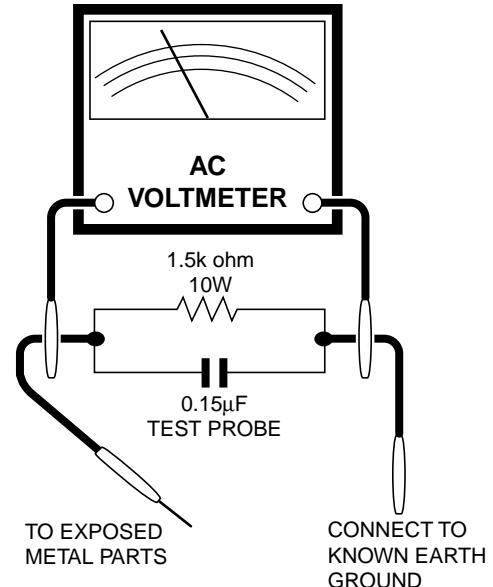



SAFETY NOTICE

Many electrical and mechanical parts in television receivers have special safety-related characteristics. These characteristics are often not evident from visual inspection, nor can protection afforded by them be necessarily increased by using replacement components rated for higher voltage, wattage and etc.

Replacement parts which have these special safety characteristics are identified in this manual; electrical components having such features are identified by "" and shaded areas in the Replacement Parts Lists and Schematic Diagrams.

For continued protection, replacement parts must be identical to those used in the original circuit. The use of substitute replacement parts which do not have the same safety characteristics as the factory recommended replacement parts shown in this service manual, may create shock, fire, X-radiation or other hazards.

LOCATION OF USER'S CONTROL

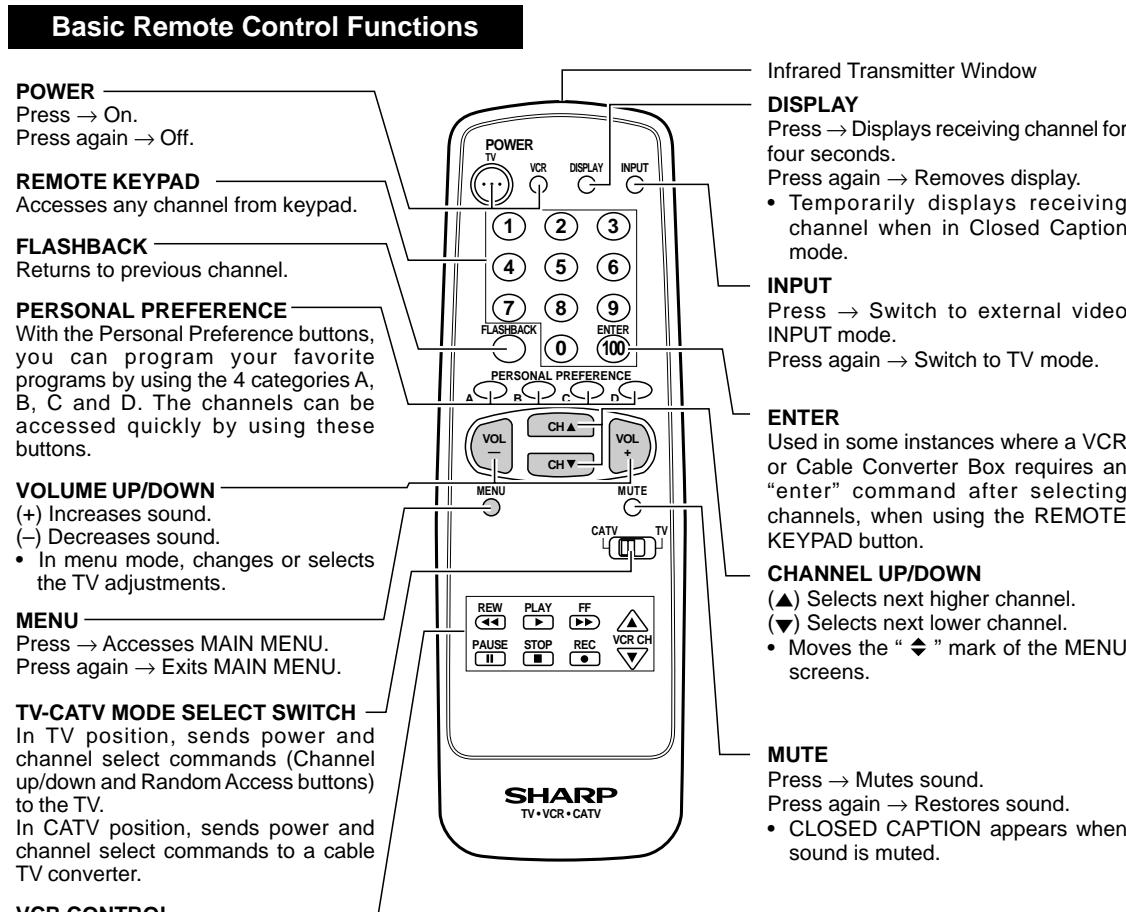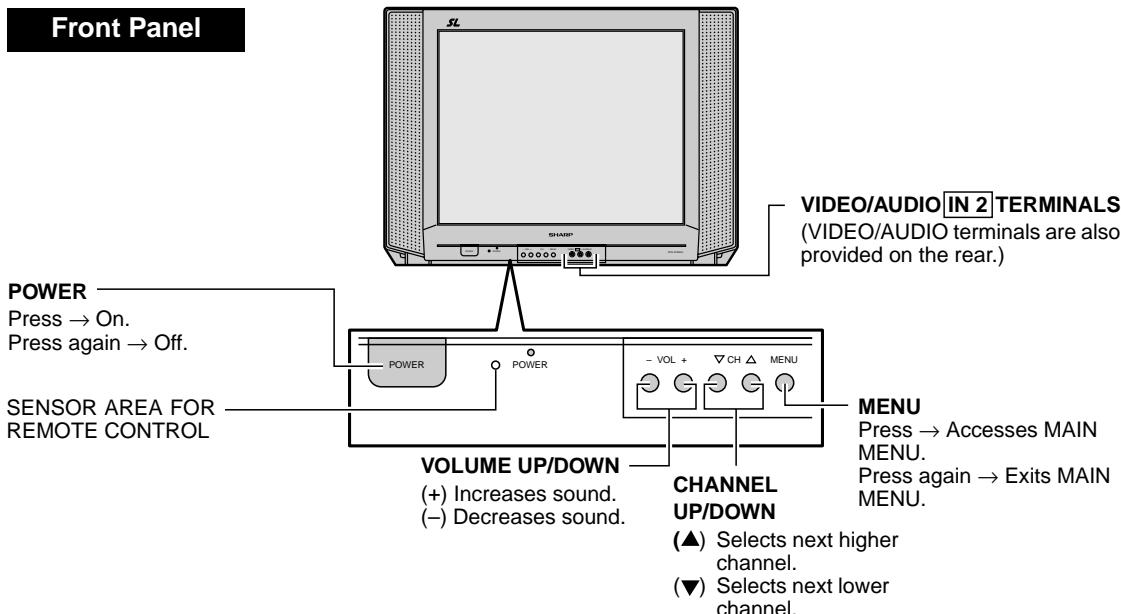

Note:

- The above shaded buttons on the Remote Control glow in the dark. To use the glow-in-the-dark display on the remote control, place it under a fluorescent light or other lighting.
- The phosphorescent material contains no radioactive or toxic material, so it is safe to use.
- The degree of illumination will vary depending on the strength of lighting used.
- The degree of illumination will decrease with time and depending on the temperature.
- The time needed to charge the phosphorescent display will vary depending on the surrounding lighting.
- Sunlight and fluorescent lighting are the most effective when charging the display.

INSTALLATION AND SERVICE INSTRUCTIONS

- Note:**
- (1) When performing any adjustments to resistor controls and transformers use non-metallic screwdrivers or TV alignment tools.
 - (2) Before performing adjustments, the TV set must be on at least 15 minutes.

CIRCUIT PROTECTION

The receiver is protected by a 5.0A fuse (F701), mounted on PWB-A, wired into one side of the AC line input.

X-RADIATION PROTECTOR CIRCUIT TEST

After service has been performed on the horizontal deflection system, high voltage system, B+ system, test the X-Radiation protection circuit to ascertain proper operation as follows:

1. Apply 127V AC using a variac transformer for accurate input voltage.
2. Allow for warm up and adjust all customer controls for normal picture and sound.
3. Receive a good local channel.
4. Connect a digital voltmeter to TP653 and make sure that the voltmeter reads $11.2 \pm 0.6V$.
5. Apply external 13.8V DC at TP653 by using an external DC supply, TV must be shut off.
6. To reset the protector, unplug the AC cord and make a short circuit between TP651 and TP652. Now make sure that normal picture appears on the screen.
7. If the operation of the horizontal oscillator does not stop in step 5, the circuit must be repaired before the set is returned to the customer.

HIGH VOLTAGE CHECK

High voltage is not adjustable but must be checked to verify that the receiver is operating within safe and efficient design limitations as specified checks should be as follows:

1. Connect an accurate high voltage meter between ground and anode of picture tube.
2. Operate receiver for at least 15 minutes at 127V AC line voltage, with a strong air signal or a properly tuned in test signal.
3. Enter the service mode and select the service adjustment "S19" and Bus data "01" (Y-mute on).
4. The voltage should be approximately, 28.7kV (26SL41M/71M)/29.7kV(29SL81M)(at zero beam). If a correct reading cannot be obtained, check circuitry for malfunctioning components. After the voltage test, make Y-mute off to the normal mode.

For adjustments of this model, the bus data is converted to various analog signals by the D/A converter circuit.

Note: There are still a few analog adjustments in this series such as focus and master screen voltage.
Follow the steps below whenever the service adjustment is required. See "Table-B" to determine, if service adjustments are required.

1. Service mode

Before putting unit into the service mode, check that customer adjustments are in the normal mode. Use the reset function in the video adjustment menu to ensure customer controls are in their proper (reset) position.

2. Service number selection

Once in the service mode, press the Ch-up or Ch-down button on the remote control unit or at the set. The service adjustment number will vary in increments of one, from "S01" to "OP2" (26SL41M)/ "M05" (26SL71M, 29SL81M). Select the item you wish to adjust.

3. Data number selection

Press the Vol-up or down button to adjust the data number.

To enter the service mode and exit service mode.

While pressing the Vol-up and Ch-up buttons at the same time, plug the AC cord into a wall socket.

Now the TV set is switched on and enters the service mode.

To exit the service mode, turn the television off by pressing the power button.

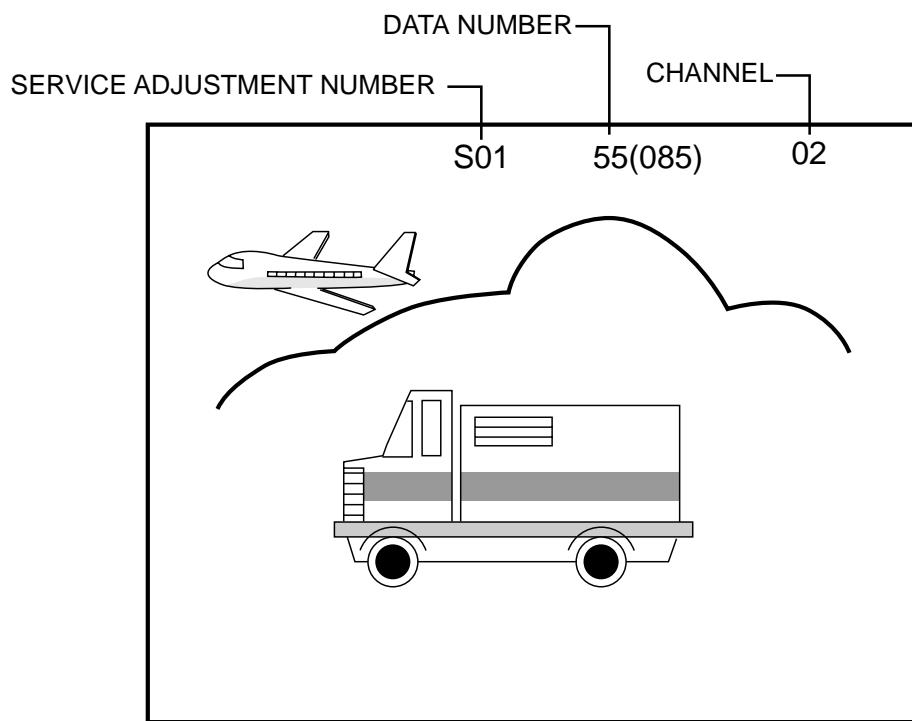


Figure A.

SERVICE NUMBER	ADJUSTMENT ITEM	DATA		ADJUSTMENT CONTENTS
		INITIAL VALUE	RANGE	
S01	PICTURE	55	00-7F	Must be set to "28"(26SL41M/71M)/"24"(29SL81M) Must be set to "00"
S02	TINT	46	00-7F	
S03	COLOR	32	00-7F	
S04	BRIGHTNESS	40	00-7F	
S05	SHARPNESS	28/24	00-3F	
S06	VERTICAL PHASE	00	00-07	
S07	HORIZONTAL PHASE	12	00-1F	
S08	RF-AGC	23	00-3F	
S09	VERTICAL AMP	20	00-3F	
S10	PIF VCO	2C	00-7F	
S11	R CUT-OFF	00	00-FF	
S12	G CUT -OFF	00	00-FF	
S13	B CUT-OFF	00	00-FF	
S14	G GAIN	7F	00-FF	
S15	B GAIN	7F	00-FF	
S16	TRAP	00/01	00 or 01	Must be set to "00"(26SL41M/71M)/"01"(29SL81M) Must be set to "20"
S17	BALANCE	20	00-3F	
S18	C.C. POSITION	17	00-7F	"00"=Normal, "01"=No Y, "03"=No Vertical Must be set to "19"
S19	MUTE	00	00,01,03	
S20	ENERGY SAVE OFFSET	20	00-3F	Must be set to "7A" No Setting
S21	INT. CYCLE TIMING	7A	00-1F	
S22		00	00	Must be set to "00" Must be set to "E1"=26SL41, "E7"=26S71M, 29SL81M
S23	TUNER SETUP	00	00, 01	
OP1	OPTION (Set to each model)	00	00-FF	Must be set to "0C"=26SL41M, "0F"=26SL71M, "8F"=29SL81M
OP2	OPTION (Set to each model)	00	00-FF	
M01	INPUT LEVEL	0A	00-0F	Only for Models 26SL71M, 29SL81M
M02	ST VCO	20	00-3F	
M03	FILTER	1C	00-3F	
M04	WIDE BAND	20	00-3F	
M05	SPECTRAL	1B	00-3F	

Table - A

Holding down both the CH-up/down buttons on the TV set at service mode for more than 2 seconds will automatically write the above initial values into IC2101.

PART REPLACED	ADJUSTMENT		NOTES
	NECESSARY	UNNECESSARY	
IC2001		X	Data is stored in IC2101.
IC201	X		The adjustment is needed to compensate for characteristics of parts including IC201 and MTS level (M01).
IC2101	X		Holding down both the CH-up/down buttons on the TV set in the service mode for more than 2 seconds will automatically write the above initial values into IC2101. Then perform a complete adjustment.
CRT	X		Adjust items related to picture tube only.
IC3001	X		Adjust items related to MTS only (M01~M05).

Table - B

■ SERVICE ADJUSTMENT

VCO Adjustment

1. Connect a digital voltmeter between pin (44) of IC201 and ground.
2. Receive a good local channel.
3. Enter the service mode and select the service adjustment "S10".
4. Adjust the data so that digital voltmeter reads 2.2V.
5. Adjustment is completed, remove the voltmeter, return to "normal" mode.

RF AGC Adjustment


1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S08".
3. Set the data value to point where no noise or beat appears.
4. Select another channel to confirm that no noise or beat appears.

Note 1: You will have to come out of the service mode to select another channel.

Note 2: Setting the data to "00" will produce a black raster.

Screen Adjustment

1. Connect a oscilloscope between TP854 and GND on the CRT Unit.
2. Receive a good local channel.
3. Enter the service mode and select the service adjustment "S03" and set the data value to "00" to set the color level to minimum. (Record original data code under adjustment "S03" before changing) You may skip this step, if you selected a B/W picture or monoscope pattern.
4. Select the service adjustment "S19" and adjust the data value to "01", this turn off the luminance signal (Y-mute).
5. Select the service adjustment "S04" and adjust data value to obtain 2.35 V on the oscilloscope screen.

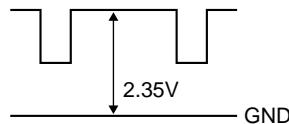

6. Adjust the master screen control until the raster darkens to the point where raster is barely seen.
7. Adjust the service adjustments "S11" red, "S12" green and "S13" blue to obtain a good grey scale with normal whites at low brightness level.
8. Select the service adjustment "S19" and reset data to "00". Select the service adjustment "S03" and reset data to obtain normal color level.
9. Remove oscilloscope and reset the master screen control to obtain normal brightness range.

White Balance Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S03" and set to "00" (minimum color)(Record original data code under adjustment "S03" before changing). "S03" does not have to be adjusted, if you selected a B/W picture or monoscope pattern.
3. Alternately adjust the service adjustment data of "S14" and "S15" until a good grey scale with normal whites is obtained.
4. Select the service adjustment "S03" and adjust data to obtain normal color level.

Sub-Picture Adjustment

1. Receive a good local channel.
2. Make sure the customer picture control is set to maximum.
3. Enter the service mode and select the service adjustment "S01".
4. Adjust the data value to achieve normal contrast range.

Sub-Tint Adjustment

1. Receive a good local channel.
2. Set customer tint control to center of it's range.
3. Enter the service mode and select the service adjustment "S02".
4. Adjust "S02" data value to obtain normal flesh tones.

Sub-Color Adjustment

1. Receive a good local channel.
2. Make sure the customer color control is set to center position.
3. Enter the service mode and select service adjustment "S03".
4. Adjust "S03" data value to obtain normal color level.

Sub-Brightness Adjustment

1. Receive a good local channel.
2. Make sure the customer brightness control is set to center position.
3. Enter the service mode and select the service adjustment "S04".
4. Adjust "S04" data value to obtain normal brightness level.

Vertical-Size Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S09".
3. While observing the top and bottom of the screen, adjust "S09" data value to proper vertical size.

Vertical Phase Adjustment

1. Enter the service mode and select the service adjustment "S06".
2. Adjust data value to "00".

Note: This must be set "00" when changed data retrace line will appear.

Horizontal Position Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S07".
3. Adjust "S07" data value so that picture is centered.

Caption Position Adjustment (Horizontal)

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S18".
3. A black text box appears on the screen. (see **Figure B.** below)
4. Adjust "S18" data value so that text box is positioned in the center of the screen.

3.58MHz Trap Adjustment

1. Receive a good local channel.
2. Enter the service mode and select the service adjustment "S16".
3. This is a two position adjustment, "00" is ON, "01" is OFF.
4. Adjust data value to "00"(26SL41M/71M)/"01" (29SL81M) for normal viewing.

Sharpness and Audio Balance Adjustments

1. Receive a good local channel.
2. Enter the service mode and select the service adjustments "S05" for sharpness and "S17" for audio balance.

• Sharpness Adjustment

3. Adjust data value to "28"(26SL41M/71M)/"24" (29SL81M)(center of data range) for sharpness adjustment.

• Audio Balance Adjustment

4. Adjust data value to "20"(center of data range) for audio balance adjustment.

Energy save offset Adjustment

1. Enter the service mode and select the service adjustment "S20".
2. Adjust data value to "19".

Note: This position is used to preset the level for the energy save function.

Other Adjustments

1. Enter the service mode.
2. Adjust the following data values as listed below.

S21	"7A"	INT. CYCLE TIMING
S22	"00"	No Setting
S23	"00"	TUNER SETUP

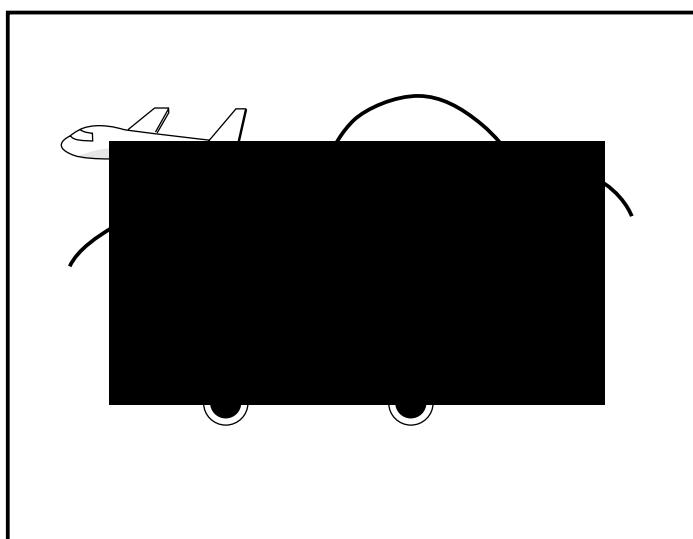


Figure B.

■ MTS ADJUSTMENT (Only for Models 26SL71M, 29SL81M)

MTS Level Adjustment

1. Feed the following monaural signal to pin (14) of IC3001.
Monaural signal : 300 Hz, 245 mVrms
2. Connect the rms voltmeter to pin (39) of IC3001.
3. Enter the service mode and select the service adjustment "M01".
4. Adjust the data so that the rms voltmeter reads 490 ± 10 mVrms.

MTS VCO Adjustment

1. Keep the unit in no-signal state.
2. Connect the frequency counter to pin (39) of IC3001.
3. Connect a capacitor (100 μ F, 50V) in between positive(+) side of C3005 and ground.
4. Enter the service mode and select the service adjustment "M02"
5. Adjust the data so that the frequency counter reads 62.94 ± 0.75 kHz.


Filter Adjustment

1. Feed the following stereo pilot signal to pin (14) of IC3001 .
Stereo pilot signal: 9.4 kHz, 600 mVrms.
2. Enter the service mode and select the service adjustment "M03".
3. Adjust the data at the point where "OK" appears on the screen. The "OK" represents the approximate center of the adjustable range of the data.


Separation Adjustment

1. Connect the rms voltmeter to pin (39) of IC3001.
2. Receive the following composite stereo signal 1.
Composite stereo signal: 30% modulation, left channel only, noise reduction on, 300 Hz
3. Enter the service mode and select the service adjustment "M04".
4. Adjust the data until the AC voltage reading of the rms voltmeter is minimum.
5. Receive the following composite stereo signal 2.
Stereo signal: 30% modulation, left channel only, noise reduction on, 3 kHz
6. Enter the service mode and select the service adjustment "M05".
7. Adjust the data until the AC voltage reading of the rms voltmeter is minimum.
8. Take the above steps 1 thru 7 again for fine adjustment.


CHASSIS LAYOUT

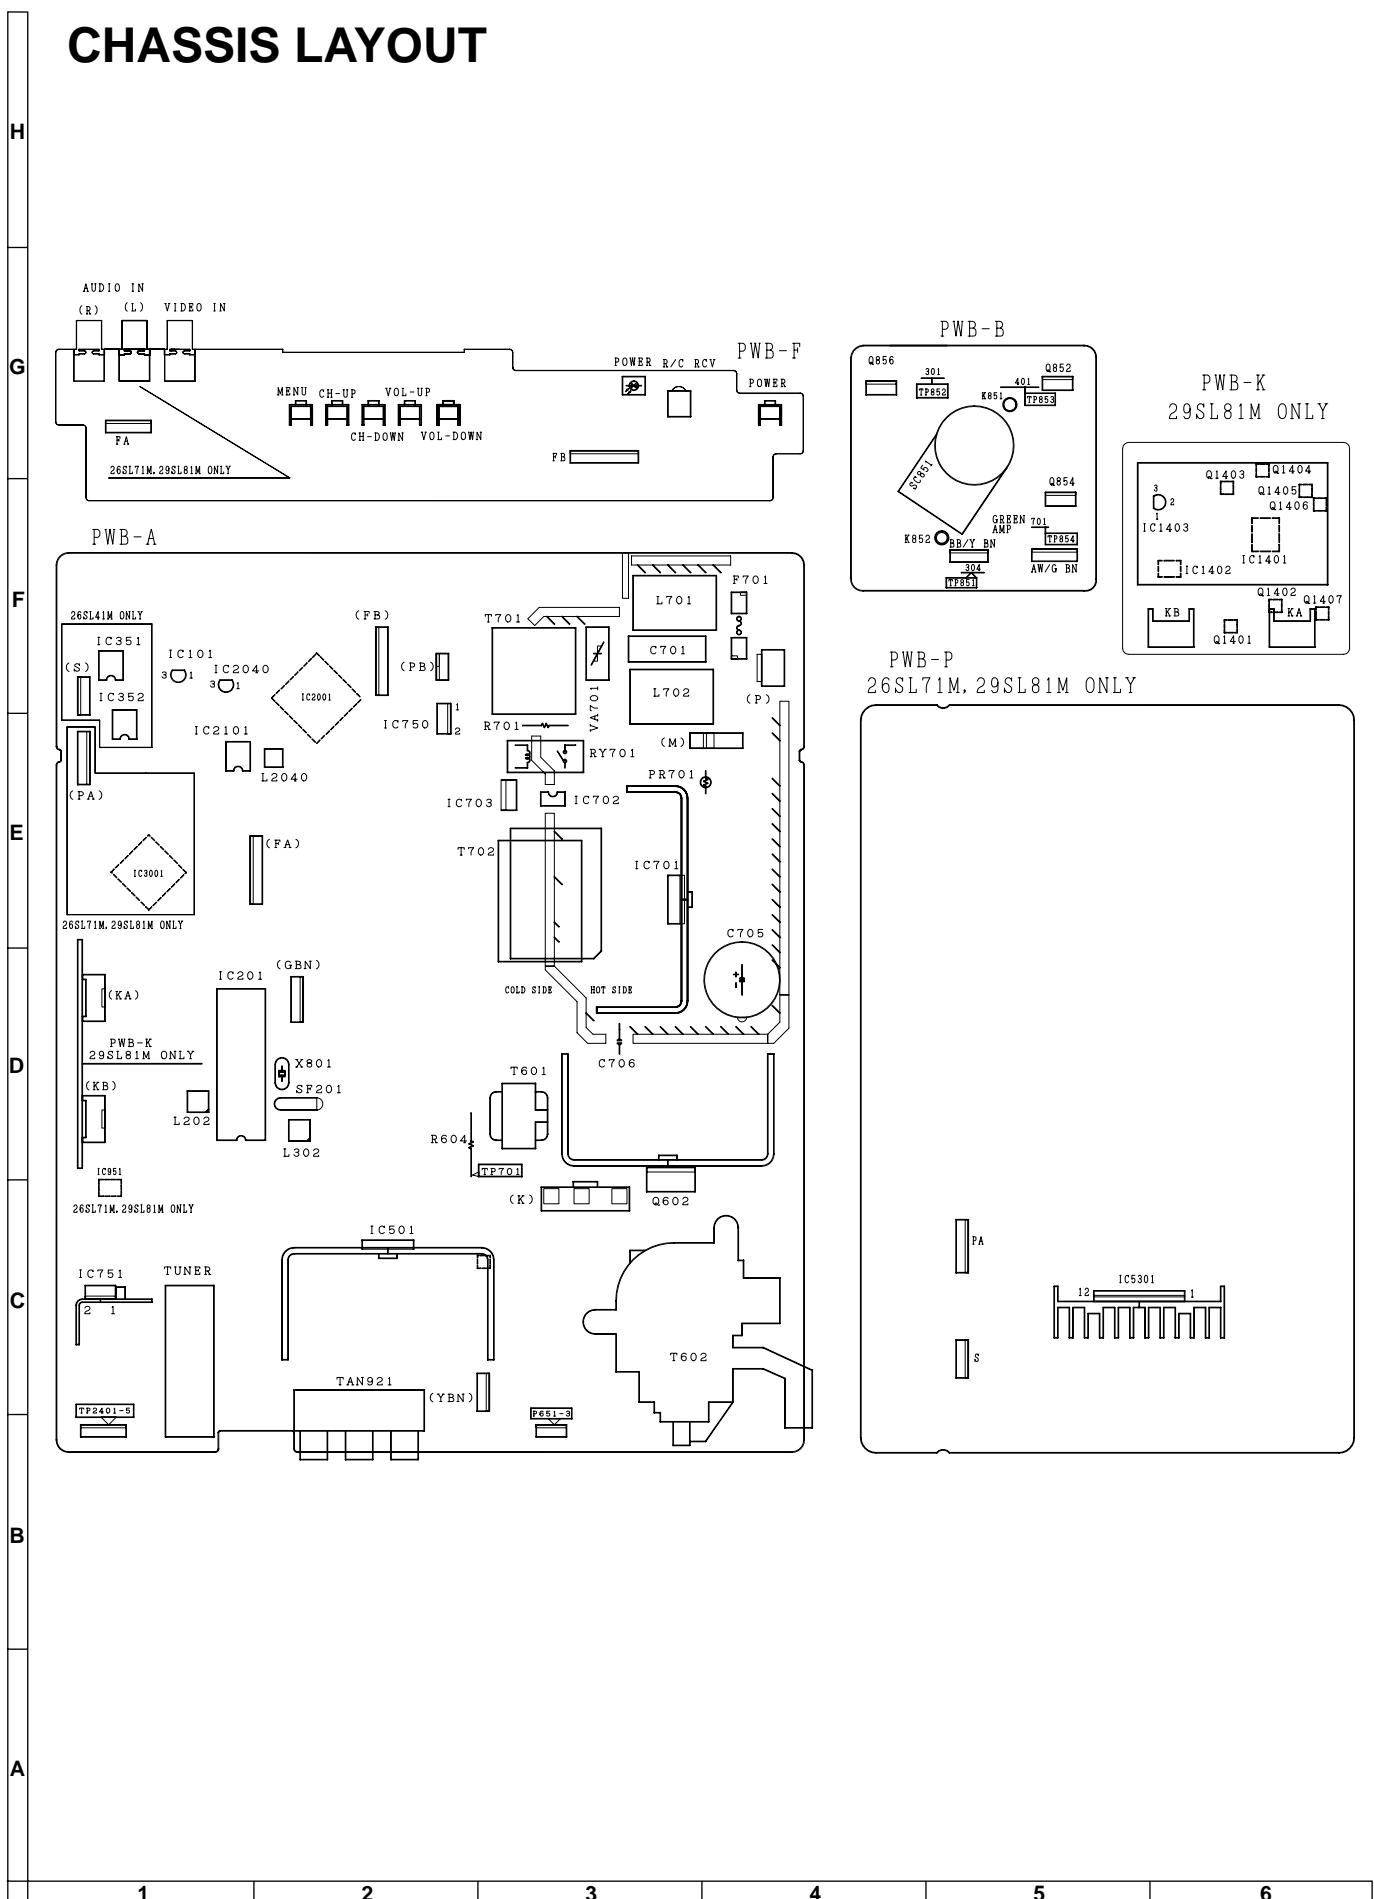


MODEL 26SL41M BLOCK DIAGRAM

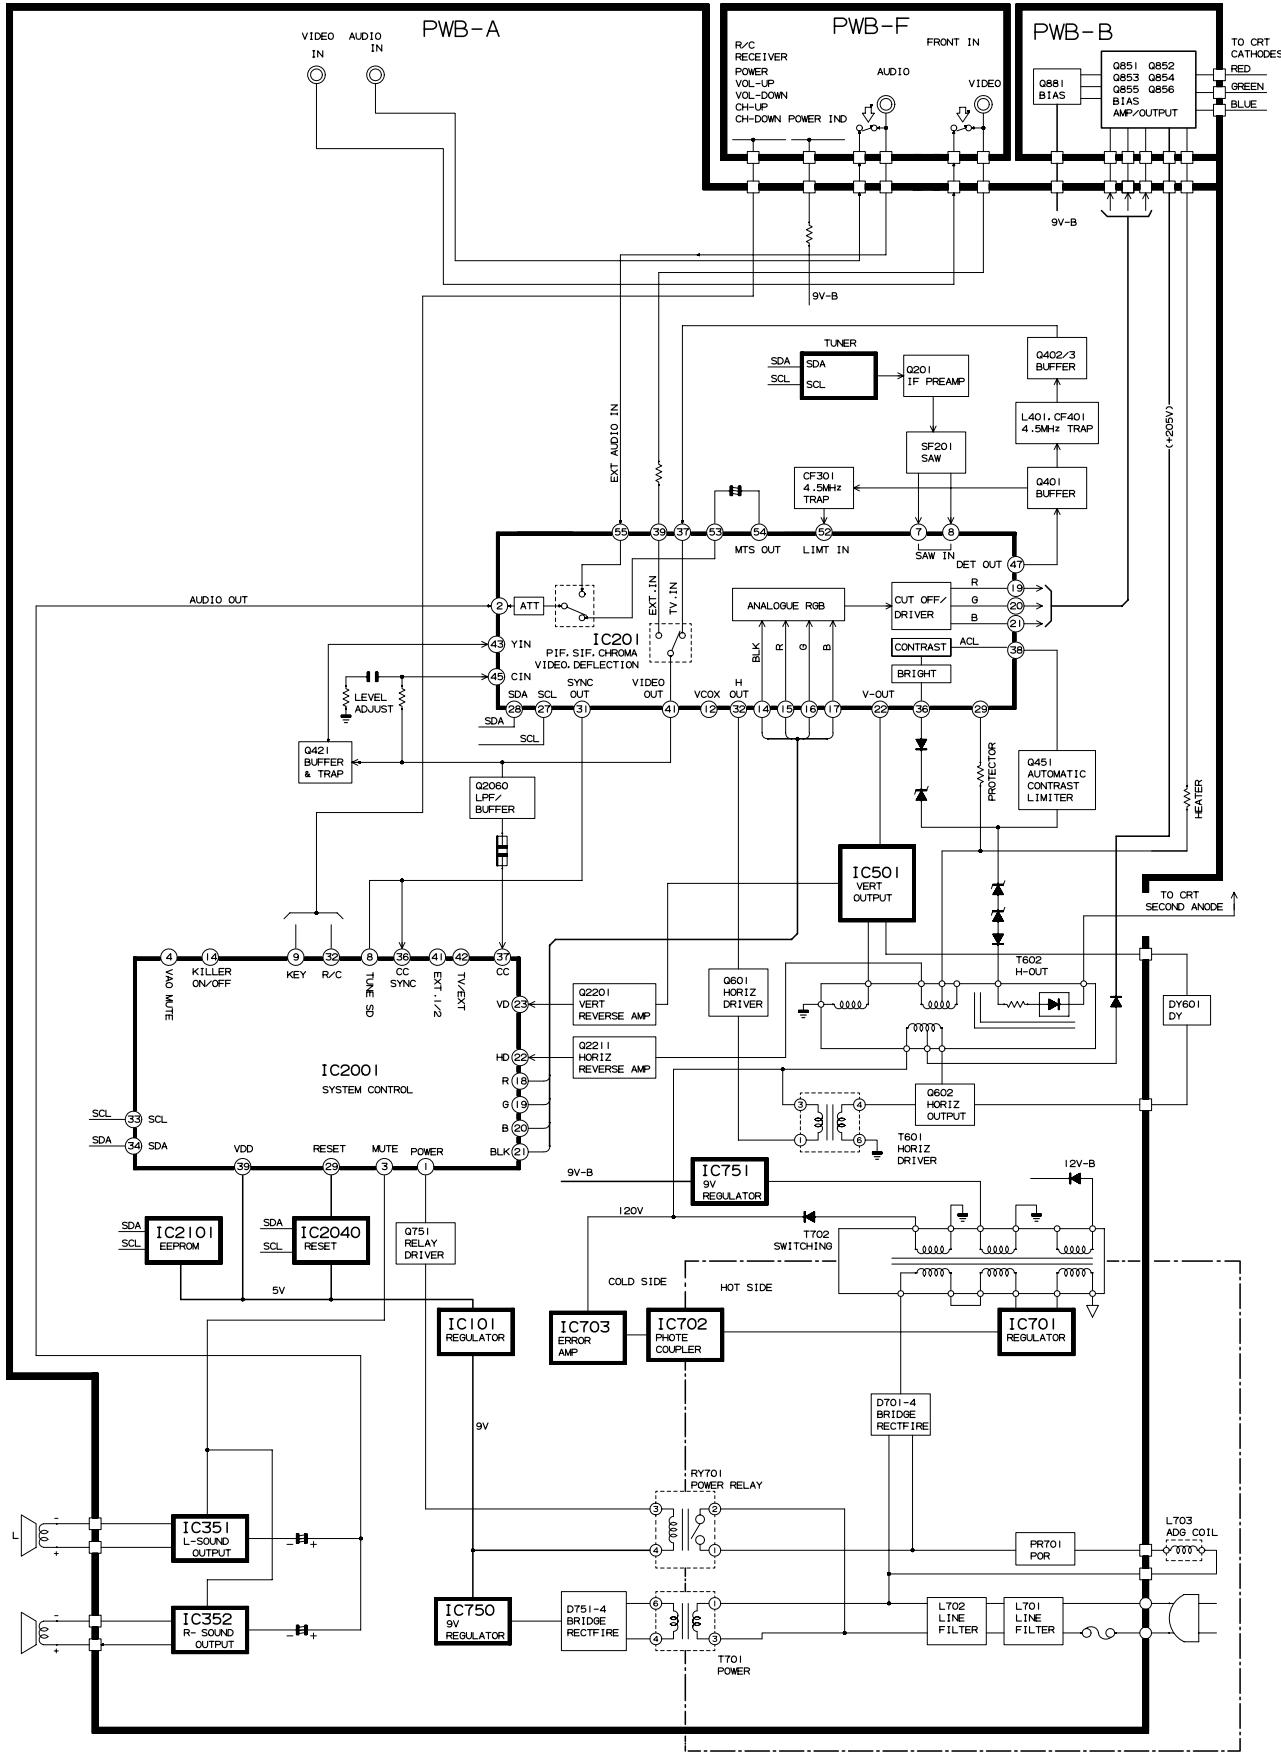

MODEL 26SL71M BLOCK DIAGRAM

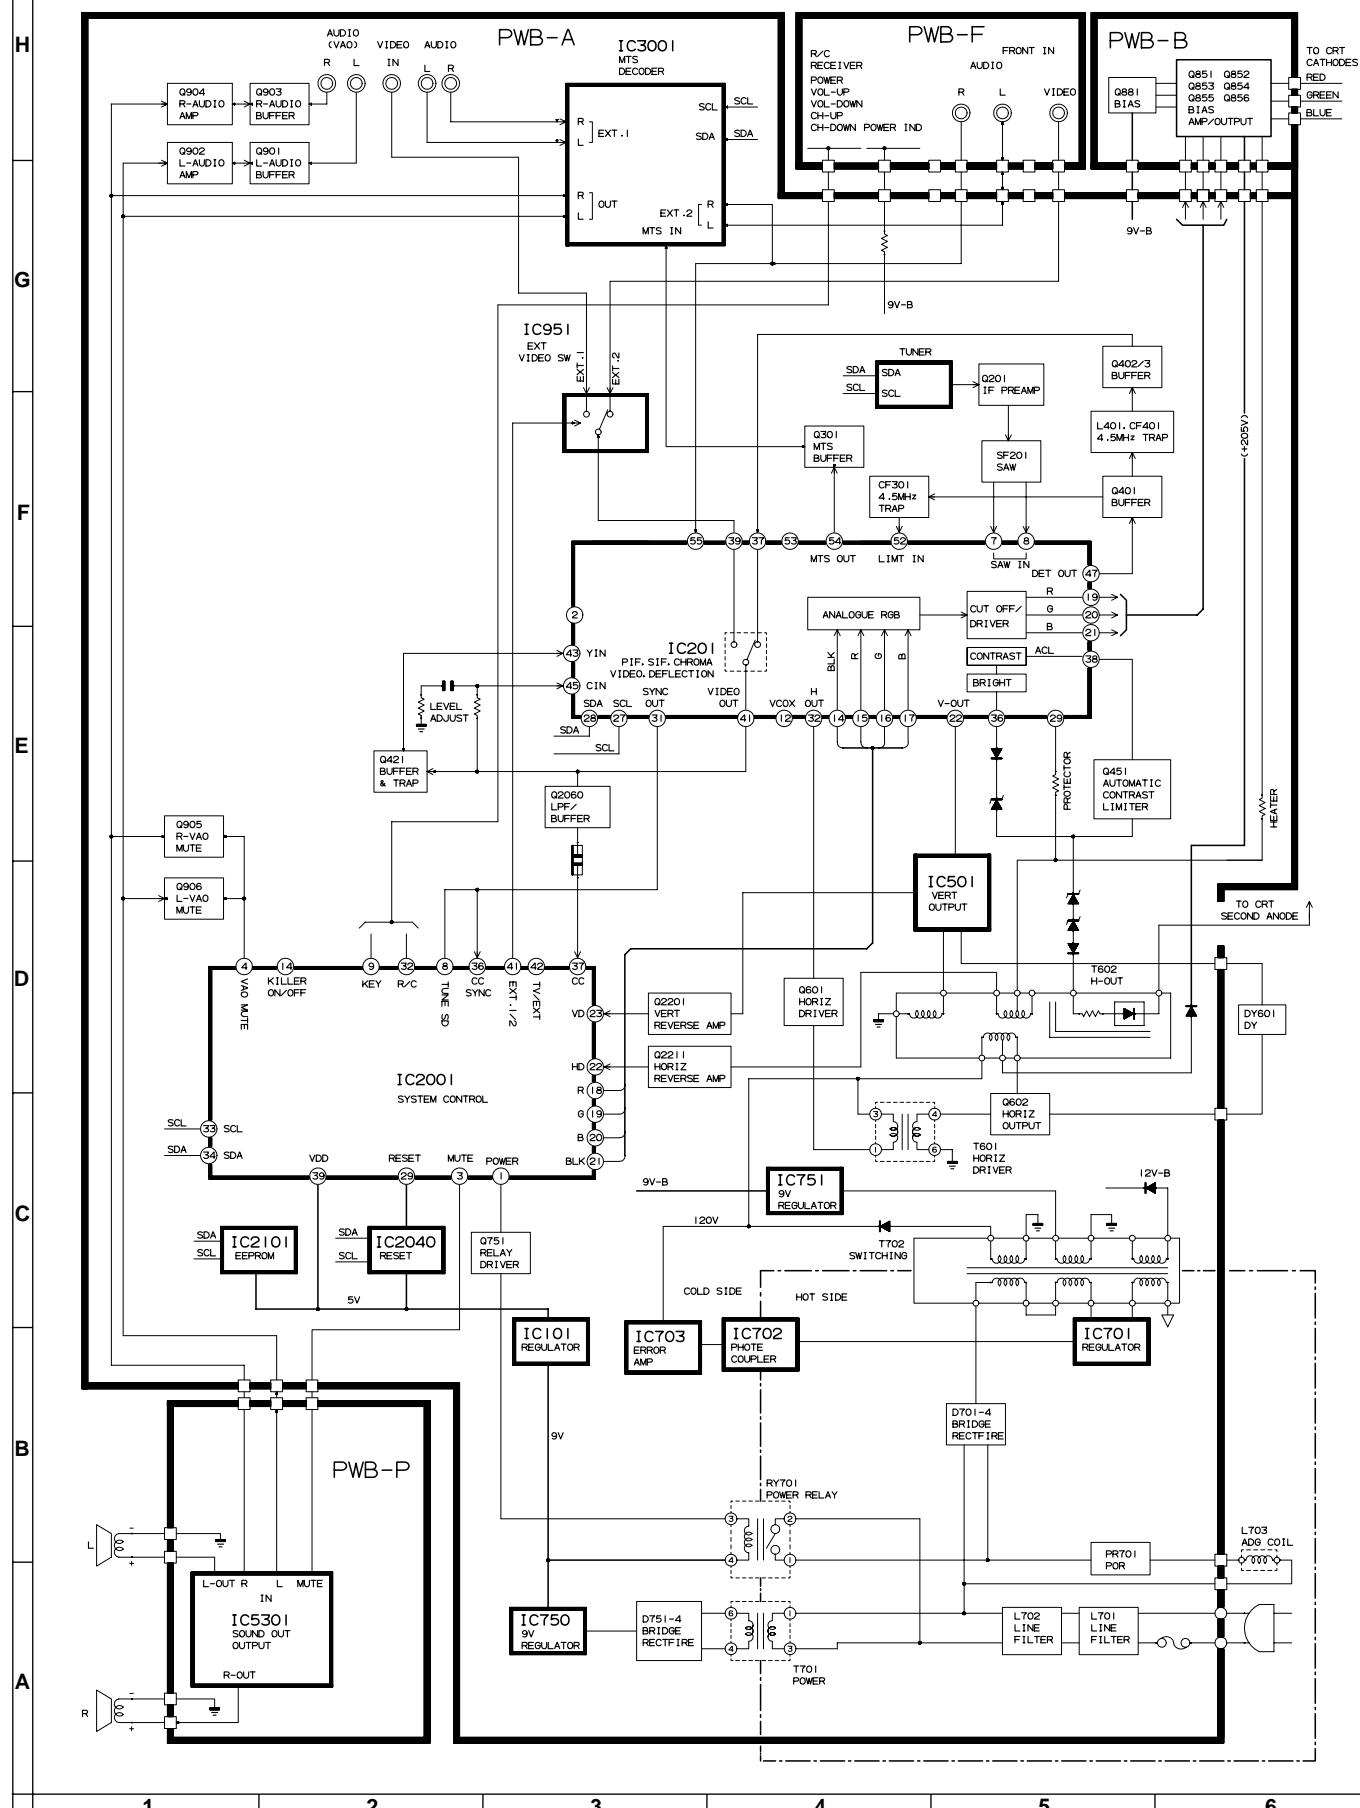

MODEL 29SL81M BLOCK DIAGRAM

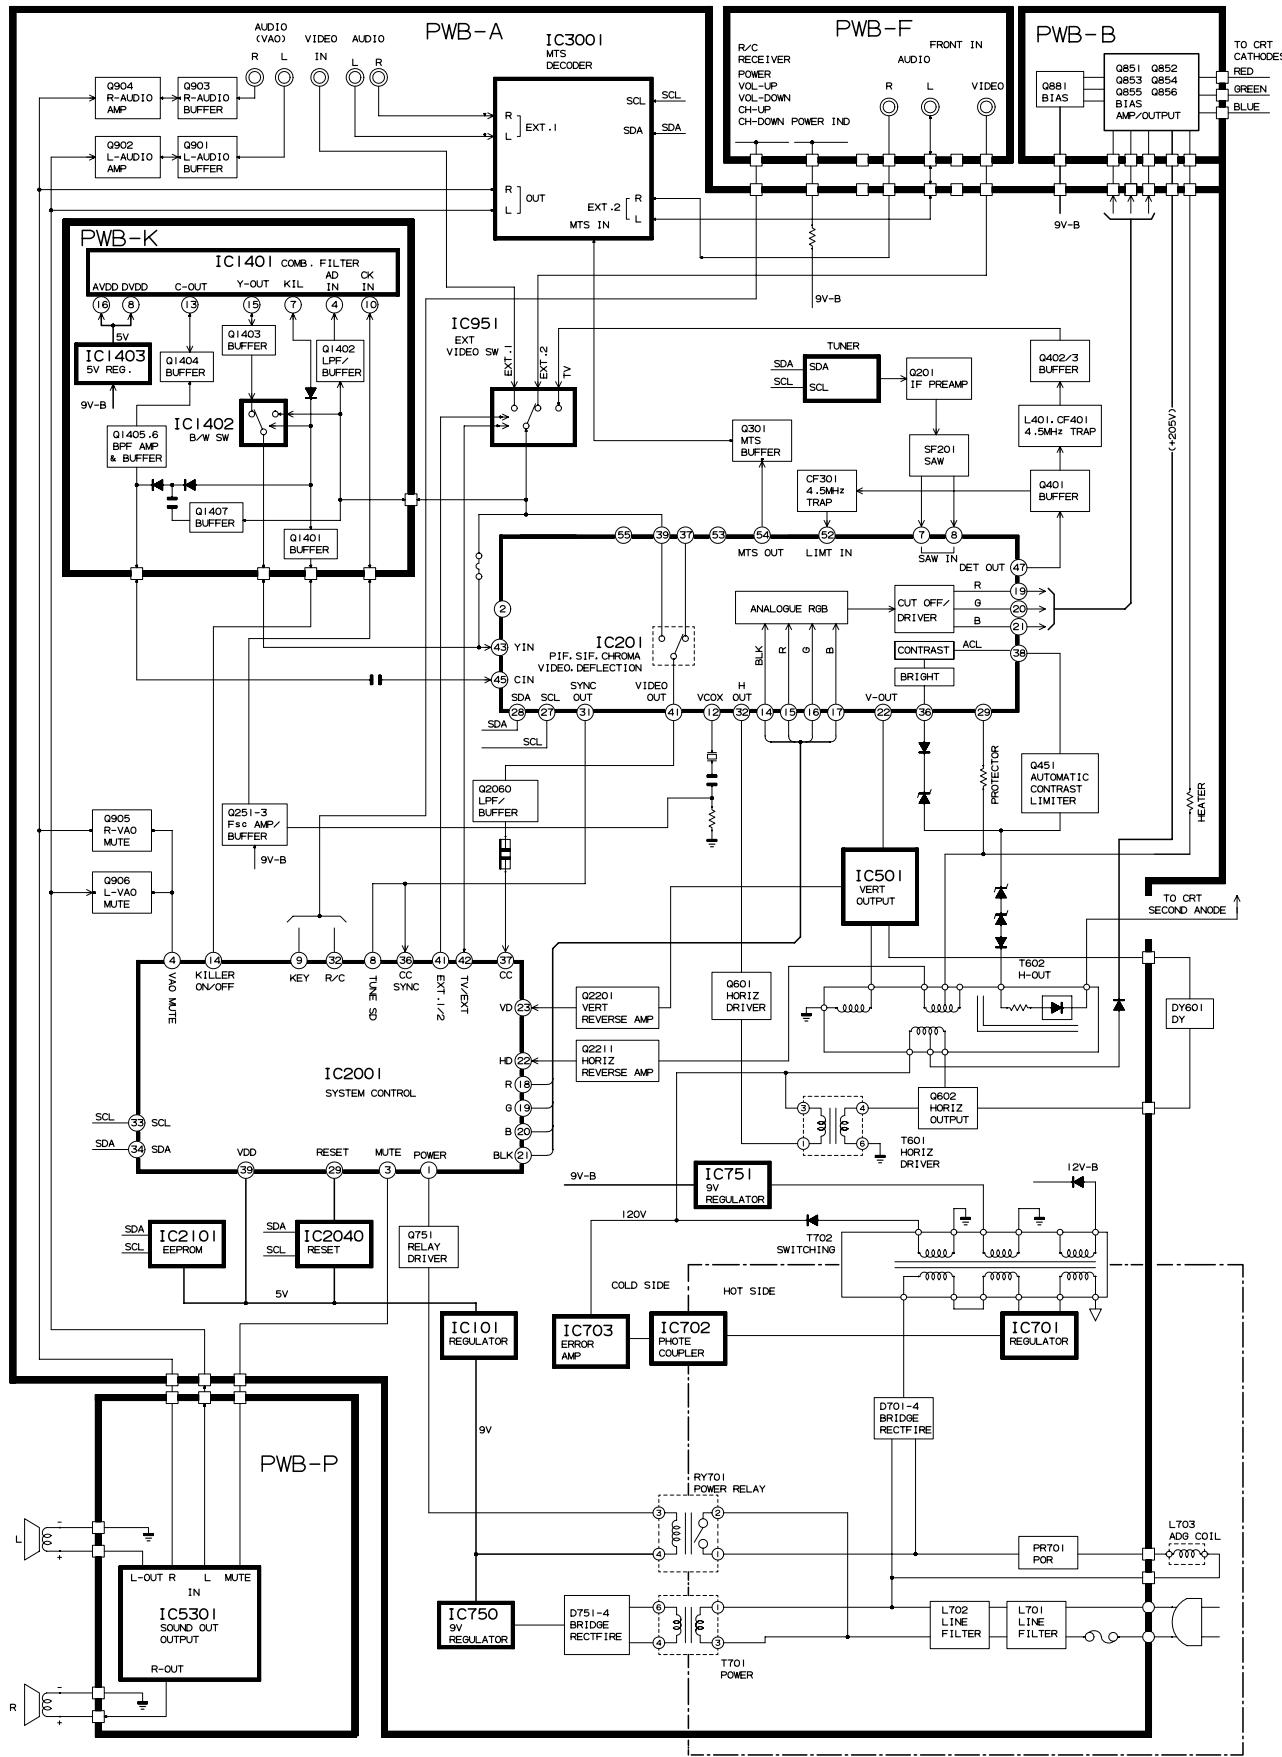

DESCRIPTION OF SCHEMATIC DIAGRAM

NOTES:

1. The unit of resistance "ohm" is omitted.
($K=k\Omega=1000\Omega$, $M=M\Omega$)
2. All resistors are 1/16 watt, unless otherwise noted.
3. All capacitors are μF , unless otherwise noted.
($P=pF=\mu\mu F$)
4. (G) indicates $\pm 2\%$ tolerance may be used.
5. \perp indicates line isolated ground.
6. \downarrow indicates hot ground.

VOLTAGE MEASUREMENT CONDITIONS:

1. All DC voltages are measured with DVM connected between points indicated and chassis ground, line voltage set at 110-220V AC and all controls set for normal picture unless otherwise indicated.
2. All voltages measured with $1000\mu V$ B & W or Color signal.

WAVEFORM MEASUREMENT CONDITIONS:


1. Photographs taken on a standard gated color bar signal, the tint setting adjusted for proper color. The wave shapes at the red, green and blue cathodes of the picture tube depend on the tint, color level and picture control.
2.  indicates waveform check points (See chart, waveforms are measured from point indicated to chassis ground.)

 AND SHADED () COMPONENTS = SAFETY RELATED PARTS.

 MARK= X-RAY RELATED PARTS.

This circuit diagram is a standard one, printed circuits may be subject to change for product improvement without prior notice.


WAVEFORMS

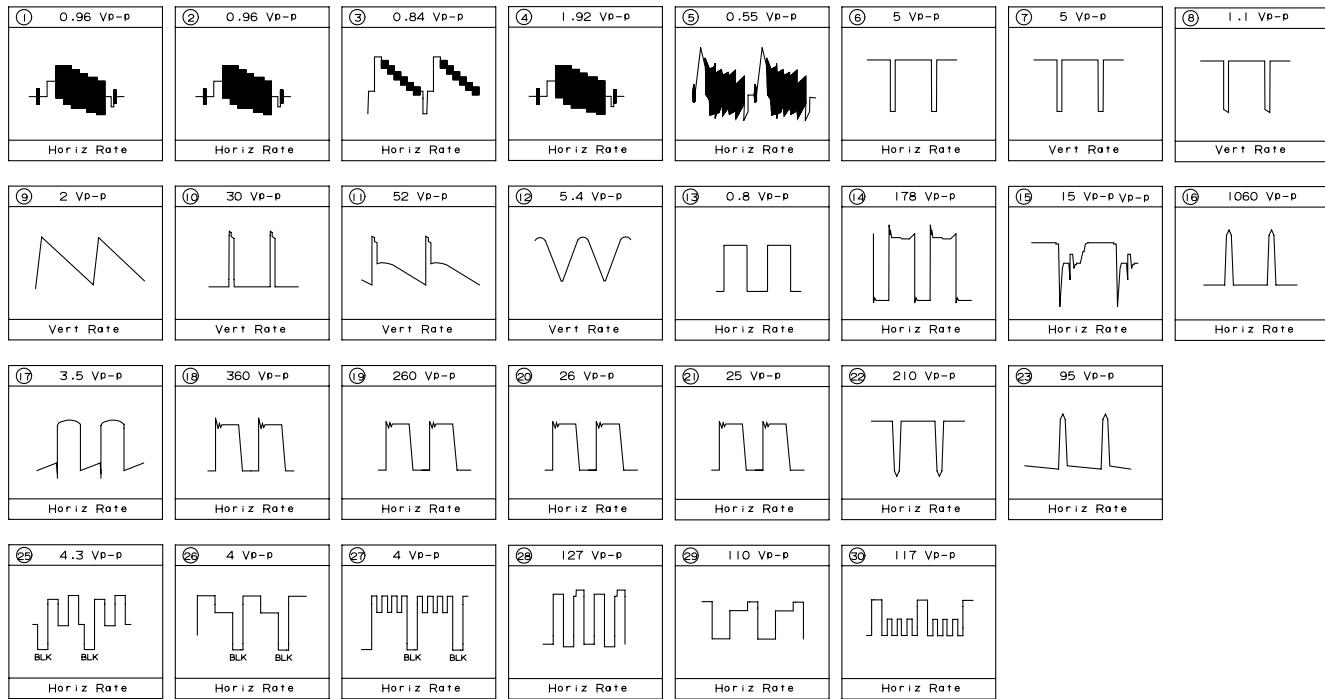

MODEL 26SL41M SCHEMATIC DIAGRAM: MAIN-1 Unit


NOTE: ALL DIODES ARE "1SD111" UNLESS OTHERWISE SPECIFIED.
 ALL TRANSISTORS ARE "2SC2412" OR "2SD601AR" UNLESS OTHERWISE SPECIFIED.

PWB-A
(DUNTKA270WEV4)

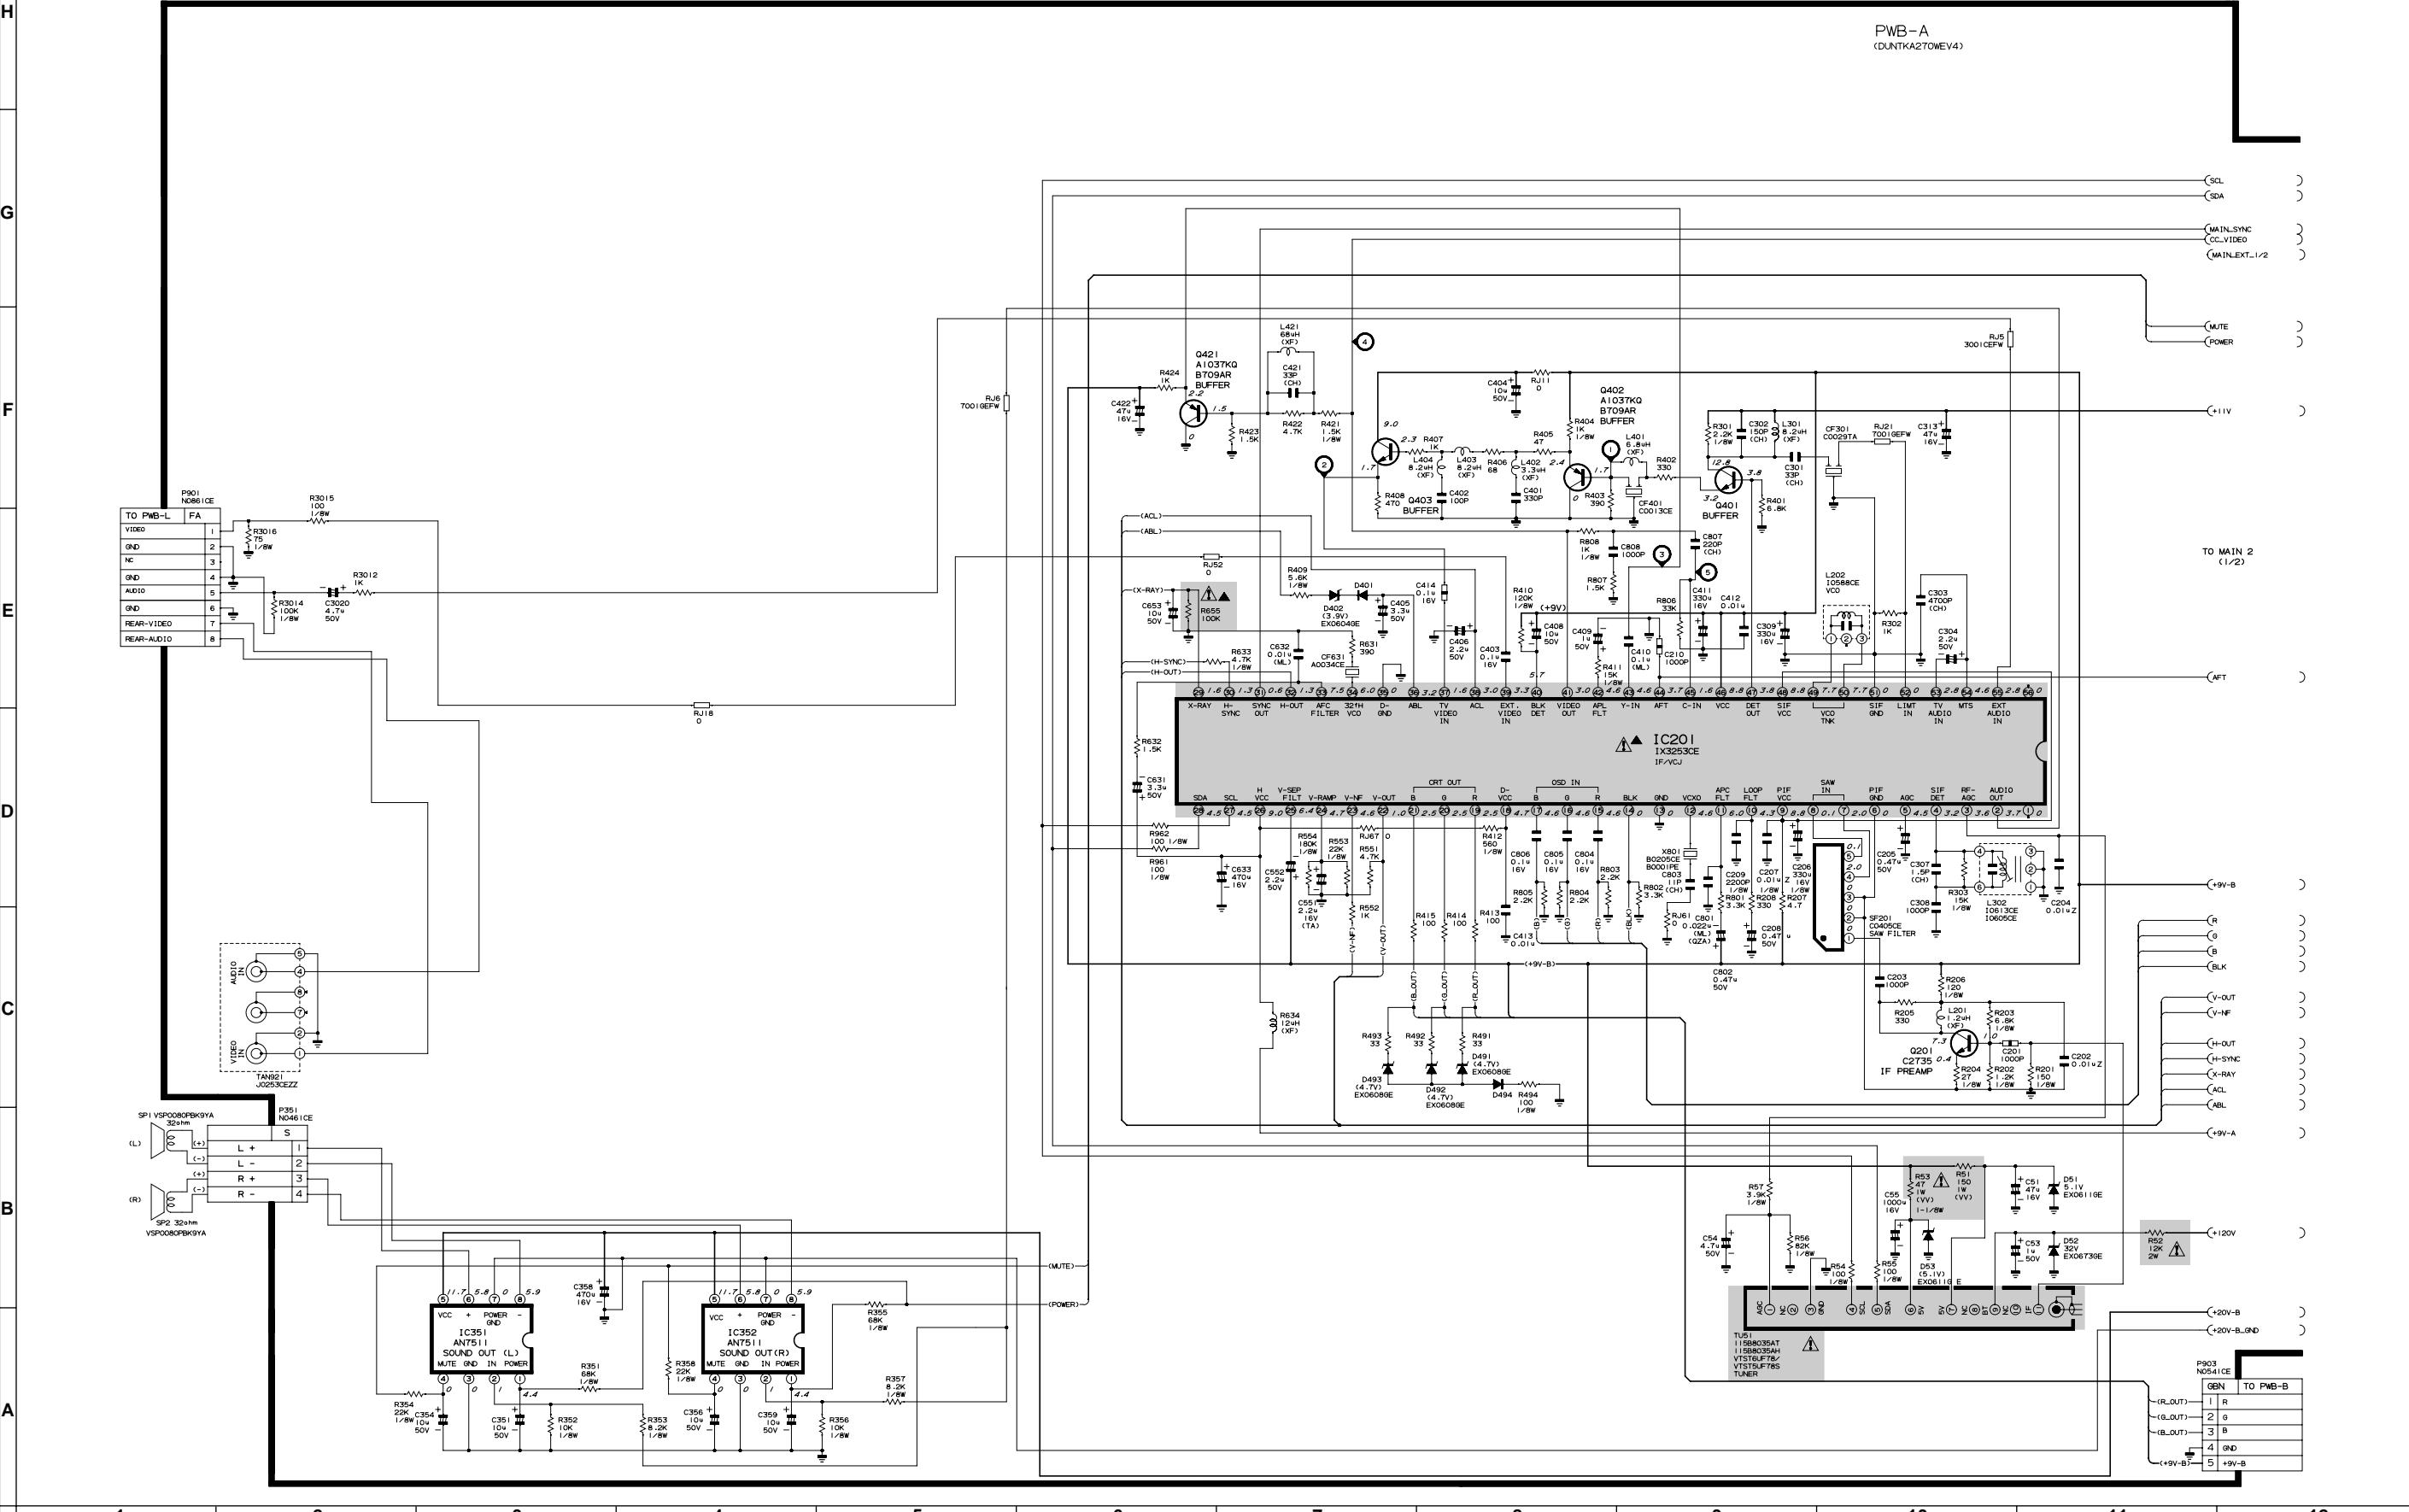

1 2 3 4 5 6 7 8 9 10 11 12


MODEL 26SL41M SCHEMATIC DIAGRAM: MAIN-2 Unit

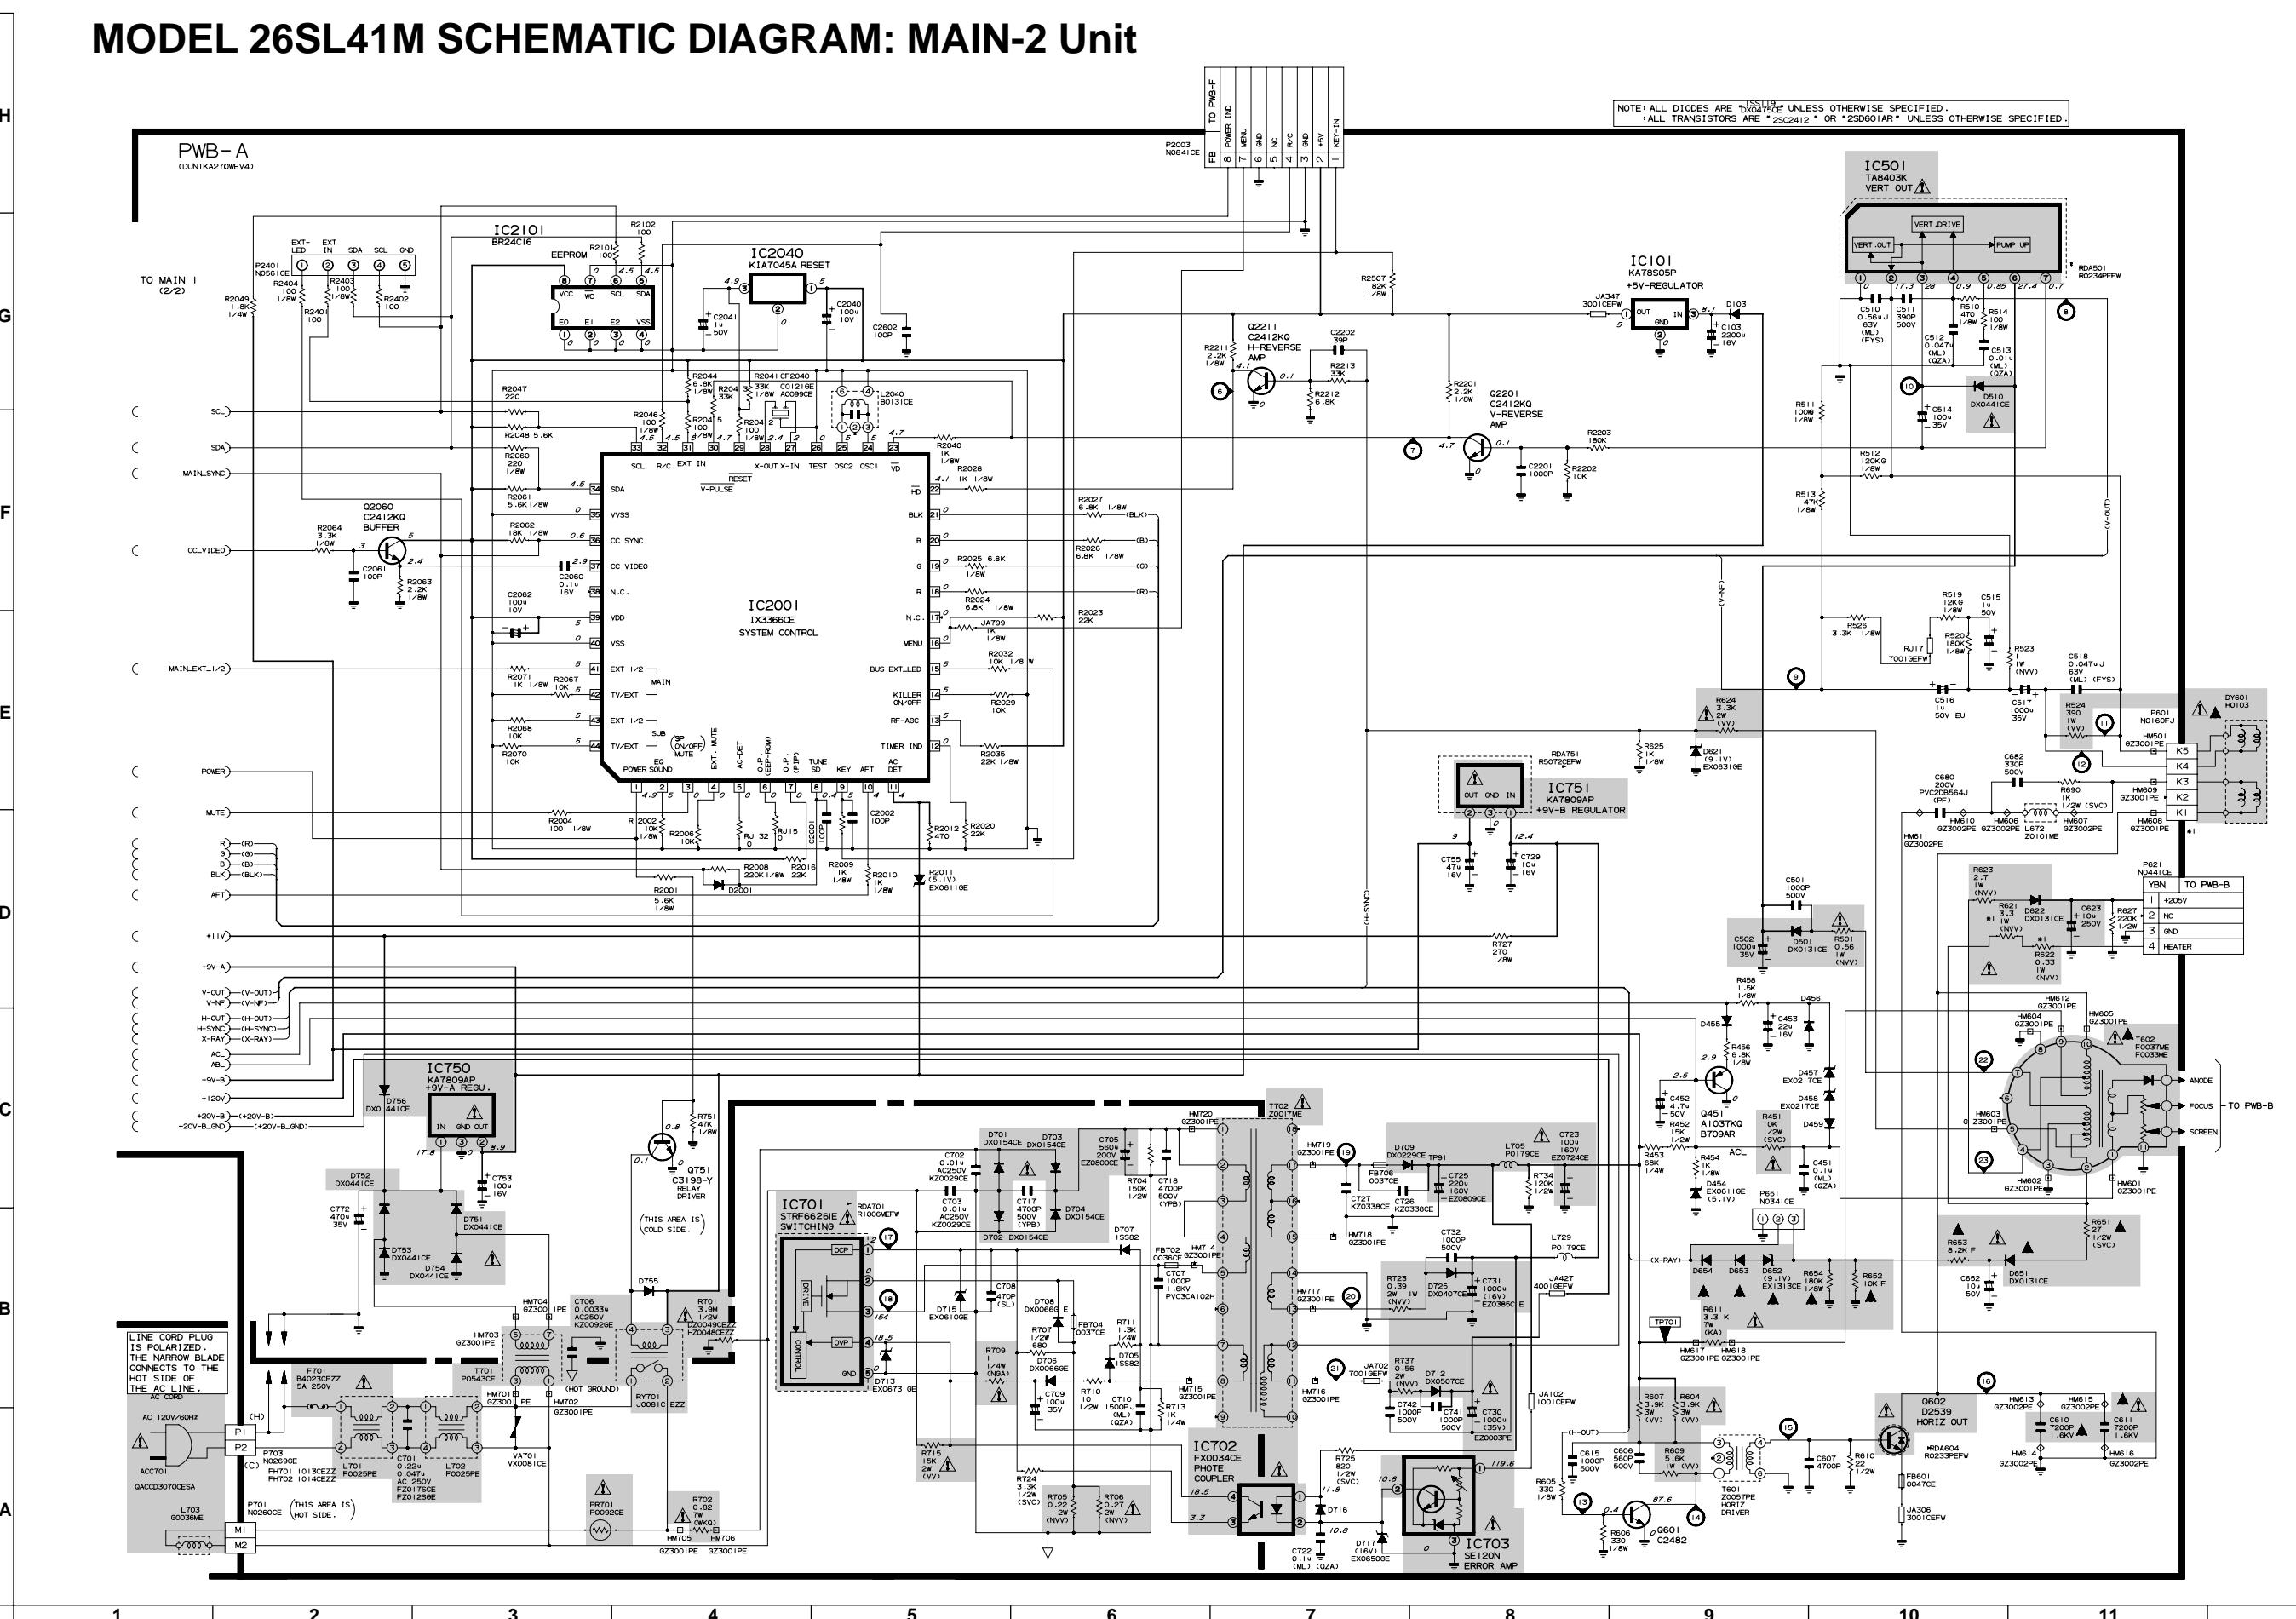

MODEL 26SL71M SCHEMATIC DIAGRAM: MAIN-1 Unit


NOTE: ALL DIODES ARE "1SS119" UNLESS OTHERWISE SPECIFIED.
 ALL TRANSISTORS ARE "2SC2412" OR "2SD601AR" UNLESS OTHERWISE SPECIFIED.

PWB-A
(DUNTKA270WEV3)

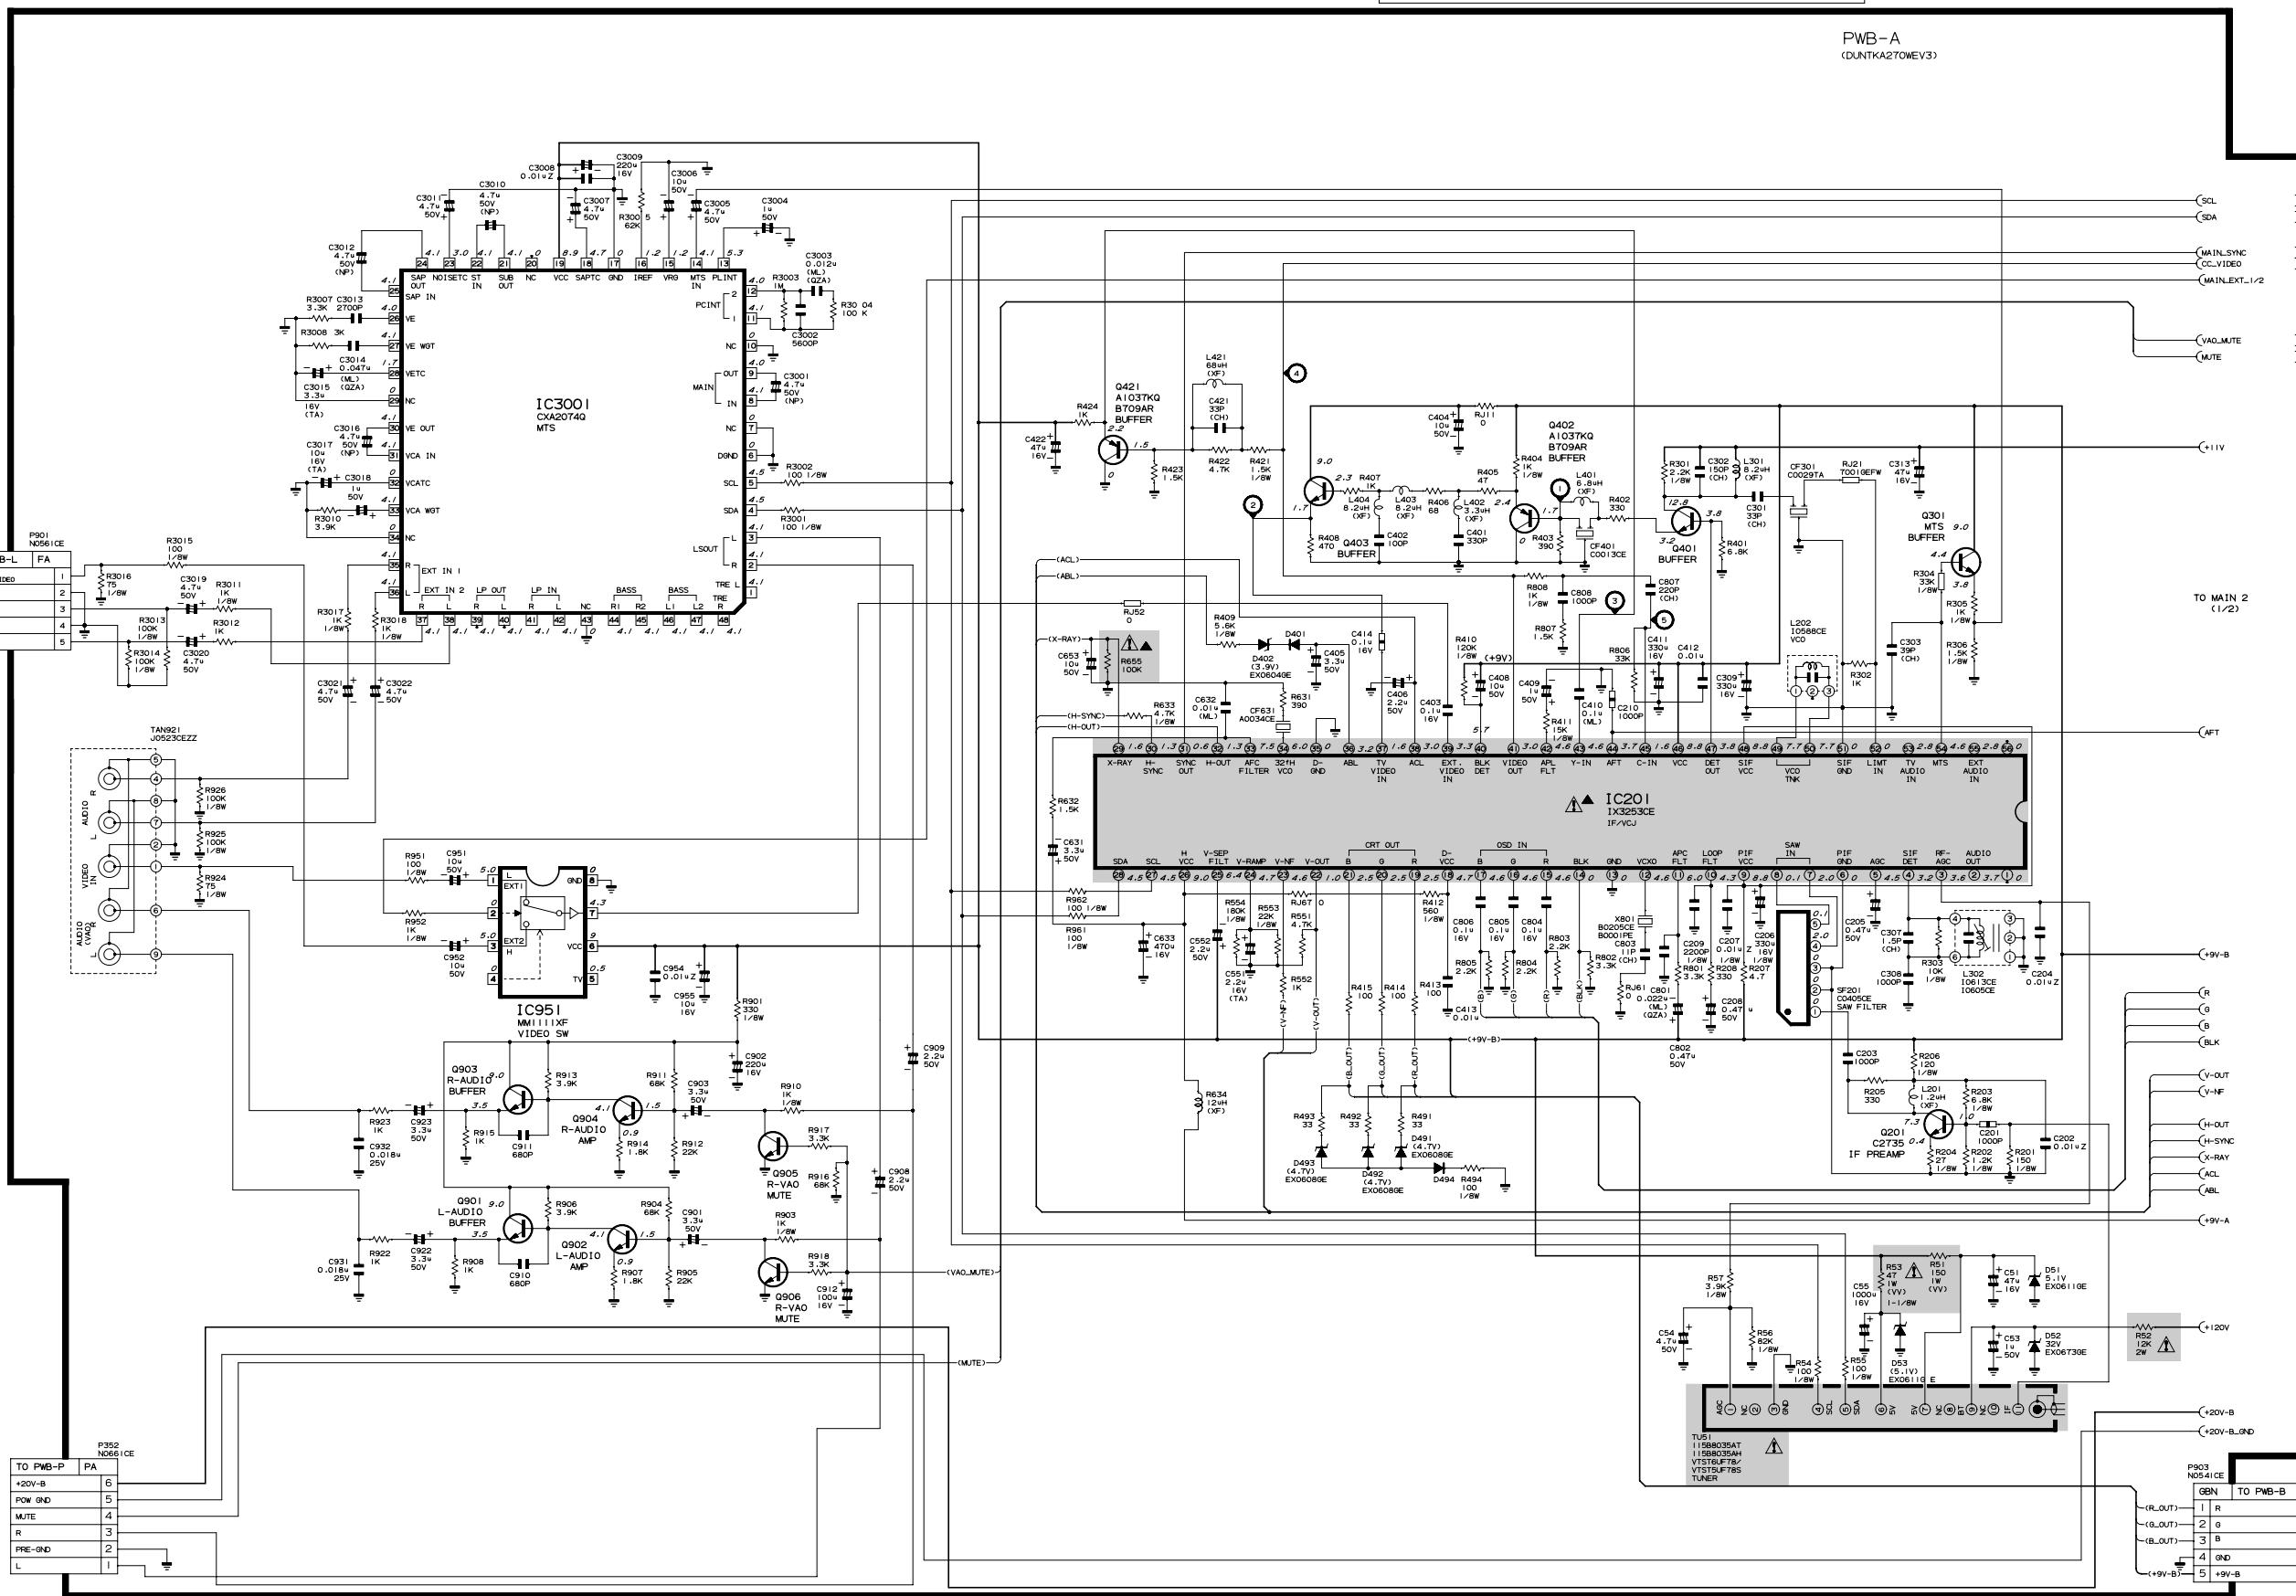


1 2 3 4 5 6 7 8 9 10 11 12

MODEL 26SL71M SCHEMATIC DIAGRAM: MAIN-2 Unit

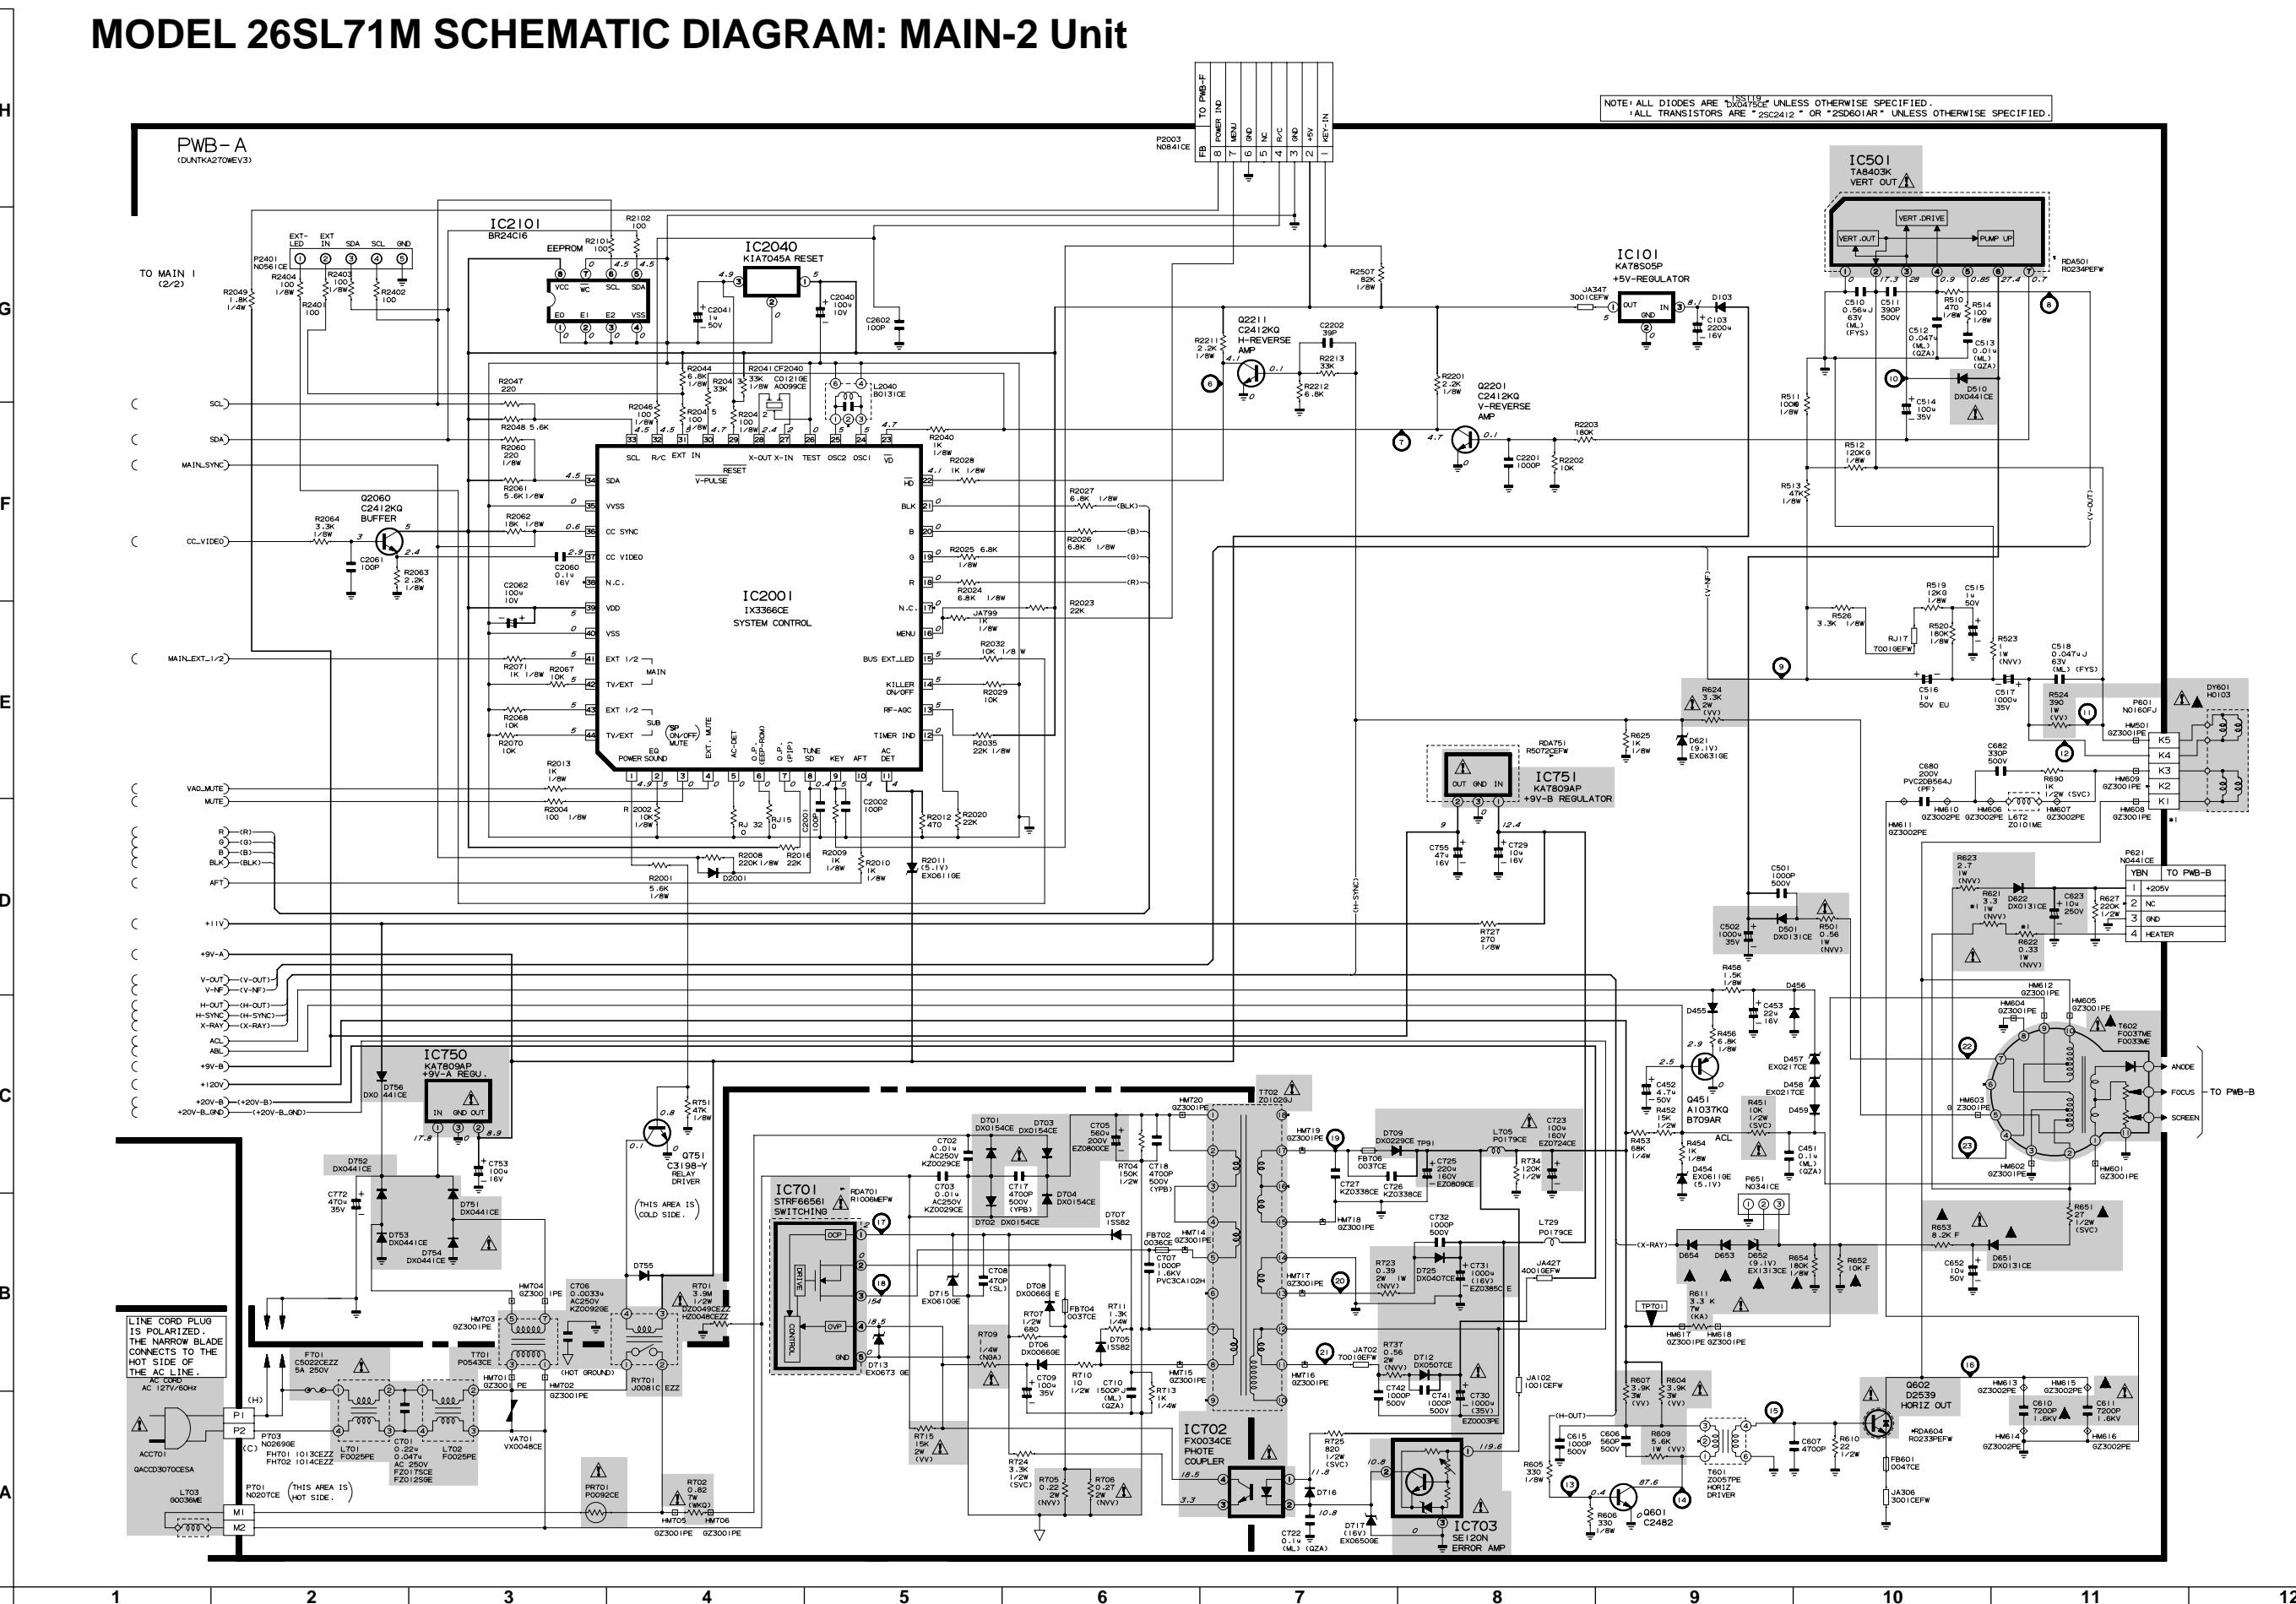


MODEL 29SL81M SCHEMATIC DIAGRAM: MAIN-1 Unit


NOTE: ALL DIODES ARE "1SS119" UNLESS OTHERWISE SPECIFIED.
ALL TRANSISTORS ARE * 2SC2412 * OR * 2SD601AR * UNLESS OTHERWISE SPECIFIED.

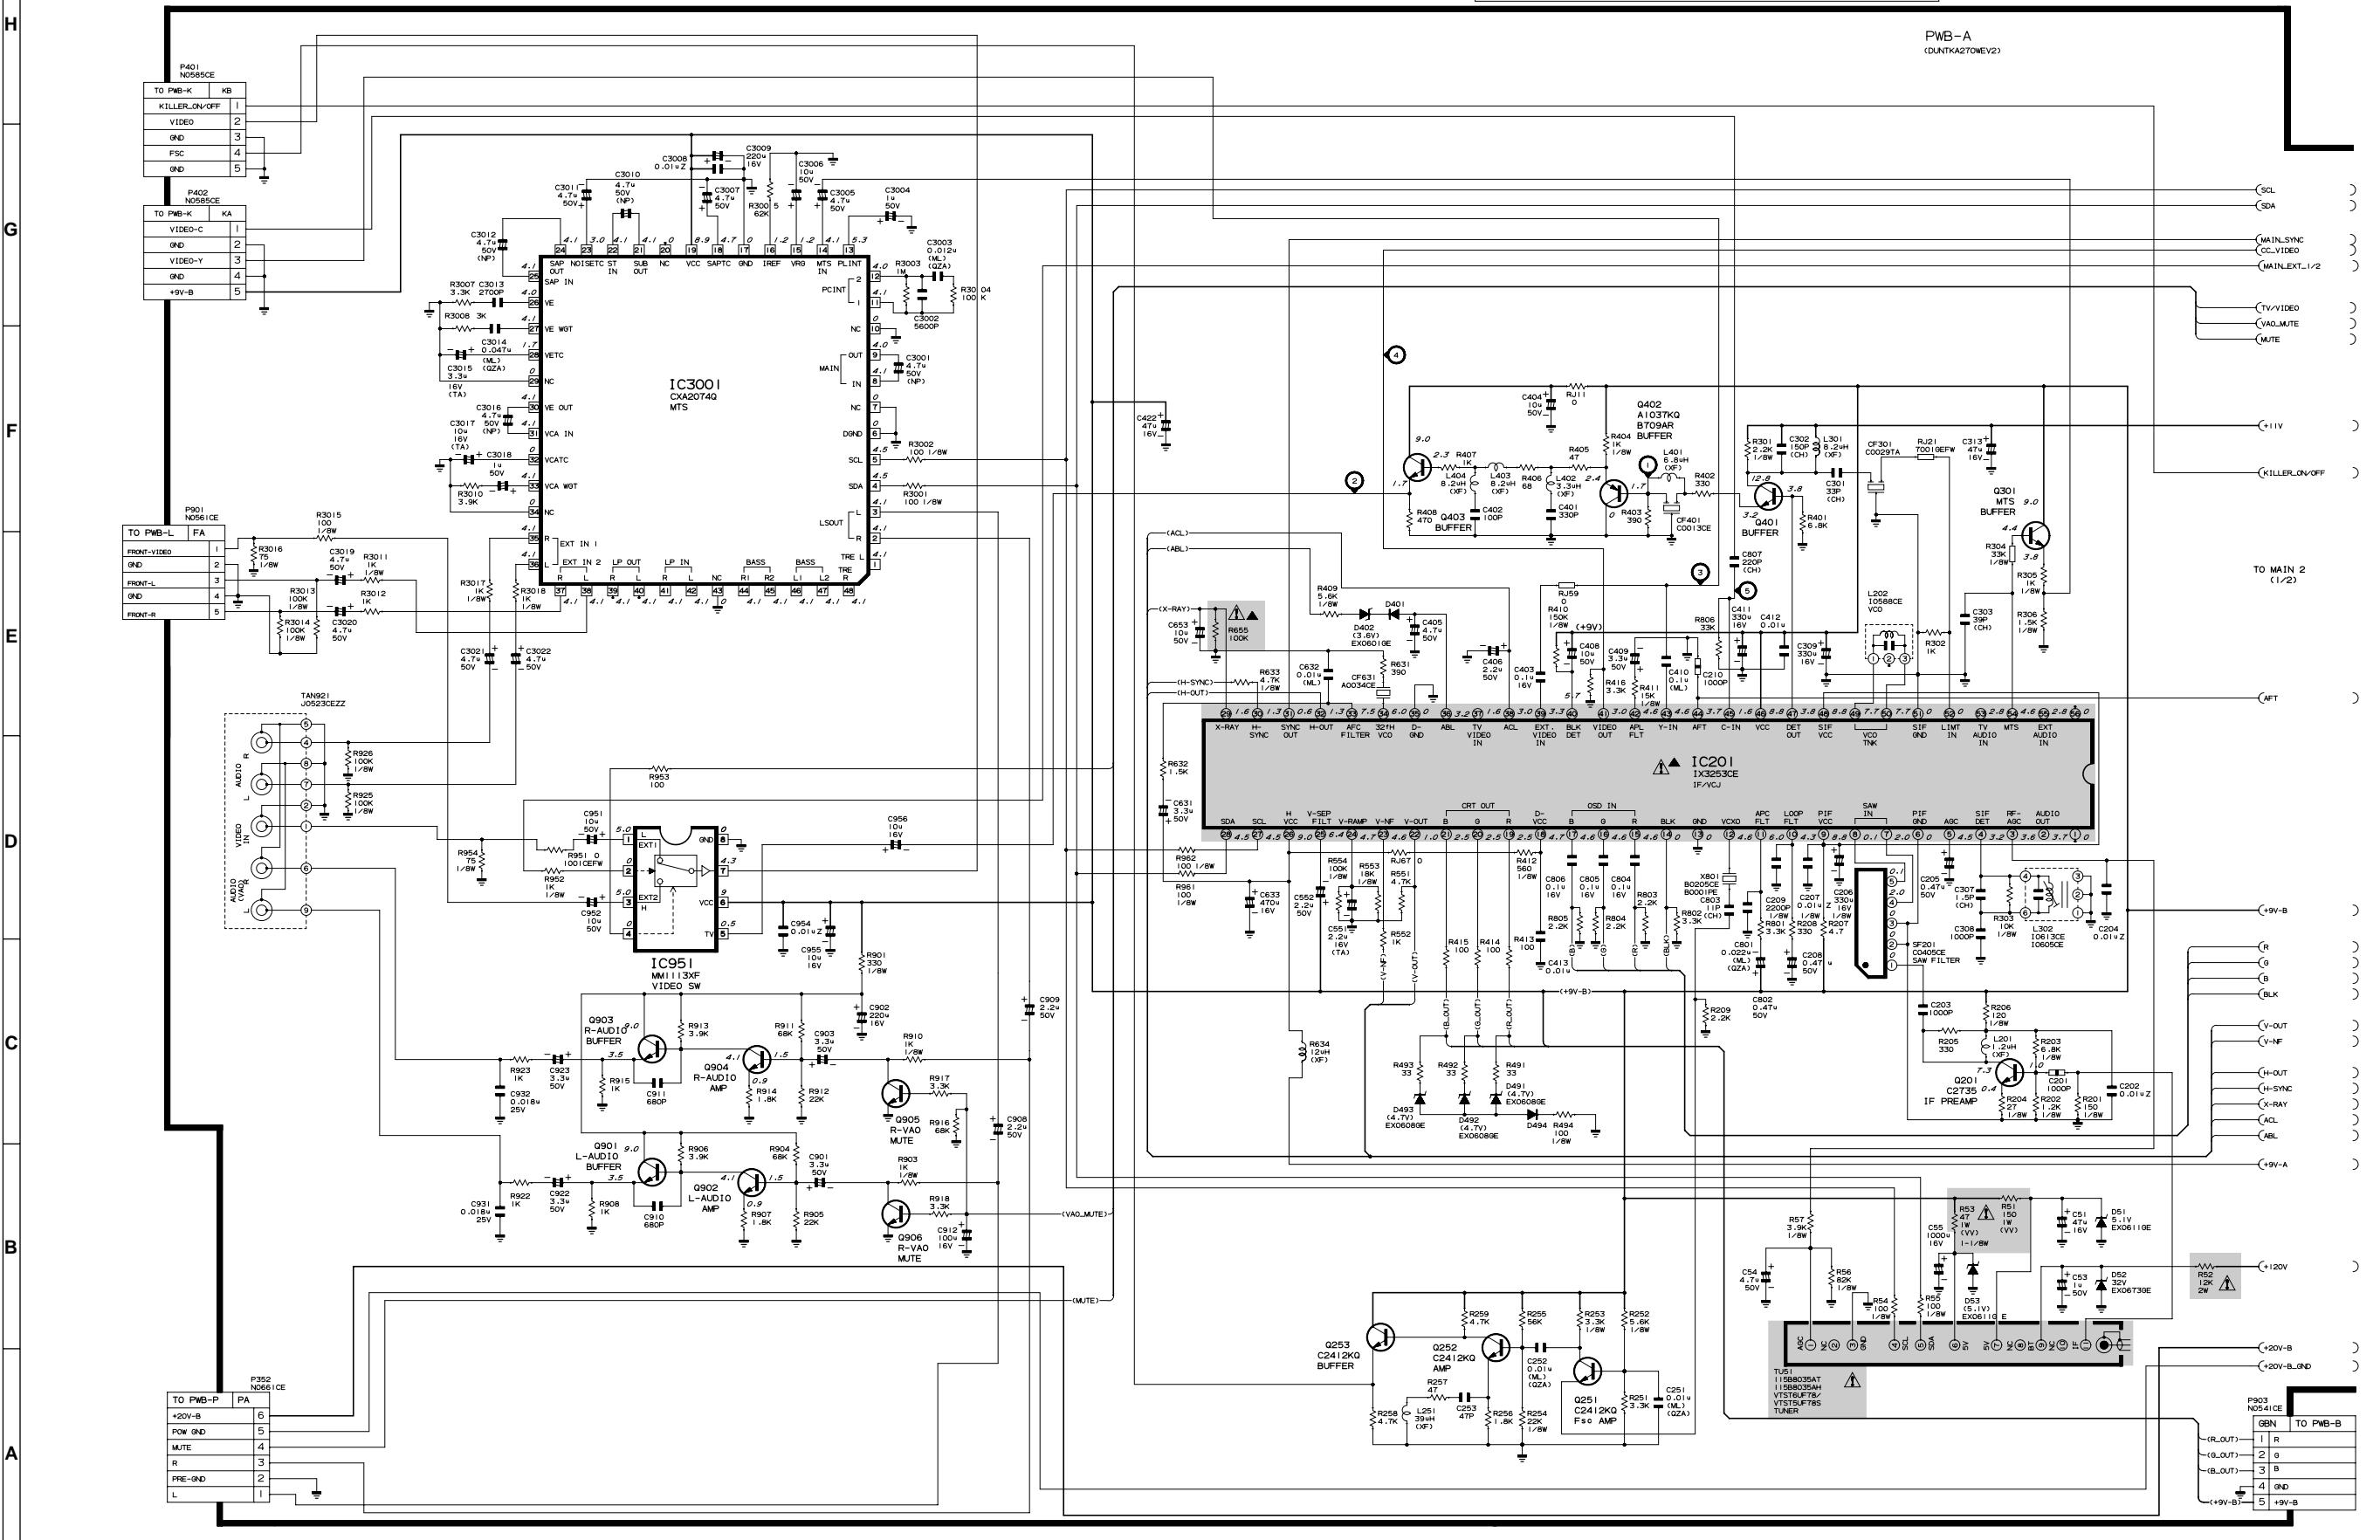

MODEL 29SL81M SCHEMATIC DIAGRAM: MAIN-2 Unit

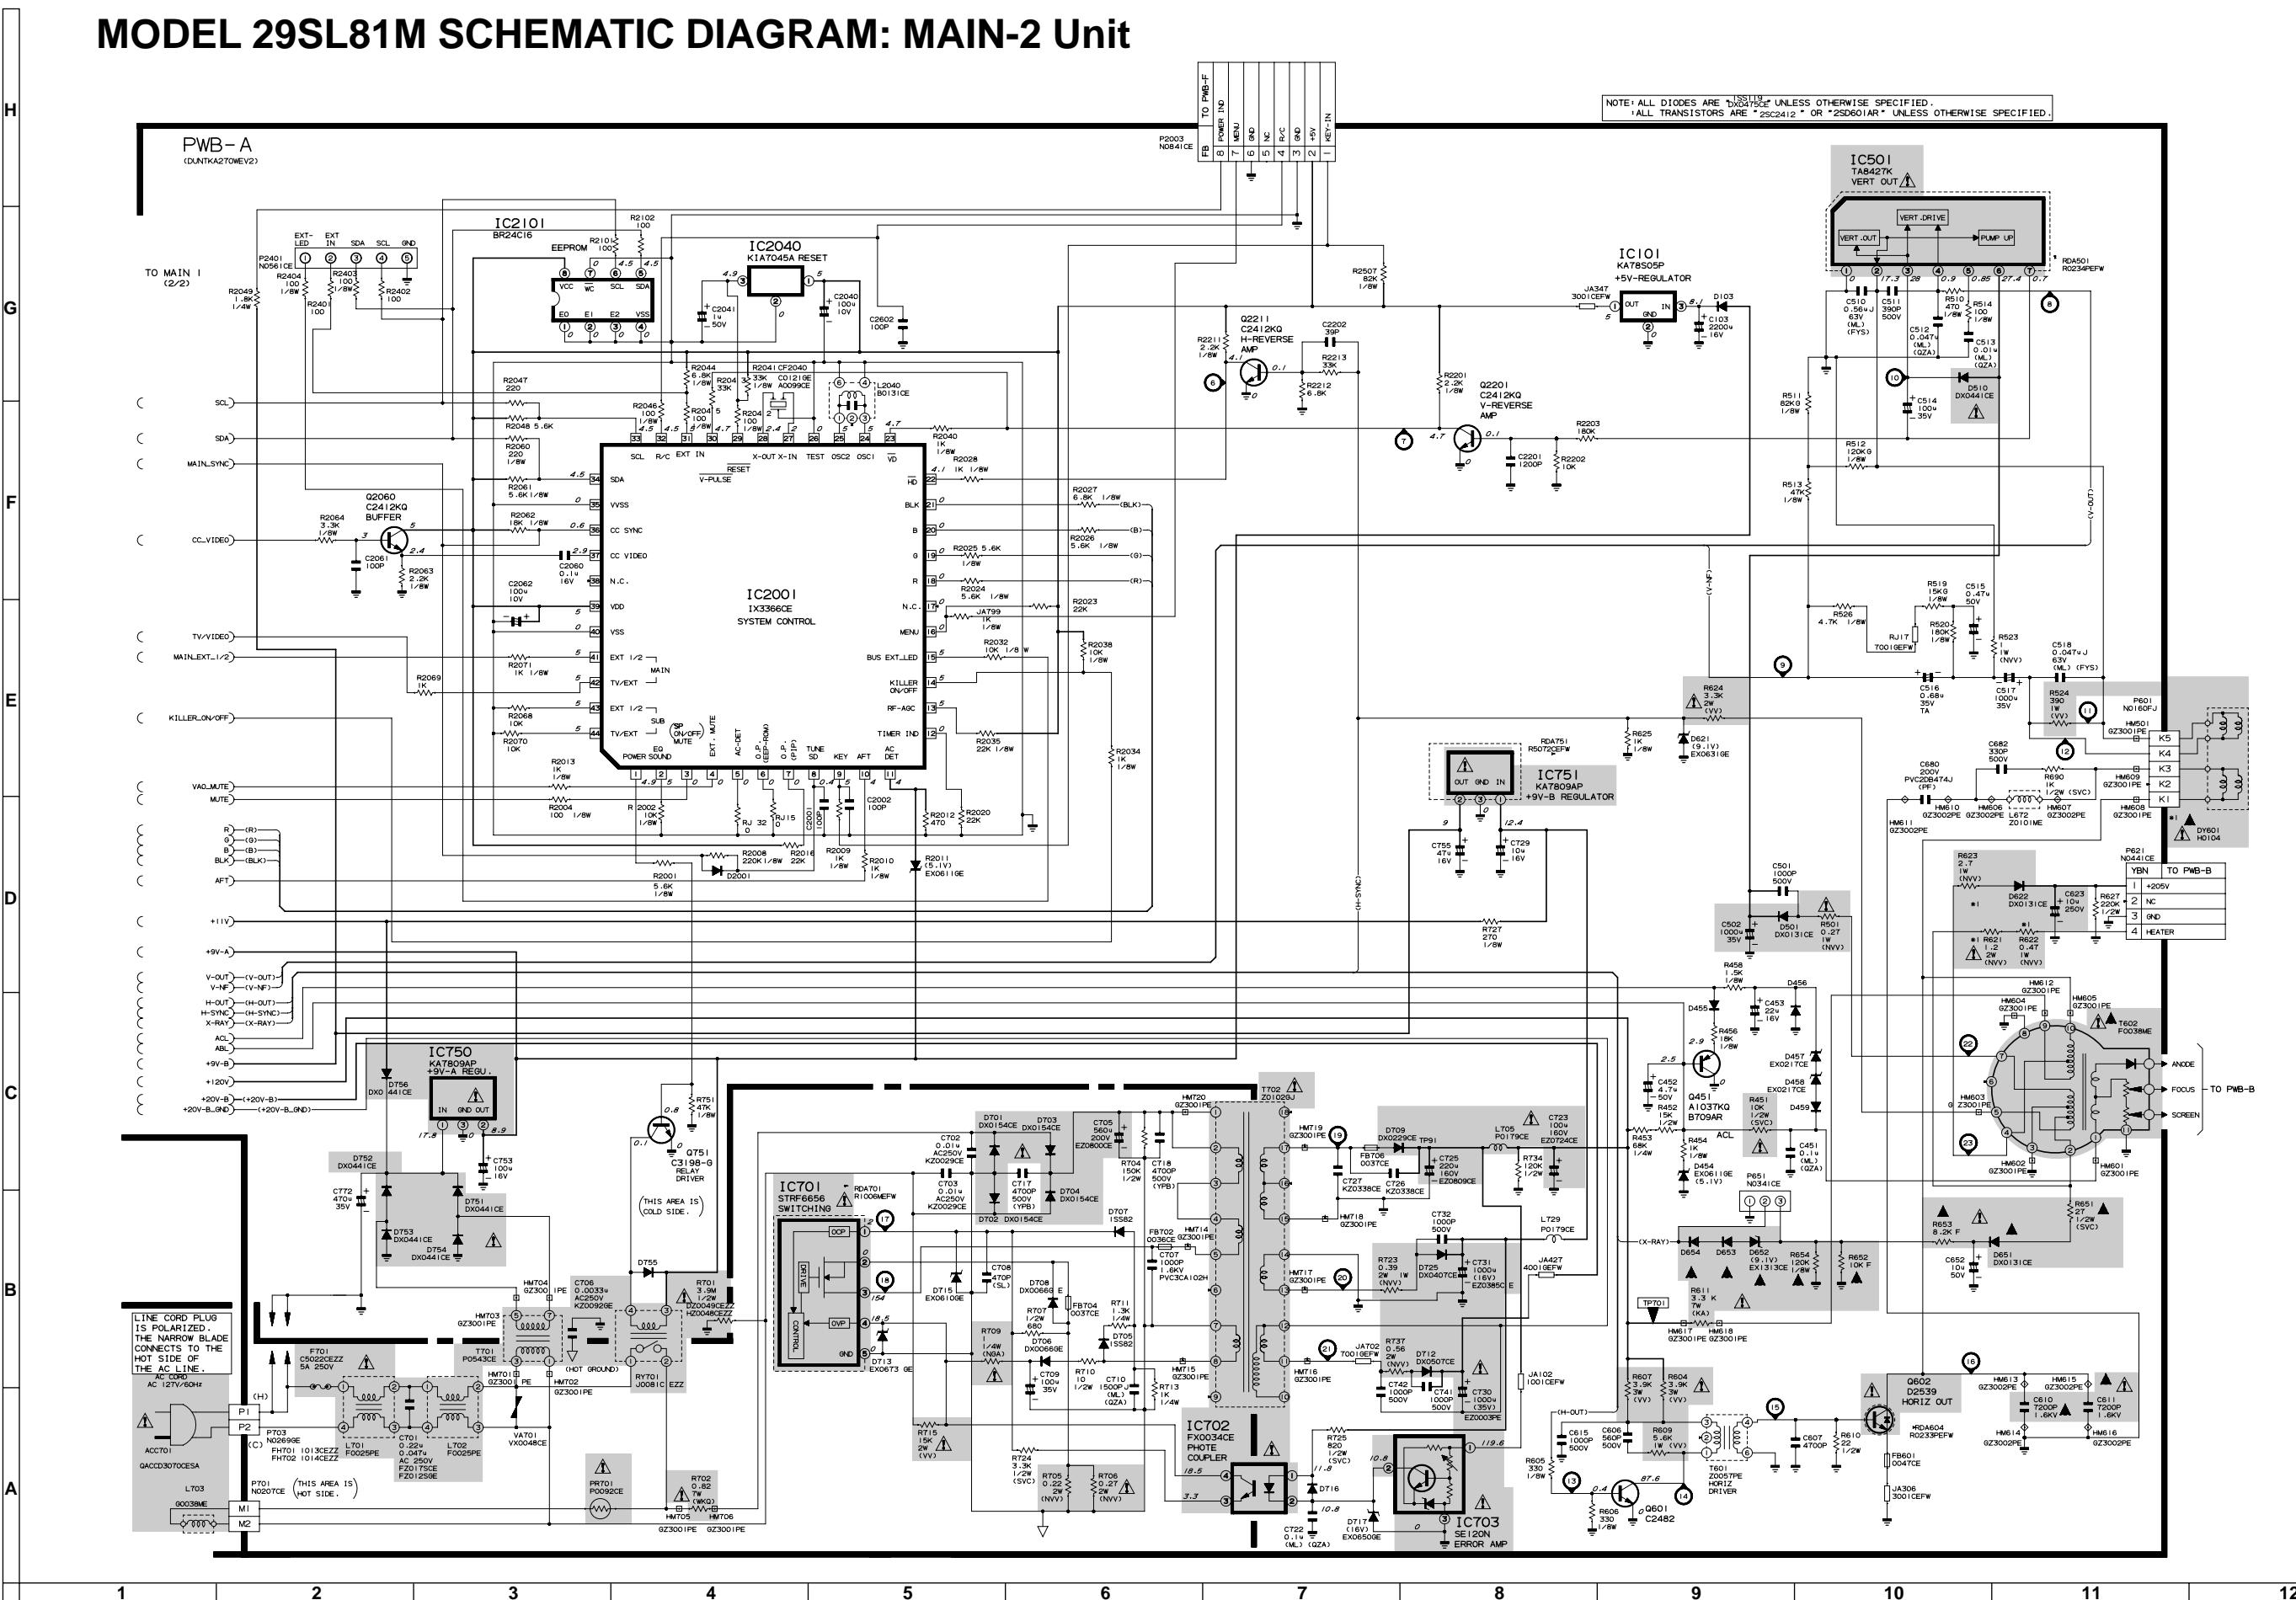


SCHMATIC DIAGRAM: CRT Unit

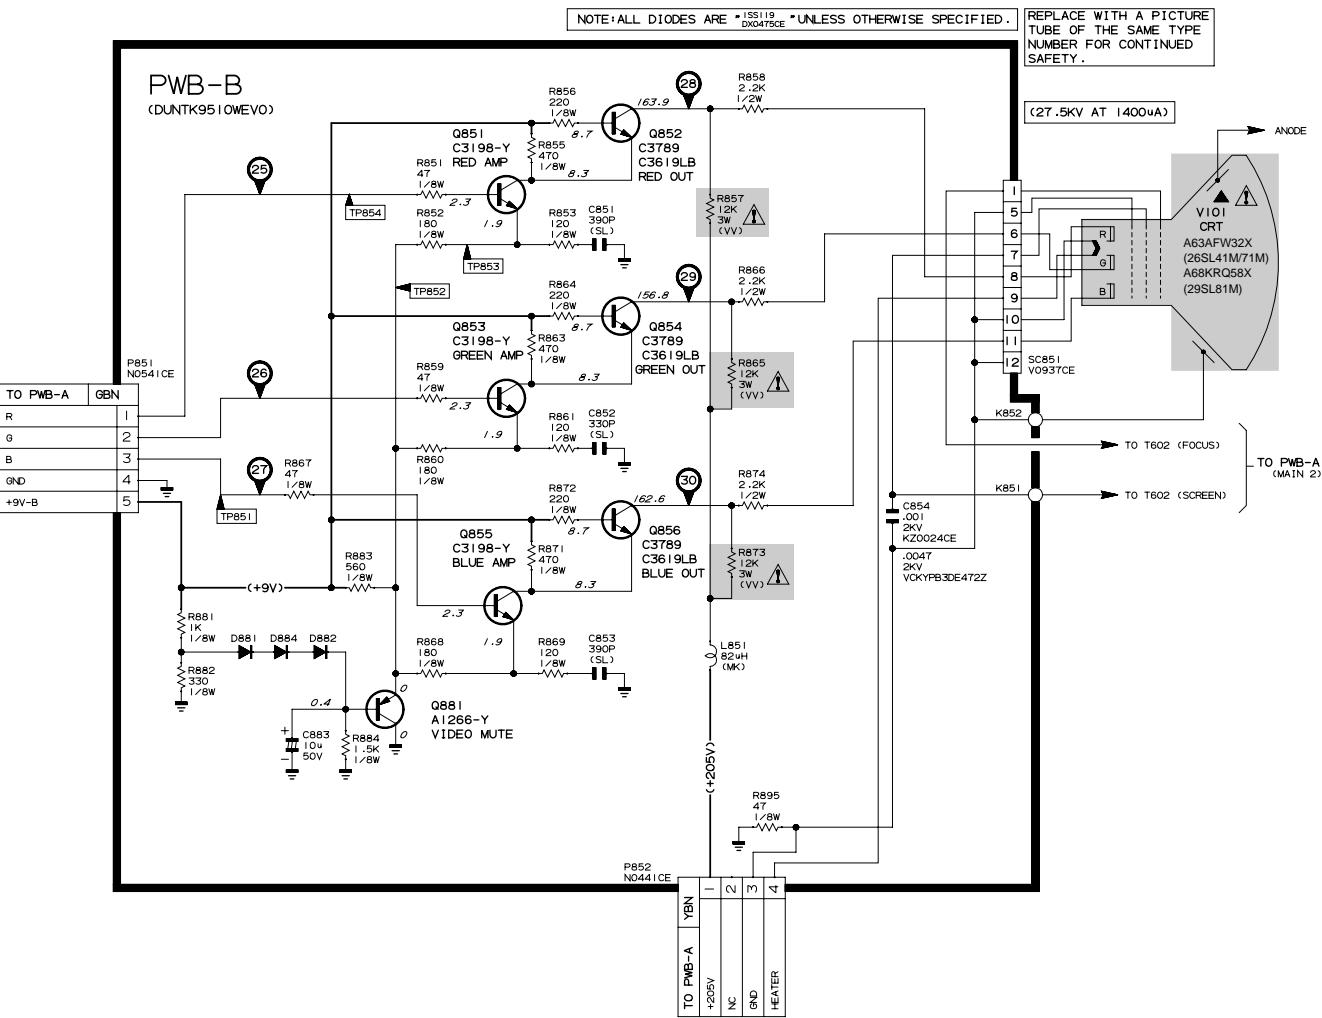

SCHEMATIC DIAGRAM: FRONT AV Unit


H MODEL 26SL41M

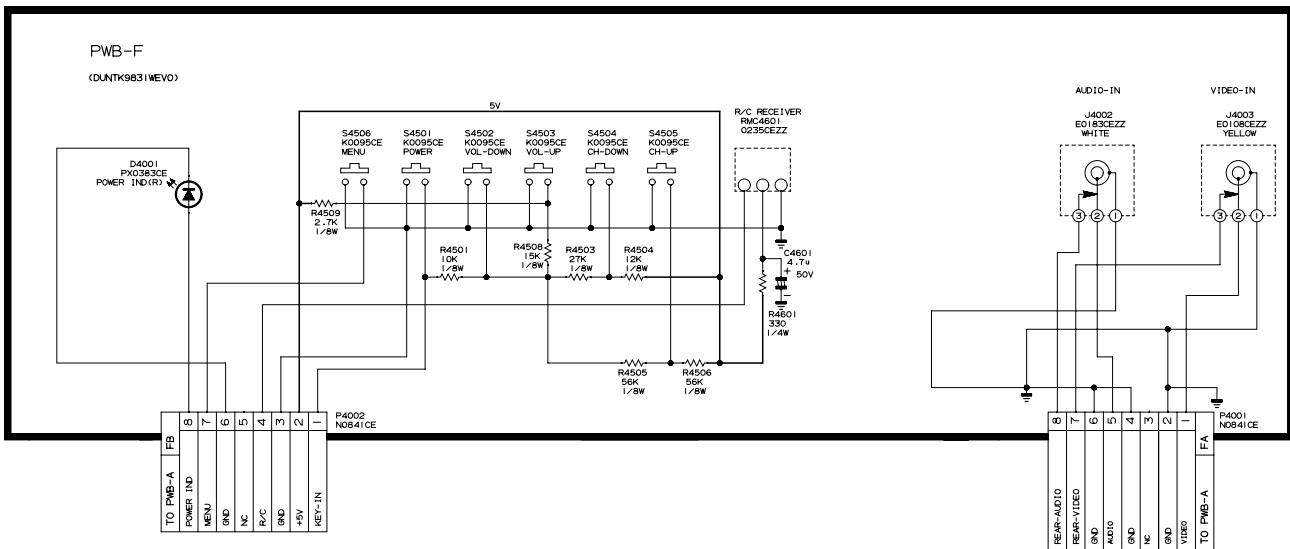

E


D

MODELS 26SL71M, 29SL81M

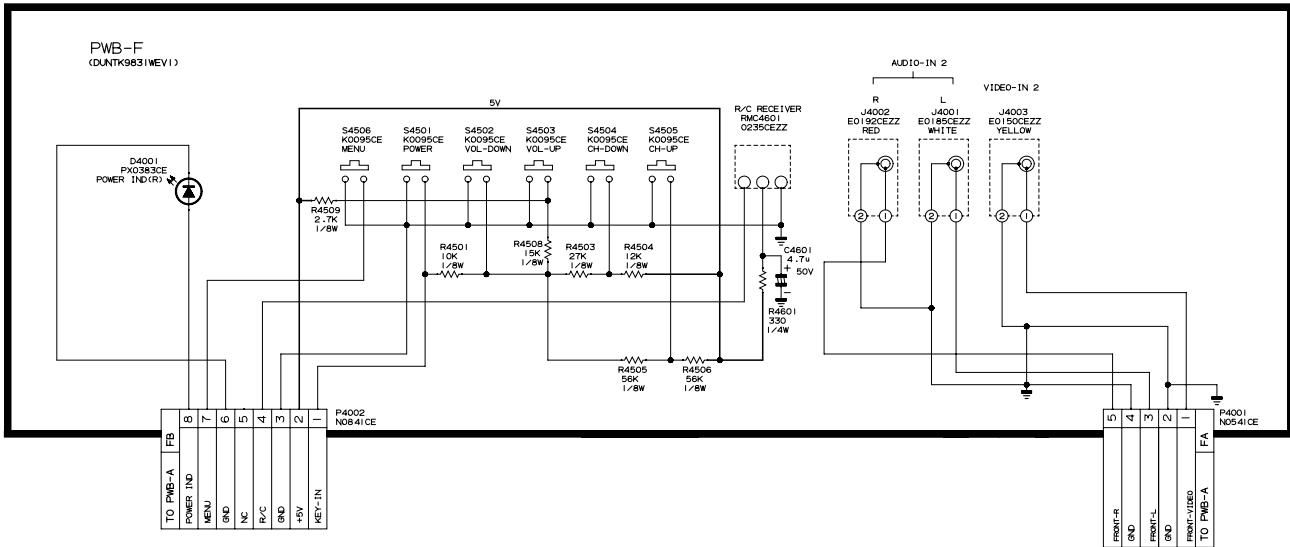


A

MODEL 26SL71M, 29SL81M SCHEMATIC DIAGRAM: AUDIO OUT Unit

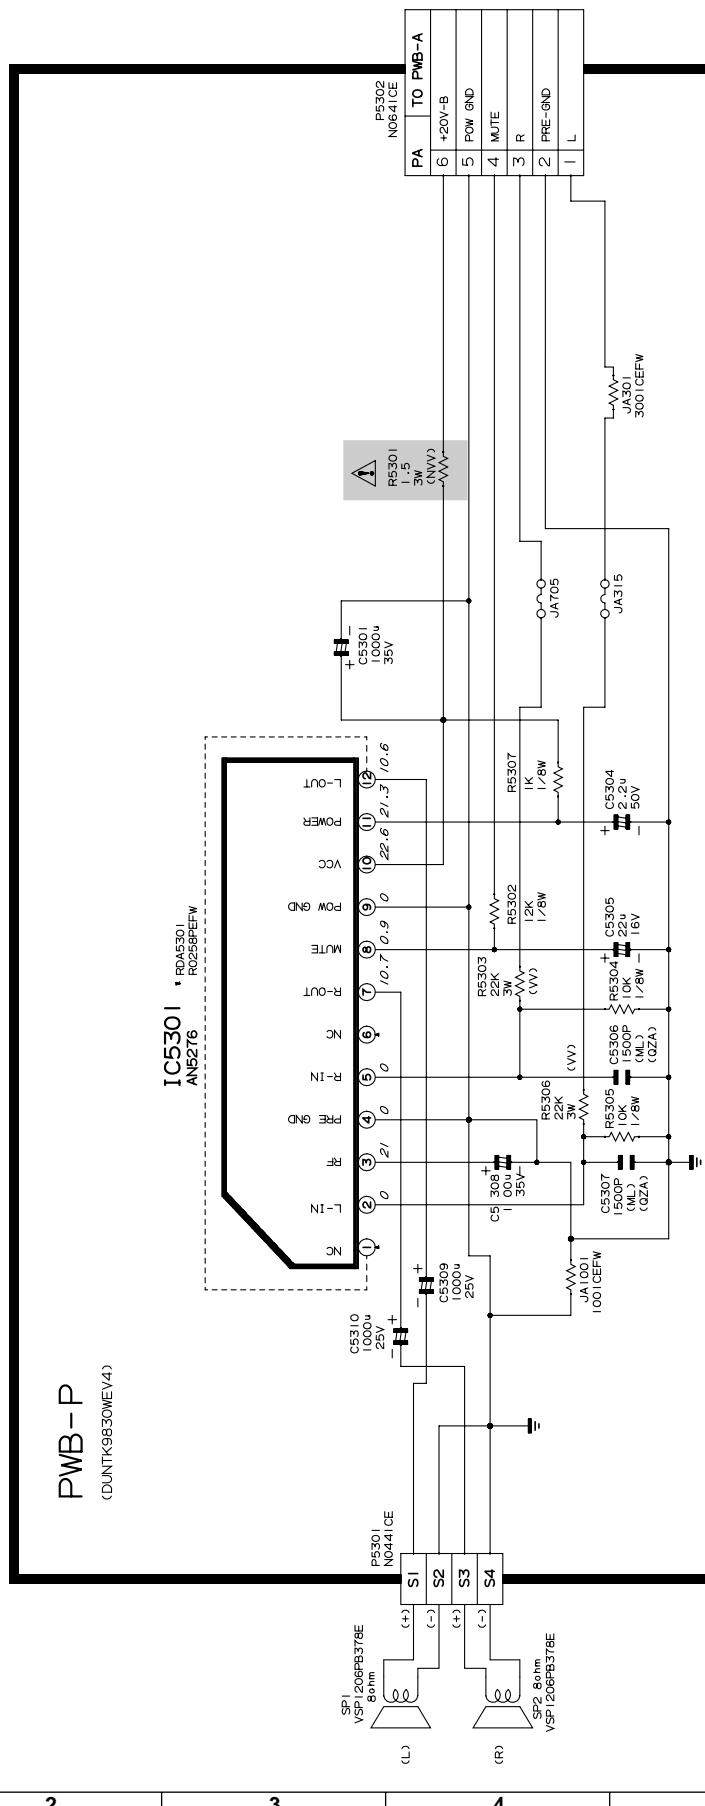

MODEL 29SL81M SCHEMATIC DIAGRAM: Y/C Unit

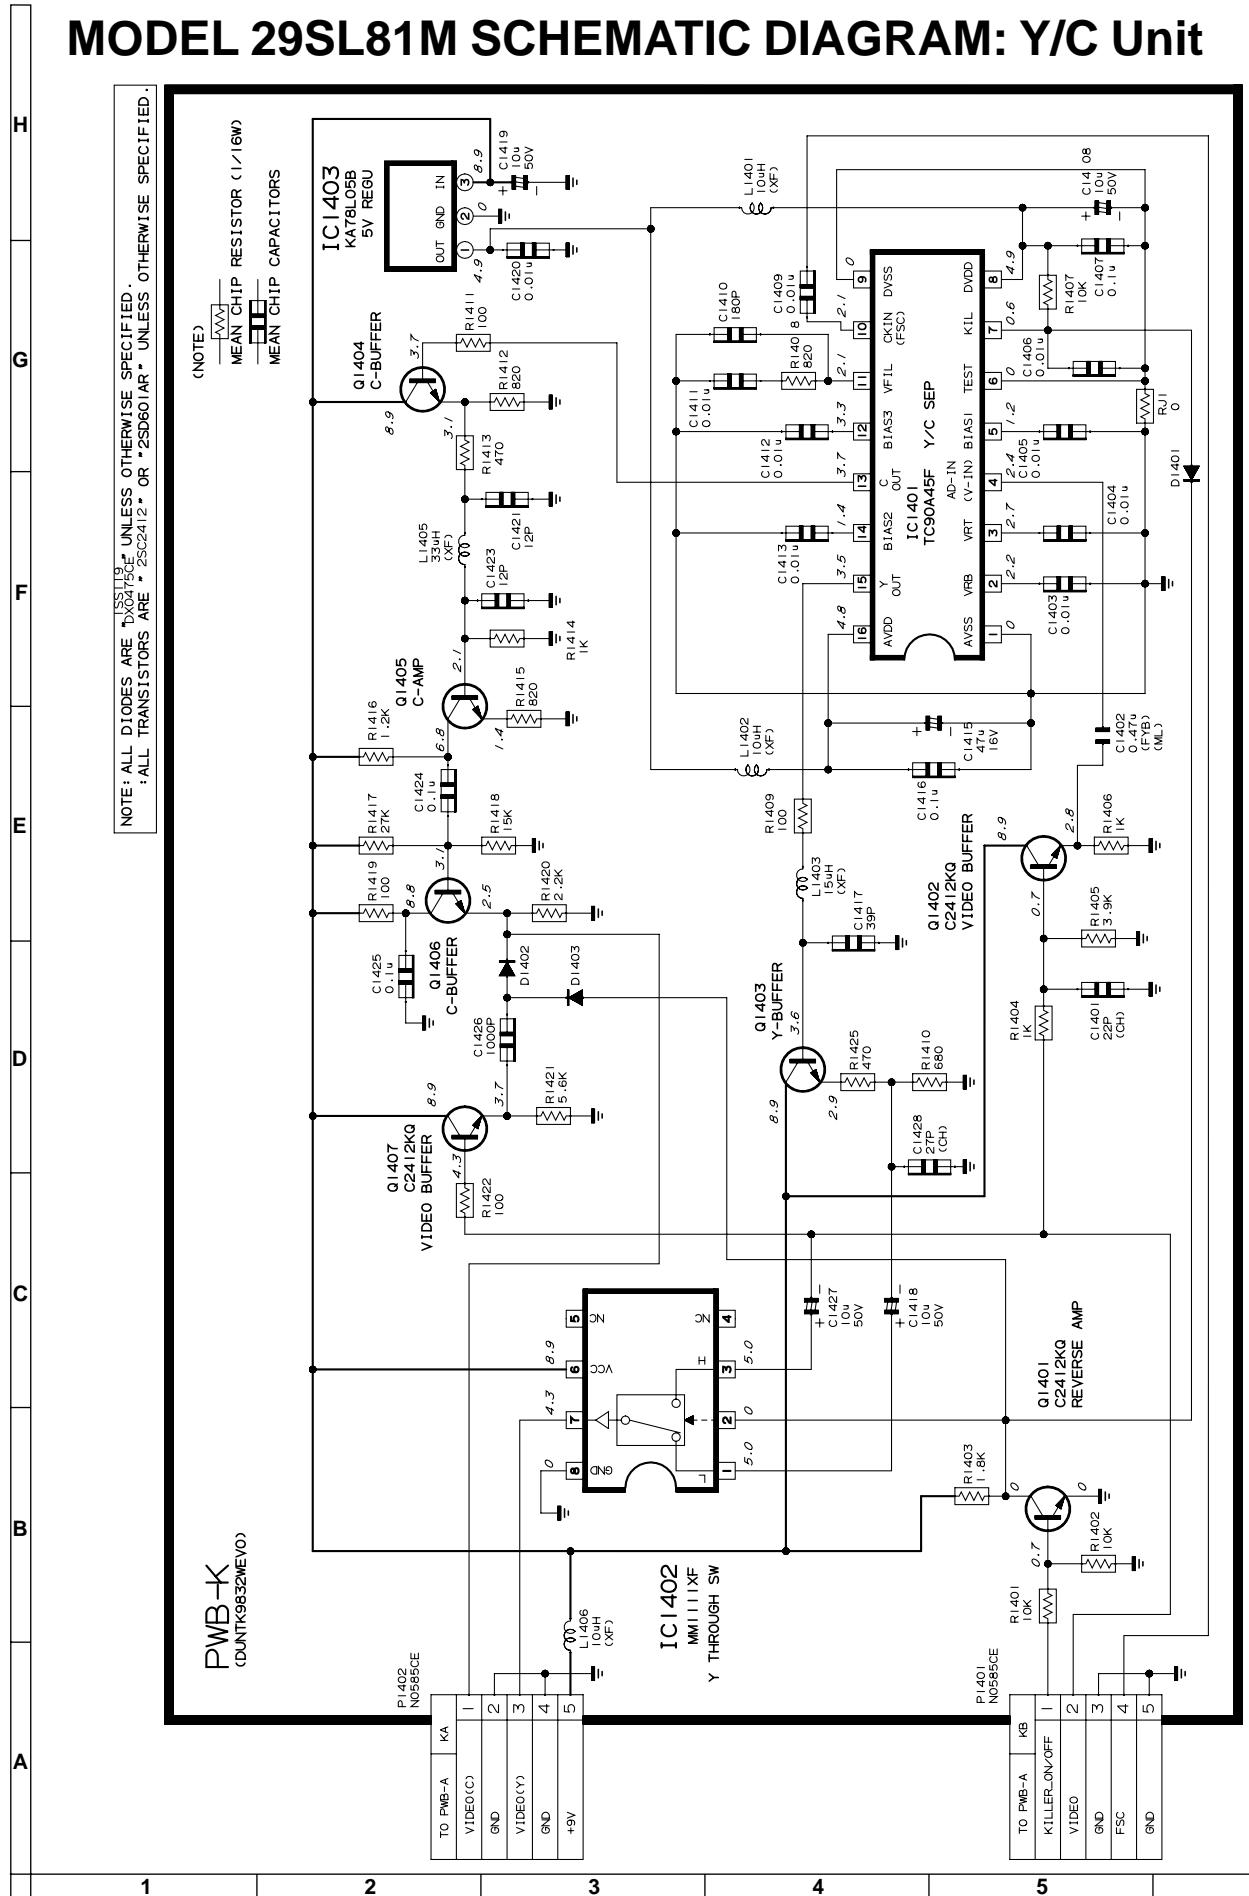

PRINTED WIRING BOARD ASSEMBLIES

H

G

F


E

D


C

B


A

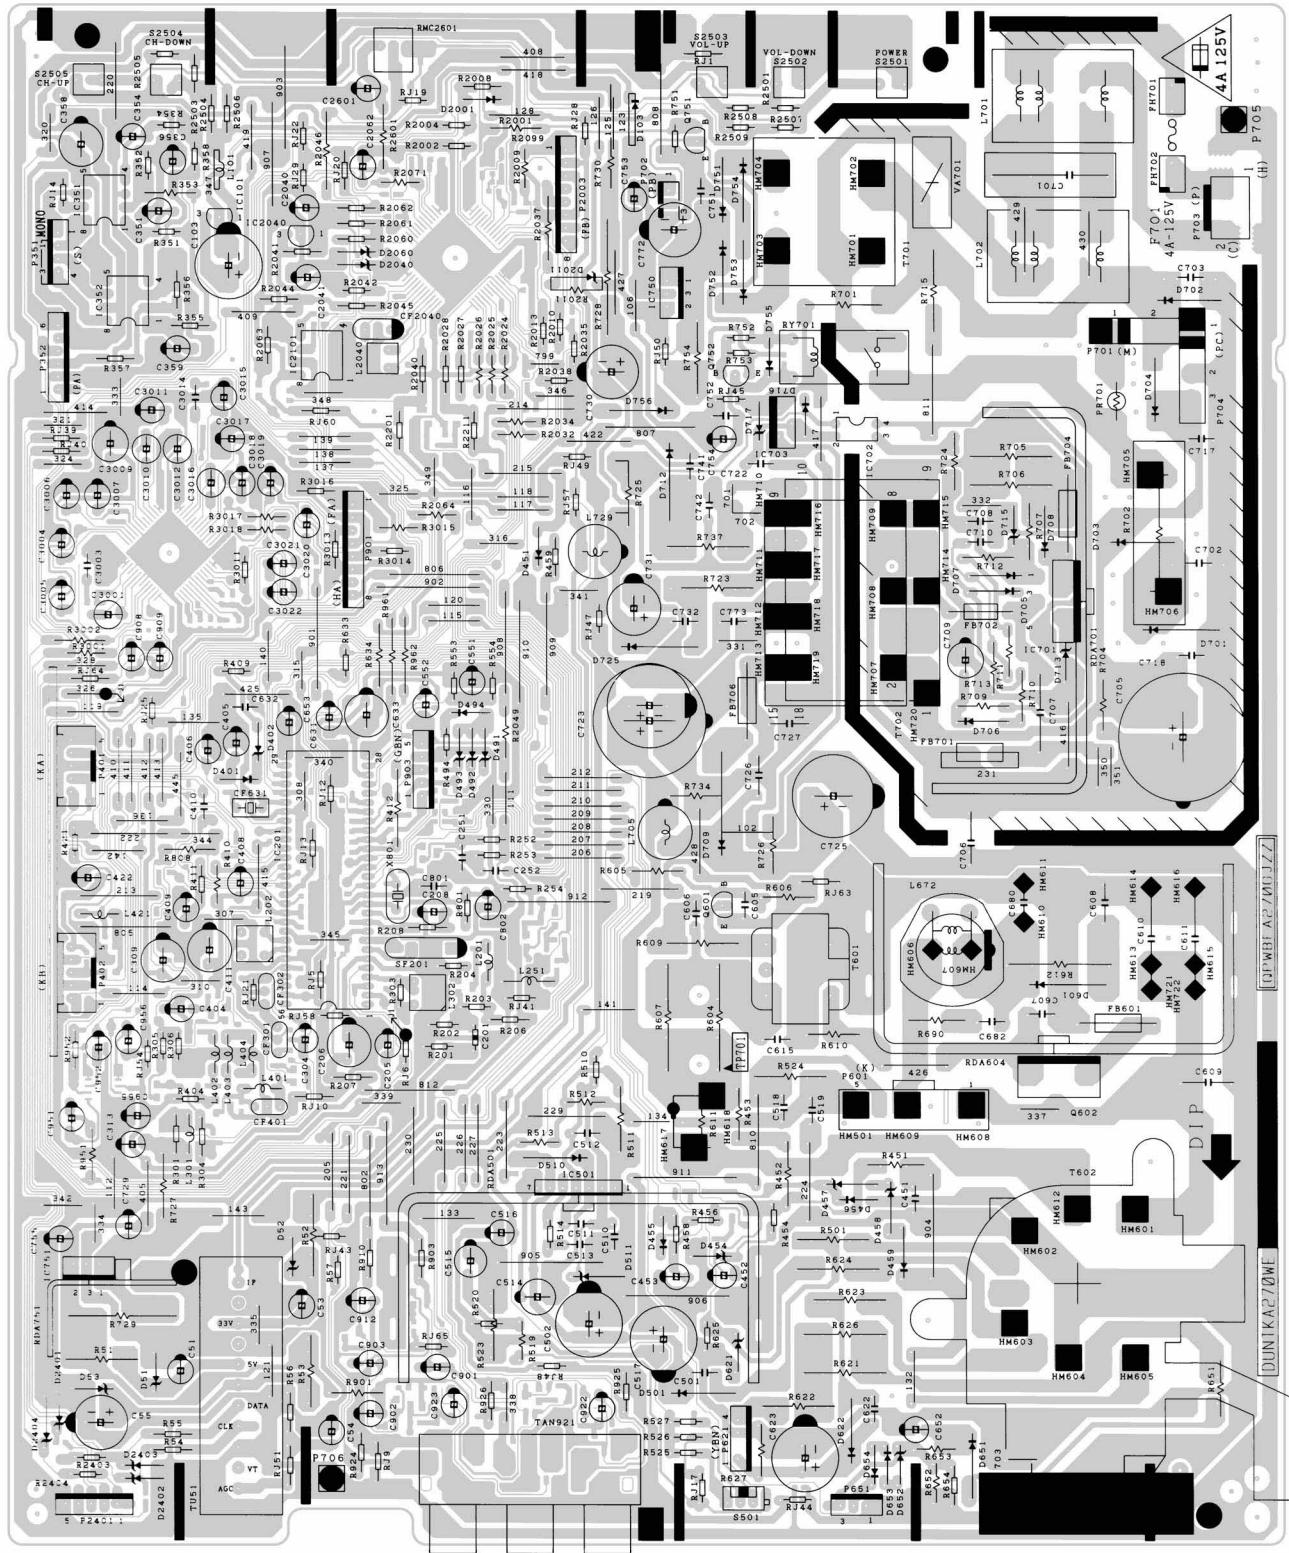


PWB-A: MAIN Unit (Wiring Side)

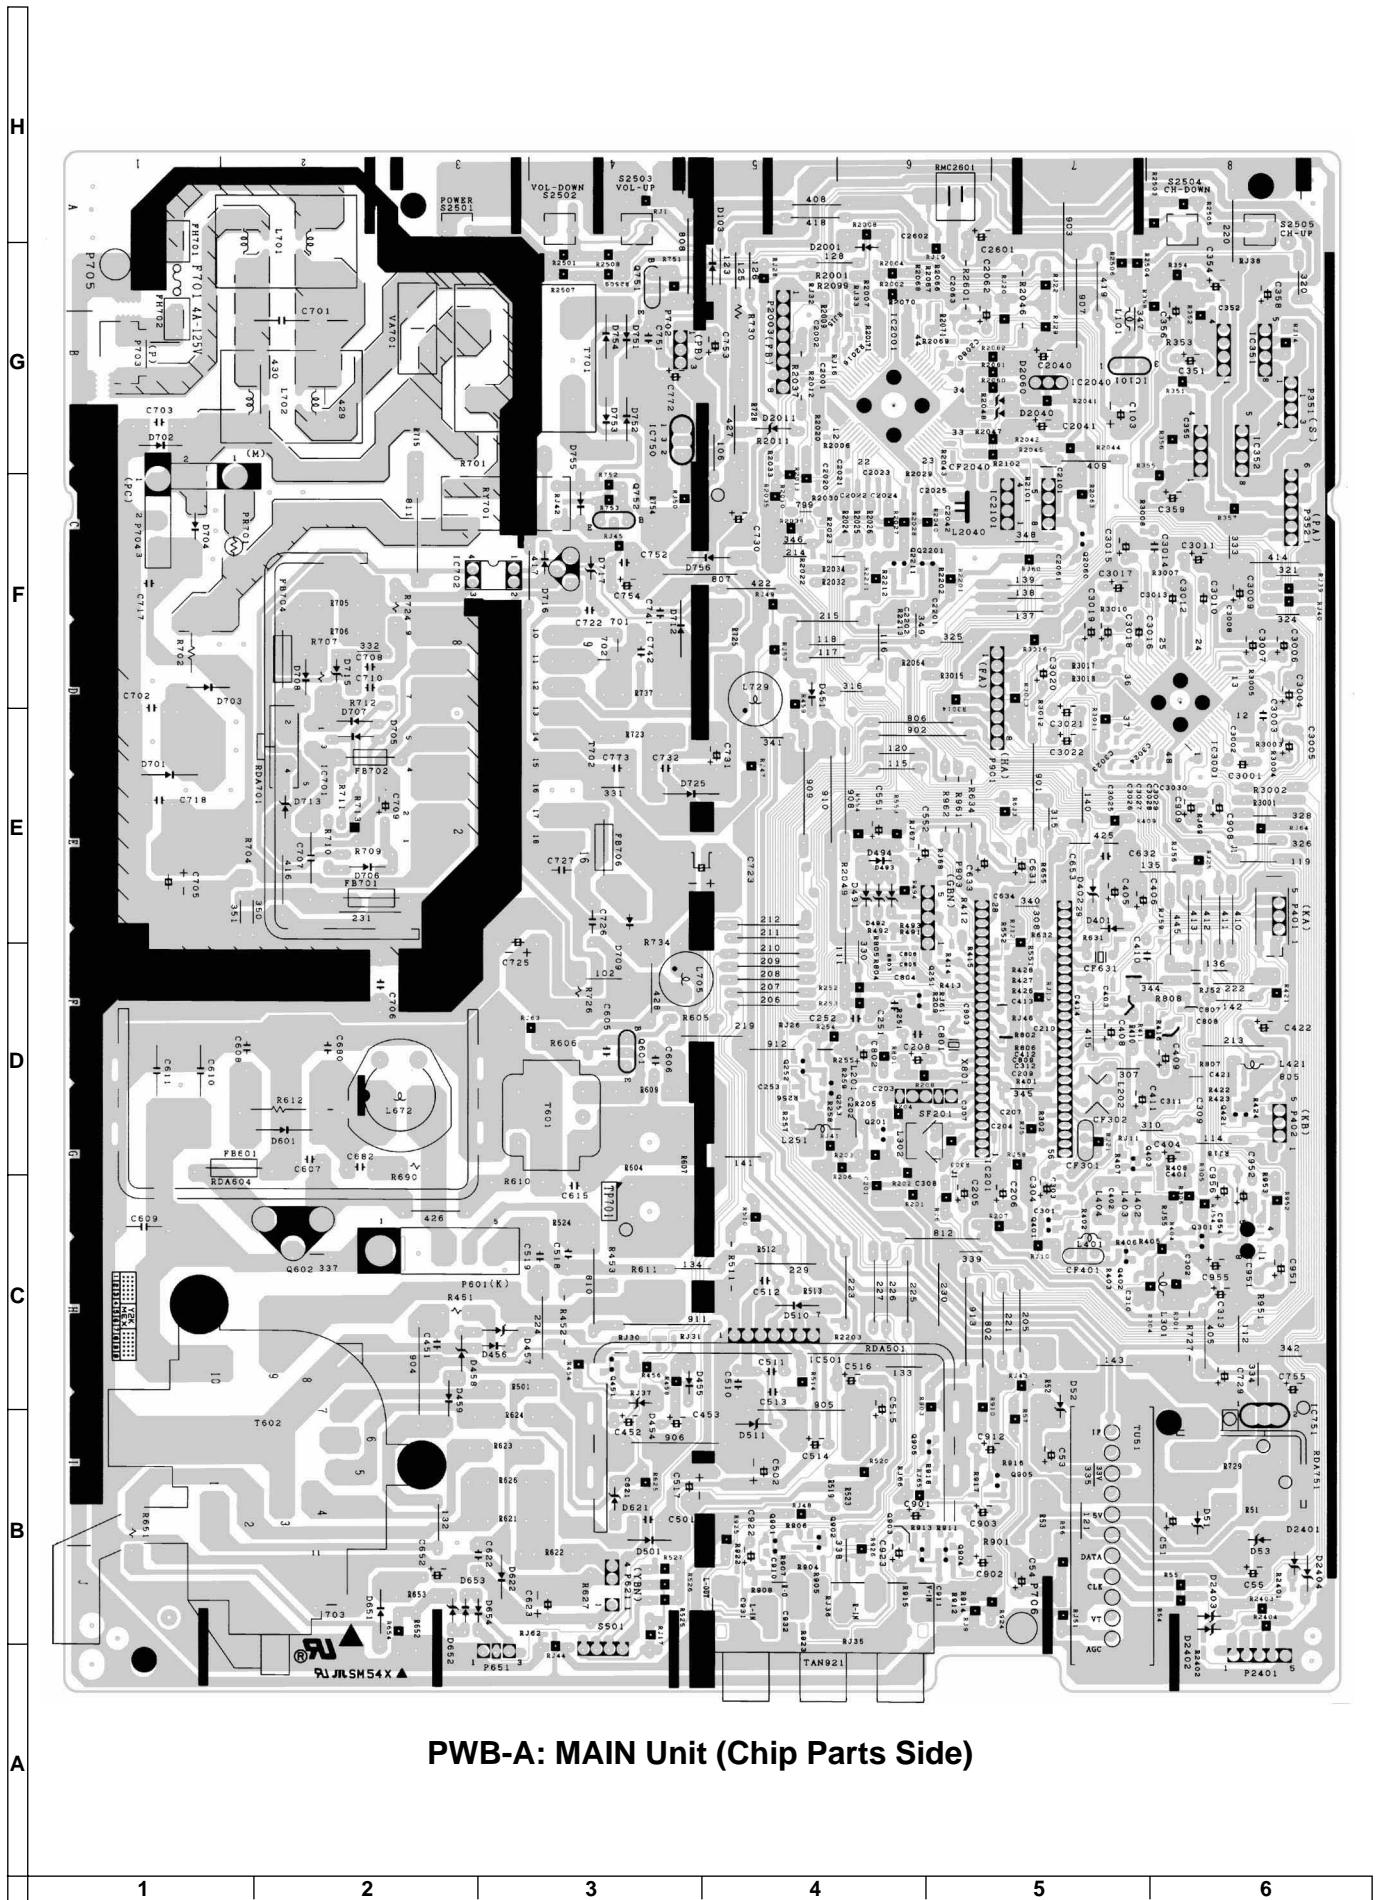


PWB-A: MAIN Unit (Chip Parts Side)

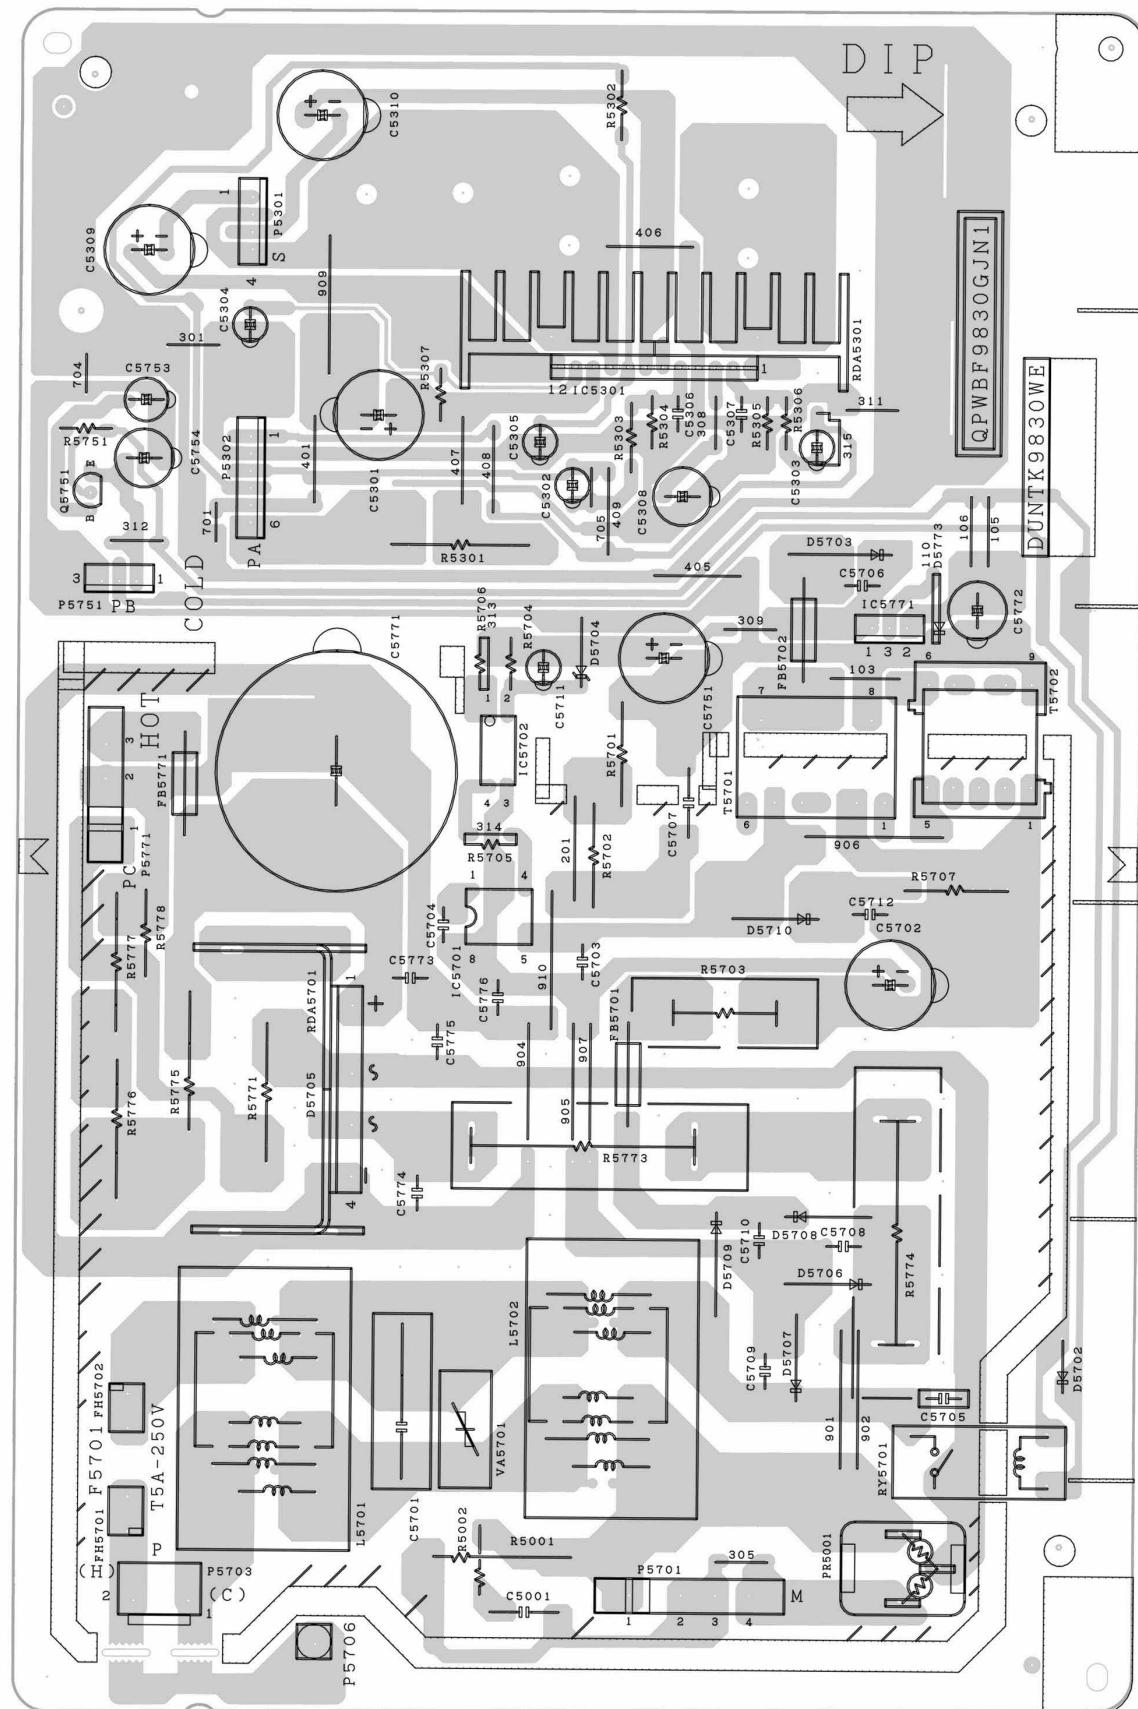


PWB-P: AUDIO OUT Unit (Wiring Side) (Only for 26SL71M, 29SL81M)

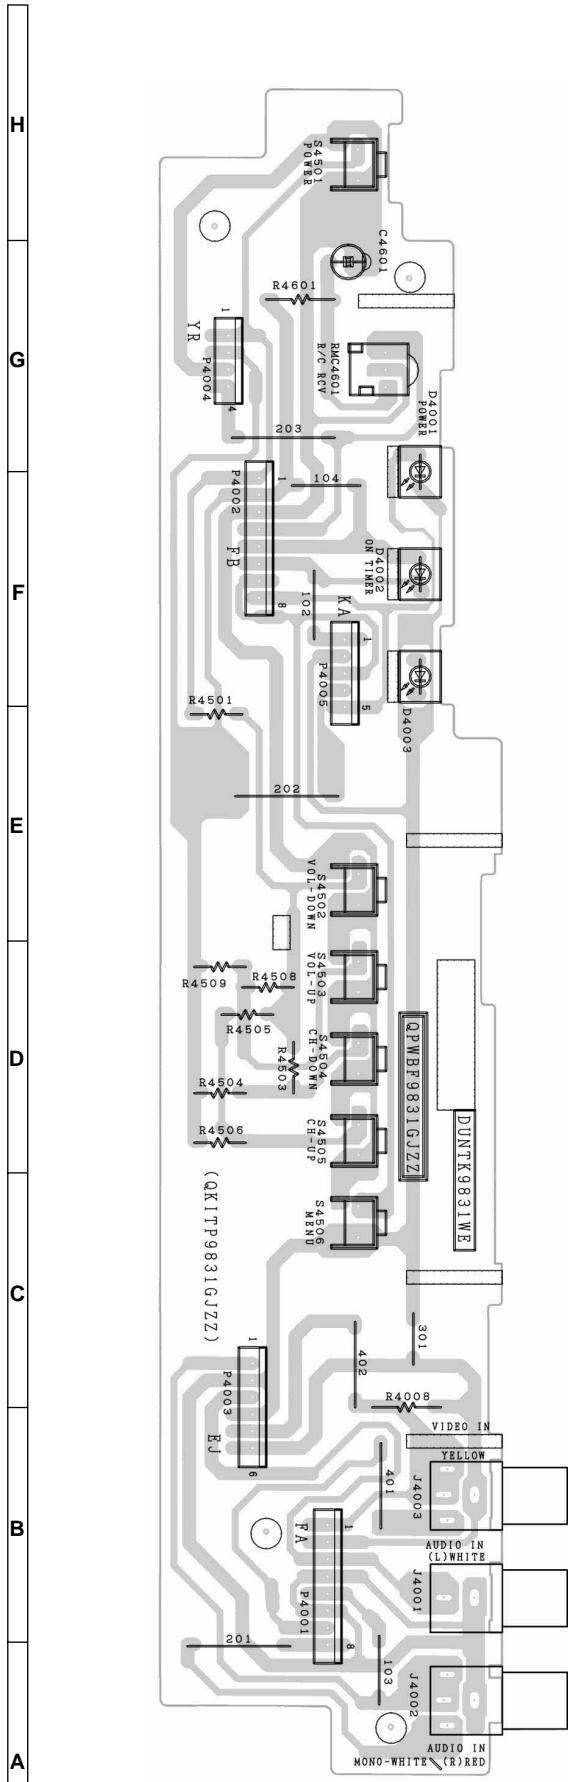


PWB-F: FRONT AV Unit (Wiring Side)

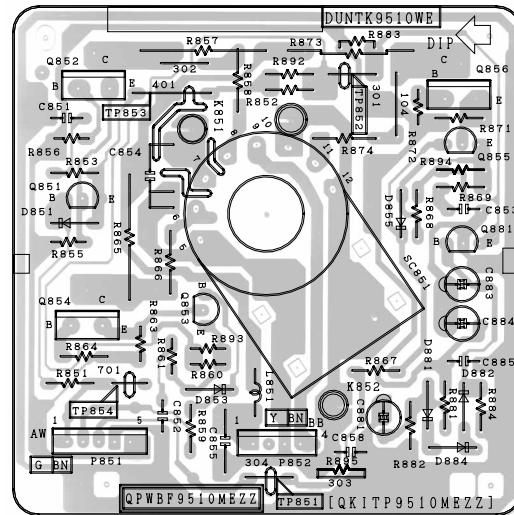

PWB-B: CRT Unit (Wiring Side)

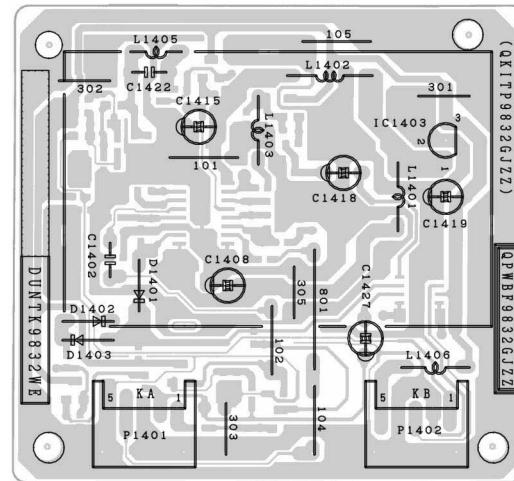

PWB-K: Y/C Unit (Wiring Side) (Only for 29SL81M)

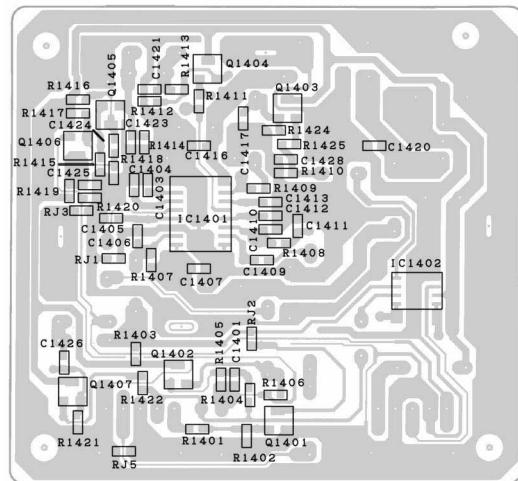

PWB-K: Y/C Unit (Chip Parts Side) (Only for 29SL81M)

PARTS LIST

PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual; electrical components having such features are identified by \triangle and shaded areas in the Replacement Parts Lists and Schematic Diagrams. The use of a substitute replacement part which does not have the same safety characteristic as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

"HOW TO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

1. MODEL NUMBER	2. REF. NO.
3. PART NO.	4. DESCRIPTION

★ MARK : SPARE PARTS-DELIVERY SECTION

▲ MARK : X- RAY RELATED PARTS

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PICTURE TUBE

▲△ V101	VB63AHC26X/*S	X	Picture Tube (26SL41M, 26SL71M)	CF
▲△ V101	VB68KRQ58X/*S	X	Picture Tube (29SL81M)	CK
▲△ DY601	RCiLH0103GJZZ	X	Deflection Yoke (26SL41M, 26SL71M)	AZ
▲△ DY601	RCiLH0104GJZZ	X	Deflection Yoke (29SL81M)	BE
△ L703	RCiLG0036MEZZ	X	Degaussing Coil (26SL71M, 26SL41M)	AN
△ L703	RCiLG0038MEZZ	X	Degaussing Coil (29SL81M)	AQ
	MSPRT0002MEZZ	M	Spring for CRT	AA
	PMAGF3046CEZZ	J	Purity Magnet	AE
	QEARC2508MEZZ	X	Grounding Part (26SL41M, 26SL71M)	AG
	QEARC2702MEZZ	M	Grounding Part (29SL81M)	AH

PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)

PWB-A	DUNTKA270WEV4	-	MAIN Unit (26SL41M)	-
PWB-A	DUNTKA270WEV3	-	MAIN Unit (26SL71M)	-
PWB-A	DUNTKA270WEV2	-	MAIN Unit (29SL81M)	-
PWB-B	DUNTK9510WEV0	-	CRT Unit	-
PWB-F	DUNTK9831WEV0	-	FRONT AV Unit (26SL41M)	-
PWB-F	DUNTK9831WEV1	-	FRONT AV Unit (26SL71M, 29SL81M)	-
PWB-K	DUNTK9832WEV0	-	Y/C Unit (29SL81M)	-
PWB-P	DUNTK9830WEV4	-	AUDIO OUT Unit (26SL71M, 29SL81M)	-

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PWB-A: DUNTA270WEV4 (26SL41M)

PWB-A: DUNTA270WEV3 (26SL71M)

PWB-A: DUNTA270WEV2 (29SL81M)

MAIN UNIT

TUNER

NOTE : THE PARTS HERE SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT NOT INDEPENDENTLY.

△ TU51	VTU115B8035AH	M	VHF Tuner	AH
	or			
	VTU115B8035AT			
	or			
	VTUVTST6UF78/			
	or			
	VTUVTST5UF78S			

INTEGRATED CIRCUITS

IC101	VHiKA78S05P-1	J	KA78S05P	AD
▲△ IC201	RH-iX3253CEZZ	J	TA1268AN	AV
IC351	VHiAN7511//1	J	AN7511 (26SL41M)	AK
IC352	VHiAN7511/-1	J	AN7511 (26SL41M)	AK
△ IC501	VHiTA8403K/-1	J	TA8403K (26SL41M, 26SL71M)	AL
△ IC501	VHiTA8427K/-1	J	TA8427K (29SL81M)	AL
△ IC701	VHiSTRF66261E	J	STRF6626 (26SL41M)	AX
IC701	VHiSTRF66561E	J	STRF6656 (26SL71M, 29SL81M)	
△ IC702	RH-FX0034CEZZ	J	PC817	AE
△ IC703	VHiSE120N/-1	J	SE120N	AG
△ IC750	VHiKA7809AP-1	J	KA7809AP	AE
△ IC751	VHiKA7809AP-1	J	KA7809AP	AE
IC951	VHiMM1111XF1E	J	MM1111XF (26SL71M)	AE
IC951	VHiMM1113XF1E	J	MM1113XF (29SL81M)	AE
IC2001	RH-iX3366CEN2	X	TMPA8700CPF (26SL41M)	AT
IC2001	RH-iX3366CEZZ	X	TMPA8700CPF (26SL71M, 29SL81M)	AU
IC2040	VHiKiA7045A-1	M	KIA7045A	AC
IC2101	VHiBR24C16/-1	J	BR24C16	AL
IC3001	VHiCXA2074Q-1	J	CXA2074Q (26SL71M, 29SL81M)	AY

TRANSISTORS

You can substitute "VS2SD601AR/-1" for "VS2SC2412KQ-1".

Q201	VS2SC2735//1E	J	SC2735	AC
Q251	VS2SC2412KQ-1	J	SC2412 (29SL81M)	AA
Q252	VS2SC2412KQ-1	J	SC2412 (29SL81M)	AA
Q253	VS2SC2412KQ-1	J	SC2412 (29SL81M)	AA
Q301	VS2SC2412KQ-1	J	SC2412 (26SL71M, 29SL81M)	AA
Q401	VS2SC2412KQ-1	J	SC2412	AA
Q402	VS2SA1037KQ-1	J	2SA1037	AA
	or			
Q403	VS2SB709AR/-1			
Q421	VS2SC2412KQ-1	J	SC2412	AA
	VS2SA1037KQ-1	J	2SA1037 (26SL41M, 26SL71M)	AA
Q451	VS2SB709AR/-1			
	VS2SA1037KQ-1	J	2SA1037	AA
	or			
Q601	VS2SC2482//1	J	2SC2482	AD
△ Q602	VS2SD2539//1E	J	2SD2589	AP
Q751	VS2SC3198-G-1	J	SC3198 (29SL81M)	AA
Q751	VS2SC3198-Y-1	J	SC3198 (26SL41M, 26SL71M)	AA
Q901	VS2SC2412KQ-1	J	SC2412 (26SL71M, 29SL81M)	AA
Q902	VS2SC2412KQ-1	J	SC2412 (26SL71M, 29SL81M)	AA
Q903	VS2SC2412KQ-1	J	SC2412 (26SL71M, 29SL81M)	AA
Q904	VS2SC2412KQ-1	J	SC2412 (26SL71M, 29SL81M)	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code					
PWB-A: DUNTA270WEV4 (26SL41M)														
PWB-A: DUNTA270WEV3 (26SL71M)														
PWB-A: DUNTA270WEV2 (29SL81M)														
MAIN UNIT (Continued)														
Q905	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA	CF301	RFILC0029TAZZ	J	Ceramic Filter	AD					
Q906	VS2SC2412KQ-1	J	2SC2412 (26SL71M, 29SL81M)	AA	CF401	RFILC0013CEZZ	J	Ceramic Filter	AE					
Q2060	VS2SC2412KQ-1	J	2SC2412	AA	CF631	RFILA0034CEZZ	J	Ceramic Filter	AD					
Q2201	VS2SC2412KQ-1	J	2SC2412	AA	CF2040	RFILC0121GEZZ	J	Ceramic Filter	AD					
Q2211	VS2SC2412KQ-1	J	2SC2412	AA	L201	VP-XF1R2K0000	J	Peaking 1.2μH	AB					
DIODES														
You can substitute "RH-DX0475CEZZ" for "VHD1SS119/-1".														
D51	RH-EX0611GEZZ	J	Zener Diode, 5.1V	AA	L202	RCIL0588CEZZ	J	VCO Coil	AF					
D52	RH-EX0673GEZZ	J	Zener Diode, 32V	AB	L251	VP-XF390K0000	J	Peaking 39μH (29SL81M)	AB					
D53	RH-EX0611GEZZ	J	Zener Diode, 5.1V	AA	L301	VP-XF8R2K0000	J	Peaking 8.2μH	AB					
D103	VHD1SS119/-1	J	Diode	AB	L302	RCIL0613CEZZ	J	IF Coil or RCIL0605CEZZ	AE					
D401	VHD1SS119/-1	J	Diode	AB	L401	VP-XF6R8K0000	J	Peaking 6.8μH	AB					
D402	RH-EX0601GEZZ	J	Zener Diode, 3.6V (29SL81M)	AA	L402	VP-XF3R3K0000	J	Peaking 3.3μH	AB					
D402	RH-EX0604GEZZ	J	Zener Diode, 3.9V (26SL41M, 26SL71M)	AB	L403	VP-XF8R2K0000	J	Peaking 8.2μH	AB					
D454	RH-EX0611GEZZ	J	Zener Diode, 5.1V	AA	L404	VP-XF8R2K0000	J	Peaking 8.2μH	AB					
D455	VHD1SS119/-1	J	Diode	AB	L421	VP-XF680K0000	J	Peaking 68μH (26SL41M, 26SL71M)	AB					
D456	VHD1SS119/-1	J	Diode	AB	L672	RCILZ0101MEZZ	M	Coil	AL					
D457	RH-EX0217CEZZ	J	Zener Diode, 15V	AB	▲ L701	RCILF0025PEZZ	J	Filter	AK					
D458	RH-EX0217CEZZ	J	Zener Diode, 15V	AB	▲ L702	RCILF0025PEZZ	J	Filter	AK					
D459	VHD1SS119/-1	J	Diode	AB	▲ L705	RCILP0179CEZZ	J	Coil	AD					
D491	RH-EX0608GEZZ	J	Zener Diode	AA	L729	RCILP0179CEZZ	J	Coil	AD					
D492	RH-EX0608GEZZ	J	Zener Diode	AA	L2040	RCILB0131CEZZ	J	Oscillation Coil	AE					
D493	RH-EX0608GEZZ	J	Zener Diode	AA	SF201	RFILC0405CEZZ	J	SAW Filter	AH					
D494	VHD1SS119/-1	J	Diode	AB	TRANSFORMERS									
▲ D501	RH-DX0131CEZZ	J	Diode	AC	T601	RTRNZ0057PEZZ	R	Transformer	AK					
▲ D510	RH-DX0441CEZZ	J	Diode	AC	▲ T602	RTRNF0037MEZZ	X	H-Volt Transformer (26SL41M, 26SL71M)	AZ					
D621	RH-EX0631GEZZ	J	Zener Diode, 9.1V	AA	or RTRNF0033MEZZ									
▲ D622	RH-DX0131CEZZ	J	Diode	AC	▲ ▲ T602	RTRNF0038MEZZ	X	H-Volt Transformer (29SL81M)	AY					
▲ D651	RH-DX0131CEZZ	J	Diode	AC	▲ T701	RTRNP0543CEZZ	J	Transformer	AM					
▲ D652	RH-EX1313CEZZ	J	Zener Diode, 9.1V	AD	▲ T702	RTRNZ0017MEZZ	J	Transformer (26SL41M)	AT					
▲ D653	VHD1SS119/-1	J	Diode	AB	▲ T702	RTRNZ0102GJZZ	X	Transformer (26SL71M, 29SL81M)	AS					
▲ D654	VHD1SS119/-1	J	Diode	AB	CAPACITORS									
▲ D701	RH-DX0154CEZZ	J	Diode	AC	[EL... Electrolytic, M-Poly... Metallized Polypro Film]									
▲ D702	RH-DX0154CEZZ	J	Diode	AC	C51	VCEA0A1CW476M	J	47 16V EL.	AB					
▲ D703	RH-DX0154CEZZ	J	Diode	AC	C53	VCEA0A1HW105M	J	1.0 50V EL.	AB					
▲ D704	RH-DX0154CEZZ	J	Diode	AC	C54	VCEA0A1HW475M	J	4.7 50V EL.	AB					
D705	VHD1SS82//1A	J	Diode	AC	C55	VCEA0A1CW108M	J	1000 16V EL.	AD					
D706	RH-DX0066GEZZ	J	Diode	AB	C103	VCEA0A1CW228M	J	2200 16V EL.	AD					
D707	VHD1SS82//1A	J	Diode	AC	C201	VCKYPA1HB102K	J	1000p 50V Ceramic	AA					
D708	RH-DX0066GEZZ	J	Diode	AB	C202	VCKYCY1HF103Z	J	0.01 50V Ceramic	AA					
▲ D709	RH-DX0229CEZZ	J	Diode	AF	C203	VCKYCY1HB102K	J	1000p 50V Ceramic	AA					
▲ D712	RH-DX0407CEZZ	J	Diode (26SL41M)	AD	C204	VCKYCY1HF103Z	J	0.01 50V Ceramic	AA					
▲ D712	RH-DX0507CEZZ	J	Diode (26SL71M, 29SL81M)	AB	C205	VCEA0A1HW474M	J	0.47 50V EL.	AB					
D713	RH-EX0673GEZZ	J	Zener Diode, 30V	AB	C206	VCEA0A1HW474M	J	0.47 50V EL.	AB					
D715	RH-EX0610GEZZ	J	Zener Diode, 4.7V	AA	C207	VCEA0A1CW337M	J	330 16V EL.	AC					
D716	VHD1SS119/-1	J	Diode	AB	C208	VCEA0A1HW474M	J	0.47 50V Ceramic	AA					
D717	RH-EX0650GEZZ	J	Zener Diode, 16V	AB	C209	VCKYCY1HB222K	J	2200p 50V Ceramic	AA					
▲ D725	RH-DX0407CEZZ	J	Diode	AD	C210	VCKYCY1HB102K	J	1000p 50V Ceramic	AA					
▲ D751	RH-DX0441CEZZ	J	Diode	AB	C251	VCQYTA1HM103J	J	0.01 50V Mylar (29SL81M)	AA					
▲ D752	RH-DX0441CEZZ	J	Diode	AB	C252	VCQYTA1HM103J	J	0.01 50V Mylar (29SL81M)	AA					
▲ D753	RH-DX0441CEZZ	J	Diode	AB	C253	VCCCCY1HH470J	J	47p 50V Ceramic (29SL81M)	AA					
▲ D754	RH-DX0441CEZZ	J	Diode	AB	C301	VCCCCY1HH330J	J	33p 50V Ceramic	AA					
D755	VHD1SS119/-1	J	Diode	AB	C302	VCCCCY1HH151J	J	150p 50V Ceramic	AA					
▲ D756	RH-DX0441CEZZ	J	Diode	AC	C303	VCCCCY1HH390J	J	39p 50V Ceramic (26SL71M, 29SL81M)	AA					
D2001	VHD1SS119/-1	J	Diode	AB	C303	VCKYCY1HB472K	J	4700p 50V Ceramic (26SL41M)	AA					
VA701	RH-VX0048CEZZ	J	Varistor	AE	C304	VCEA0A1HW225M	J	2.2 50V EL. (26SL41M)	AB					
PACKAGED CIRCUITS														
▲ PR701	RMPTP0092CEZZ	J	Packaged Circuit	AH	C307	VCCCCY1HH1R5C	J	1.5p 50V Ceramic	AD					
X801	RCRSB0205CEZZ	J	Crystal or RCRSB0001PEZZ	AF	C308	VCKYCY1HB102K	J	1000p 50V Ceramic	AA					
					C309	VCEA0A1CW337M	J	330 16V EL.	AC					
					C313	VCEA0A1CW476M	J	47 16V EL.	AB					

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTA270WEV4 (26SL41M)									
PWB-A: DUNTA270WEV3 (26SL71M)									
PWB-A: DUNTA270WEV2 (29SL81M)									
MAIN UNIT (Continued)									
C351	VCEA0A1CW106M	J	10 16V (26SL41M)	EL. AB	C682	VCKYPA2HB331K	J	330p 500V 275V Ceramic	AA
C354	VCEA0A1CW106M	J	10 16V (26SL41M)	EL. AB	△ C701	RC-FZ017SCEZZ	J	0.22 Ceramic or	AD
C356	VCEA0A1CW106M	J	10 16V (26SL41M)	EL. AB	C702	RC-KZ0029CEZZ	J	0.01 250V Ceramic	AC
C358	VCEA0A1CW477M	J	47 16V (26SL41M)	EL. AC	C703	RC-KZ0029CEZZ	J	0.01 250V Ceramic	AC
C359	VCEA0A1CW106M	J	10 16V (26SL41M)	EL. AB	△ C705	RC-EZ0800CEZZ	J	560 200V EL.	AQ
C401	VCKYCY1HB331K	J	330p 50V	Ceramic	C706	RC-KZ0092GEZZ	J	3300p 250V Ceramic	AF
C402	VCCCCY1HH101J	J	100p 50V	Ceramic	C707	VCFPVC3CA102H	X	1000p 1.6kV Polypro Film	AF
C403	VCKYCY1CB104K	J	0.1 16V	Ceramic	C708	VCCSPA1HL471J	J	470p 50V Ceramic	AA
C404	VCEA0A1HW106M	J	10 50V	EL.	C709	VCEA0A1VV107M	J	100 35V EL.	AC
C405	VCEA0A1HW335M	J	3.3 50V (26SL41M, 26SL71M)	EL. AB	C710	VCQYTA1HM152J	J	1500p 50V Mylar	AA
C405	VCEA0A1HW475M	J	4.7 50V (29SL81M)	EL. AB	C711	VCKYPA2HB472K	J	4700p 500V Ceramic	AB
C406	VCEA0A1HW225M	J	2.2 50V	EL.	C712	VCKYPA2HB472K	J	4700p 500V Ceramic	AB
C408	VCEA0A1HW106M	J	10 50V	EL.	C718	VCKYPA2HB472K	J	4700p 500V Ceramic	AB
C409	VCEA0A1HW105M	J	1.0 50V (26SL41M, 26SL71M)	EL. AB	C722	VCQYTA1HM104J	J	0.1 50V Mylar	AA
C409	VCEA0A1HW335M	J	3.3 50V (29SL81M)	EL. AB	△ C723	RC-EZ0724CEZZ	J	100 160V EL.	AG
C410	VCQYTA1HM104J	J	0.1 50V	Mylar	△ C725	RC-EZ0809CEZZ	J	220 160V EL.	AL
C411	VCEA0A1CW337M	J	330 16V	EL.	C726	RC-KZ0338CEZZ	J	560p 2kV EL.	AD
C412	VCKYCY1HB103K	J	0.01 50V	Ceramic	C727	RC-KZ0338CEZZ	J	560p 2kV EL.	AD
C413	VCKYCY1HB103K	J	0.01 50V	Ceramic	C729	VCEA0A1CW106M	J	10 16V EL.	AB
C414	VCKYCY1CB104K	J	0.1 16V (26SL41M, 26SL71M)	Ceramic	△ C730	RC-EZ0003PEZZ	R	1000 35V EL.	AF
C421	VCCCCY1HH330J	J	33p 50V (26SL41M, 26SL71M)	Ceramic	△ C731	RC-EZ0385CEZZ	J	1000 16V EL.	AE
C422	VCEA0A1CW476M	J	47 16V	EL.	C732	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
C451	VCQYTA1HM104J	J	0.1 50V	Mylar	C741	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
C452	VCEA0A1HW475M	J	4.7 50V	EL.	C742	VCKYPA2HB102K	J	1000p 500V Ceramic	AA
C453	VCEA0A1CW226M	J	22 16V	EL.	C753	VCEA0A1CW107M	J	100 16V EL.	AC
△ C502	VCKYPA2HB102K	J	1000p 500V	Ceramic	C755	VCEA0A1CW476M	J	47 16V EL.	AB
C510	VCEA0A1VV108M	J	1000 35V	EL.	C772	VCEA0A1VV477M	J	470 35V EL.	AB
C511	VCFYSA1JB564J	J	0.56 63V	Mylar	C801	VCQYTA1HM223J	J	0.022 50V Mylar	AA
C512	VCFYSA1JA473J	J	0.047 50V	Mylar	C802	VCEA0A1HW474M	J	0.47 50V EL.	AB
C513	VCFYSA1JA473J	J	0.047 50V	Mylar	C803	VCEA0A1HW474M	J	0.47 50V EL.	AB
C514	VCFYSA1JA473J	J	0.047 50V	Mylar	C804	VCCCCY1HH110J	J	11p 50V Ceramic	AA
C515	VCFYSA1JA473J	J	0.047 50V	Mylar	C805	VCFYSA1JA473J	J	0.047 50V Mylar	AA
C515	VCEA0A1HW105M	J	1.0 50V	EL.	C806	VCFYSA1JA473J	J	0.047 50V Mylar	AA
C515	VCEA0A1HW105M	J	1.0 50V (26SL41M, 26SL71M)	EL. AB	C807	VCFYSA1JA473J	J	0.047 50V Mylar	AA
C515	VCEA0A1HW474M	J	0.47 50V (29SL81M)	EL. AB	C808	VCFYSA1JA473J	J	0.047 50V Mylar	AA
C516	VCEACA1HC105K	J	1.0 50V (26SL41M, 26SL71M)	EL. AC	C901	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
C516	VCSATA1VE684K	J	0.68 35V (29SL81M)	Tantalum	C902	VCEA0A1CW227M	J	220 16V EL. (26SL71M, 29SL81M)	AC
C517	VCEA0A1VV108M	J	1000 35V	EL.	C903	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
C518	VCFYSA1JA473J	J	0.047 63V	Mylar	C908	VCEA0A1HW225M	J	2.2 50V EL. (26SL71M, 29SL81M)	AB
C551	VCSATA1CE225K	J	2.2 16V	Tantalum	C909	VCEA0A1HW225M	J	2.2 50V EL. (26SL71M, 29SL81M)	AB
C552	VCEA0A1HW225M	J	2.2 50V	EL.	C910	VCFYSA1JA473J	J	680p 50V Ceramic	AA
C606	VCFYSA1JA473J	J	680p 50V	Ceramic	C911	VCFYSA1JA473J	J	680p 50V Ceramic	AA
C607	VCFYSA1JA473J	J	680p 50V	Ceramic	C912	VCEA0A1CW107M	J	100 16V EL. (26SL71M, 29SL81M)	AC
▲ C610	VCFPVC3CA722H	J	7200p 1.6kV	Polypro Film	C922	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
▲ C611	VCFPVC3CA722H	J	7200p 1.6kV	Polypro Film	C923	VCEA0A1HW335M	J	3.3 50V EL. (26SL71M, 29SL81M)	AB
C615	VCFYSA1JA473J	J	1000p 500V	Ceramic	C931	VCFYSA1JA473J	J	0.018 25V Ceramic	AA
△ C623	VCEA4A2EN106M	J	10 250V	EL.	C932	VCFYSA1JA473J	J	0.018 25V Ceramic	AA
C631	VCEA0A1HW335M	J	3.3 50V	EL.	C951	VCEA0A1HW106M	J	10 50V EL. (26SL71M, 29SL81M)	AB
C632	VCQYTA1HM103J	J	0.01 50V	Mylar	C952	VCEA0A1HW106M	J	10 50V EL. (26SL71M, 29SL81M)	AB
C633	VCEA0A1CW477M	J	470 16V	EL.	C954	VCFYSA1JA473J	J	0.01 50V Ceramic	AA
C652	VCEA0A1HW106M	J	10 50V	EL.	C955	VCEA0A1CW106M	J	10 16V EL. (26SL71M, 29SL81M)	AB
C653	VCEA0A1HW106M	J	10 50V	EL.	C956	VCEA0A1CW106M	J	10 16V EL. (29SL81M)	AB
C680	VCFPVC2DB564J	J	0.56 200V	Polypro Film	C2001	VCFYSA1JA473J	J	100p 50V Ceramic	AA
C680	VCFPVC2DB564J	J	0.56 200V	Polypro Film	C2002	VCFYSA1JA473J	J	100p 50V Ceramic	AA
C680	VCFPVC2DB474J	J	0.47 200V	Polypro Film	C2040	VCEA0A1HW106M	J	100 10V EL.	AB
C680	VCFPVC2DB474J	J	0.47 200V	Polypro Film	C2041	VCEA0A1HW105M	J	1.0 50V EL.	AB
C680	VCFPVC2DB474J	J	0.47 200V	Polypro Film	C2060	VCFYSA1JA473J	J	0.1 16V Ceramic	AB

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTA270WEV4 (26SL41M)									
PWB-A: DUNTA270WEV3 (26SL71M)									
PWB-A: DUNTA270WEV2 (29SL81M)									
MAIN UNIT (Continued)									
C2061	VCCCCY1HH101J	J	100p 50V Ceramic	AA	RJ35	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA
C2062	VCEA0A1AW107M	J	100 10V EL.	AB	RJ36	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA
C2201	VCKYCY1HB102K	J	1000p 50V Ceramic (26SL41M, 26SL71M)	AA	RJ37	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA
C2201	VCKYCY1HB122K	J	1200p 50V Ceramic (29SL81M)	AA	RJ38	VRS-CY1JF000J	J	0 1/16W M-Ox. (26SL41M)	AA
C2202	VCCCCY1HH390J	J	39p 50V Ceramic	AA	RJ42	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA
C2602	VCCCCY1HH101J	J	100p 50V Ceramic	AA	RJ46	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA
C3001	VCE9GA1HW475M	J	4.7 50V EL. (N.P.)	AB	RJ52	VRS-CY1JF000J	J	0 1/16W M-Ox. (26SL41M, 26SL71M)	AA
C3002	VCKYCY1HB562K	J	5600p 50V Ceramic (26SL71M, 29SL81M)	AA	RJ55	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA
C3003	VCQYTA1HM123J	J	0.012 50V Mylar (26SL71M, 29SL81M)	AA	RJ56	VRS-CY1JF000J	J	0 1/16W M-Ox. (29SL81M)	AA
C3004	VCEA0A1HW105M	J	1.0 50V EL. (26SL71M, 29SL81M)	AB	RJ59	VRS-CY1JF000J	J	0 1/16W M-Ox. (29SL81M)	AA
C3005	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB	RJ61	VRS-CY1JF000J	J	0 1/16W M-Ox. (26SL41M, 26SL71M)	AA
C3006	VCEA0A1HW106M	J	10 50V EL. (26SL71M, 29SL81M)	AB	RJ66	VRS-CY1JF000J	J	0 1/16W M-Ox. (26SL71M, 29SL81M)	AA
C3007	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB	RJ67	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA
C3008	VCKYCY1HF103Z	J	0.01 50V Ceramic (26SL71M, 29SL81M)	AA	▲ R51	VRS-VV3AB151J	J	150 1W M-Ox.	AA
C3009	VCEA0A1CW227M	J	220 16V EL. (26SL71M, 29SL81M)	AC	▲ R52	VRS-VV3DB123J	J	12k 2W M-Ox.	AA
C3010	VCE9GA1HW475M	J	4.7 50V EL. (N.P.)	AB	▲ R53	VRS-VV3AB470J	J	47 1W M-Ox.	AA
C3011	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB	R54	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C3012	VCE9GA1HW475M	J	4.7 50V EL. (N.P.)	AB	R55	VRD-RA2BE101J	J	100 1/8W Carbon	AB
C3013	VCKYCY1HB272K	J	2700p 50V Ceramic (26SL71M, 29SL81M)	AA	R56	VRD-RA2BE823J	J	82k 1/8W Carbon	AA
C3014	VCQYTA1HM473J	J	0.047 50V Mylar (26SL71M, 29SL81M)	AA	R57	VRD-RA2BE392J	J	3.9k 1/8W Carbon	AA
C3015	VCSATA1CE335K	J	3.3 16V Tantalum (26SL71M, 29SL81M)	AC	R201	VRD-RA2BE151J	J	150 1/8W Carbon	AA
C3016	VCE9GA1HW475M	J	4.7 50V EL. (N.P.)	AB	R202	VRD-RA2BE122J	J	1.2k 1/8W Carbon	AA
C3017	VCSATA1CE106K	J	10 16V Tantalum (26SL71M, 29SL81M)	AD	R203	VRD-RA2BE682J	J	6.8k 1/8W Carbon	AA
C3018	VCEA0A1HW105M	J	1.0 50V EL. (26SL71M, 29SL81M)	AB	R204	VRD-RA2BE270J	J	27 1/8W Carbon	AA
C3019	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB	R205	VRS-CY1JF331J	J	330 1/16W M-Ox.	AA
C3020	VCEA0A1HW475M	J	4.7 50V EL.	AB	R206	VRD-RA2BE121J	J	120 1/8W Carbon	AA
C3021	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB	R207	VRD-RA2BE4R7J	J	4.7 1/8W Carbon	AA
C3022	VCEA0A1HW475M	J	4.7 50V EL. (26SL71M, 29SL81M)	AB	R208	VRD-RA2BE331J	J	330 1/8W Carbon	AA
RESISTORS									
[M-Ox.... Metal Oxide, M-Film.... Metal Film]									
RJ1	VRS-CY1JF000J	J	0 1/16W M-Ox. (29SL81M)	AA	R209	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
RJ2	VRS-CY1JF000J	J	0 1/16W M-Ox. (29SL81M)	AA	R251	VRS-CY1JF332J	J	3.3k 1/16W M-Ox.	AA
RJ3	VRS-CY1JF000J	J	0 1/16W M-Ox. (29SL81M)	AA	R252	VRD-RA2BE562J	J	5.6k 1/8W Carbon	AA
RJ11	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R253	VRD-RA2BE332J	J	3.3k 1/8W Carbon	AA
RJ15	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R254	VRD-RA2BE223J	J	22k 1/8W Carbon	AA
RJ16	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R255	VRS-CY1JF563J	J	56k 1/16W M-Ox.	AA
RJ18	VRS-CY1JF000J	J	0 1/16W M-Ox. (26SL41M)	AA	R256	VRS-CY1JF182J	J	1.8k 1/16W M-Ox.	AA
RJ26	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R257	VRS-CY1JF470J	J	47 1/16W M-Ox.	AA
RJ30	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R258	VRS-CY1JF472J	J	4.7k 1/16W M-Ox.	AA
RJ31	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R259	VRS-CY1JF472J	J	4.7k 1/16W M-Ox.	AA
RJ32	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R301	VRD-RA2BE222J	J	2.2k 1/8W Carbon	AA
RJ33	VRS-CY1JF000J	J	0 1/16W M-Ox.	AA	R302	VRS-CY1JF102J	J	1.0k 1/16W M-Ox.	AA
					R303	VRD-RA2BE153J	J	15k 1/8W Carbon (26SL41M)	AA
					R303	VRD-RA2BE103J	J	10k 1/8W Carbon (26SL71M, 29SL81M)	AA
					R304	VRD-RA2BE333J	J	33k 1/8W Carbon (26SL71M, 29SL81M)	AA
					R305	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
					R306	VRD-RA2BE152J	J	1.5k 1/8W Carbon (26SL71M, 29SL81M)	AA
					R351	VRD-RA2BE683J	J	68k 1/8W Carbon (26SL41M)	AA
					R352	VRD-RA2BE103J	J	10k 1/8W Carbon (26SL41M)	AA
					R353	VRD-RA2BE822J	J	8.2k 1/8W Carbon (26SL41M)	AA
					R354	VRD-RA2BE223J	J	22k 1/8W Carbon (26SL41M)	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTA270WEV4 (26SL41M)									
PWB-A: DUNTA270WEV3 (26SL71M)									
PWB-A: DUNTA270WEV2 (29SL81M)									
MAIN UNIT (Continued)									
R355	VRD-RA2BE683J	J	68k 1/8W Carbon (26SL41M)	AA	R526	VRD-RA2BE472J	J	4.7k 1/8W Carbon (29SL81M)	AA
R356	VRD-RA2BE103J	J	10k 1/8W Carbon (26SL41M)	AA	R551	VRS-CY1JF472J	J	4.7k 1/16W M-Ox.	AA
R357	VRD-RA2BE822J	J	8.2k 1/8W Carbon (26SL41M)	AA	R552	VRS-CY1JF102J	J	1.0k 1/16W M-Ox.	AA
R358	VRD-RA2BE223J	J	22k 1/8W Carbon (26SL41M)	AA	R553	VRD-RA2BE223J	J	22k 1/8W Carbon (26SL41M, 26SL71M)	AA
R401	VRS-CY1JF682J	J	6.8k 1/16W M-Ox.	AA	R553	VRD-RA2BE183J	J	18k 1/8W Carbon (29SL81M)	AA
R402	VRS-CY1JF331J	J	330 1/16W M-Ox.	AA	R554	VRD-RA2BE184J	J	180k 1/8W Carbon (26SL41M, 26SL71M)	AA
R403	VRS-CY1JF391J	J	390 1/16W M-Ox.	AA	R554	VRD-RA2BE104J	J	100k 1/8W Carbon (29SL81M)	AA
R404	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA	▲ R604	VRS-VV3LB392J	J	3.9k 3.0W M-Ox.	AB
R405	VRS-CY1JF470J	J	47 1/16W M-Ox.	AA	R605	VRD-RA2BE331J	J	330 1/8W Carbon	AA
R406	VRS-CY1JF680J	J	68 1/16W M-Ox.	AA	R606	VRD-RA2BE331J	J	330 1/8W Carbon	AA
R407	VRS-CY1JF102J	J	1.0k 1/16W M-Ox.	AA	▲ R607	VRS-VV3LB392J	J	3.9k 3.0W M-Ox.	AB
R408	VRS-CY1JF471J	J	470 1/16W M-Ox.	AA	▲ R609	VRS-VV3AB562J	J	5.6k 1W M-Ox.	AA
R409	VRD-RA2BE562J	J	5.6k 1/8W Carbon	AA	R610	VRD-RM2HD220J	J	22 1/2W Carbon	AA
R410	VRD-RA2BE124J	J	120k 1/8W Carbon (26SL41M, 26SL71M)	AA	▲ R611	VRS-KA3NG3R3K	J	3.3 7.0W M-Ox.	AD
R410	VRD-RA2BE154J	J	150k 1/8W Carbon (29SL81M)	AA	R621	VRN-VV3AB3R3J	J	3.3 1W M-Film (26SL41M, 26SL71M)	AA
R411	VRD-RA2BE153J	J	15k 1/8W Carbon	AA	▲ R621	VRN-VV3DB1R2J	J	1.2 2W M-Film (29SL81M)	AA
R412	VRD-RA2BE561J	J	560 1/8W Carbon	AA	▲ R622	VRN-VV3ABR33J	J	0.33 1W M-Film (26SL41M, 26SL71M)	AA
R413	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA	▲ R622	VRN-VV3ABR47J	J	0.47 1W M-Film (29SL81M)	AA
R414	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA	▲ R623	VRN-VV3AB2R7J	J	2.7 1W M-Film	AA
R415	VRS-CY1JF101J	J	100 1/16W M-Ox.	AA	▲ R624	VRS-VV3DB332J	J	3.3k 2W M-Ox.	AA
R416	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (29SL81M)	AA	R625	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R421	VRD-RA2BE152J	J	1.5k 1/8W Carbon (26SL41M, 26SL71M)	AA	R627	VRD-RM2HD224J	J	220k 1/2W Carbon	AA
R422	VRS-CY1JF472J	J	4.7k 1/16W M-Ox. (26SL41M, 26SL71M)	AA	R631	VRS-CY1JF391J	J	390 1/16W M-Ox.	AA
R423	VRS-CY1JF152J	J	1.5k 1/16W M-Ox. (26SL41M, 26SL71M)	AA	R632	VRS-CY1JF152J	J	1.5k 1/16W M-Ox.	AA
R424	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL41M, 26SL71M)	AA	R633	VRD-RA2BE472J	J	4.7k 1/8W Carbon	AA
▲ R451	VRS-SV2HC103J	J	10k 1/2W M-Ox.	AA	R634	VP-XF120K0000	J	Peaking 12μH	AB
R452	VRD-RM2HD153J	J	15k 1/2W Carbon	AA	▲ ▲ R651	VRS-SV2HC270J	J	27 1/2W M-Ox.	AA
R453	VRD-RA2EE683J	J	68k 1/4W Carbon	AA	▲ ▲ R652	VRN-RA2BK103F	J	10k 1/8W M-Film	AA
R454	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA	▲ ▲ R653	VRN-RA2BK822F	J	8.2k 1/8W M-Film	AA
R456	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA	▲ ▲ R654	VRD-RA2BE184J	J	180k 1/8W Carbon (26SL41M, 26SL71M)	AA
R456	VRD-RA2BE183J	J	18k 1/8W Carbon (29SL81M)	AA	▲ ▲ R654	VRD-RA2BE124J	J	120k 1/8W Carbon (29SL81M)	AA
R458	VRD-RA2BE152J	J	1.5k 1/8W Carbon	AA	▲ ▲ R655	VRS-CY1JF104J	J	100k 1/16W M-Ox.	AA
R491	VRS-CY1JF330J	J	33 1/16W M-Ox.	AA	R690	VRS-SV2HC102J	J	1.0k 1/2W M-Ox.	AA
R492	VRS-CY1JF330J	J	33 1/16W M-Ox.	AA	▲ R701	RR-DZ0049CEZZ	J	3.9M 1/2W Carbon or RR-HZ0048CEZZ	AB
R493	VRS-CY1JF330J	J	33 1/16W M-Ox.	AA	▲ R702	VRW-KQ3NCR82K	X	0.82 7W M-Ox.	AF
R494	VRD-RA2BE101J	J	100 1/8W Carbon	AB	R704	VRD-RM2HD154J	J	150k 1/2W Carbon	AA
▲ R501	VRN-VV3ABR56J	J	0.56 1W M-Film (26SL41M, 26SL71M)	AA	▲ R705	VRN-VV3DBR22J	J	0.22 2W M-Film	AB
▲ R501	VRN-VV3ABR27J	J	0.27 1W M-Film (29SL81M)	AA	▲ R706	VRN-VV3DBR27J	J	0.27 2W M-Film	AB
R510	VRD-RA2BE471J	J	470 1/8W Carbon	AA	R707	VRS-SV2HC681J	J	680 1/2W M-Ox.	AA
R511	VRD-RA2BE104G	J	100k 1/8W Carbon (26SL41M, 26SL71M)	AA	▲ R709	VRN-GA2EB1R0J	J	1.0 1/4W M-Film	AA
R511	VRD-RA2BE823G	J	82k 1/8W Carbon (29SL81M)	AB	R710	VRD-RM2HD100J	J	10 1/2W Carbon	AA
R512	VRD-RA2BE124G	J	120k 1/8W Carbon	AA	R711	VRD-RA2EE132J	J	1.3k 1/4W Carbon	AA
R513	VRD-RA2BE473J	J	47k 1/8W Carbon	AA	R713	VRD-RA2EE102J	J	1.0k 1/4W Carbon	AA
R514	VRD-RA2BE101J	J	100 1/8W Carbon	AB	▲ R715	VRN-VV3DB153J	J	15k 2W M-Ox.	AA
R519	VRD-RA2BE123G	J	12k 1/8W Carbon (26SL41M, 26SL71M)	AA	▲ R723	VRN-VV3DBR39J	J	0.39 2W M-Film	AA
R519	VRD-RA2BE153G	J	15k 1/8W Carbon (29SL81M)	AA	R724	VRS-SV2HC332J	J	3.3k 1/2W M-Ox.	AA
R520	VRD-RA2BE184J	J	180k 1/8W Carbon	AA	R725	VRS-SV2HC821J	J	820 1/2W M-Ox.	AA
R523	VRN-VV3AB1R0J	J	1.0 1W M-Film	AA	R727	VRD-RA2BE271J	J	270 1/8W Carbon	AA
▲ R524	VRS-VV3AB391J	J	390 1W M-Ox.	AA	▲ R737	VRN-VV3DBR56J	J	0.56 2W M-Film	AA
R526	VRD-RA2BE332J	J	3.3k 1/8W Carbon (26SL41M, 26SL71M)	AA	R751	VRD-RA2BE473J	J	47k 1/8W Carbon	AA
					R801	VRD-RA2BE332J	J	3.3k 1/8W Carbon	AA
					R802	VRS-CY1JF332J	J	3.3k 1/16W M-Ox.	AA
					R803	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
					R804	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
					R805	VRS-CY1JF222J	J	2.2k 1/16W M-Ox.	AA
					R806	VRS-CY1JF333J	J	33k 1/16W M-Ox.	AA
					R807	VRS-CY1JF152J	J	1.5k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
					R808	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL41M, 26SL71M)	AA

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTA270WEV4 (26SL41M)									
PWB-A: DUNTA270WEV3 (26SL71M)									
PWB-A: DUNTA270WEV2 (29SL81M)									
MAIN UNIT (Continued)									
R901	VRD-RA2BE331J	J	330 1/8W Carbon (26SL71M, 29SL81M)	AA	R2024	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R903	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2025	VRD-RA2BE562J	J	5.6k 1/8W Carbon (29SL81M)	AA
R904	VRS-CY1JF683J	J	68k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2025	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R905	VRS-CY1JF223J	J	22k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2026	VRD-RA2BE562J	J	5.6k 1/8W Carbon (29SL81M)	AA
R906	VRS-CY1JF392J	J	3.9k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2026	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R907	VRS-CY1JF182J	J	1.8k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2027	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R908	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2028	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R910	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2029	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R911	VRS-CY1JF683J	J	68k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2032	VRD-RA2BE103J	J	10k 1/8W Carbon (26SL41M, 26SL71M)	AA
R912	VRS-CY1JF223J	J	22k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2034	VRD-RA2BE102J	J	1.0k 1/8W Carbon (29SL81M)	AA
R913	VRS-CY1JF392J	J	3.9k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2035	VRD-RA2BE223J	J	22k 1/8W Carbon (29SL81M)	AA
R914	VRS-CY1JF182J	J	1.8k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2038	VRD-RA2BE103J	J	10k 1/8W Carbon (29SL81M)	AA
R915	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2040	VRD-RA2BE102J	J	1.0k 1/8W Carbon (29SL81M)	AA
R916	VRS-CY1JF683J	J	68k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2041	VRD-RA2BE333J	J	33k 1/8W Carbon (29SL81M)	AA
R917	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2042	VRD-RA2BE101J	J	100 1/8W Carbon (29SL81M)	AB
R918	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2043	VRS-CY1JF333J	J	33k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R922	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2044	VRD-RA2BE682J	J	6.8k 1/8W Carbon (26SL41M, 26SL71M)	AA
R923	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2045	VRD-RA2BE101J	J	100 1/8W Carbon (26SL41M, 26SL71M)	AB
R924	VRD-RA2BE750J	J	75 1/8W Carbon (26SL71M)	AA	R2046	VRD-RA2BE101J	J	100 1/8W Carbon (26SL41M, 26SL71M)	AB
R925	VRD-RA2BE104J	J	100k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2047	VRS-CY1JF221J	J	220 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R926	VRD-RA2BE104J	J	100k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2048	VRS-CY1JF562J	J	5.6k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R951	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M)	AB	R2049	VRD-RA2EE182J	J	1.8k 1/4W Carbon (26SL41M, 26SL71M)	AA
R952	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2060	VRD-RA2BE221J	J	220 1/8W Carbon (26SL41M, 26SL71M)	AA
R953	VRS-CY1JF101J	J	100 1/16W M-Ox. (29SL81M)	AA	R2061	VRD-RA2BE562J	J	5.6k 1/8W Carbon (26SL41M, 26SL71M)	AA
R954	VRD-RA2BE750J	J	75 1/8W Carbon (29SL81M)	AA	R2062	VRD-RA2BE183J	J	18k 1/8W Carbon (26SL41M, 26SL71M)	AA
R961	VRD-RA2BE101J	J	100 1/8W Carbon (29SL81M)	AB	R2063	VRD-RA2BE222J	J	2.2k 1/8W Carbon (26SL41M, 26SL71M)	AA
R962	VRD-RA2BE101J	J	100 1/8W Carbon (29SL81M)	AB	R2064	VRD-RA2BE332J	J	3.3k 1/8W Carbon (26SL41M, 26SL71M)	AA
R2001	VRD-RA2BE562J	J	5.6k 1/8W Carbon (29SL81M)	AA	R2067	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R2002	VRD-RA2BE103J	J	10k 1/8W Carbon (29SL81M)	AA	R2068	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R2004	VRD-RA2BE101J	J	100 1/8W Carbon (29SL81M)	AB	R2069	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (29SL81M)	AA
R2006	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M)	AA	R2070	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL41M, 26SL71M)	AA
R2008	VRD-RA2BE224J	J	220k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2071	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R2009	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2101	VRS-CY1JF101J	J	100 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R2010	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2102	VRS-CY1JF101J	J	100 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R2011	RH-EX0611GEZZ	J	Zener Diode	AA	R2201	VRD-RA2BE222J	J	2.2k 1/8W Carbon (26SL71M, 29SL81M)	AA
R2012	VRS-CY1JF471J	J	470 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2202	VRS-CY1JF103J	J	10k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R2013	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA	R2203	VRS-CY1JF184J	J	180k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R2016	VRS-CY1JF223J	J	22k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2211	VRD-RA2BE222J	J	2.2k 1/8W Carbon (26SL71M, 29SL81M)	AA
R2020	VRS-CY1JF223J	J	22k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2212	VRS-CY1JF682J	J	6.8k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R2023	VRS-CY1JF223J	J	22k 1/16W M-Ox. (26SL71M, 29SL81M)	AA	R2213	VRS-CY1JF333J	J	33k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
R2024	VRD-RA2BE562J	J	5.6k 1/8W Carbon (29SL81M)	AA	R2401	VRS-CY1JF101J	J	100 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R2402	VRS-CY1JF101J	J	100 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R2403	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M, 29SL81M)	AB
					R2404	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M, 29SL81M)	AB
					R2507	VRD-RA2BE823J	J	82k 1/8W Carbon (26SL71M, 29SL81M)	AA
					R3001	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M, 29SL81M)	AB
					R3002	VRD-RA2BE101J	J	100 1/8W Carbon (26SL71M, 29SL81M)	AB
					R3003	VRS-CY1JF105J	J	1.0M 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R3004	VRS-CY1JF104J	J	100k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R3005	VRS-CY1JF623J	J	62k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R3007	VRS-CY1JF332J	J	3.3k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R3008	VRS-CY1JF302J	J	3.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R3010	VRS-CY1JF392J	J	3.9k 1/16W M-Ox. (26SL71M, 29SL81M)	AA
					R3011	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
					R3012	VRS-CY1JF102J	J	1.0k 1/16W M-Ox. (26SL71M, 29SL81M)	AA

Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTA270WEV4 (26SL41M)				
PWB-A: DUNTA270WEV3 (26SL71M)				
PWB-A: DUNTA270WEV2 (29SL81M)				
MAIN UNIT (Continued)				
R3013	VRD-RA2BE104J	J	100k 1/8W Carbon (26SL71M, 29SL81M)	AA
R3014	VRD-RA2BE104J	J	100k 1/8W Carbon	AA
R3015	VRD-RA2BE101J	J	100 1/8W Carbon	AB
R3016	VRD-RA2BE750J	J	75 1/8W Carbon	AA
R3017	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA
R3018	VRD-RA2BE102J	J	1.0k 1/8W Carbon (26SL71M, 29SL81M)	AA

MISCELLANEOUS PARTS

△ RY701	RRLYJ0081CEZZ	J	Relay	AL
△ F701	QFS-B4023CEZZ	J	Fuse 5A, 250V (26SL41M)	AC
△ F701	QFS-C5022CEZZ	J	Fuse 5A, 250V (26SL71M, 29SL81M)	AD
FH701	QFSHD1013CEZZ	J	Fuse Holder	AC
FH702	QFSHD1014CEZZ	J	Fuse Holder	AC
FB601	RBLN-0047CEZZ	J	Ferrite Bead	AB
FB702	RBLN-0036CEZZ	J	Ferrite Bead	AB
FB704	RBLN-0037CEZZ	J	Ferrite Bead	AB
FB706	RBLN-0037CEZZ	J	Ferrite Bead	AB
P351	QPLGN0441CEZZ	J	Plug, 4-pin (S) (26SL41M)	AB
P352	QPLGN0641CEZZ	J	Plug, 6-pin (PA) (26SL71M, 29SL81M)	AB
P401	QSOCN0585CEZZ	J	Socket, 5-pin (KB) (29SL81M)	AC
P402	QSOCN0585CEZZ	J	Socket, 5-pin (KA) (29SL81M)	AC
P601	QPLGN0160FJZZ	J	Plug, 5-pin (K)	AD
P621	QPLGN0441CEZZ	J	Plug, 4-pin (YBN)	AB
P651	QPLGN0341CEZZ	J	Plug, 3-pin	AA
P701	QPLGN0260CEZZ	J	Plug, 2-pin (M)	AC
P703	QPLGN0269GEZZ	J	Plug, 2-pin (H)	AB
P901	QPLGN0841CEZZ	J	Plug, 8-pin (FA) (26SL41M)	AB
P901	QPLGN0541CEZZ	J	Plug, 5-pin (FA) (26SL71M, 29SL81M)	AB
P903	QPLGN0541CEZZ	J	Plug, 5-pin (GBN)	AB
P2003	QPLGN0841CEZZ	J	Plug, 8-pin (FB)	AB
P2401	QPLGN0541CEZZ	J	Plug, 5-pin	AB
RDA501	PRDAR0234PEFW	R	Heat Sink, for IC501	AH
RDA604	PRDAR0233PEFW	R	Heat Sink, for Q602	AK
RDA701	PRDAR1006MEFW	J	Heat Sink, for IC701 (26SL71M, 29SL81M)	AH
RDA701	PRDAR1008MEFW	J	Heat Sink, for IC701 (26SL41M)	AH
RDA751	PRDAR5072CEFW	J	Heat Sink, for IC751	AC
TAN921	QTANJ0253CEZZ	X	AV Terminal (26SL41M)	AK
TAN921	QTANJ0523CEZZ	X	AV Terminal (26SL71M, 29SL81M)	AL
LX-BZ3049GEFD	X	Screw		AA
LX-TZ3004CEFD	J	Screw		AA

Ref. No.	Part No.	★	Description	Code
PWB-B: DUNTK9510WEV0				
CRT UNIT				
TRANSISTORS				
Q851 VS2SC3198-Y-1 J 2SC3198 (Y) AA				
Q852 VS2SC3789//2E J 2SC3789 or VS2SC3619LB-1 AA				
Q853 VS2SC3198-Y-1 J 2SC3198 (Y) AA				
VS2SC3619LB-1 or VS2SC3789//2E J 2SC3789 AF				
Q855 VS2SC3198-Y-1 J 2SC3198 (Y) AA				
Q856 VS2SC3789//2E J 2SC3789 AF				
or VS2SC3619LB-1 VS2SA1266-Y-1 J 2SA1266 (Y) AA				
DIODES				
You can substitute "RH-DX0475CEZZ" for "VHD1SS119/-1".				
D881	VHD1SS119/-1	J	Diode	AB
D882	VHD1SS119/-1	J	Diode	AB
D884	VHD1SS119/-1	J	Diode	AB
COIL				
L851	VP-MK820K0000	J	Peaking 82μH	AB
CAPACITORS				
<i>[EL... Electrolytic]</i>				
C851	VCCSPA1HL391J	J	390p 50V Ceramic	AA
C852	VCCSPA1HL331J	J	330p 50V Ceramic	AA
C853	VCCSPA1HL391J	J	390p 50V Ceramic	AA
C854	RC-KZ0024CEZZ	J	0.001 2kV Ceramic	AC
or VCKYPB3DE472Z J 0.0047 2kV Ceramic				
C883	VCEA0A1HW106M	J	10 50V EL.	AB
RESISTORS				
<i>[M-Ox... Metal Oxide]</i>				
R851	VRD-RA2BE470J	J	47 1/8W Carbon	AA
R852	VRD-RA2BE181J	J	180 1/8W Carbon	AA
R853	VRD-RA2BE121J	J	120 1/8W Carbon	AA
R855	VRD-RA2BE471J	J	470 1/8W Carbon	AA
R856	VRD-RA2BE221J	J	220 1/8W Carbon	AA
△ R857	VRS-VV3LB123J	J	12k 3.0W M-Ox.	AA
R858	VRD-RM2HD222J	J	2.2k 1/2W Carbon	AA
R859	VRD-RA2BE470J	J	47 1/8W Carbon	AA
R860	VRD-RA2BE181J	J	180 1/8W Carbon	AA
R861	VRD-RA2BE121J	J	120 1/8W Carbon	AA
R863	VRD-RA2BE471J	J	470 1/8W Carbon	AA
R864	VRD-RA2BE221J	J	220 1/8W Carbon	AA
△ R865	VRS-VV3LB123J	J	12k 3.0W M-Ox.	AB
R866	VRD-RM2HD222J	J	2.2k 1/2W Carbon	AA
R867	VRD-RA2BE470J	J	47 1/8W Carbon	AA
R868	VRD-RA2BE181J	J	180 1/8W Carbon	AA
R869	VRD-RA2BE121J	J	120 1/8W Carbon	AA
R871	VRD-RA2BE471J	J	470 1/8W Carbon	AA
R872	VRD-RA2BE221J	J	220 1/8W Carbon	AA
△ R873	VRS-VV3LB123J	J	12k 3.0W M-Ox.	AB
R874	VRD-RM2HD222J	J	2.2k 1/2W Carbon	AA
R881	VRD-RA2BE102J	J	1.0k 1/8W Carbon	AA
R882	VRD-RA2BE331J	J	330 1/8W Carbon	AA
R883	VRD-RA2BE561J	J	560 1/8W Carbon	AA
R884	VRD-RA2BE152J	J	1.5k 1/8W Carbon	AA
R895	VRD-RA2BE470J	J	47 1/8W Carbon	AA
MISCELLANEOUS PARTS				
P851	QPLGN0541CEZZ	J	Plug, 5-pin (GBN)	AB
P852	QPLGN0441CEZZ	J	Plug, 4-pin (YBN)	AB
SC851	QSOCV0937CEZZ	J	CRT Socket	AL

Ref. No.	Part No.	★	Description	Code
PWB-F: DUNTK9831WEV0 (26SL41M)				
PWB-F: DUNTK9831WEV1 (26SL71M, 29SL81M)				
FRONT AV UNIT				
DIODE				
D4001	RH-PX0383CEZZ	X	LED, Power Ind.	AG
CAPACITOR				
[EL... Electrolytic]				
C4601	VCEA0A1HW475M	J	4.7 50V	EL.
RESISTORS				
R4501	VRD-RA2BE103J	J	10k 1/8W	Carbon
R4503	VRD-RA2BE273J	J	27k 1/8W	Carbon
R4504	VRD-RA2BE123J	J	12k 1/8W	Carbon
R4505	VRD-RA2BE563J	J	56k 1/8W	Carbon
R4506	VRD-RA2BE563J	J	56k 1/8W	Carbon
R4508	VRD-RA2BE153J	J	15k 1/8W	Carbon
R4509	VRD-RA2BE272J	J	2.7k 1/8W	Carbon
R4601	VRD-RA2EE331J	J	330 1/4W	Carbon
SWITCHES				
S4501	QSW-K0095CEZZ	J	Power	AB
S4502	QSW-K0095CEZZ	J	VOL-Down	AB
S4503	QSW-K0095CEZZ	J	VOL-Up	AB
S4504	QSW-K0095CEZZ	J	CH-Down	AB
S4505	QSW-K0095CEZZ	J	CH-Up	AB
S4506	QSW-K0095CEZZ	J	MENU	AB
MISCELLANEOUS PARTS				
J4001	QJAKE0185CEZZ	J	Audio IN (L) (26SL71M, 29SL81M)	AE
J4002	QJAKE0192CEZZ	X	Audio IN (R) (26SL71M, 29SL81M)	AD
J4002	QJAKE0183CEZZ	X	Audio IN (26SL41M)	AE
J4003	QJAKE0150CEZZ	J	Video IN (26SL71M, 29SL81M)	AD
J4003	QJAKE0108CEZZ	J	Video IN (26SL41M)	AC
P4001	QPLGN0541CEZZ	J	Plug, 5-pin (FA) (26SL71M, 29SL81M)	AB
P4001	QPLGN0841CEZZ	J	Plug, 8-pin (FA) (26SL41M)	AB
P4002	QPLGN0841CEZZ	J	Plug, 8-pin (FB)	AB
RMC4601	RRMCU0235CEZZ	J	R/C Receiver	AK

Ref. No.	Part No.	★	Description	Code
PWB-K: DUNTK9832WEV0 (29SL81M)				
Y/C UNIT				
INTEGRATED CIRCUITS				
IC1401	VHiTC90A45F-1	J	TC90A45F	AM
IC1402	VHIMM1111XF1E	J	MM1111XFBE	AE
IC1403	VHiKA78L05B-1	J	KA78L05BP	AE
TRANSISTORS				
You can substitute "VS2SD601AR/-1" for "VS2SC2412KQ-1".				
Q1401	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1402	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1403	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1404	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1405	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1406	VS2SC2412KQ-1	J	2SC2412KQ	AA
Q1407	VS2SC2412KQ-1	J	2SC2412KQ	AA
DIODES				
You can substitute "RH-DX0475CEZZ" for "VHD1SS119/-1".				
D1401	VHD1SS119/-1	J	Diode	AB
D1402	VHD1SS119/-1	J	Diode	AB
D1403	VHD1SS119/-1	J	Diode	AB
COILS				
L1401	VP-XF100K0000	J	Peaking 10µH	AB
L1402	VP-XF100K0000	J	Peaking 10µH	AB
L1403	VP-XF150K0000	J	Peaking 15µH	AB
L1405	VP-XF330K0000	J	Peaking 33µH	AB
L1406	VP-XF100K0000	J	Peaking 10µH	AB
CAPACITORS				
[EL... Electrolytic]				
C1401	VCCCCY1HH220J	J	22p 50V	Ceramic
C1402	VCFYSA1HA474J	J	0.47 50V	Mylar
C1403	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1404	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1405	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1406	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1407	VCKYCY1CB104K	J	0.1 16V	Ceramic
C1408	VCEA0A1HW106M	J	10 50V	EL.
C1409	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1410	VCCCCY1HH181J	J	180p 50V	Ceramic
C1411	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1412	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1413	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1415	VCEA0A1CW476M	J	47 16V	EL
C1416	VCKYCY1CB104K	J	0.1 16V	Ceramic
C1417	VCCCCY1HH390J	J	39p 50V	Ceramic
C1418	VCEA0A1HW106M	J	10 50V	EL.
C1419	VCEA0A1HW106M	J	10 50V	EL.
C1420	VCKYCY1HB103K	J	0.01 50V	Ceramic
C1421	VCCCCY1HH120J	J	12p 50V	Ceramic
C1423	VCCCCY1HH120J	J	12p 50V	Ceramic
C1424	VCKYCY1CB104K	J	0.1 16V	Ceramic
C1425	VCKYCY1CB104K	J	0.1 16V	Ceramic
C1426	VCKYCY1HB102K	J	100p 50V	Ceramic
C1427	VCEA0A1HW106M	J	10 50V	EL.
C1428	VCCCCY1HH270J	J	27p 50V	Ceramic
RESISTORS				
[M-Ox... Metal Oxide]				
RJ1	VRS-CY1JF000J	J	0 1/16W	M-Ox.
RJ2	VRS-CY1JF000J	J	0 1/16W	M-Ox.
RJ3	VRS-CY1JF000J	J	0 1/16W	M-Ox.
RJ5	VRS-CY1JF000J	J	0 1/16W	M-Ox.
R1401	VRS-CY1JF103J	J	10k 1/16W	M-Ox.
R1402	VRS-CY1JF103J	J	10k 1/16W	M-Ox.
R1403	VRS-CY1JF182J	J	1.8k 1/16W	M-Ox.
R1404	VRS-CY1JF102J	J	1.0k 1/16W	M-Ox.
R1405	VRS-CY1JF392J	J	3.9k 1/16W	M-Ox.
R1406	VRS-CY1JF102J	J	1.0k 1/16W	M-Ox.

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
PWB-K: DUNTK9832WEV0 (29SL81M)									
Y/C UNIT (Continued)									
R1407	VRS-CY1JF103J	J	10k	1/16W	M-Ox.	AA			
R1408	VRS-CY1JF821J	J	820	1/16W	M-Ox.	AA			
R1409	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA			
R1410	VRS-CY1JF681J	J	680	1/16W	M-Ox.	AA			
R1411	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA			
R1412	VRS-CY1JF821J	J	820	1/16W	M-Ox.	AA			
R1413	VRS-CY1JF471J	J	470	1/16W	M-Ox.	AA			
R1414	VRS-CY1JF102J	J	1.0k	1/16W	M-Ox.	AA			
R1415	VRS-CY1JF821J	J	820	1/16W	M-Ox.	AA			
R1416	VRS-CY1JF122J	J	1.2k	1/16W	M-Ox.	AA			
R1417	VRS-CY1JF273J	J	27k	1/16W	M-Ox.	AA			
R1418	VRS-CY1JF153J	J	15k	1/16W	M-Ox.	AA			
R1419	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA			
R1420	VRS-CY1JF222J	J	2.2k	1/16W	M-Ox.	AA			
R1421	VRS-CY1JF562J	J	5.6k	1/16W	M-Ox.	AA			
R1422	VRS-CY1JF101J	J	10	1/16W	M-Ox.	AA			
R1425	VRS-CY1JF471J	J	470	1/16W	M-Ox.	AA			
MISCELLANEOUS PARTS									
P1401	QPLGN0585CEZZ	J	Plug, 5-pin (KA)		AA				
P1402	QPLGN0585CEZZ	J	Plug, 5-pin (KB)		AB				

PWB-P: DUNTK9830WEV4 (26SL71M, 29SL81M)
AUDIO OUT UNIT

INTEGRATED CIRCUITS

IC5301 VHiAN5276//-1 J AN5276 AR

CAPACITORS

[EL... Electrolytic]

C5301	VCEA0A1VW108M	J	1000	35V	EL.	AD
C5304	VCEA0A1HW225M	J	2.2	50V	EL.	AB
C5306	VCQYTA1HM152J	X	1500p	50V	Mylar	AA
C5307	VCQYTA1HM152J	X	1500p	50V	Mylar	AA
C5308	VCEA0A1VW107M	J	100	35V	EL.	AC
C5309	VCEA0A1EW108M	J	1000	25V	EL.	AD
C5310	VCEA0A1EW108M	J	1000	25V	EL.	AD

RESISTORS

[M-Film... Metal Film]

▲ R5301	VRN-VV3LB1R5J	J	1.5	3.0W	M-Film	AC
R5302	VRD-RA2BE123J	J	12k	1/8W	Carbon	AA
R5303	VRD-RA2BE223J	J	22k	1/8W	Carbon	AA
R5304	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
R5305	VRD-RA2BE103J	J	10k	1/8W	Carbon	AA
R5306	VRD-RA2BE223J	J	22k	1/8W	Carbon	AA
R5307	VRD-RA2BE102J	J	1.0k	1/8W	Carbon	AA

MISCELLANEOUS PARTS

P5301	QPLGN0441CEZZ	J	Plug, 4-pin (S)		AB
P5302	QPLGN0641CEZZ	J	Plug, 6-pin (PA)		AD
RDA5301	PRDRA0258PEFW		Heat Sink, for IC5301		AG

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
MISCELLANEOUS PARTS									
△ ACC701QACCZ3008PEZZ	R	AC Cord	AN		SPAKC0132GJZZ	—	Packing Case	(26SL41M)	—
SP1 VSP0080PBL4YS	X	Speaker 32 ohm (L) (26SL41M)	AH		SPAKC0131GJZZ	—	Packing Case	(26SL71M)	—
SP2 VSP0080PBL4YS	X	Speaker 32 ohm (R) (26SL41M)	AH		SPAKC0133GJZZ	—	Packing Case	(29SL81M)	—
SP1 VSP1206PB378E	X	Speaker 8 ohm (L) (26SL71M, 29SL81M)	AQ		SPAKP0105GJZZ	—	Wrapping Paper	(26SL41M, 26SL71M)	—
SP2 VSP1206PB378E	X	Speaker 8 ohm (R) (26SL71M, 29SL81M)	AQ		SPAKP0106GJZZ	—	Wrapping Paper	(29SL81M)	—
QCNW-0102GJZZ	X	Connecting Cord (YBN)	AE		SPAKX0106GJZZ	—	Buffer Material	(26SL41M, 26SL71M)	—
QCNW-0103GJZZ	X	Connecting Cord (S) (26SL71M, 29SL81M)	AF		SPAKX0005GJZZ	—	Buffer Material	(29SL81M)	—
QCNW-0106GJZZ	X	Connecting Cord (PA) (26SL71M, 29SL81M)	AG		SSAKA0101GJZZ	—	Polyethylene Bag		—
QCNW-0109GJZZ	X	Connecting Cord (GBN) (26SL41M, 26SL71M)	AE						
QCNW-0104GJZZ	X	Connecting Cord (FA) (26SL71M, 29SL81M)	AG						
QCNW-0105GJZZ	X	Connecting Cord (FB)	AG						
QCNW-0113GJZZ	X	Connecting Cord (FA) (26SL41M)	AG						
QCNW-0132GJZZ	X	Connecting Cord (S) (26SL41M)	AF						
TLABZ0115GJZZ	X	Label (26SL71M)	AG						
TLABZ0116GJZZ	X	Label (29SL81M)	AG						
TLABZ0121GJZZ	X	Label (26SL41M)	AG						
TLABM0003GJZZ	X	Model Label (26SL41M)	AF						
TLABM0107GJZZ	X	Model Label (26SL71M, 29SL81M)	AK						

SUPPLIED ACCESORRIES

RRMCG1339CESB	X	Infrared R/C Unit (26SL41M)	AQ
RRMCG1573CESAM		Infrared R/C Unit (26SL71M, 29SL81M)	AW
TINS-7034GJZZ	X	Operation Manual (26SL41M)	AL
TINS-7090GJZZ	X	Operation Manual (26SL71M, 29SL81M)	AM

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------	----------	----------	---	-------------	------

CABINET PARTS


26SL41M, 26SL71M

1	CCABA0010WEH3 X	Front Cabinet Ass'y (26SL41M)	BE
1	CCABA0008WEH3 X	Front Cabinet Ass'y (26SL71M)	BF
1-1	<i>Not Available</i> —	Front Cabinet	—
1-2	GCOVA0106GJSA X	Cover for R/C	AG
1-3	HBDGB3141CESA X	Badge, "SHARP"	AG
1-4	JBTN-0106GJSB X	Button, Power	AG
1-5	MSPRC0005PEFWR	Spring for Power Button	AB
1-6	GDORF0102GJSB X	Door	AG
1-7	PKAi-0002PE00 X	Door Latch	AF
1-8	HiNDP0102GJZZ X	Indication Plate (26SL41M)	AK
1-8	HiNDP0001GJZZ X	Indication Plate (26SL71M)	AK
2	GCABB0009GJKA J	Rear Cabinet (26SL41M)	BA
2	GCABB0008GJKA X	Rear Cabinet (26SL71M)	BA


29SL81M

1	CCABA0007WEH3 X	Front Cabinet Ass'y	BF
1-1	<i>Not Available</i> —	Front Cabinet	—
1-2	GCOVA0005GJSA X	Cover for R/C	AG
1-3	HBDGB3141CESB X	Badge, "SHARP"	AG
1-4	JBTN-0005GJSB X	Button, Power	AG
1-5	MSPRC0005PEFWR	Spring for Power Button	AB
1-6	GDORF0001GJSB X	Door	AG
1-7	PKAi-0002PE00 X	Door Latch	AF
1-8	HiNDP0001GJZZ X	Indication Plate	AK
2	CCABB0006WEH0 X	Rear Cabinet Ass'y	BA

CABINET PARTS LOCATION

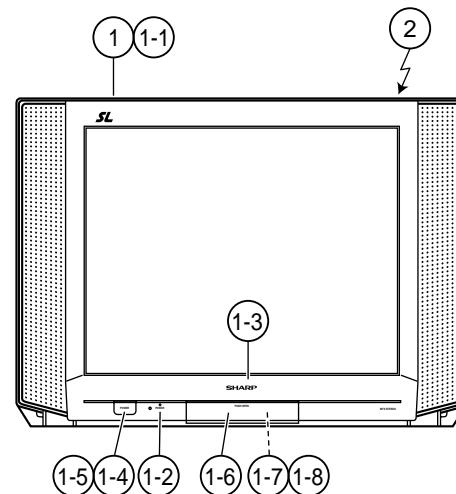

PACKING OF THE SET

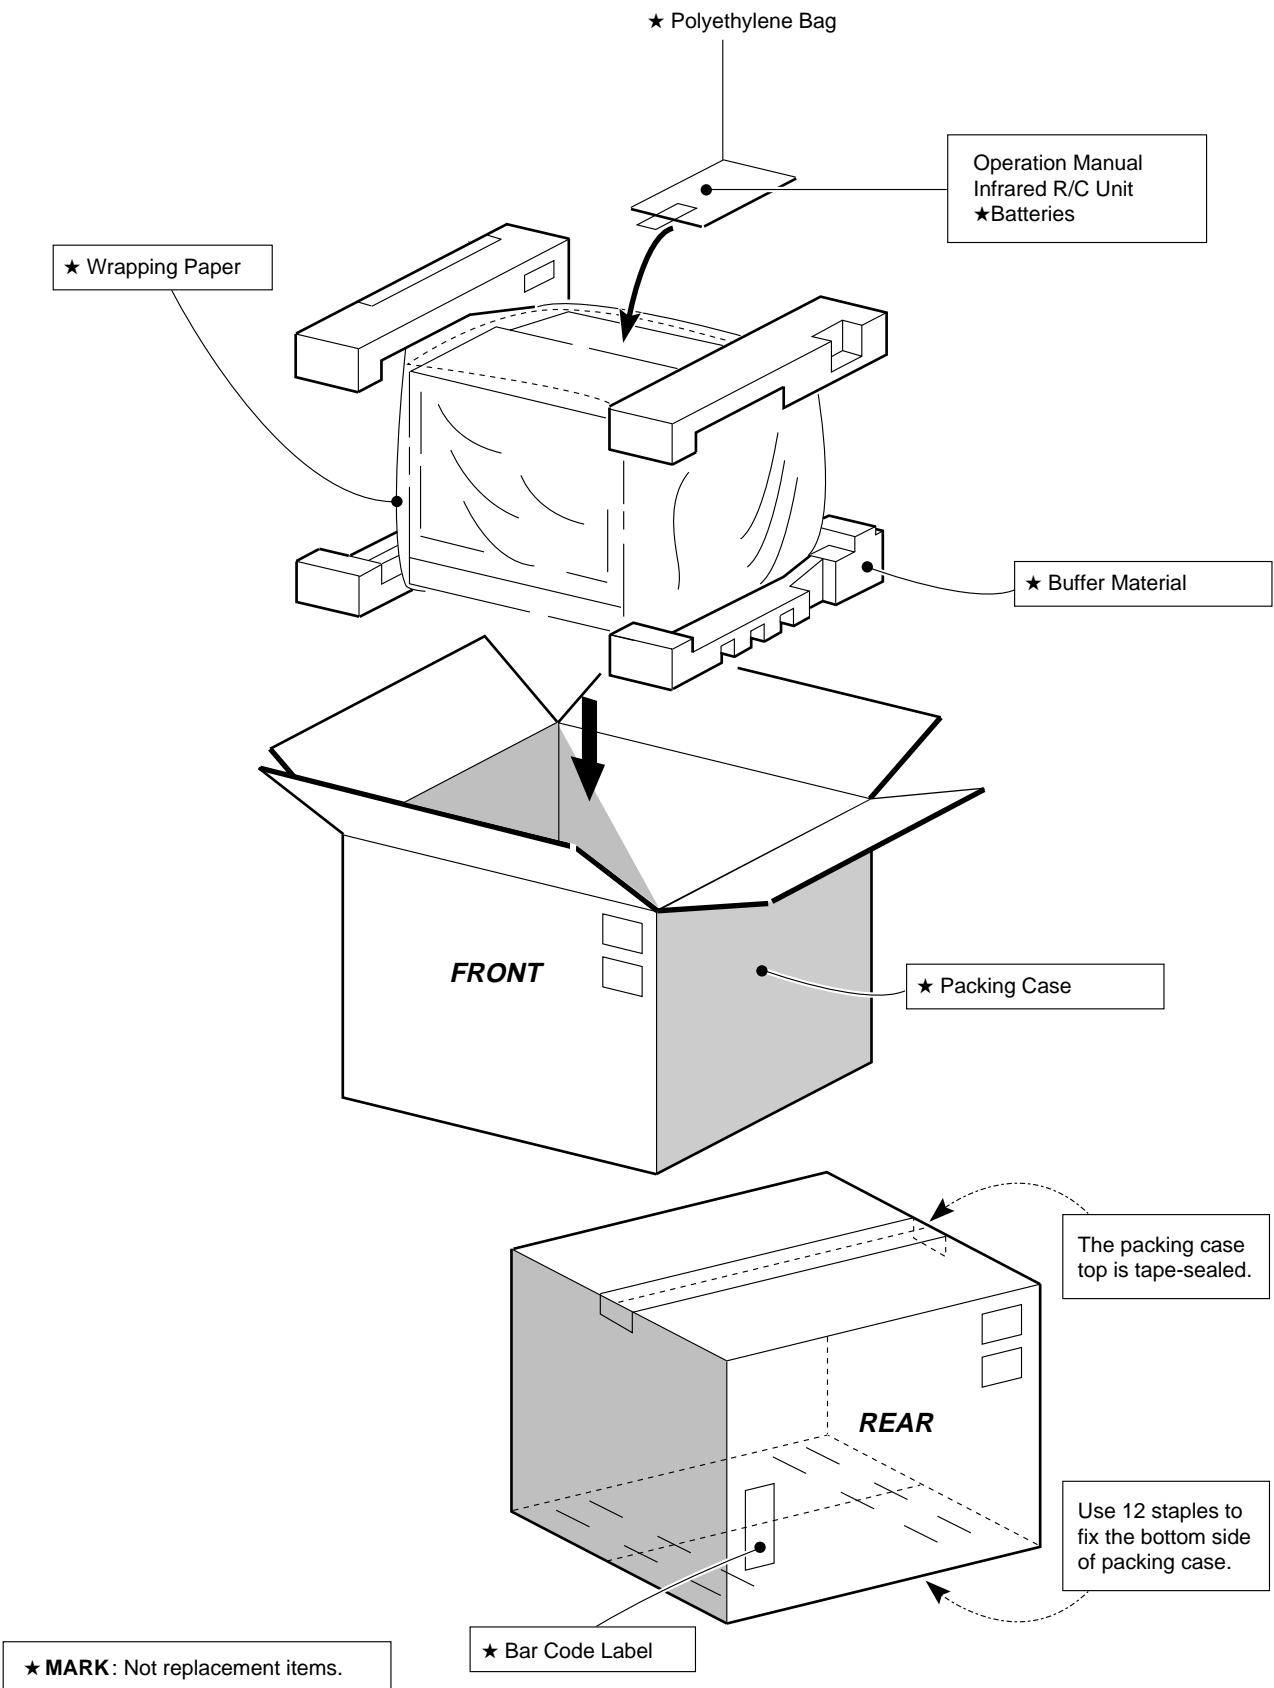

SHARP

COPYRIGHT © 2000 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted in
any form or by any means, electronic, mechanical,
photocopying, recording, or otherwise, without
prior written permission of the publisher.