

SERVICE MANUAL

BX1S CHASSIS

<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>	<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>
KV-BT212M40	RM-W101	E	SCC-U98S-A				
KV-BT212M50	RM-W101	Vietnam	SCC-V07P-A				
KV-BT212M50	RM-W101	GE	SCC-V04M-A				
KV-BT212M70	RM-W101	Russia	SCC-V13B-A				
KV-BT212M80	RM-W101	Saudi Arabia	SCC-V10S-A				
KV-BT212M80	RM-W101	Russia	SCC-V13C-A				
KV-BT212M90	RM-W101	Hong Kong	SCC-U97L-A				
KV-BT212N80	RM-W150	Taiwan	SCC-V05K-A				



RM-W101 RM-W150

TRINITRON® COLOR TV
SONY®

TABLE OF CONTENTS


<u>Section</u>	<u>Title</u>	<u>Page</u>	<u>Section</u>	<u>Title</u>	<u>Page</u>
	SELF DIAGNOSTIC FUNCTION	3	4. DIAGRAMS		
1. DISASSEMBLY			4-1. Block Diagram		34
1-1. Rear Cover Removal		6	4-2. Circuit Boards Location		35
1-2. Speaker Removal		6	4-3. Schematic Diagram Information		35
1-3. Chassis Assy Removal		6	4-3-1. C Board Schematic Diagram		36
1-4. Service Position		6	4-3-2. A Board — Processor (Block 001)		37
1-5. Terminal Bracket Removal		6	4-3-3. A Board — Audio (Block 002)		39
1-6. A Board Removal		6	4-3-4. A Board — Power Supply (Block 003)		41
1-7. Picture Tube Removal		7	4-3-5. A Board — Deflection (Block 004)		43
2. SET-UP ADJUSTMENTS			4-3-6. A Board — Tuner (Block 005)		45
2-1. Beam Landing		8	4-3-7. A Board — Jack (Block 006)		47
2-2. Convergence		9	4-3-8. A Board — Heat Sink (Block 007)		49
2-3. Focus Adjustment		11	4-4. Voltage Measurement and Waveforms		50
2-4. G2 (SCREEN) Adjustments		11	4-5. Printed Wiring Boards and Parts Location		53
2-5. White Balance Adjustment		11	4-6. Semiconductors		56
2-6. Sub Bright Adjustment		11	5. EXPLODED VIEWS		
3. CIRCUIT ADJUSTMENTS			5-1. Chassis		58
3-1. Adjustment With Commander		12	6. ELECTRICAL PARTS LIST		60
3-2. Adjustment Method		13			
3-3. Picture Quality Adjustment		31			
3-4. Deflection Adjustment		31			
3-5. Picture Distortion Adjustment		32			

OPERATING INSTRUCTIONS

CAUTION

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK  ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

SELF DIAGNOSTIC FUNCTION

The units in this manual contain a self diagnostic function. If an error occurs, the STANDBY (⏻) indicator will automatically begin to flash. A description of the self-diagnosis function is explained in the instruction manual. The number of times the STANDBY (⏻) indicator flashes translates to a probable source of the problem. If an error symptom cannot be reproduced, the remote commander can be used to review the failure occurrence data stored in memory to reveal past problems and how often these problems occur.

1. DIAGNOSTIC TEST INDICATORS

When an errors occurs, the STANDBY (⏻) indicator will flash a set number of times to indicate the possible cause of the problem. If there is more than one error, the indicator will identify the first of the problem areas.

Result for all of the following diagnosis items are displayed on screen. No error has occurred if the screen displays a "0".


Diagnosis Item Description	No. of timer STANDBY (⏻) indicator flashes	Self-Diagnostic display/ Diagnosis result	Probable Cause Location	Detected Symptoms
Power does not turn on	Does not light	—	<ul style="list-style-type: none"> Power cord is not plugged in. Fuse is burned out (F600) A board. 	<ul style="list-style-type: none"> Power does not turn on. No power is supplied on TV. AC Power supply is faulty.
+B overcurrent (OCP)*	2 times	2:0 or 2:1 ~ 255	<ul style="list-style-type: none"> H OUT (Q805) is shorted. (A board) IC751 is shorted. (C board) 	<ul style="list-style-type: none"> Power does not come on. Load on power line is shorted.
V-Protect	4 times	4:0 or 4:1 ~ 255	<ul style="list-style-type: none"> +13V is not supplied. (A board) IC804 is faulty. (A board) 	<ul style="list-style-type: none"> Has entered standby state after horizontal raster. Vertical deflection pulse is stopped. Power line is shorted or power supply is shorted.
IK (AKB)	5 times	5:0 or 5:1 ~ 255	<ul style="list-style-type: none"> Video OUT (IC1545) is faulty. (A board) IC001 is faulty. (A board) Screen (G2) is improperly adjusted.** 	<ul style="list-style-type: none"> No raster is generated. CRT Cathode current detection reference pulse output is small.
Power supply NG (+5V) for Video Processor	8 times	8:0 or 8:1 ~ 255	<ul style="list-style-type: none"> IC604 faulty. IC602 faulty. 	<ul style="list-style-type: none"> No power supply to CRT ANODE. No RASTER is generated.

* If a +B overcurrent is detected, stoppage of the vertical deflection is detected simultaneously. The symptom that is diagnosed first by the mirco controller is displayed on the screen.

** Refer to Screen (G2) Adjustment in this manual.

2. DISPLAY OF STANDBY (⏻) INDICATOR

FLASH COUNT

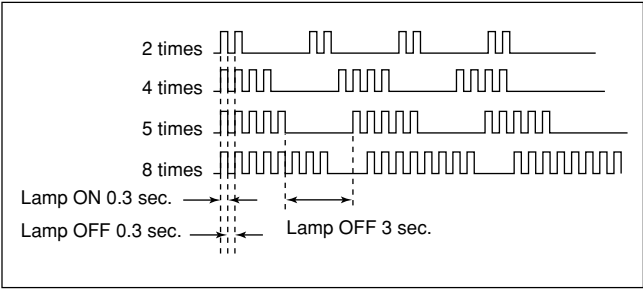

Diagnostic Item	Flash Count*
+B overcurrent	2 times
V-Protect	4 times
IK (AKB)	5 times
Power Supply NG (+5V) for Video processor	8 times

* One flash count is not used for self-diagnosis.



STANDBY (⏻) indicator

3. STOPPING THE STANDBY (⏻) INDICATOR FLASH

Turn off the power switch on the TV main unit or unplug the power cord from the outlet to stop the STANDBY (⏻) indicator from flashing.

4. SELF-DIAGNOSTIC SCREEN DISPLAY

For errors with symptoms such as "power sometimes shuts off" or "screen sometimes goes off" that cannot be confirmed, it is possible to bring up past occurrences of failure on the screen for confirmation.

[To Bring Up Screen Test]

In standby mode, press buttons on the remote commander sequentially in rapid succession as shown below:

Display → Channel → Volume → Power / TV



Note that this differs from entering the service mode (volume).

The following screen will be displayed indicating the error count.

SELF DIAGNOSTIC	
2 :	0
3 :	N/A
4 :	0
5 :	1
8 :	0
101 :	N/A

Numeral "0" means that no fault was detected.
Numeral "1" means the number of a fault occurrence (1 ~ 255).

5. HANDLING OF SELF-DIAGNOSTIC SCREEN DISPLAY

Since the diagnostic results displayed on the screen are not automatically cleared, always check the self-diagnostic screen during repairs. When you have completed the repairs, clear the result display to "0".

Unless the result display is cleared to "0", the self-diagnosis function will not be able to detect subsequent faults after completion of the repairs.

[Clearing the result display]


To clear the result display to "0", press buttons on the remote commander subsequent as shown below when the self-diagnostic screen is being displayed.

8 → 0

[Quitting Self-diagnostic screen]

To quit the entire self-diagnostic screen, turn off the power switch on the remote commander or the main unit.

6. SELF-DIAGNOSTIC CIRCUIT

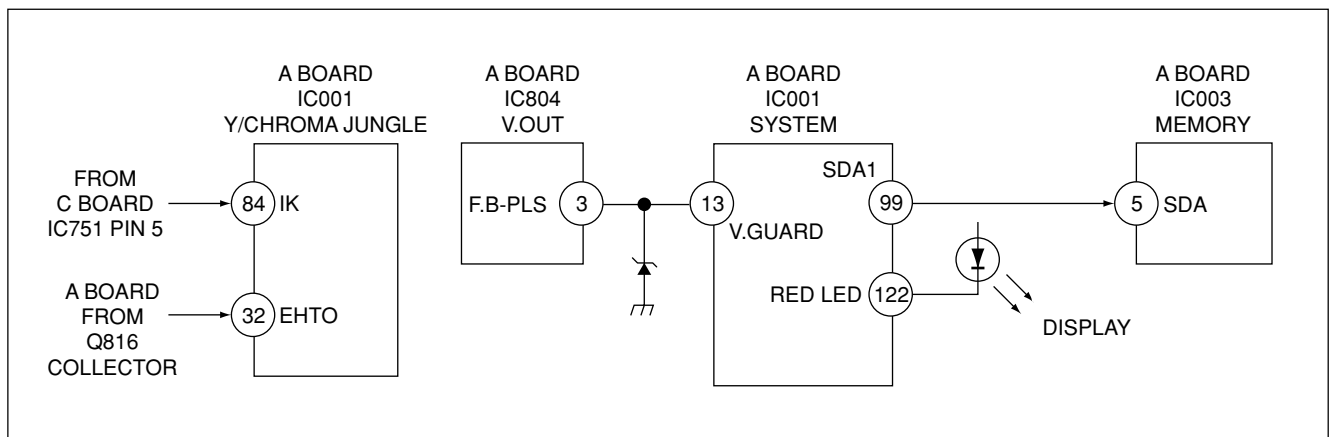

+B overcurrent (OCP)

Occurs when an overcurrent on the +B(135V) line is detected by pin 32 of IC001 (A board). If the voltage of pin 32 of IC001 (A board) is more than 4V, the unit will automatically go to standby.

V-PROTECT

Occurs when an absence of the vertical deflection pulse is detected by pin 13 of IC001 (A board).

IK (AKB)

If the RGB levels* do not balance within 15 sec after the power is turned on, this error will be detected by IC001 (A board). TV will stay on, but there will be 5 times LED blinking.


POWER SUPPLY NG (+5V) for VIDEO PROCESSOR

Occurs when IC001 internal HV protect detects an abnormal H-Pulse (frequency) due to improper power supply to IC001. TV cuts off high voltage power of anode CRT. No picture will be detected. eg: IC602, IC604 go faulty.


* (Refers to the RGB levels of the AKB detection Ref pulse that detects IK.)

SECTION 1
DISASSEMBLY


1-1. REAR COVER REMOVAL

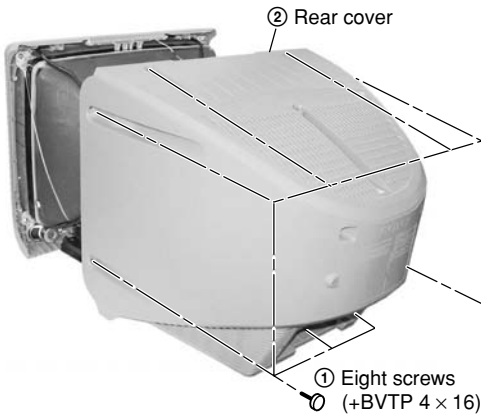


1-2. SPEAKER REMOVAL

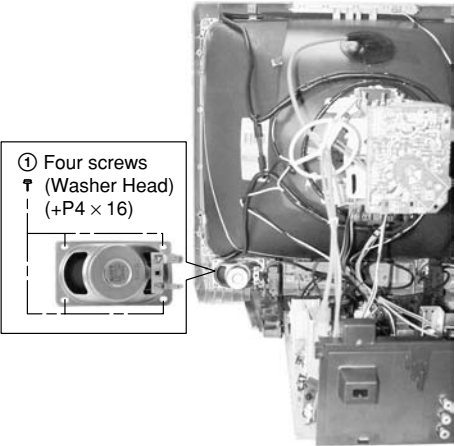


1-3. CHASSIS ASSY REMOVAL

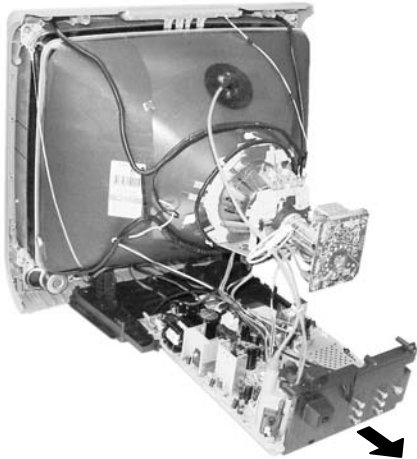


1-4. SERVICE POSITION

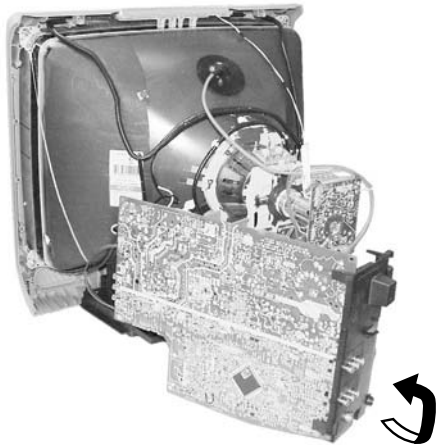

1-5. TERMINAL BRACKET REMOVAL

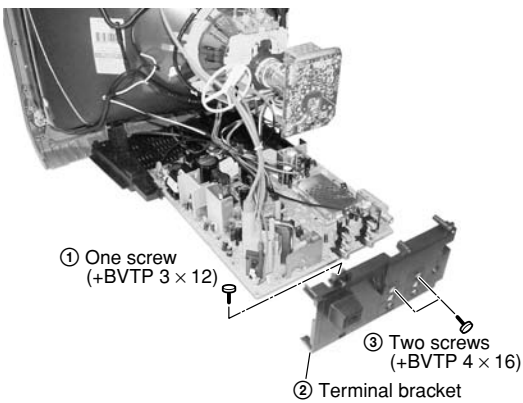


1-6. A BOARD REMOVAL

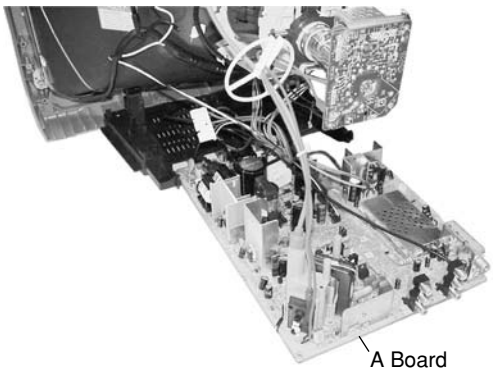

1-7. PICTURE TUBE REMOVAL

Note:

- Please make sure the TV set is not in standing position before removing necessary CRT support located on bottom right and left.
- 1) Place the TV set with the CRT face down on a cushion jig.
 - 2) Remove the rear cover.
 - 3) Unplug all inter connecting leads from the Deflection Yoke, Degaussing Coil and CRT grounding strap.

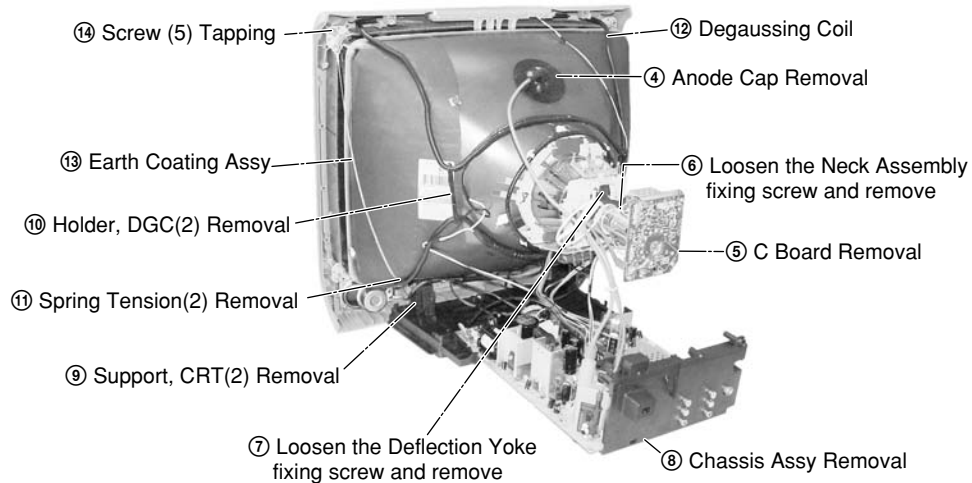


• REMOVAL OF ANODE-CAP


Note:

- After removing the anode, short circuit the anode of the picture tube and the anode cap to the metal chassis, CRT shield or carbon paint on the CRT.


• REMOVING PROCEDURES

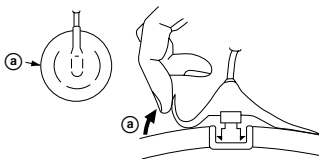

- ① Turn up one side of the rubber cap in the direction indicated by the arrow A.

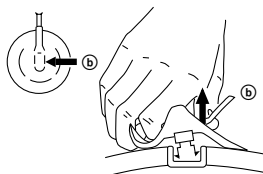

- ② Using a thumb pull up the rubber cap firmly in the direction indicated by the arrow B.
- ③ When one side of the rubber cap is separated from the anode button, the anode-cap can be removed by




anode button

turning up the rubber cap and pulling it up in the direction of the arrow C.

• HOW TO HANDLE AN ANODE-CAP

- ① Do not damage the surface of anode-caps with sharp shaped objects.
- ② Do not press the rubber too hard so as not to damage the inside of anode-cap. A metal fitting called the shatter-hook terminal is built into the rubber.
- ③ Do not turn the foot of rubber over too hard. The shatter-hook terminal will stick out or damage the rubber.

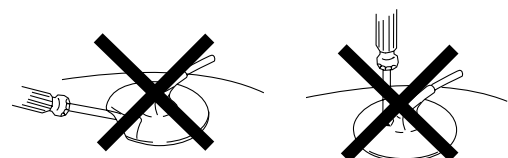

SECTION 2 SET-UP ADJUSTMENTS

- The following adjustments should be made when a complete realignment is required or a new picture tube is installed.

Set the controls as follows unless otherwise noted:

VIDEO model Standard
PICTURE control normal
BRIGHTNESS control normal

Perform the adjustments in the following order :

1. Beam Landing
2. Convergence
3. Focus
4. Screen(G2)
5. White Balance

Note : Test Equipment Required.

1. Pattern Generator
2. Degausser
3. DC Power Supply
4. Digital Multimeter
5. Oscilloscope

Preparation :

- In order to reduce the influence of geomagnetism on the set's picture tube, face it east or west.
- Switch on the set's power and degauss with the degausser.

2-1. BEAM LANDING

Picture Mode: DYNAMIC

1. Input a white signal with the pattern generator.
Contrast } normal
Brightness }
2. Set the pattern generator raster signal to a green raster.
3. Move the deflection yoke to the rear and adjust with purity control so that the green is at the center and the blue and the red take up equally sized areas on each side. (See Figures 2-1 through 2-4.)
4. Move the deflection yoke forward and adjust so that the entire screen is green. (See Figure 2-1.)
5. Switch the raster signal to blue then to red and verify the condition.
6. When the position of the deflection yoke has been decided fasten the deflection yoke with the screws and DY spacers.
7. If the beam does not land correctly in all the corners, use a magnet to adjust it. (See Figure 2-4.)

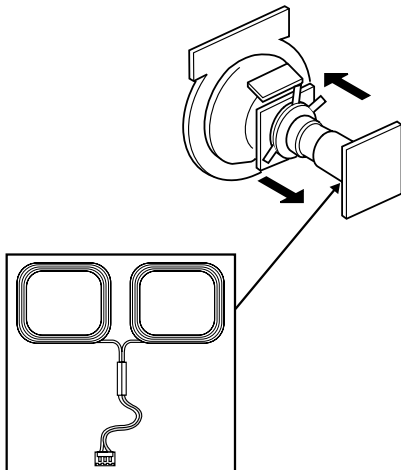


Fig. 2-1

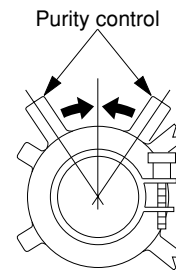


Fig. 2-2

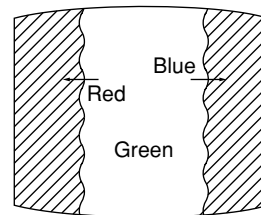


Fig. 2-3


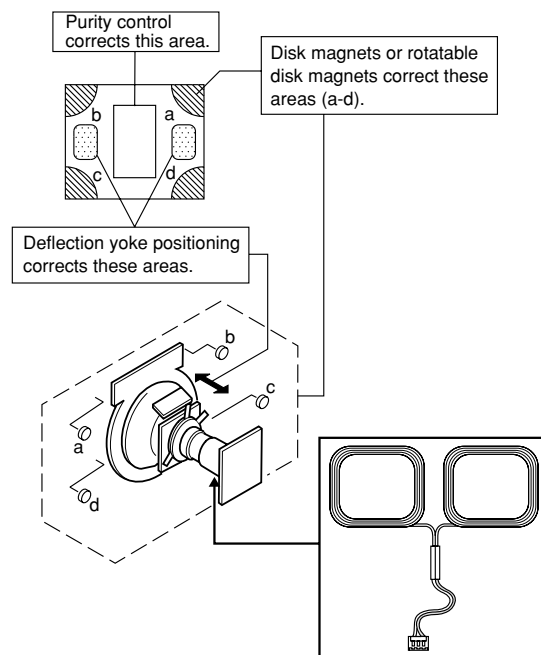


Fig. 2-4


2-2. CONVERGENCE

- Before starting this adjustment, adjust the focus, horizontal size and vertical size.
- Receive dot/hatch signal.
- Pic mode: Soft.

(1) Horizontal and Vertical Static Convergence

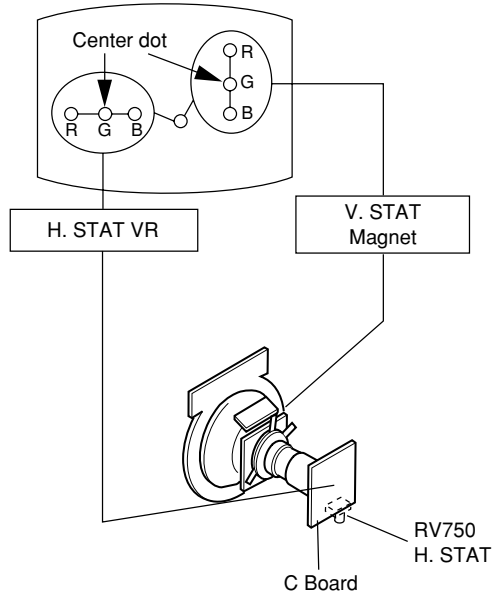


1. (Moving vertically), adjust the V.STAT magnet so that the red, green and blue dots are on top of each other at the center of the screen.
2. (Moving horizontally), adjust the H.STAT control so that the red, green and blue dots are on top of each other at the center of the screen.
3. If the H.STAT variable resistor cannot bring the red, green and blue dots together at the center of the screen, adjust the horizontal convergence with the H.STAT variable resistor and the V.STAT magnet in the manner given below.
(In this case, the H.STAT variable resistor and the V.STAT magnet influence each other, so be sure to perform adjustments while tracking.)

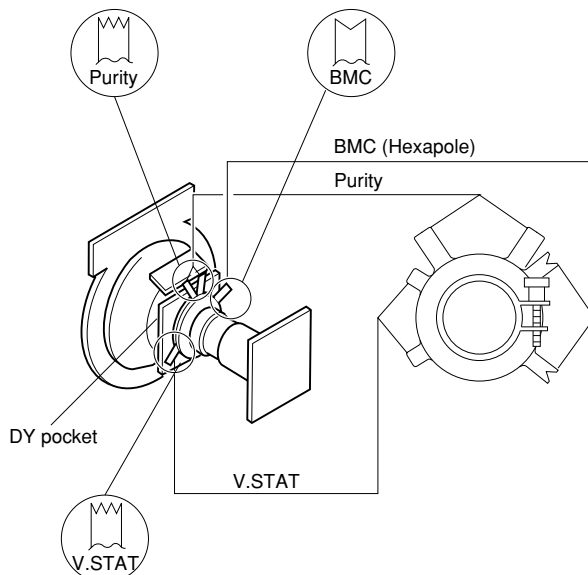


Operation of V. STAT magnet.

If the V.Stat magnet is moved in the "A" and "B" arrows, the red, green and blue dots moves as shown below.

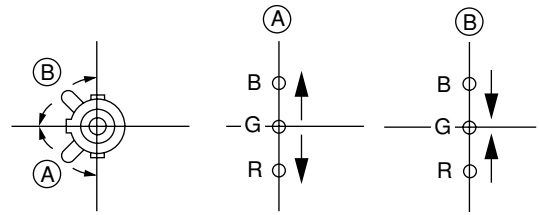


Moved RV750 H. STAT.

the red, green and blue dots move as shown below.

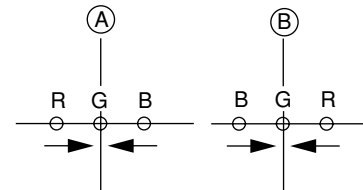

4. BMC (Hexapole) Magnet.


If the red, green and blue dots are not balanced or aligned, then use the BMC magnet to adjust in the manner described below.

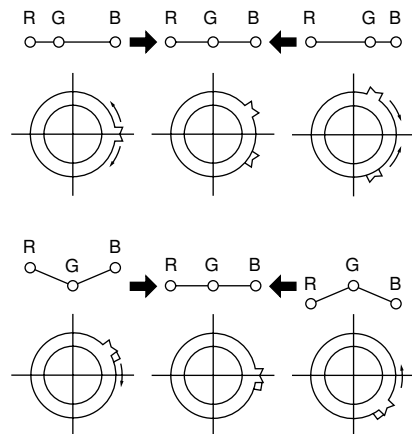

(2) Convergence Rough Adjustment

Preparation:

- Before starting this adjustment, adjust the horizontal static convergence and the vertical static convergence

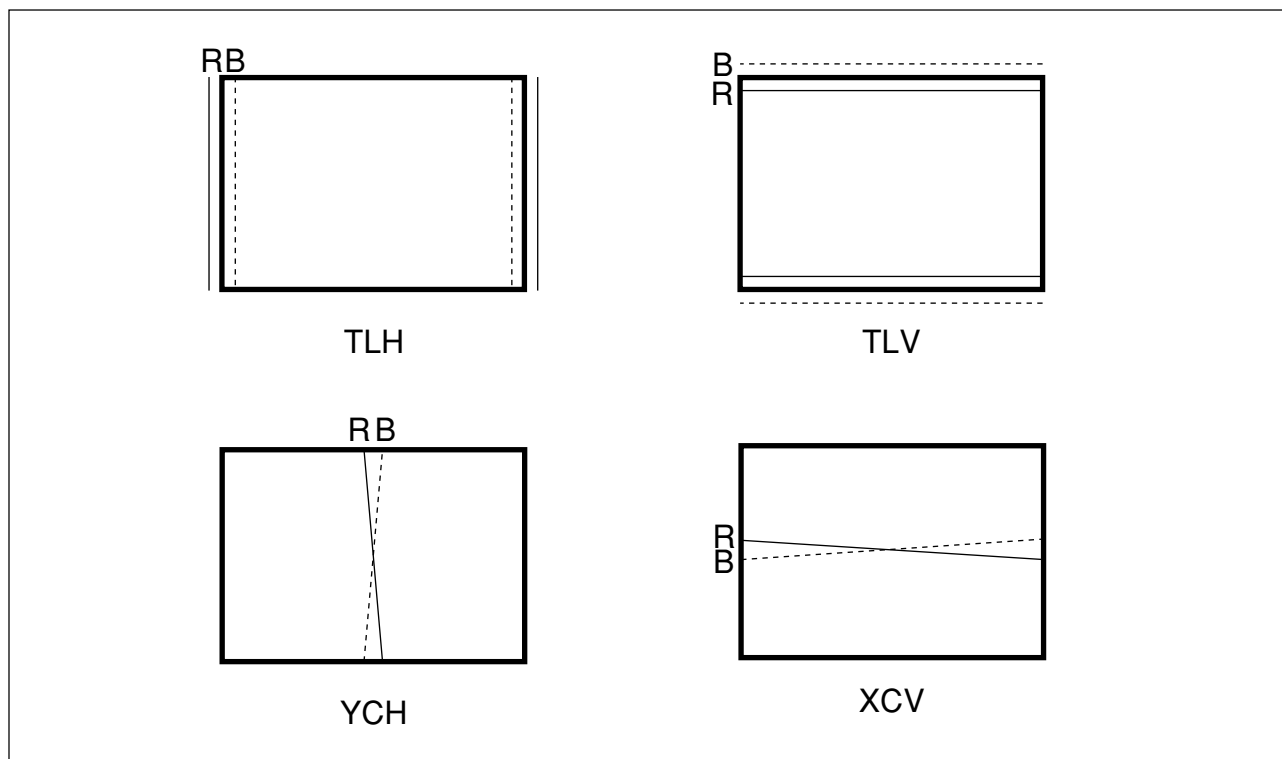

TLH Insert TLH Correction Plate to DY Pocket
(Left or Right)


YCH Insert YCH VOL on DY

TLV Rotate TLV VOL on DY


XCV Rotate XCV Adj core on DY

(3) Screen corner Convergence

- Affix a Piece A (90), conv. correct corresponding to the misconverged areas.

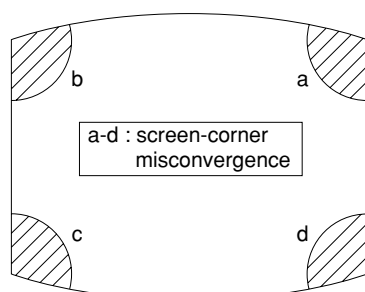


ON DY:

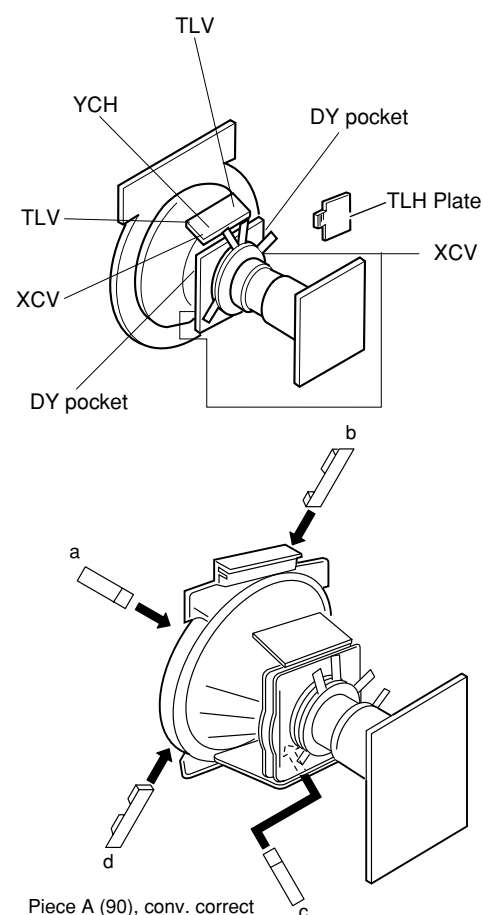

2-3. FOCUS ADJUSTMENT


FOCUS adjustment should be completed before the W/B adjustment:

1. Receive digital monoscope pattern.
2. Set picture mode: DYNAMIC.
3. Adjust focus VR to obtain a just focus at the center of the screen.
4. Change receiving signal to white pattern and blue back.
5. Confirm MAGENTA RING is not noticeable. In case magenta ring is obvious, then adjust FOCUS VR to balance magenta ring and FOCUS.

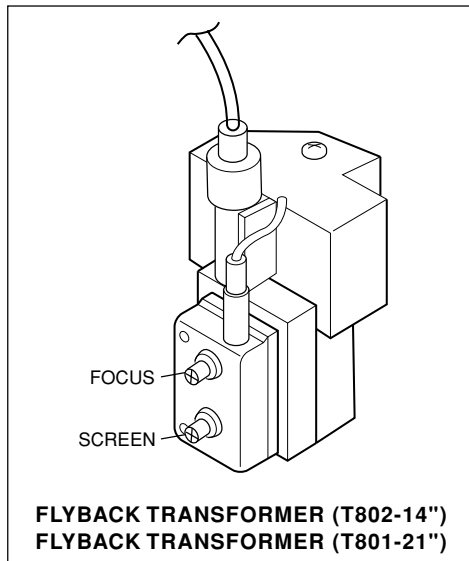

2-4. G2 (SCREEN) ADJUSTMENTS

1. Set the PICTURE & BRIGHTNESS to STANDARD.
2. Put the Video input mode signal.
3. Connect R,G,B of the C board cathode to oscilloscope.
4. Adjust Brightness to obtain the cathode value to value below.
5. Adjust G2 (screen) on the FBT until picture shows the point before cut off.

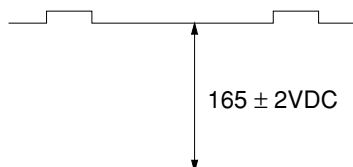

2-5. WHITE BALANCE ADJUSTMENT

1. Set to Service Mode (Refer Section 3-1: ADJUSTMENTS WITH COMMANDER)
2. Input white raster signal.
3. Set Picture to <DYNAMIC mode>
4. Select RDRV (002) with [1] and [4] and fixed the value to 25 with [3] and [6].
5. Adjust WHBL GDRV (003) and BDRV (004) with [1] and [4] and adjust the data with [3] and [6] for best white balance in Highlight condition.
6. Write into the memory by pressing [MUTING] then [0].
7. Adjust WHBL BKOR (000) and BKOG (001) with [1] and [4] and adjust the level with [3] and [6] for best white balance cut-off condition.
8. Write into memory by pressing [MUTING] then [0].

2-6. SUB BRIGHT ADJUSTMENT

1. Set to service mode.
2. Brightness set to 50%, Picture....Minimum
3. Select WHBL SBRT (010) with [1] and [4] and adjust SBRT (10) data with [3] and [6] so that the third stripe from right dimly lit.
4. Write into the memory by pressing [MUTING] then [0].
5. GA models Cut-off : 10 IRE
Slightly Glimmer : 20 IRE


SECTION 3
CIRCUIT ADJUSTMENTS

3-1. ADJUSTMENTS WITH COMMANDER

Service adjustments to this model can be performed using the supplied remote commander RM-W101, RM-W150.

a. ENTERING SERVICE MODE

With the unit on standby



This operation sequence puts the unit into service mode.
This screen display is:

category	item no. in decimal	item name	service data in decimal	NVM NG	service command	field frequency	channel no./ video input name
GEOM	006	HSIZ	031	■	SERVICE	60	S VIDEO 1

release ID	software version	service data in binary	reserved for factory	color system	power on time (decimal)
SUS01	0.69U	0001 1111	FF FF	NTSC3	65535

Flash DCXO

111 11 11 1 7 11

FG

xy 111

Status Byte
#1 SSD
000000

Status Byte
#2 SSD
000000

VDSP_C Flag
CO_LOCKED
VDSP
Detected Stereo Type (Direct Value from CZ_ Stereo_Mode)

S : for Sony
A : Aiwa
U S : US/Latin/Taiwan
E U : Europe
G A : General Area
J P : Japan
0 1 : serial no. of the M/P release
for each destination


111 Needed for Nicam DCXO alignment Purpose
xy Value of x = 0 - Unknown, 1 - BTSC, 2 - A2, 3 - NICAM,
4 - KOREAN, 5 - Japan, 6 - AV Stereo
Value of y = 0 - Mono, 1 - Stereo, 2 - Bilingual, 4 - SAP/Single

b. METHOD OF CANCELLATION FROM SERVICE MODE

Set the standby condition (Press [POWER] button on the commander), then press [POWER] button again, hereupon it becomes TV mode.

c. METHOD OF WRITE INTO MEMORY

1. Set to Service Mode.
2. Press [1] (UP) and [4] (DOWN), to select the adjustment item.
3. Change item by pressing [3], [6].
4. Press [MUTING] button to indicate WRITE on the screen.
5. Press [0] button to write into memory.

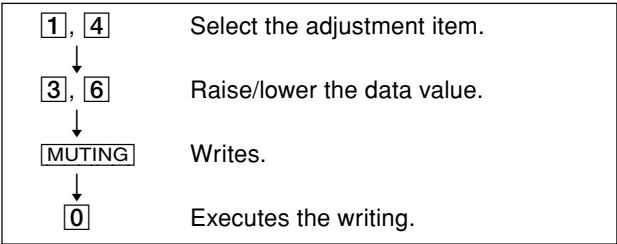

d. MEMORY WRITE CONFIRMATION METHOD

1. After adjustment, pull out the plug from AC outlet, and then plug into AC outlet again.
2. Turn the power switch ON and set to Service Mode.
3. Call the adjusted items to confirm adjustments were made.

e. OTHER FUNCTION VIA REMOTE COMMANDER

- [7], [0] All the data becomes the values in memory.
 [8], [0] All user control goes to the standard state.
 Display, [0] Service data initialization (Be sure not to use usually.)
 [2], [5] Select Device or Category


3-2. ADJUSTMENT METHOD

Item Number 000 HPOS

This explanation uses H POSITION as an example.

1. Select "000 HPOS" with the [1] and [4] buttons, or [2] and [5].
2. Raise/lower the data with the [3] and [6] buttons.
3. Select the optimum state. (The standard is IF for PAL reception.)
4. Write with the [MUTING] button. (The display changes to WRITE.)
5. Execute the writing with the [0] button. (The WRITE display will be changed to red color while excuting, and back to SERVICE.)

Example on screen display :-

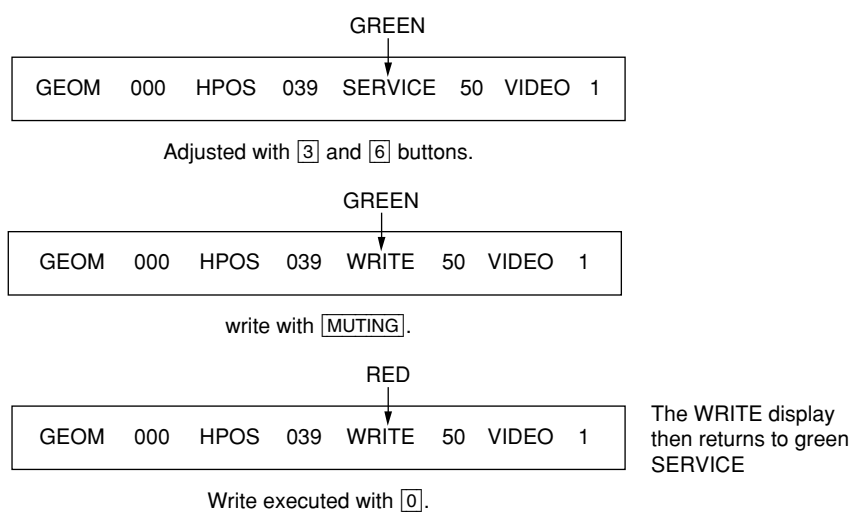

Use the same method for all Items. Use [1] and [4] to select the adjustment item, use [3] and [6] to adjust, write with [MUTING], then execute the write with [0].

- Note :**
1. In [WRITE], the data for all items are written into memory together.
 2. For adjustment items that have different standard data between 50Hz or 60Hz, be sure to use the respective input signal after adjustment.

Adjustment Item Table

NOTE

a) In the initial value (detailed)column, the data after the slash mark ("/") refers to NTSC model data.

No("/") means data is common for multi and NTSC model.

b) Item remarked "***" and "****", please refer page 25~26 for the data.

c) ■ shaded items are no data.

d) Standard data listed on the Adjustment Item Table are reference values, therefore it may be different for each model and for each mode.

e) Note for the Different Data those are the standard data values written on the microprocessor. Therefore, the data values of the models are stored respectively in the memory.

In the case of a device replacement, adjustment by rewriting the data value is necessary for some items.

f) Multi ver5.18, NTSC ver5.23

TVJ Category	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)			
	No.	Name	Dec	Dec						(4:3) 50	(4:3) 60	(4:3) w50	(4:3) w60
GEOM	000	HPOS	031	063	ADJUST	Horizontal Shift (HS)	50/60/w50/w60	TV-Processor	■	40/31	42/31	42/31	45/31
	001	HPAR	031	063	ADJUST	Horizontal Parallelogram	50/60/w50/w60		■	31	31	31	31
	002	HBOW	031	063	ADJUST	Horizontal Bow	50/60/w50/w60		■	31	31	31	31
	003	VLIN	031	063	ADJUST	Vertical Linearity	50/60/w50/w60		■	31	31	31	31
	004	VSCR	031	063	ADJUST	Vertical Scroll	50/60/w50/w60		■	31	31	31	31
	005	HSIZ	031	063	ADJUST	EW Width (EW)	50/60/w50/w60		■	26/31	25/31	25/31	28/31
	006	EWPW	031	063	ADJUST	EW Parabola/Width (PW)	50/60/w50/w60		■	24	31	31	31
	007	UCOP	017	063	ADJUST	EW Upper Corner Parabola	50/60/w50/w60		■	31/17	31/17	31/17	31/17
	008	LCOP	017	063	ADJUST	EW Lower Corner Parabola	50/60/w50/w60		■	31/17	31/17	31/17	31/17
	009	EWTZ	031	063	ADJUST	EW Trapezium	50/60/w50/w60		■	31	31	31	31
	010	VSLP	031	063	ADJUST	Vertical Slope (VS)	50/60/w50/w60		■	31	31	31	31
	011	VSIZ	015	063	ADJUST	Vertical Amplitude	50/60/w50/w60		■	24	15	15	26
	012	SCOR	014	063	ADJUST	S-Correction (SC)	50/60/w50/w60		■	25/14	25/14	25/14	25/14
	013	VPOS	031	063	ADJUST	Vertical Shift (VSH)	50/60/w50/w60		■	39	31	31	28
	014	VZOM	031	063	FIX	Vertical Zoom (VZ)	<4:3 Screen 50/60/w50/w60><16:9 Screen (50/60)*(WZ/N/F/Z)>		■				
	015	HBL	000	001	FIX	RGB Blanking Mode	50/60/w50/w60		■	01	01	01	01
	016	WBF	007	015	FIX	Timing of Wide Blanking (WBF)	50/60/w50/w60		■	07	07	07	07
	017	WBR	007	015	FIX	Timing of Wide Blanking (WBR)	50/60/w50/w60		■	10	10	10	10
	018	SBL	000	001	FIX	Service Blanking	none		00				
	019	COPY	000	001	FIX	Copy the GEO data to all 50/60Hz NVM area	none		00				

TVJ	Functionality	Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)																
Category	No.	Name	Dec	Dec					Col Temp (HIGH other)	Col Temp (LOW other)	Col Temp (NORM other)	Col Temp (HIGH YUV)	Col Temp (LOW YUV)	Col Temp (NORMAL YUV)	Col Temp (HIGH RGB)	Col Temp (LOW RGB)	Col Temp (NORM RGB)	TV	VIDEO	YUV	Pic mode 0	Pic mode 1	Pic mode 2	Pic mode 3	
WHBL	000	BKOR	031	063	ADJUST	Black Level Offset R (OFB = 00), Offset B (OFB = 01)	col temp (HIGH/LOW/Normal)*(UV/RGB/Others)	TV-Processor		31	31	31	31	31	31	31	31								
	001	BKOG	031	063	ADJUST	Black Level Offset G	col temp (HIGH/LOW/Normal)*(UV/RGB/Others)		31	31	31	31	31	31	31	31	31								
	002	RDRV	037	063	FIX	White Point R	col temp (HIGH/LOW/Normal)*(UV/RGB/Others)	TV-Processor		37	37	37	37	37	37	37	37								
	003	GDRV	037	063	ADJUST	White Point G	col temp (HIGH/LOW/Normal)*(UV/RGB/Others)		31/37	31/37	31/37	31/37	31/37	31/37	31/37	31/37	31/37								
	004	BDRV	037	063	ADJUST	White Point B	col temp (HIGH/LOW/Normal)*(UV/RGB/Others)		31/37	31/37	31/37	31/37	31/37	31/37	31/37	31/37	31/37								
	005	LPG	000	001	FIX	RGB Gain Preset	none		01																
	006	PGR	031	127	FIX	Preset Gain R (PGR)	none		*																
	007	PGG	031	127	FIX	Preset Gain G (PGG)	none		*																
	008	PGB	031	127	FIX	Preset Gain B (PGB)	none		*																
	009	GNOF	000	015	FIX	Preset Gain Offset	none	CCC loop	15																
	010	SBRT	031	063	ADJUST	Sub-Brightness	Others/RGB/YUV												31	31	31				
	011	SBRO	000	003	FIX	Sub-Brightness Offset (Intelligent Pic)	none		00																
	012	EGL	000	001	FIX	Enable Gain Loop in CCC System	none		00																
	013	SGL	000	003	FIX	Selection of High Current in CCC System	none		00																
	014	AKB	000	001	FIX	Black Current Stabilization	none		00																
	015	CBS	000	001	FIX	Control Sequence of Beam Current Limiting	none		00																
	016	RGBB	000	003	FIX	RGB Blanking	none		00																
	017	BLBG	000	001	FIX	Blanking of Blue & Green Output	none		00																
	018	OFB	000	001	FIX	Black Level Offset Blue	none		01																
	019	NSBR	000	015	FIX	Non Standard Brightness Offset	none		05/00																
020	WBP	000	003	FIX	Color Temp Setting (0:High, 1:Normal, 2,3:Low)	Picture Mode															00	01	02	01/00	

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)																									
	Category	No.	Name	Dec						Dec	YUV	50pal (TV)	50pal (Video)	50secam (TV)	50secam (Video)	60TV	60Video	50YUV	60YUV	50RGB	60RGB	Pic mode 0	Pic mode 1	Pic mode 2	Pic mode 3	TV	Video	TV Wide	Video Wide	AVM (Jpn)	AV Wide (Jpn)				
SADJ	000	PMAX	063	063	ADJUST	Picture Maximum	(TV / Video)*(Normal / Wide) / <Normal / Wide>	TV-Processor														37	37	37	37	00	00								
	001	SHUE	007	015	ADJUST	Sub-Hue	TV / Video															07	07												
	002	SSHP	015	063	FIX	Sub-Sharpness	TV / Video / YUV		*												*	*													
	003	SSHO	000	003	FIX	Sub-Sharpness Offset (Intelligent Pic)	none		06																										
	004	SCOL	031	063	ADJUST	Sub-Color	50pal(tv)/50pal(video)/50secam(tv)/50secam(video)/ 60TV/60video/50YUV/60YUV/50RGB/60RGB			31/00	31	31/00	31	31	31	31/00	31	31/00	31																
	005	SCOO	000	003	FIX	Sub-Color Offset (Intelligent Pic)	none		02																										
	006	PIC	031	127	FIX	Picture Control [GA:0-100(valid), >100(invalid); Others:0-63(valid); ignore bit 6(invalid)]	Picture Model(GA: Personal = User Reset Data)											100/63	80/50	65/41	100/63														
	007	COL	031	127	FIX	Color Control [GA:0-100(valid), >100(invalid); Others:0-63(valid); ignore bit 6(invalid)]	Picture Model(GA: Personal = User Reset Data)											56/35	50/32	40/25	50/38														
	008	BRT	031	127	FIX	Brightness Control [GA:0-100(valid), >100(invalid); Others:0-63(valid); ignore bit 6(invalid)]	Picture Model(GA: Personal = User Reset Data)											50/32	50/32	60/38	50/32														
	009	HUE	031	127	FIX	Hue Control [GA:0-100(valid), >100(invalid); Others:0-63(valid); ignore bit 6(invalid)] (* Send to TINT #1Eh(5-0) with US model)	Picture Model(GA: Personal = User Reset Data)											50/31	50/31	50/31	50/31														
	010	SHP	031	127	FIX	Sharpness Control [GA:0-100(valid), >100(invalid); Others:0-63(valid); ignore bit 6(invalid)]	Picture Model(GA: Personal = User Reset Data)											60/35	50/32	50/32	50/32														

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)											
Category	No.	Name	Dec	Dec						Others	YUV	PAL(TV)	NTSC(TV)	SECAM(TV)	PAL(Video)	NTSC(Video)	SECAM(Video)	S-INPUT	SECAM	NTSC	TV
YC	000	PFRQ	000	003	FIX	Peaking Center Frequency and Delay		TV-Processor		00											00
	001	RPA	001	003	FIX	Ratio Pre & Over Shoot	TV/other			02											02/03
	002	RPO	002	003	FIX	Ratio of Positive & Negative Peaks	TV/other			02											02/01
	003	YDLY	012	015	FIX	Y-Delay	(PAL/NTSC/SECAM)*(TV/VIDEO)+YUV/S-INPUT				*	*	*	*	*	*	*	*	*		
	004	CMAT	000	003	FIX	PAL-SECAM or NTSC (Japan/USA) Matrix			00												
	005	ACL	001	001	FIX	Automatic Color Limiting			01												
	006	CB	000	001	FIX	Chroma Bandpass Center Frequency	valid only with TV (*Video:0 fix)		01/00												
	007	SBO	001	003	FIX	SECAM Black Offset			00												
	008	CHSE	001	003	FIX	PAL/NTSC Ident Sensitivity			02												
	009	CLO	000	001	FIX	Center Frequency of Cloche(Bell) Filter			00												
	010	CTRP	000	001	FIX	Chroma Trap Mode	SECAM/others			00									01/00		
	011	BPS	000	001	FIX	Bypass of Chroma Base-band Delay Line	NTSC/others			*										*	
	012	FCO	000	001	FIX	Forced Color On			00												
	013	TINT	031	063	FIX	Base-Band Tint Control	YUV/others			31	31										
	014	TUV	000	001	FIX	Tint Control on UV Signals			00												

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)									
Category	No.	Name	Dec	Dec						50	60	others	YUV	TV	Video	Teletext	TV-ip	No signal	
SYNC	000	SYS	000	001	FIX	Synchronization on YSYNC Input			00										
	001	FO	000	003	FIX	Phase 1 Time Constant	TV IP ON/TV IP OFF/Video/Teletext/Auto Tuning or No signal(RF)							**/03	03	01/00	**/00	00	
	002	VID	000	001	FIX	Video Ident Mode	50/60			00	00								
	003	FSL	000	001	FIX	Forced Slicing Level for Vertical Sync			00										
	004	SSL	000	001	FIX	Slicing Level Sync Separator	50/60			00	00								
	005	SVID	001	007	FIX	Source Selection for Video Identification	YUV/Others					00	07						
	006	FORF	000	003	FIX	Forced Field Frequency			03/01										
	007	MVK	000	001	FIX	Macro Vision Keying			01										
	008	AFCT	000	003	FIX	AFC Timing Switch Control (GA,US:Pin116)			03										

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)									
Category	No.	Name	Dec	Dec						Others	RGB	Live	TV (Dyn)	TV (Others)	Video (Dyn)	Video (Others)	ColorTemp (HIGH)	ColorTemp (Others)	Color Temp(LOW)
PICT	000	CADL	007	015	FIX	Cathode Drive Level			00/**										
	001	CFA	000	003	FIX	Comb Filter Mode			*										
	002	SOC	002	003	FIX	Soft Clipping Level			00										
	003	PWL	001	001	FIX	Peak White Limiting Switch			01										
	004	WHTL	006	015	FIX	Peak White Limiting			*										
	005	GAM	001	001	FIX	Gamma			00										
	006	WTS	001	003	FIX	Gamma Control and White Stretch	Live/Others			02		02							
	007	TFR	000	001	FIX	DC Transfer Ratio of Luminance Signal	Live/Others			01	00	01							
	008	COR	003	003	FIX	Coring	(TV/Video)*(Dyna/others)						00	00	00	00			
	009	CORO	000	001	FIX	Coring Offset (Intelligent Pic)			02										
	010	BKS	003	003	FIX	Black Stretch	RGB/others			02	02								
	011	AAS	001	001	FIX	Black Area to Switch off the Black Stretch			01										
	012	DSK	000	001	FIX	Dynamic Skin Control			00										
	013	BLS	000	001	FIX	Blue Stretch	col temp (HIGH/OTHERS)								00	00			
	014	NBLS	000	001	FIX	Operation Blue Stretch Circuit			00										
	015	NRR	000	001	FIX	Non Red Reduction	col temp (HIGH/LOW/NORMAL)								01		01	01	

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)		
Category	No.	Name	Dec	Dec						YUV	TV	Video
SW	000	CV2	000	001	FIX	CVBS2 Input Signal Selection			00			
	001	SVO	001	003	FIX	Function of IFVO/SVO/CVBSI Pin @ 48	TV/Video/YUV			02	01	01
	002	DFL	000	001	FIX	Flash Protection			01			

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common
Category	No.	Name	Dec	Dec					
VIF	000	OIFD	036	063	FIX	Offset IF Demodulator		TV-Processor	36
	001	AGCT	031	063	FIX	AGC Take-over			31
	002	STM	000	001	FIX	Search Tuning Mode			01
	003	GD	000	001	FIX	Group Delay on CVBS1 Signal			00
	004	AGCS	001	003	FIX	IF AGC Speed			01
	005	FFI	000	001	FIX	Fast Filter IF PLL			00
	006	LNAI	001	001	FIX	RF Amp LNA bit initial value			00
	007	LNAT	195	225	FIX	RF Amp Threshold Level			195/00
	008	LNSN	004	007	FIX	RF Amp SN Level Threshold			03/00
	009	LNSD	002	007	FIX	RF Amp SN Level Drop Threshold			01/00
	010	LNEX	016	063	FIX	RF Amp check SN Drop Timing			30/00
	011	CHTR	048	127	FIX	Channel Threshold after Auto Prg to set RF Amp User Mode			25/00

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)			
Category	No.	Name	Dec	Dec						Pic mode 0	Pic mode 1	Piv mode 2	Pic mode 3
VM	000	RGBD	003	007	FIX	Delayof RGB Output to VM Output	none	TV-Processor	04				
	001	VMA	003	003	FIX	Amplitude of VM Output	none		*				
	002	VMAP	002	003	FIX	VM setting (0:High, 1:Low, 2,3:OFF)	Picture Mode			00	01	02	00
	003	VMMO	003	003	FIX	VM Mode			01				

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common
Category	No.	Name	Dec	Dec					
SDEM	000	FMWS	000	003	FIX	Window Selection for FM Demodulator		TV-Processor	02
	001	QSS	001	001	FIX	Quasi Split Sound (QSS) Amplifier Mode (N/A for GA multi M system)			**/01
	002	BPB	000	001	FIX	Bypass of Sound Bandpass Filter			00
	003	AMLO	000	001	FIX	Audio Output Signal for AM Sound			00
	004	HPVC	000	001	FIX	Head Phone Volume Control			00

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common
Category	No.	Name	Dec	Dec					
TXT	000	TXV	039	063	FIX	Teletext Vertical Position for Philips		Text Decoder	39/00
	001	THD	005	127	FIX	Teletext H-sync Active Edge Shift			10/00
	002	TBR	004	015	FIX	Teletext RGB Brightness			11/00
	003	LCB	000	001	FIX	Teletext LCB 0: disable 1: enable (setting for FASTEX)			00/00

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common	Initial Value (Detailed)							
Category	No.	Name	Dec	Dec						TV-L(Euro)	TV	Video	Off	SRS/WOW	Trusurround	Istereo	Imono
SDSP	000	AVM	002	007	FIX	AVL Mode		SSD	02								
	001	AVV	005	015	FIX	AVL Reference Level			09								
	002	BBL	000	015	FIX	BBE Contour			*								
	003	BBH	000	015	FIX	BBE Process			*								
	004	BBLW	000	015	FIX	BBE Contour Offset			**/06								
	005	SVOF	000	015	FIX	Surround /Effect Mode Volume Offset	Off(SRS/WOW)/Trusurround/Istereo/Imono						*	*	*	*	*
	006	IVOF	000	007	FIX	Master Volume Positive Offset			06								
	007	EVOF	000	007	FIX	Master Volume Negative Offset			06								
	008	LAD	000	031	FIX	Decoder Level Adjust			05								
	009	LAM	000	031	FIX	Mono Level Adjust			05								
	010	LAN	000	031	FIX	Nicam Level Adjust			22								
	011	LAS	000	031	FIX	SAP Level Adjust			08								
	012	LAA	000	031	FIX	ADC Level Adjust	Tv/Video(Non Euro)/ TV-L/TV-non L/Video			00	00	00					
	013	SEF	003	007	FIX	Incredible Mono/Stereo Effect	Istereo/Imono									05	03
	014	A1L	000	255	FIX	AUX1 Volume Left			00								
	015	A1R	000	255	FIX	AUX1 Volume Right			00								
	016	BAS	000	015	FIX	Main Bass Offset			*								
	017	TRE	000	015	FIX	Main Treble Offset			*								
	018	EQ1	000	015	FIX	Equalizer Main Channel Band (100 Hz) Offset			*								
	019	EQ2	000	015	FIX	Equalizer Main Channel Band (300 Hz) Offset			*								
	020	EQ3	000	015	FIX	Equalizer Main Channel Band (1000 Hz) Offset			*								
	021	EQ4	000	015	FIX	Equalizer Main Channel Band (3000 Hz) Offset			*								
	022	EQ5	000	015	FIX	Equalizer Main Channel Band (8000 Hz) Offset			*								
	023	BFCT	005	007	FIX	DBE, DUB and BBE Control			*								
	024	SCEN	001	015	FIX	SRS3D Center Control			04								
	025	SSPA	000	015	FIX	SRS3D Space Control			01								
	026	BBHW	000	015	FIX	BBE process offset in WOW mode			**/00								
	027	STRE	002	007	FIX	Treble Offset for surround mode			**/01								
	028	BBHT	000	015	FIX	BBE Offset in TV mode			00								
	029	DWA	000	000	FIX	DWA???			00								
	030	TTRE	002	007	FIX	Treble Offset in TV Mode			02								

TVJ	Functionality		Init.	Range	Data	Function	Table & Note	Device Name	Common
Category	No.	Name	Dec	Dec					
SDEC	000	MPTU	003	015	FIX	Upper Threshold for MPX pilot detection (BTSC)		SSD	02
	001	MPTL	009	015	FIX	Lower Threshold for MPX pilot detection (BTSC)			05
	002	SPTU	003	015	FIX	Upper Threshold for SAP carrier detection			08/05
	003	SPTL	006	015	FIX	Lower Threshold for SAP carrier detection			15
	004	C1TH	000	031	FIX	Normal Threshold for detection of SC1			00
	005	C1AP	000	031	FIX	Auto Program Threshold for detection of SC1			00
	006	SPTH	000	031	FIX	Noise Threshold for automute of SAP			00/05
	007	SPHY	004	015	FIX	Hysteresis size for automute of SAP			03
	008	FMTH	000	031	FIX	Noise Threshold for automute of SC2 in FM A2 standard			18/00
	009	FMHY	004	015	FIX	Hysteresis size for automute of SC2 in FM A2 standard			07/04
	010	BTTH	000	031	FIX	Noise Threshold for automute of BTSC stereo carrier			00
	011	BTHY	004	015	FIX	Hysteresis size for automute of BTSC stereo			03
	012	EJTH	000	031	FIX	Noise Threshold for automute of EIAJ FM subcarrier			00
	013	EJHY	004	015	FIX	Hysteresis size for automute of EIAJ FM subcarrier			04
	014	ONLY	000	001	FIX	Reproduce only related NICAM on DEC output			00
	015	EXAM	000	001	FIX	Fall back source in case of automute in standard L (DDEP)			00
	016	NIMT	000	001	FIX	NICAM auto mute function depend on bit error rate (DDEP)			00
	017	NILE	100	255	FIX	NICAM lower error limit (DDEP)			05
	018	NIUE	200	255	FIX	NICAM upper error limit (DDEP)			200
	019	EPMD	001	003	FIX	DEMDEC Easy Programming (DDEP)	If EPMD = 0 and STDS = 0 and OP3 Bit = 1 SDEC category is Disable and SDKC category will take over		02/01
	020	STDS	019	031	FIX	Bits multiplexed for ASD and SSS modes			31/**
	021	OVMA	001	001	FIX	FM overmodulation adaption			00
	022	FLBW	000	003	FIX	FM/AM demodulator filter bandwidth			03/**
	023	IDMD	000	003	FIX	FM ident speed in SSS mode			00/01
	024	FPAL	000	001	FIX	Line frequency for BTSC decoding			00
	025	OVMT	001	002	FIX	Overmodulation level threshold relative to nominal			03
	026	DCXI	000	001	FIX	NICAM DCXO Scaling Control Inverter			**/00
	027	DCXG	000	007	FIX	NICAM DCXO Scaling Control Gain			**/00
	028	DCLL	011	015	FIX	NICAM DCXO Scaling Control Limit (L)			00
	029	DCLH	000	031	FIX	NICAM DCXO Scaling Control Limit (H)			**/00
	030	IDEU	001	003	FIX	IDMOD setting for European A2 STD			00
	031	IDKR	001	003	FIX	IDMOD setting for Korean M STD			00
	032	IDJP	001	003	FIX	IDMOD setting for EIAJ STD			01

TVJ	Functionality		Init.	Range	Data	Function	Device Name	Common	Initial Value (Detailed)	
Category	No.	Name	Dec	Dec					50	60
OPTM	000	ASHT	006	007	FIX	Auto shut off timer (data * 5 min)		00		
	001	OSDB	000	015	FIX	OSD brightness	MMR/Micro 60h	05		
	002	OSDH	005	015	FIX	OSD Horizontal Position	XDATA/Micro 60h	08/05		
	003	OSDV	037	063	FIX	OSD Vertical Position	MMR/Micro 60h		63/39	31/39
	004	MUTE	000	001	FIX	No Signal Mute Switch (1=enabled)		00		
	005	RFUL	015	015	FIX	RF Signal Change Counter after Unlocked (Disable when 0fh)		04		
	006	RFLK	015	015	FIX	RF Signal Change Counter after Locked (Disable when 0fh)		00		
	007	LANG	000	003	FIX	OSD language shipping condition		*		
	008	HTXT	000	001	FIX	Sync seperator sw	TV-Processor	00		
	009	CMSS	000	001	FIX	Sync sw	TV-Processor	01		
	010	DCXO	060	295	FIX	DCXO Value	SFR/Micro 60h/DSP	*		
	011	EXBL	000	015	FIX	Extended Blanking Timer to Eliminate White Noise		07/04		
	012	TSYS	000	003	FIX	Memorize TV Sys in NVM at Test Reset [0:B/G, 1:I, 2:D/K, 3:M] (GA Model)		**/00		
	013	LNSW	001	001	FIX	Signal Booster Shipping/Test Reset condition (1:Auto, 0:Off)		**/00		
	014	LBL	001	001	FIX	Brightness Reduction At No Signal condition		00		

TVJ	Functionality		Init.	Range	Data	Function	Device Name	Common	Initial Value (Detailed)	
Category	No.	Name	Dec	Dec					Others	YUV
OPUS	000	SOFF	000	001	FIX	Stay off(0:follow last memory with AC on, 1:standby with AC on)		00/**		
	001	CCBR	000	015	FIX	CC OSD Brightness	MMR/Micro 60h	00		
	002	SPCH	001	127	FIX	Channel Number after Shipping Condition		00/07		
	003	SPCA	001	001	FIX	Cable Selection after Shipping Condition (1 = Cable On)		00/**		
	004	OUV	000	001	FIX	Offset Control on UV input Signals (only for US)			00	00
	005	CFA2	000	001	FIX	Forced Comb Filter On (only for US)		00		

(For NTSC model only)

TVJ	Functionality		Init.	Range	Data	Function	Device Name	Common
Category	No.	Name	Dec	Dec				
OPTB	000	IALL	000	001	FIX	Standard Write Switch (not memorized in NVM)		x
	001	OPB1	000	255	FIX	Option 1 (System related)		Please
	002	OPB2	000	255	FIX	Option 2 (Video Signal related)		refer
	003	OPB3	000	255	FIX	Option 3 (Stereo Decoding related)		to
	004	OPB4	000	255	FIX	Option 4 (Miscellaneous)		Option Bit
	005	OPB5	000	255	FIX	Option 5 (Miscellaneous)		for each
	006	OPB6	000	255	FIX	Option 6 (OSD Language related)		model

Data Variant depend on models

Category	No	Name	Model	Data
WHBL	006	PGR	With VM	50
			Without VM	45
	007	PGG	With VM	50
			Without VM	45
	008	PGB	With VM	50
			Without VM	45

Category	No	Name	Model	Data
VM	001	VMA	With VM	03
			Without VM	00

Category	No	Name	Model	Table							
				PAL (TV)	NTSC (TV)	SECAM (TV)	PAL (VIDEO)	NTSC (VIDEO)	SECAM (VIDEO)	YUV	S-Input
YC	003	YDLY	Comb Model	08	08	08	11	09	11	09	09
			Non-Comb Model	02	02	10	2	2	2	09	09
			GA NTSC BT models	08	05	08	11	09	11	09	09

Category	No	Name	Model	Table		
				TV	Video	YUV
SADJ	002	SSHP	21" Comb models	30/45	35	35
			21"Non-Comb models &	30	38	35
			All 14" models	30	38	35
			21"NTSC BT models	45	35	35

Category	No	Name	Model	Table	
				NTSC	Others
YC	011	BPS	Comb models	01	00
			Non-Comb models	00	00
			GA NTSC BT models	01	00

Category	No	Name	BT212(AV Stereo)/ Stereo	BT212 Mono
SDSP	002	BBL	00	00
	003	BBH	00	00
	004	BBLW	06	06
	016	BAS	19	00
	017	TRE	21	00
	018	EQ1	21	00
	019	EQ2	19	00
	020	EQ3	17	00
	021	EQ4	00	00
	022	EQ5	17	00
	023	BFCT	00	00
	026	BBHW	00	00
	027	STRE	01	01

Category	No	Name	China/Vietnam	Other models
OPTM	007	LANG	01	00

KV-BT212M40/M50/M70/M80/M90/N80
RM-W101 RM-W150

Category	No	Name	Others country	Hong Kong model	China model
OPTM	012	TSYS	00	01	02

Category	No	Name	Model	Table				
				Off	SRS/WOW	Trusurround	Istereo	Imono
SDSP	005	SVOF	BT212 (AV Stereo)	04	11	04	06	04
			BT212 (mono)	00	07	00	02	00

Category	No	Name	GA Stereo	GA AV ST/GA NTSC ST	GA Mono/ NTSC Mono
OPTM	010	DCXO	50	70	61

Category	No	Name	14" Models	21" Models
PICT	004	WHTL	09	00

Category	No	Name	Mono & AV Stereo models	Stereo, China & India models	Vietnam
SDEM	001	QSS	00	01	01

Category	No	Name	Stereo models	non- stereo models
SDEC	026	DCXI	01	00
	027	DCXG	03	00
	029	DCLH	06	00

Category	No	Name	BT212 mono	B212 AV Stereo	GA NTSC BT Mono
SDEC	020	STDS	13	13	13
	022	FLBW	00	01	01

Category	No	Name	China model	Other models
OPTM	013	LNSW	00	01

Category	No	Name	model	Data
PICT	001	CFA	Comb models	00
			Non Comb models	01
			GA NTSC BT models	00

Category	No	Name	GA NTSC
OPUS	000	SOFF	00
	003	SPCA	01

Category	No	Name	Model	Vietnam	Other models
SYNC	001	FO	TV	01	03
			TV-IP	01	00

ITEM INFORMATION

No. OPB1

Item	Speed Search		Home Theatre	Wide Screen	M (GA)	B/G	I	D/K	Dec
KV-BT212M40 (E)	0	1	0	0	1	1	1	1	79
KV-BT212M50 (Vietnam)	0	1	0	0	1	1	1	1	79
KV-BT212M50 (GE)	0	1	0	0	1	1	1	1	79
KV-BT212M70 (Russia)	0	1	0	0	1	1	1	1	79
KV-BT212M80 (Saudi Arabia)	0	1	0	0	1	1	1	1	79
KV-BT212M80 (Russia)	0	1	0	0	1	1	1	1	79
KV-BT212M90 (Hong Kong)	0	1	0	0	1	1	1	1	79
KV-BT212N80 (Taiwan)	1	1	0	0	1	0	0	0	200

SPEED SEARCH (Time of speed search)

00 = disabled (original cycle speed)

01 = 4 time speed from the original

10 = 6 time speed from the original

11 = 8 time speed from the original

TV System Selection

0 = disabled, 1 = enabled

Home Theatre

1 = Home Theatre mode available

Wide Screen

1 = Wide Screen model

No. OPB2

Item	Party Mode	PAM(GA)	Component	Composite (SCART)		SECAM	Color Decoding		Dec
KV-BT212M40 (E)	0	0	0	1	0	1	0	0	20
KV-BT212M50 (Vietnam)	0	0	0	1	0	1	0	0	20
KV-BT212M50 (GE)	0	0	0	1	0	1	0	0	20
KV-BT212M70 (Russia)	0	0	0	1	0	1	0	0	20
KV-BT212M80 (Saudi Arabia)	0	0	0	1	0	1	0	0	20
KV-BT212M80 (Russia)	0	0	0	1	0	1	0	0	20
KV-BT212M90 (Hong Kong)	0	0	0	1	0	1	0	0	20
KV-BT212N80 (Taiwan)	0	0	0	1	0	1	0	0	20

Party Mode

(karaoke function)

0 = not available, 1 = available

PAM

Portable Audio Mode - GA

0 = not available, 1 = available

Component

(Component [YCbCr] Terminals)

0 = not available, 1 = available

Composite

(No. of Composite Terminals)

BX1S/BX1L Basic 00 = no composite terminal

BX1L-Full : 00 = no composite terminal

01 = 1 composite terminal

01 = 2 composite terminals

10 = 2 composite terminals

10 = 3 composite terminals

11 = 3 composite terminals

11 = 4 composite terminals

SECAM

(SECAM Color System)

0 = disabled, 1 = enabled

Color decoding

(Color Crystal Selection)

00 = PAL/NTSC (Multi)

01 = NTSC (3.58MHz)

10 = PAL/NTSC (4.43MHz)

11 = PAL/NTSC (Tri-Norma)

No. OPB3

Item	HDEV	NICAM ST	NICAM BI	A2 ST	Thai Bilingual	US ST	Korean ST	MONO	Dec
KV-BT212M40 (E)	0	0	0	0	0	0	0	1	01
KV-BT212M50 (Vietnam)	0	0	0	0	0	0	0	0	00
KV-BT212M50 (GE)	0	0	0	0	0	0	0	0	00
KV-BT212M70 (Russia)	0	0	0	0	0	0	0	1	01
KV-BT212M80 (Saudi Arabia)	0	0	0	0	0	0	0	0	00
KV-BT212M80 (Russia)	0	0	0	0	0	0	0	0	00
KV-BT212M90 (Hong Kong)	0	1	1	1	0	0	0	0	112
KV-BT212N80 (Taiwan)	0	0	0	0	0	0	0	0	00

HDEV (High Deviation Mode) 0 = disabled, 1 = enabled
 NICAM ST (NICAM Stereo) 0 = disabled, 1 = enabled
 NICAM BI (NICAM Bilingual) 0 = disabled, 1 = enabled
 A2 ST/BI (A2 [West German] Stereo/Bilingual) 0 = disabled, 1 = enabled
 Thai Bilingual (A2 [Thai] Bilingual) or Force SAP if US ST is active 0 = disabled, 1 = enabled
 US ST (JP/US Stereo) 0 = disabled, 1 = enabled
 Korean ST (Korean Stereo) 0 = disabled, 1 = enabled
 MONO (Monaural Model) 0 = Stereo (SSD) Model
 1 = Monaural Model

No. OPB4

Item	SMAT	1 spk models	VM	Equalizer	Surround		Top	Text	Dec
KV-BT212M40 (E)	1	0	0	0	0	0	0	0	128
KV-BT212M50 (Vietnam)	1	0	0	0	0	0	0	0	128
KV-BT212M50 (GE)	1	0	0	0	0	0	0	0	128
KV-BT212M70 (Russia)	1	0	0	0	0	0	0	0	128
KV-BT212M80 (Saudi Arabia)	1	0	0	0	0	0	0	0	128
KV-BT212M80 (Russia)	1	0	0	0	0	0	0	0	128
KV-BT212M90 (Hong Kong)	1	0	0	0	0	0	0	0	128
KV-BT212N80 (Taiwan)	1	0	0	0	0	0	0	0	128

SMAT Surround Matrix 0 = Active, 1 = Passive
 1 spk Models 1 Speaker Models 0 = 2 or 3 Speakers Models, 1 = 1 speaker Models
 VM (Velocity Modulation) 0 = disabled, 1 = enabled
 Equalizer (5-band Equalizer Model) 0 = Bass/Treble Model, 1 = Equalizer Model
 Surround Surround Selection 00 = Off/Simulated/Surround
 01 = Off/Simulated/SRS (3D) Surround
 10 = Off/Simulated/WOW/TruSurround
 11 = Off/Simulated/WOW/TruSurround/ Virtual Dolby(not working Now)
 TOP (Forced TOP) 0 = Auto Mode (TOP/FLOF), 1 = Forced TOP
 TEXT (Teletext Model) 0 = Non-Teletext Model, 1 = Teletext Model

No. OPB5

Item	Full Surround	No Surround	COSMIC ASD	ASD	Tilt	IP Plus	IP	Wide	Dec
KV-BT212M40 (E)	0	0	1	0	0	1	1	0	38
KV-BT212M50 (Vietnam)	0	1	1	0	0	1	1	0	102
KV-BT212M50 (GE)	0	1	1	0	0	1	1	0	102
KV-BT212M70 (Russia)	0	0	1	0	0	1	1	0	38
KV-BT212M80 (Saudi Arabia)	0	1	1	0	0	1	1	0	102
KV-BT212M80 (Russia)	0	1	1	0	0	1	1	0	102
KV-BT212M90 (Hong Kong)	0	1	0	1	1	1	1	0	94
KV-BT212N80 (Taiwan)	0	1	0	0	1	1	1	0	78

Full Surround

(Full Surround option-no for EURO model)

0 = Normal Surround Model

1 = Full Surround Model

(Off/simulated/surround/SRS/WOW/TruSurround)

No Surround
Cosmic ASD(No Surround Model)
Automatic Standard Detection
Using COSMIC (Non-Stereo)

0 = Surround Model, 1 = Non-Surround Model

0 = disabled, 1 = enabled

ASD

(Automatic Standard Detection)

0 = disabled, 1 = enabled

Tilt

(Tilt Correction/PIC Rotation)

0 = disabled, 1 = enabled

IP Plus

(Intelligent Picture Plus)

0 = disabled, 1 = enabled

IP

(Intelligent Picture)

0 = disabled, 1 = enabled

Wide

(Wide Mode/V-Compressed)

0 = disabled, 1 = enabled

No. OPB6

Item	GA US	3D OSD	Feature 2	Feature 1	OSD Language Selection				Dec
KV-BT212M40 (E)	0	0	0	0	1	0	0	0	08
KV-BT212M50 (Vietnam)	0	0	0	0	1	0	0	0	08
KV-BT212M50 (GE)	0	0	0	0	1	0	0	0	08
KV-BT212M70 (Russia)	0	0	0	0	0	1	0	0	04
KV-BT212M80 (Saudi Arabia)	0	0	0	0	0	1	0	0	04
KV-BT212M80 (Russia)	0	0	0	0	0	1	0	0	04
KV-BT212M90 (Hong Kong)	0	0	0	0	1	0	0	0	08
KV-BT212N80 (Taiwan)	1	0	0	0	1	0	1	0	138

GA US (US Model Destination) 0 = US/CANADA/Latin
1 = Taiwan/Korea/Philippine
(Wake-up timer enable)
(GA Surround Spec:OFF, SIMULATED, SRS)

3D OSD (BX1L Full version GA Multi Destination ONLY) 0 = Normal with 3D Intelligent picture OSD
1 = Disable 3D Intelligent picture OSD

Feature 2 (Temporary for BX1L) 0 = Comb Not available
1 = Comb available

Feature 1 (Temporary for BX1L) 0 = PiP Not Available
1 = PiP available

OSD Language Selection


US (GA NTSC) 1x1x = Complicated Chinese
1xx1 = Korean (note: for BX1L, combination of C.Chinese & Korean not available)

GA 1xxx = Simplified Chinese
x1xx = Arabic
xx1x = Thai
xxx1 = Vietnamese

3-3. PICTURE QUALITY ADJUSTMENTS

PMAX/CONTRAST ADJUSTMENT

1. Select Video Mode.
2. Input PAL CB to TV set (others), Input NTSC 75% CB to TV set (NTSC model).
3. Set PICT 003 "PWL" to 00h and WHBL 017 "BLBG" to 01h.
4. Set the following condition:
PICTURE 100%, COLOR 0%, BRIGHTNESS 50%.
5. Connect an oscilloscope to pin ④ (R output) of CN004.
6. Set to Service Mode "PWL" to 00h, "BLBG" to 01h.
7. Select SADJ 000 "PMAX" with [1] and [4] of the commander then adjust VR within spec with [3] and [6].

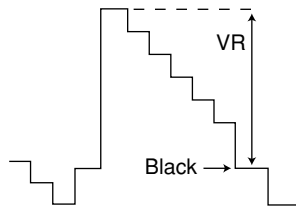


1.23 ± 0.03 Vp-p = for NTSC VM models
1.46 ± 0.03 Vp-p = For 21" without VM models
1.65 ± 0.03 Vp-p = with VM models except NTSC models
1.10 ± 0.03 Vp-p = for 21" NTSC non VM models
1.38 ± 0.03 Vp-p = for 14" Models

8. Then press [MUTING] → [0] to write the data.
9. Set "PWL" and "BLBG" back to initial data respectively.
(PWL: 01h and BLBG: 00h)

SUB COLOR ADJUSTMENT

1. Select Video and set Picture mode.
2. Input PAL 100% CB to TV set (others), Input NTSC 75% CB to TV set (NTSC model).
3. Set PICT 006 "WTS" to 00h, and Intelligent Picture to "OFF".
4. Set the following condition:
PICTURE 100%, COLOR 50%, BRIGHTNESS 50%,
HUE (OTHER, SHP 50%).
5. Connect an oscilloscope to pin ② (B output) of CN004.
6. Select to Service Mode and adjust SADJ 004 "SCOL" with [1] and [4] of commander then adjust to VB2 = VB3 = VB4 with [3] and [6], and write in the data as +10 step with +5 step offset.

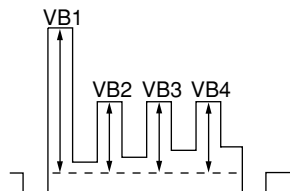


VB2 = VB3 = VB4 (for PAL sub color adjustment)
VB1 = VB4 (for NTSC sub color adjustment)
(Difference is within 70mV)

7. Then press [MUTING] → [0] to write the data.
8. Set "WTS" back to original data, and set Intelligence Picture to "ON".

SUB HUE ADJUSTMENT

1. Select Video.
2. Input NTSC 3.58 Color Bar to TV set.
3. Set the following condition:
PICTURE 100%, COLOR 50%, BRIGHTNESS 50%,
HUE Center, SHP 50%.
4. Connect an oscilloscope to pin ② (B output) of CN004.
5. Set to service and adjust SADJ 001 "SHUE" with [1] and [4] of commander then adjust to VB1=VB2=VB3=VB4 with [3] and [6].
6. Then press [MUTING] → [0] to write the data.
7. Select TV channel with NTSC 3.58 and repeat item 3-6 (Except GA NTSC model)
8. Select TV channel with 3.58 repeat 3-5, +1 step data offset (applied to GA NTSC models)
Then press [MUTING] → [0] to write the data.
9. For single system models with NTSC 4.43 select TV channel with NTSC 4.43 repeat 3→6.

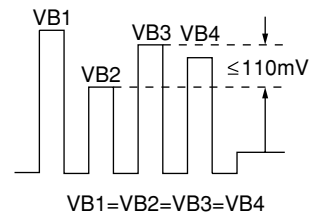

The highest level of VB1, VB2, VB3, VB4 must be aligned at the same time.

The ideal difference between VB2 and VB3 is within ±110mV.

3-4. DEFLECTION ADJUSTMENT

H-TRAPEZOID ADJUSTMENT

1. Receive cross hatch/dotsignal.
2. Adjust on to make H-Trapezoid distortion best.

NORMAL MODE (50Hz)

1. Set to Service Mode.
2. Input SPCB Signal.
3. Using the [1] and [4] button select GEOM (Service Mode).
4. Raise/lower data using the [3] and [6] buttons adjust the following items:-

GEOM :	000	HPOS	Horizontal Shift (HS)
	001	HPAR	Horizontal Parallelogram
	002	HBOW	Horizontal Bow
	003	VLIN	Vertical Linearity
	004	VSCR	Vertical Scroll
	005	HSIZ	EW Width (EW)
	006	EWPW	EW Parabola/Width (PW)
	007	UCOP	EW Upper Corner Parabola
	008	LCOP	EW Lower Corner Parabola
	009	EWTZ	EW Trapezium
	010	VSLP	Vertical Slope (VS)
	011	VSIZ	Vertical Amplitude
	012	SCOR	S-Correction (SC)
	013	VPOS	Vertical Shift (VSH)
	014	VZOM	Vertical Zoom (VZ)
	015	HBL	RGB Blanking Mode
	016	WBF	Timing of Wide Blanking (WBF)
	017	WBR	Timing of Wide Blanking (WBR)
	018	SBL	Service Blanking
	019	COPY	Copy the GEOM data to all 50/60Hz NVM area

- Write into memory by pressing **[MUTING]** then **[0]** on the remote commander.

WIDE MODE (50Hz)

(V-Compression Adjustment)

- Input SPCB signal.
- Adjust condition change to WIDE MODE : ON
- Copy (Item from normal mode 50Hz) all Normal Mode adjusted data.

NORMAL MODE (60Hz)

- Input 525/60Hz signal.
- They can copy 50Hz first.
("COPY" under GEOM is set to **[1]**, then **[MUTE] + [0]**)
- Using the **[1]** and **[4]** button, select category GEOM (Service Mode).
- Raise/lower data using the **[3]** and **[6]** buttons to obtain optimum image.

GEOM :	000	HPOS	Horizontal Shift (HS)
	001	HPAR	Horizontal Parallelogram
	002	HBOW	Horizontal Bow
	003	VLIN	Vertical Linearity
	004	VSCR	Vertical Scroll
	005	HSIZ	EW Width (EW)
	006	EWPW	EW Parabola/Width (PW)
	007	UCOP	EW Upper Corner Parabola
	008	LCOP	EW Lower Corner Parabola
	009	EWTZ	EW Trapezium
	010	VSLP	Vertical Slope (VS)
	011	VSIZ	Vertical Amplitude
	012	SCOR	S-Correction (SC)
	013	VPOS	Vertical Shift (VSH)
	014	VZOM	Vertical Zoom (VZ)
	015	HLB	RGB Blanking Mode
	016	WBF	Timing of Wide Blanking (WBF)
	017	WBR	Timing of Wide Blanking (WBR)
	018	SBL	Service Blanking
	019	COPY	Copy the GEOM data to all 50/60Hz NVM area

WIDE MODE (60Hz)


(V-Compression Adjustment)

- Input mono scope signal/NTSC monoscope signal (for NTSC model)
- Adjust condition change to WIDE MODE : ON
- "COPY" is set to **[1]**, then **[MUTE] + [0]**

3-5. PICTURE DISTORTION ADJUSTMENT


H. CENTER ADJUSTMENT (HPOS)

- Input Monoscope signal/NTSC monoscope signal (for NTSC model).
- Activate the Service Adjustment Mode.
- Select the HPOS item with **[1]** and **[4]**.
- Adjust the value of HPOS with **[3]** and **[6]** for the best vertical center.
- Press **[MUTING]** then **[0]** to save into the memory.

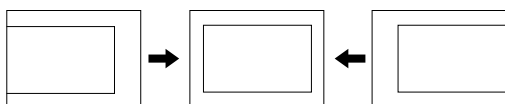


H. SIZE ADJUSTMENT (HSIZ)

- Input Monoscope signal/NTSC monoscope signal (for NTSC model).
- Activate the Service Adjustment Mode.
- Select HSIZ with **[1]** and **[4]**.
- Adjust with **[3]** and **[6]** for the best horizontal size.
- Press **[MUTING]** then **[0]** to save into the memory.

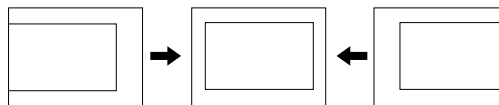


V. SIZE ADJUSTMENT (VSIZ)

- Input Monoscope signal/NTSC monoscope signal (for NTSC model).
- Activate the Service Adjustment Mode.
- Select the VSIZ item with **[1]** and **[4]**.
- Adjust value of VPOS with **[3]** and **[6]** for the best vertical center.
- Press **[MUTING]** then **[0]** to save into the memory.

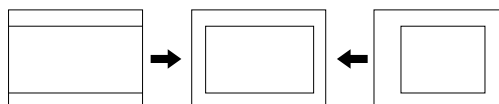

V. CENTER ADJUSTMENT (VPOS)

- Input Monoscope signal/NTSC monoscope signal (for NTSC model).
- Activate the Service Adjustment Mode.
- Select the VPOS item with **[1]** and **[4]**.
- Adjust value of VPOS with **[3]** and **[6]** for the best vertical center.
- Press **[MUTING]** then **[0]** to save into the memory.

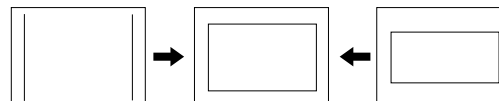


V. LINEARITY (VLIN), V. CORRECTION (SCOR), PIN AMP (EWPW), AND HORIZONTAL TRAPEZOID (EWTZ) ADJUSTMENTS

1. Input Monoscope signal/NTSC monoscope signal (for NTSC model).
2. Activate the Service Adjustment Mode.
3. Select VLIN, SCOR, EWPW, and EWTZ with **[1]** and **[4]**.
4. Adjust with **[3]** and **[6]** for the best horizontal size.
5. Press **[MUTING]** then **[0]** to save into the memory.


VERTICAL LINEARITY (VLIN)




S CORRECTION (SCOR)

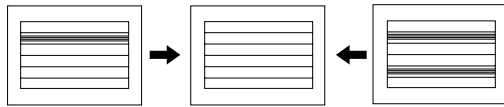

EW PARABOLA/WIDTH (EWPW)

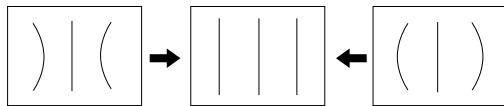

EW TRAPEZIUM (EWTZ)

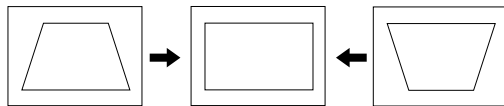


V. ANGLE (HPAR), H. BOW (HBOW), UPPER PIN (UCOP) AND LOW PIN (LCOP) ADJUSTMENTS

1. Input Monoscope signal/NTSC monoscope signal (for NTSC model).
2. Activate the Service Adjustment Mode.
3. Select HPAR, HBOW, UCOP, and LCOP with **[1]** and **[4]**.
4. Adjust with **[3]** and **[6]** for the best picture.
5. Press **[MUTING]** then **[0]** to save into the memory.


HORIZONTAL PARALLELOGRAM (HPAR)




HORIZONTAL BOW (HBOW)

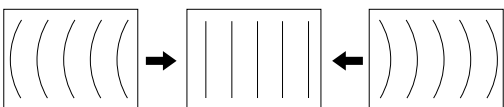

EW UPPER CORNER PARABOLA (UCOP)

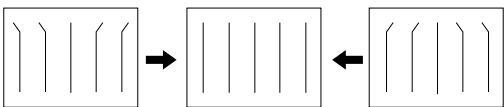


EW LOWER CORNER PARABOLA (LCOP)

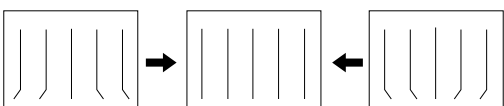


SECTION 4 DIAGRAMS

4-1. BLOCK DIAGRAM

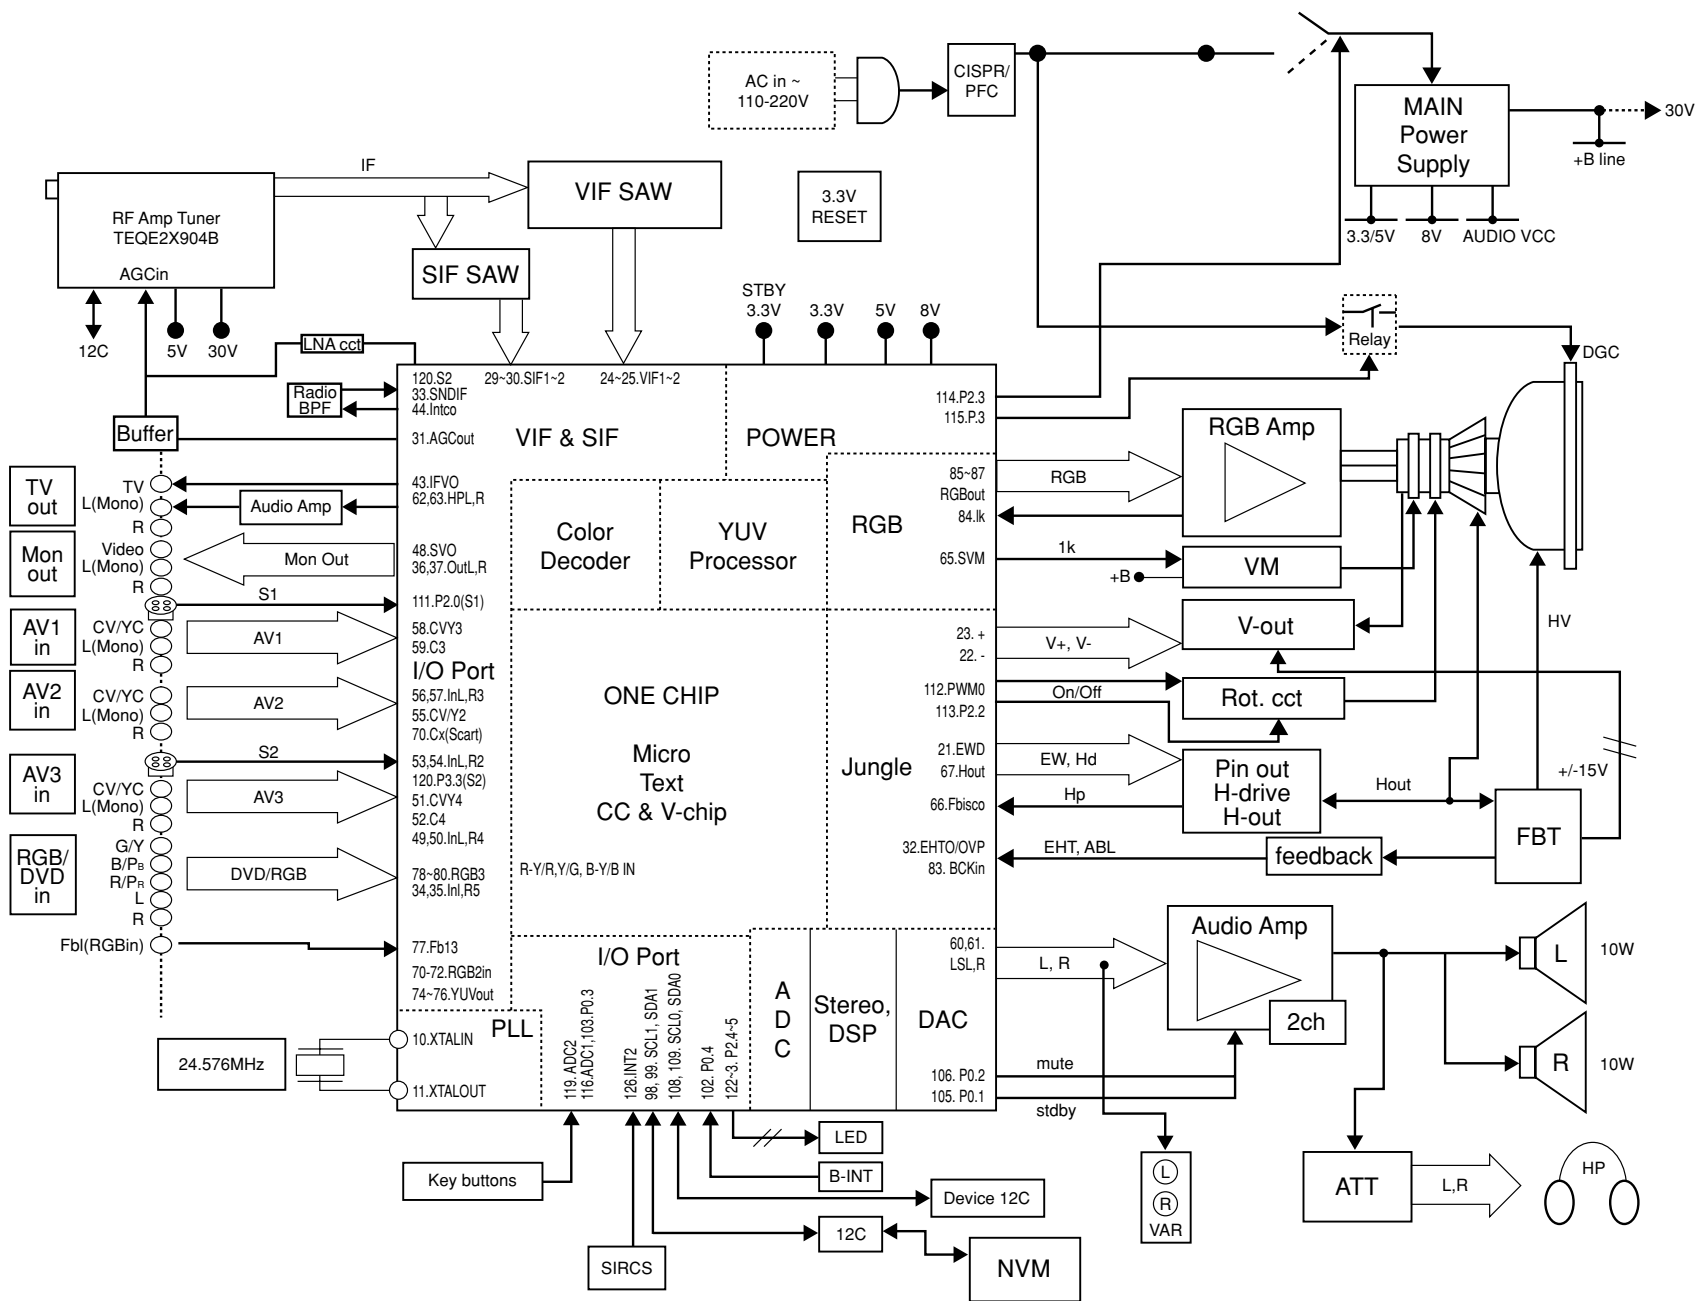

4-2. CIRCUIT BOARDS LOCATION

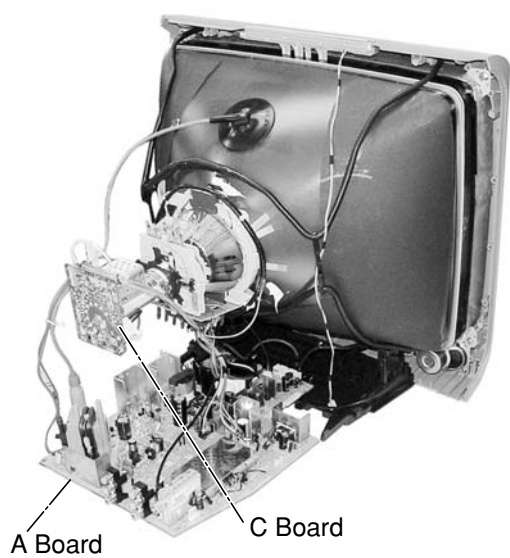








4-3. SCHEMATIC DIAGRAM INFORMATION

Note:

- All capacitors are in μF unless otherwise noted.
- All electrolytic capacitors are rated at 50V unless otherwise noted.
- All resistors are in ohms.
 $\text{k}\Omega = 1000\Omega$, $\text{M}\Omega = 1000\text{k}\Omega$
- Indication of resistance which does not have rating electrical power is as follows.

Pitch: 5 mm
Rating electrical power 1/4W (CHIP: 1/10W)


-  : nonflammable resistor.
-  : fusible resistor.
-  : internal component.
-  : panel designation or adjustment for repair.
- All variable and adjustable resistors have characteristic curve B unless otherwise noted.
- **Readings are taken with a color-bar signal input.**
no mark : Common
() : PAL
[] : NTSC 3.58
- **Readings are taken with a 10 $\text{M}\Omega$ digital multimeter.**
- **Voltage are dc with respect to ground unless otherwise noted.**
- **Voltage variations may be noted due to normal production tolerances.**
- **All voltage are in Volt.**
- * : Cannot be measured.
- **Circled numbers are waveform references.**
-  : B +bus.
-  : B -bus.
-  : signal path.

Note: The reference number which starts with Wxxx (eg: W003) indicates a wire to wire connection.

Note: Components marked as XX are not fitted on this model.


Reference information

RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RS	NONFLAMMABLE METAL OXIDE
	: RB	NONFLAMMABLE CEMENT
COIL	: RW	NONFLAMMABLE WIREWOUND
	: *	ADJUSTMENT RESISTOR
	: LF-8L	MICRO INDUCTOR
	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE
CAPACITOR		


Note: The component identified by shading and mark  are critical for safety. Replace only with part number specified.

Note: "A" board schematic diagram is divided into 7 blocks. Each block is named by its function and block "number". eg: Processor (Block 001)
Joint connection between boards can be identified using the block number followed by the grid's guide.
eg: -<PWR-OFF-MUTE
002 : 4E
Meaning: Block 001 joint "PWR-OFF MUTE" is connected to Block 002 joint "PWR-OFF MUTE" located at grid 4E.

4-3-1. C Board Schematic Diagram

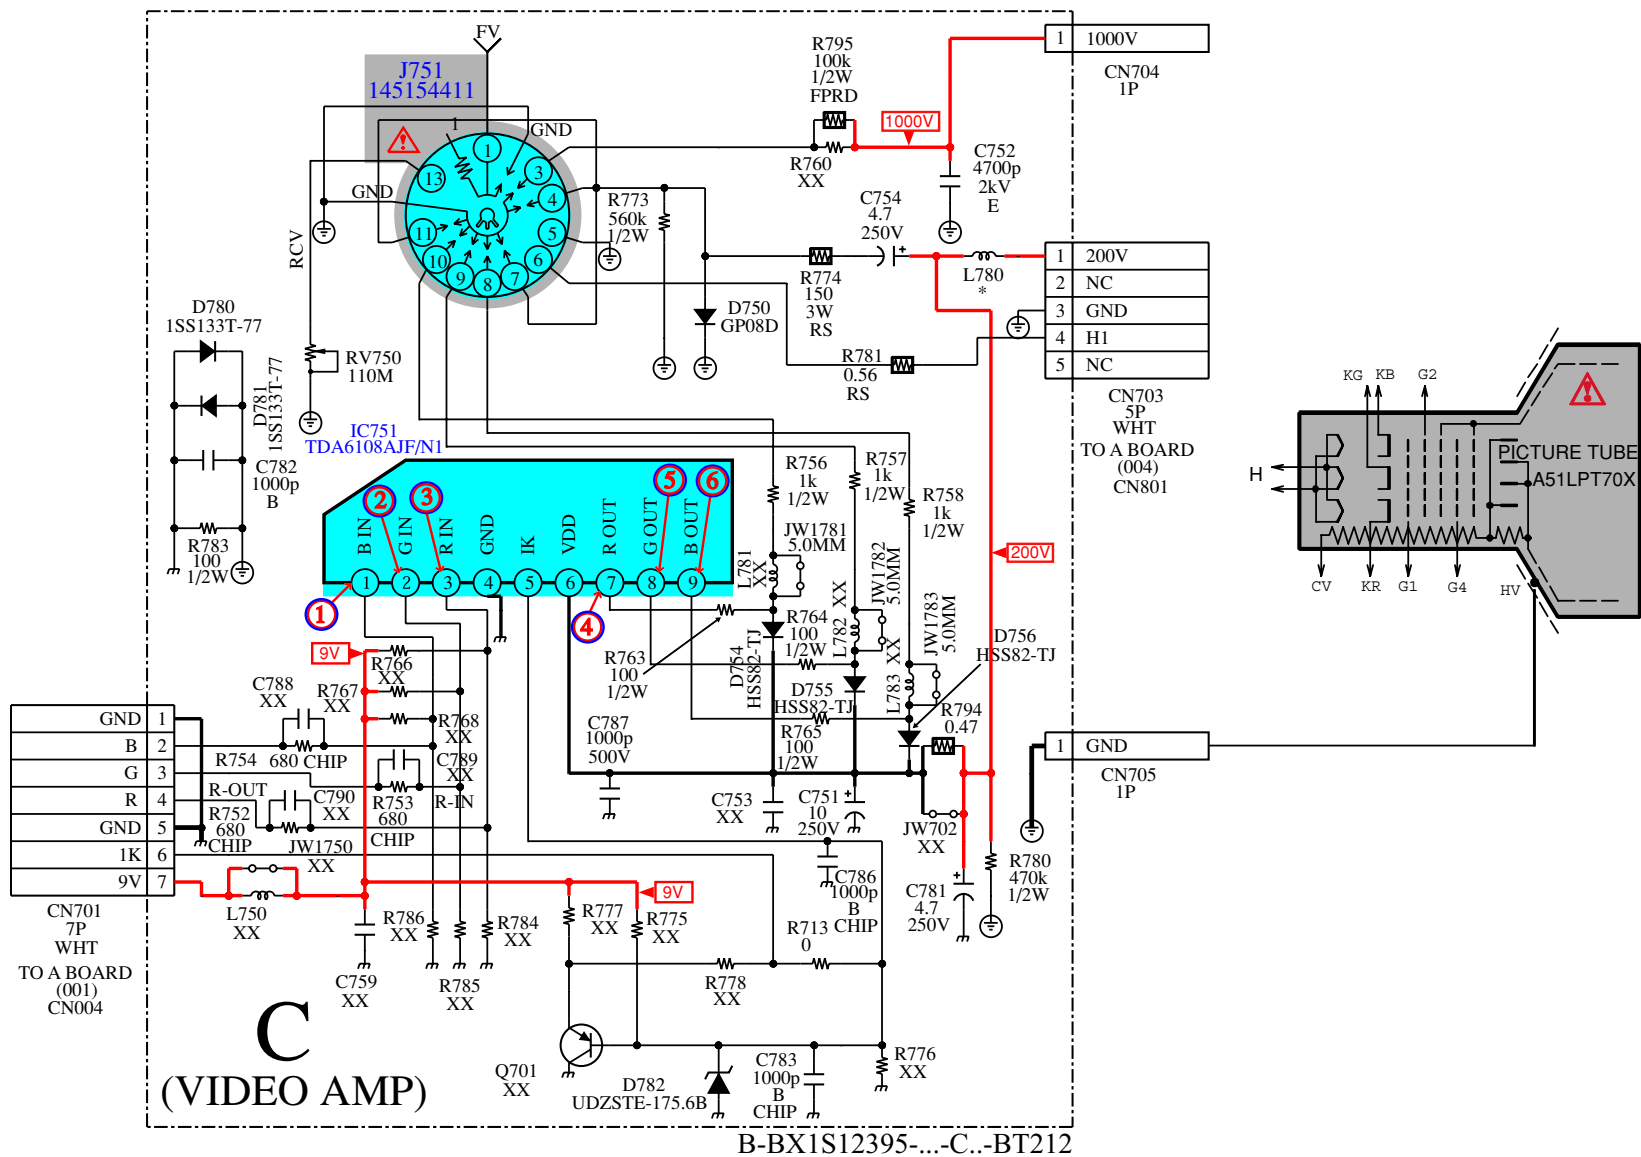

A
(BLOCK 001)
PROCESSOR

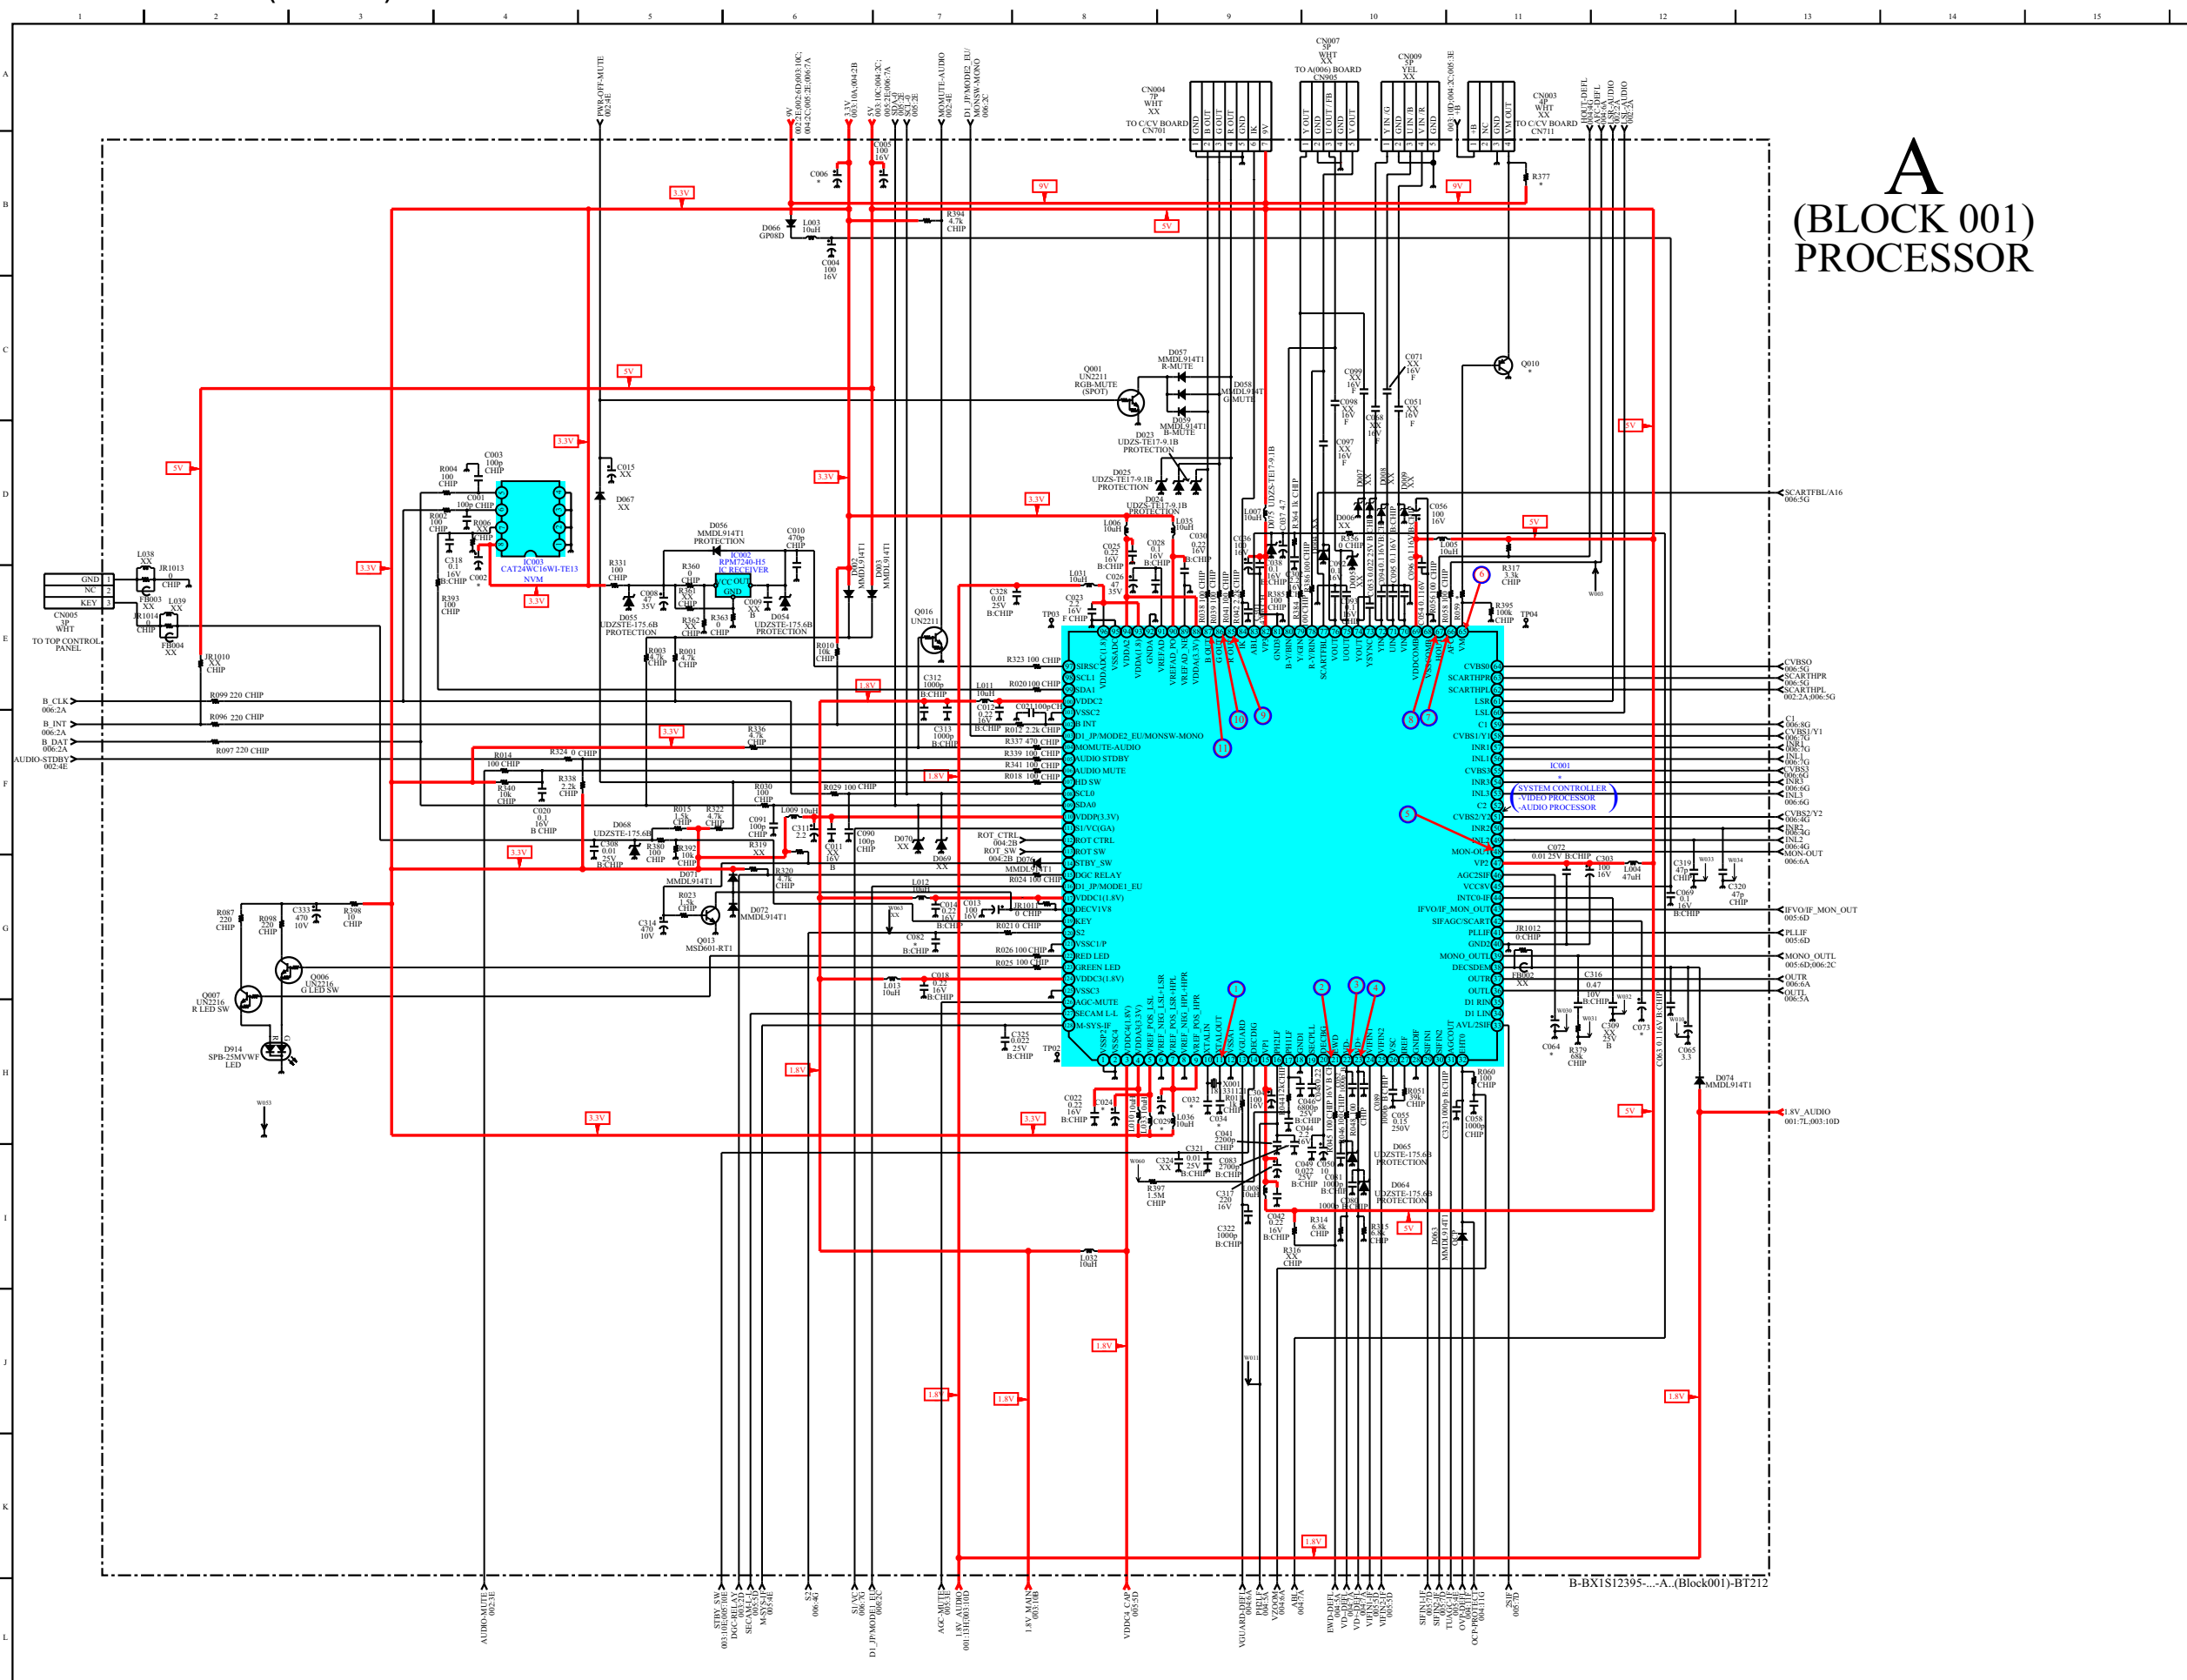


A
BLOCK (002)
AUDIO

001:6A:002:6D:003:10C:004:2C;
005:2E:006:7A

001:6A:002:2E:003:10C:004:2C;
005:2E:006:7A

B-BX1S12395-...-A..(Block002)-BT212


A (BLOCK 003) POWER SUPPLY

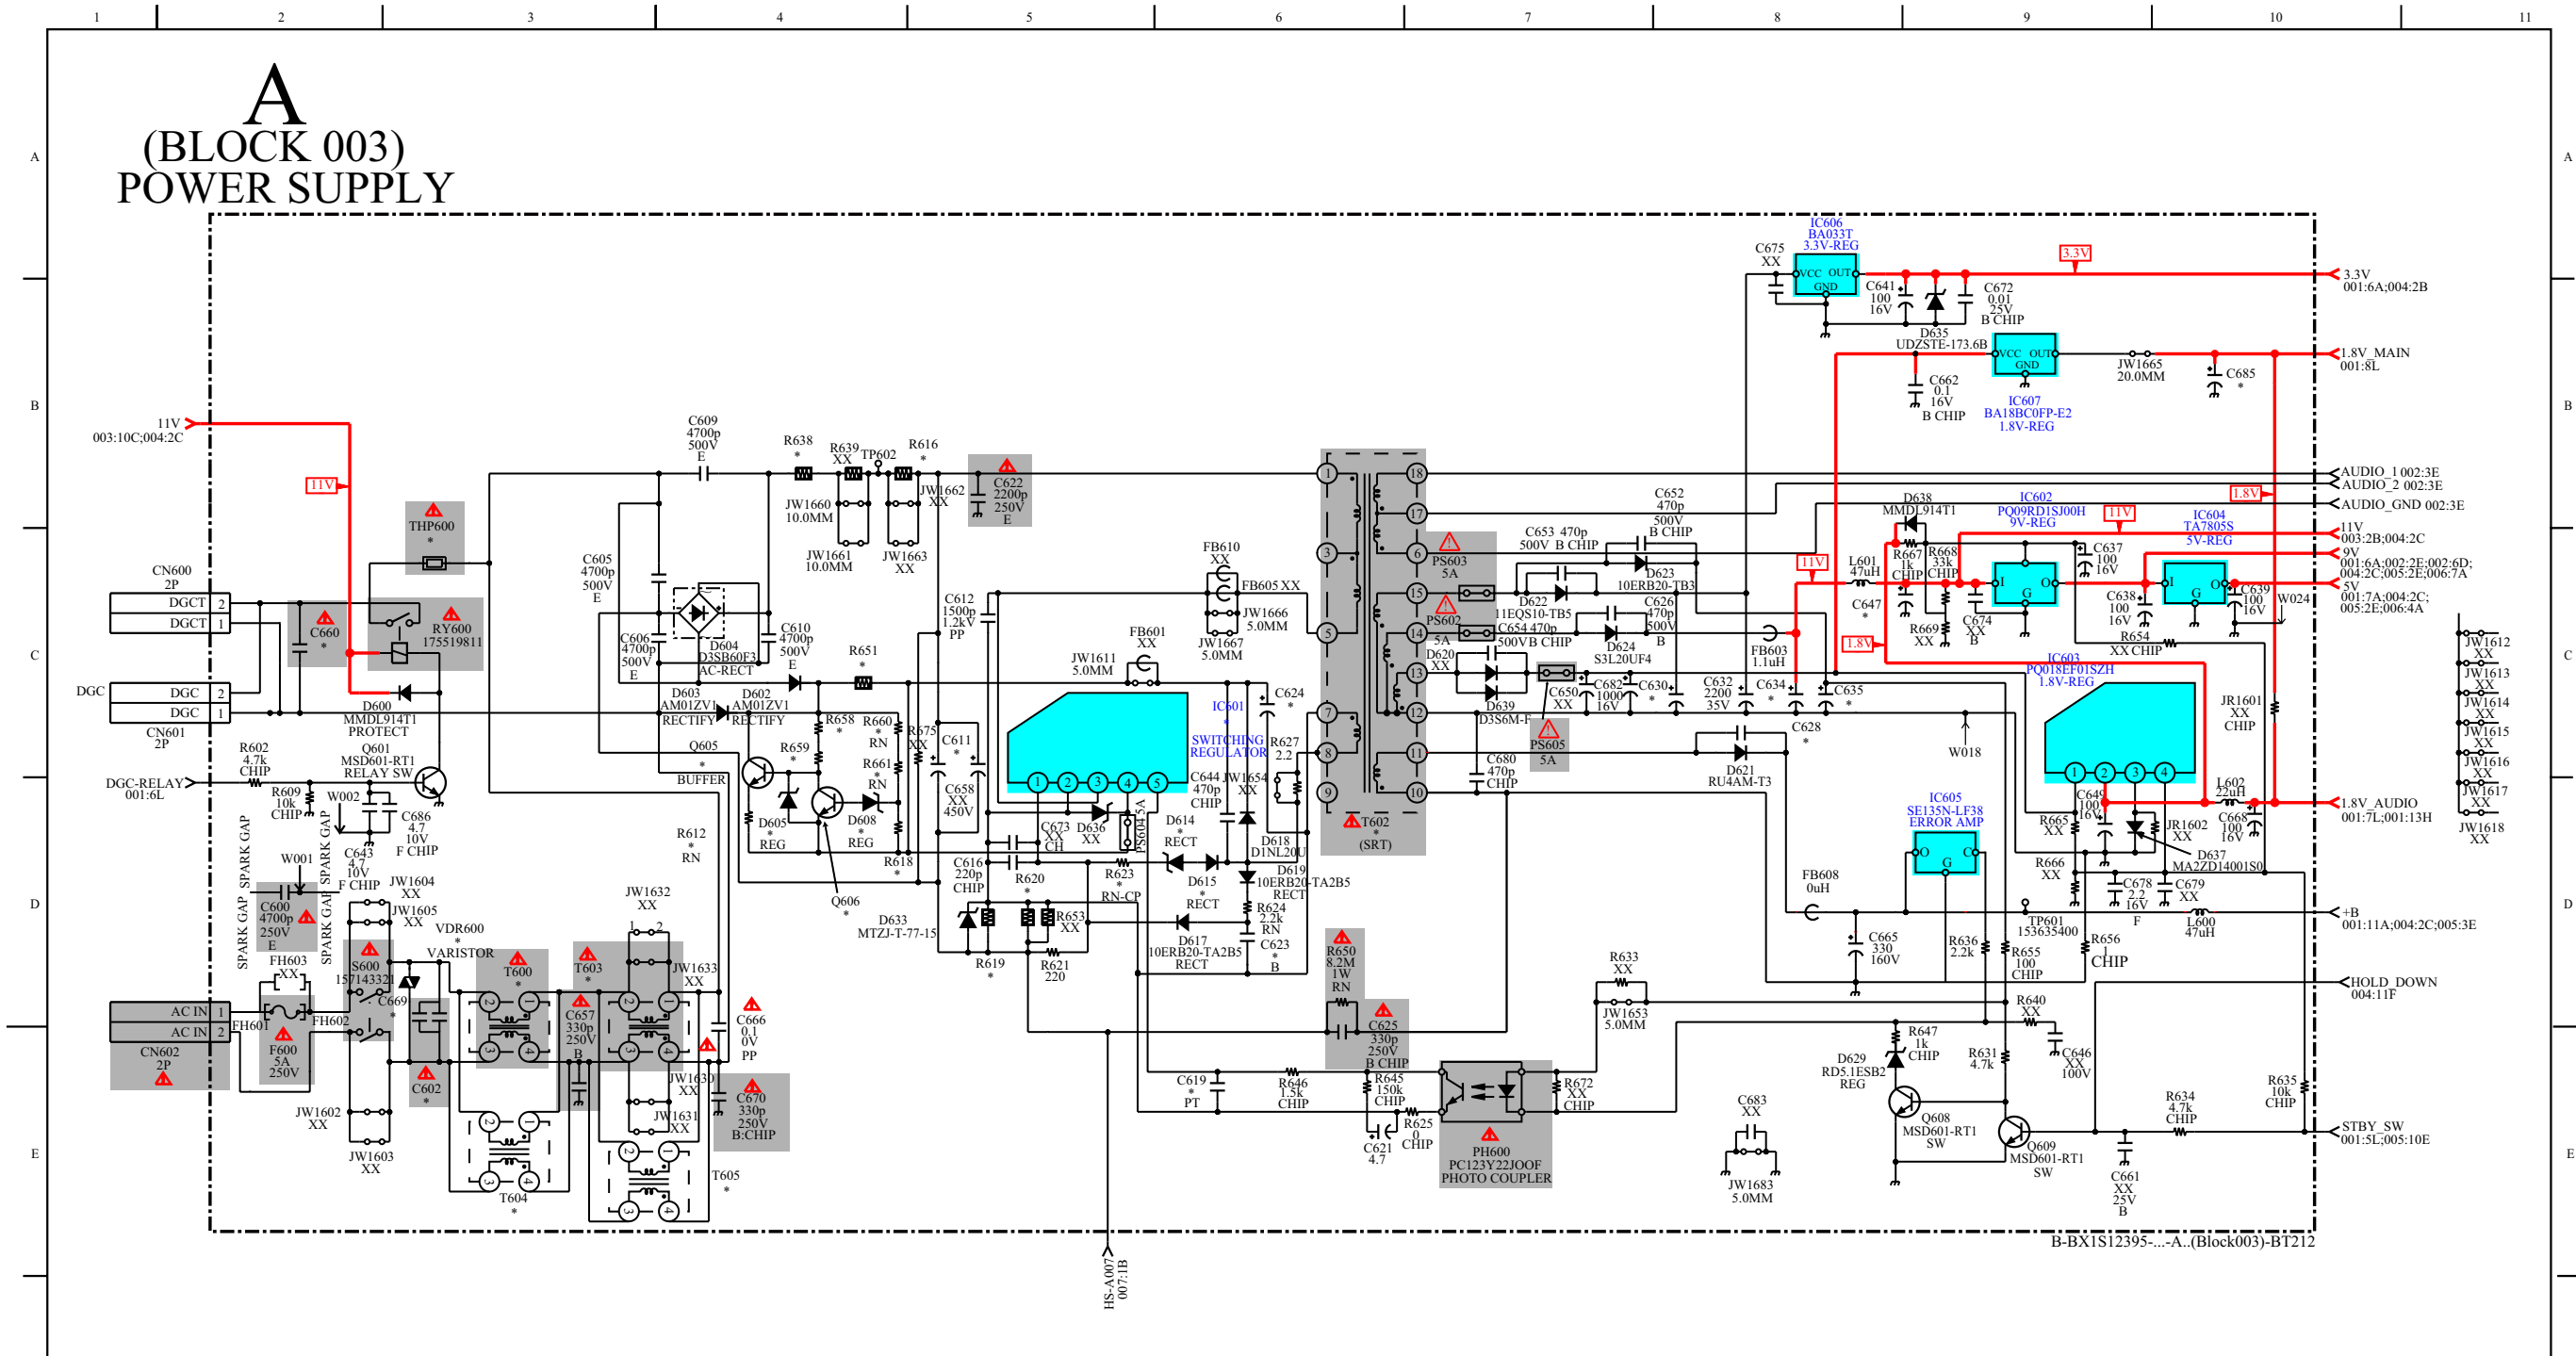


A

(BLOCK 004)

DEFLECTION

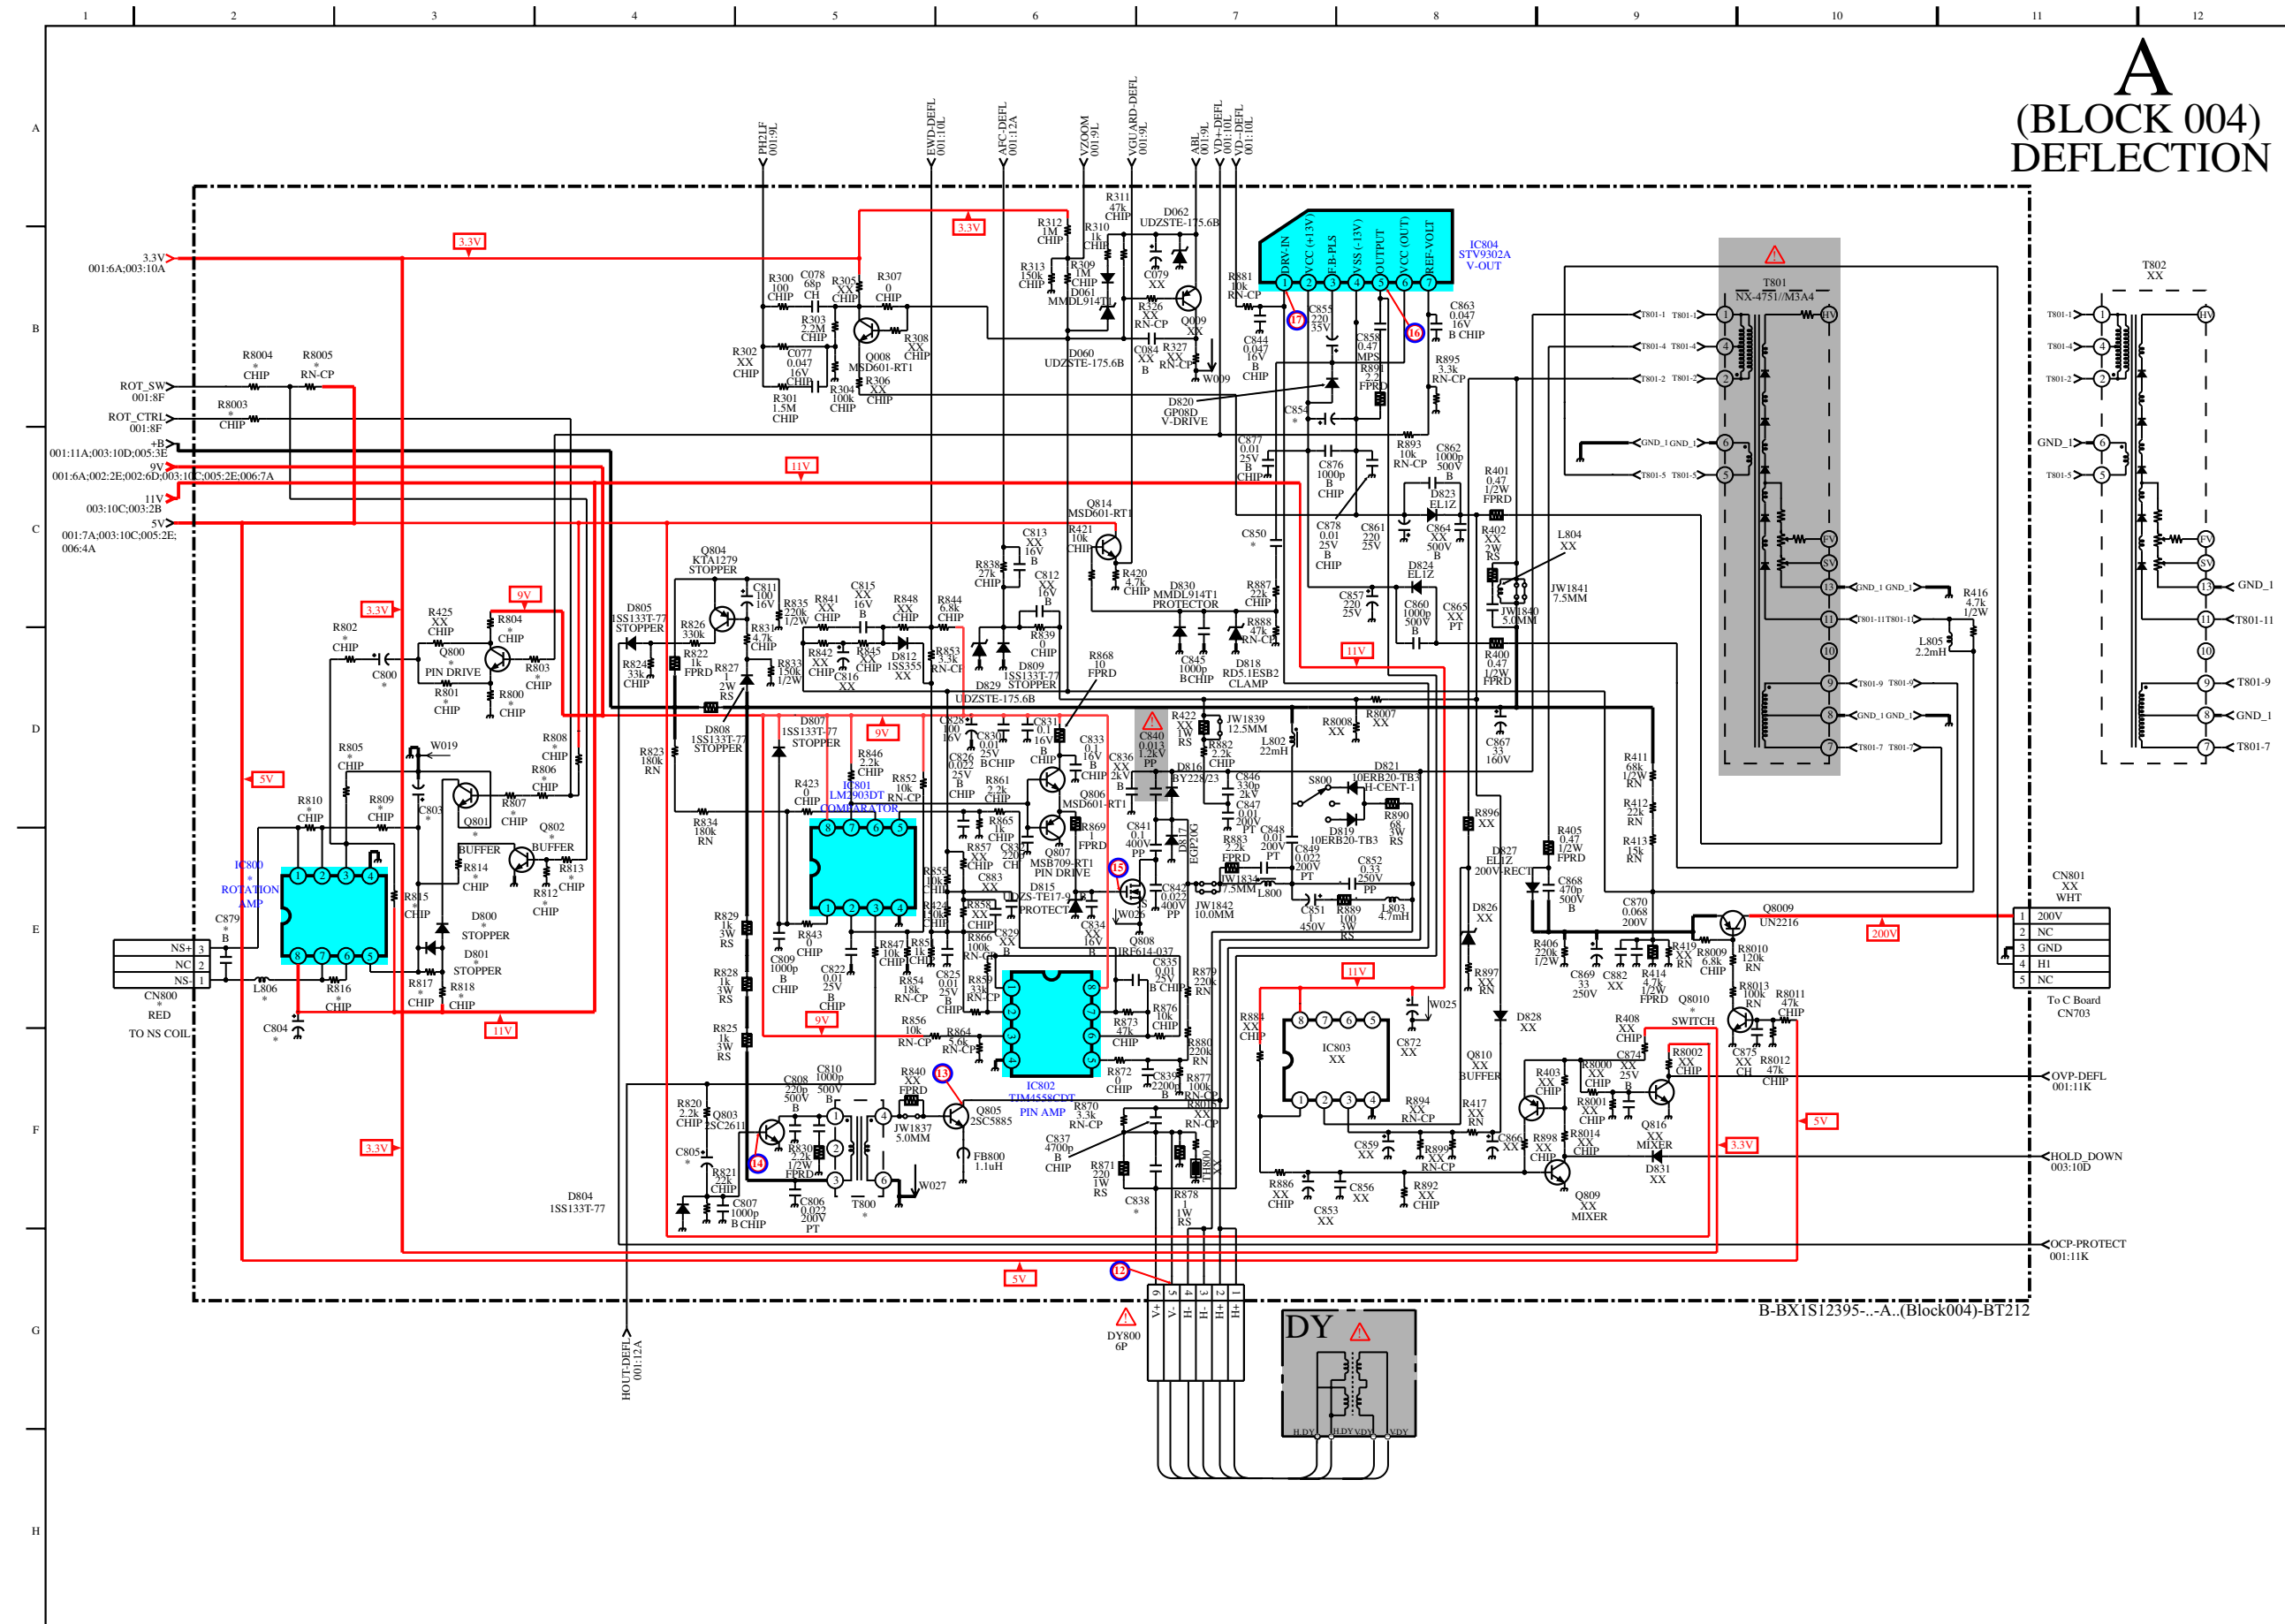


4-3-6. A Board — Tuner (Block 005)

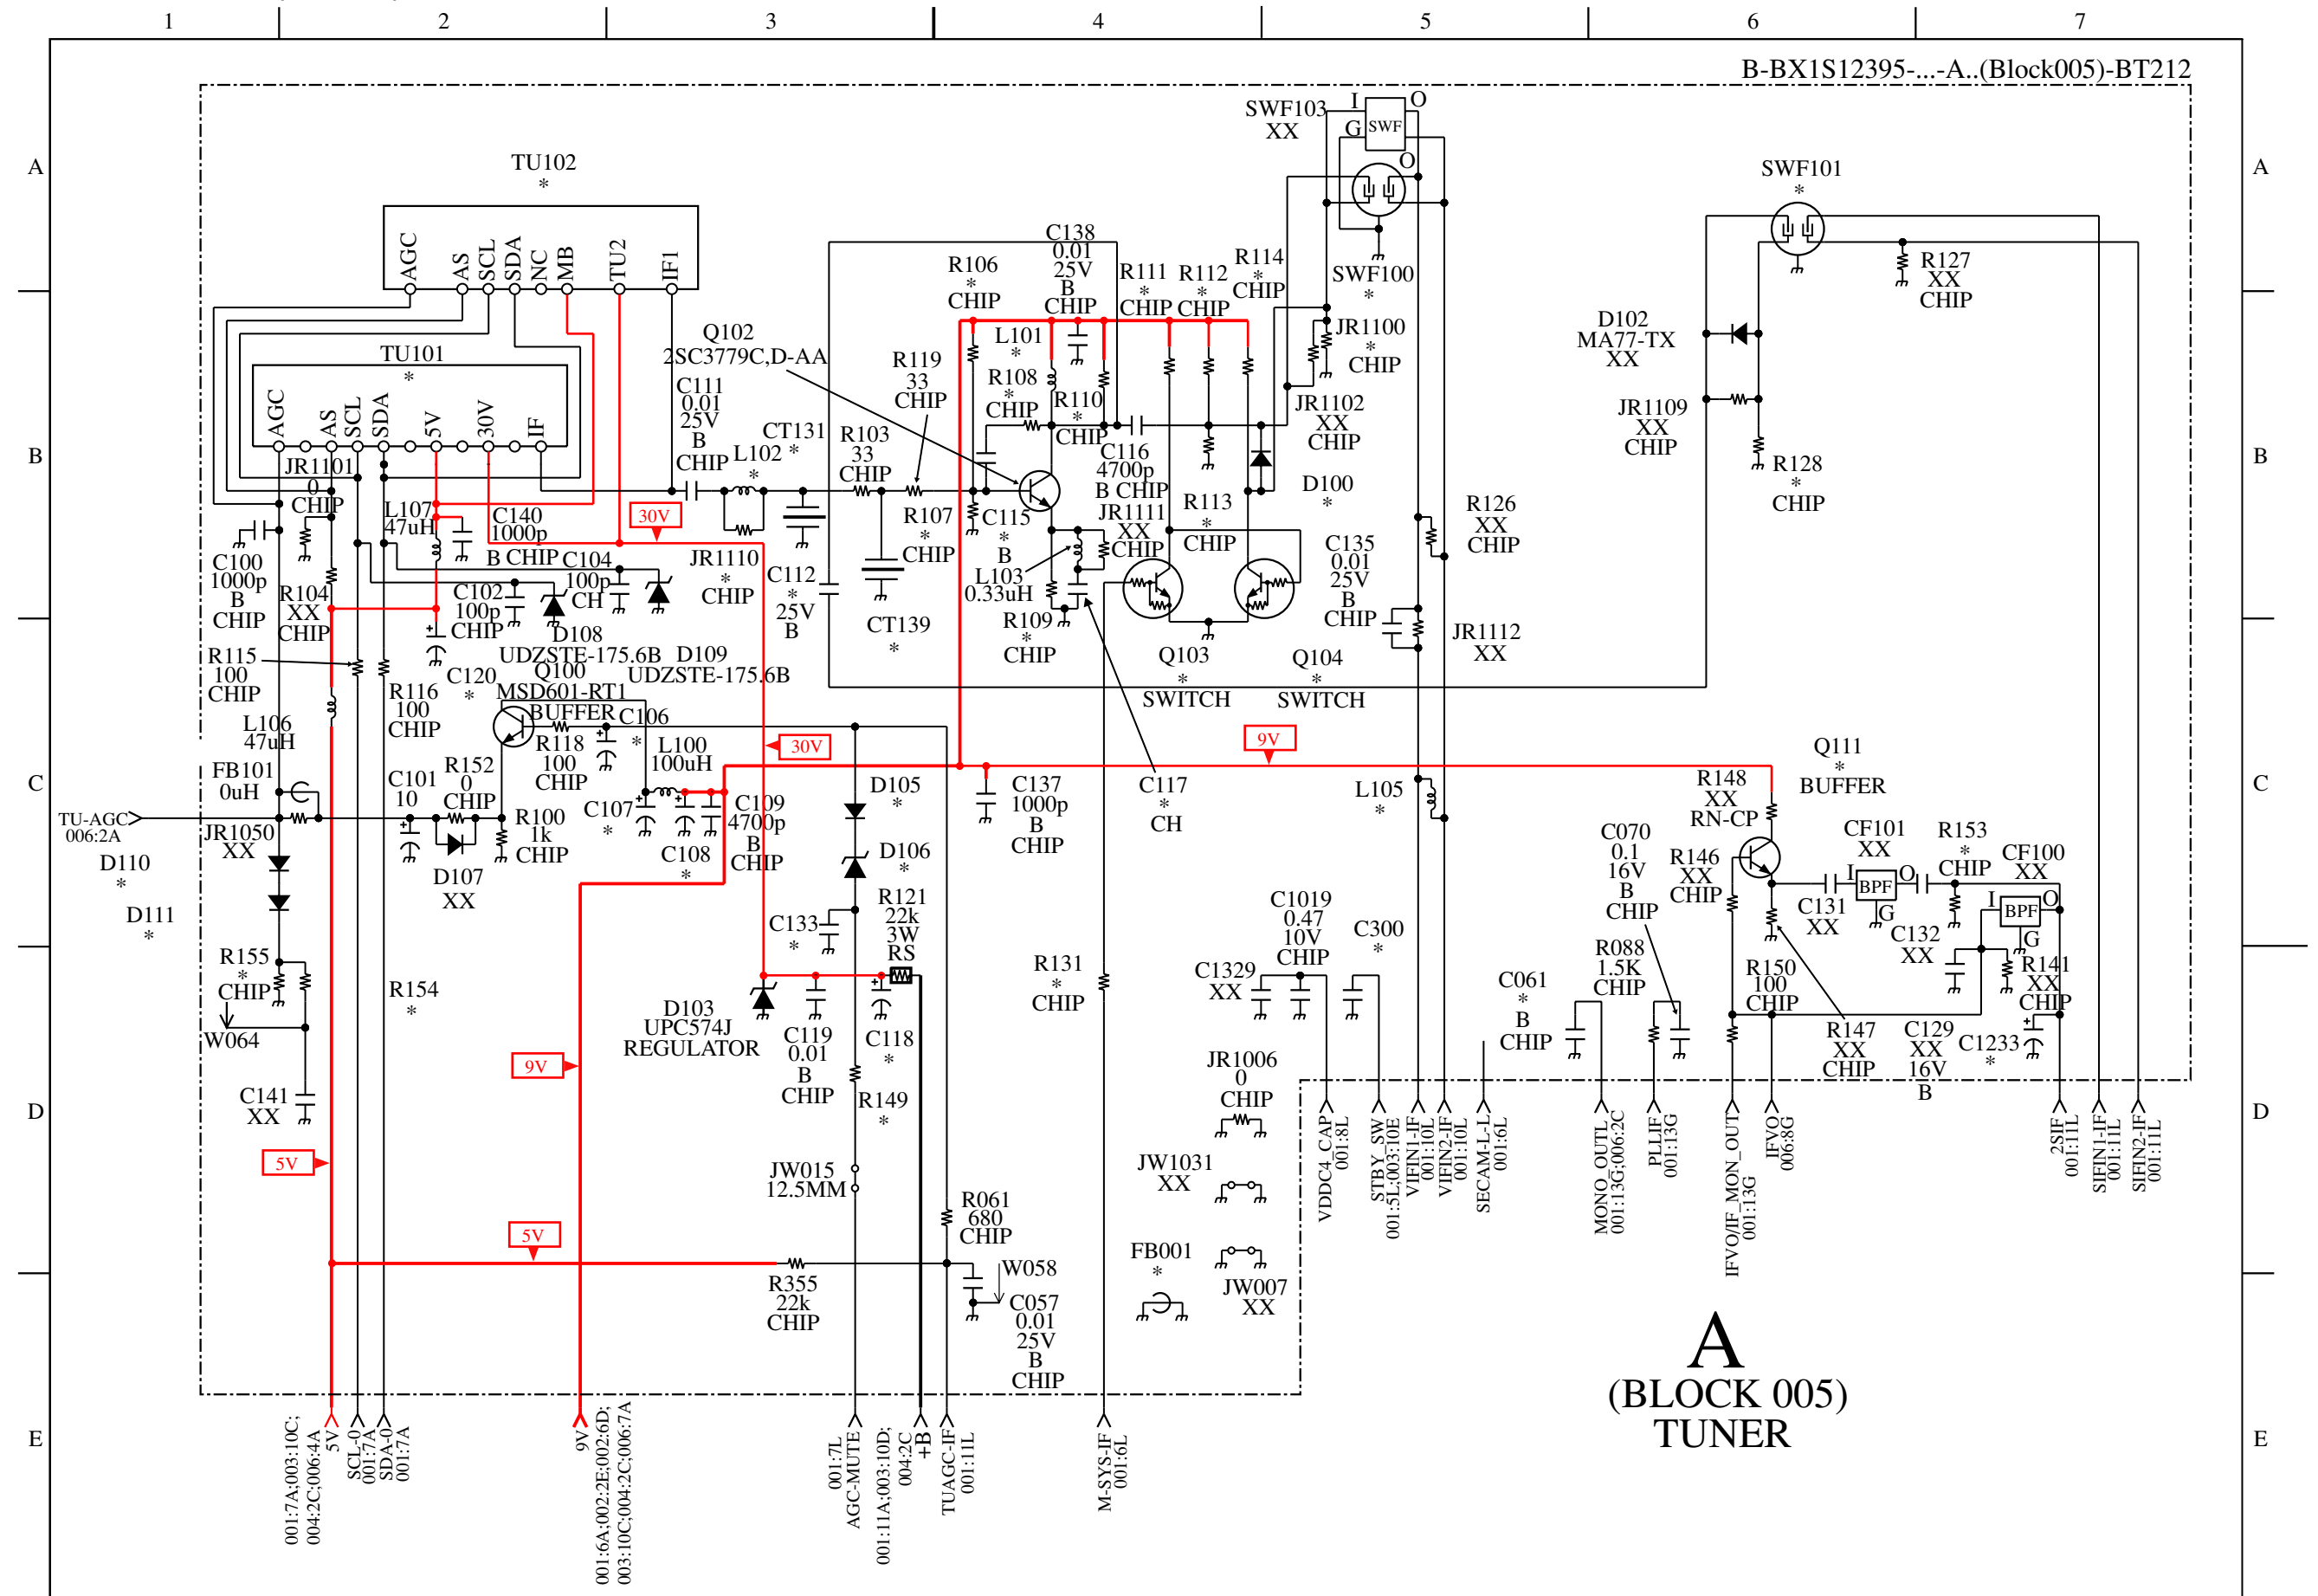

























[illegible]

4-3-8. A Board – Heat Sink (Block 007)




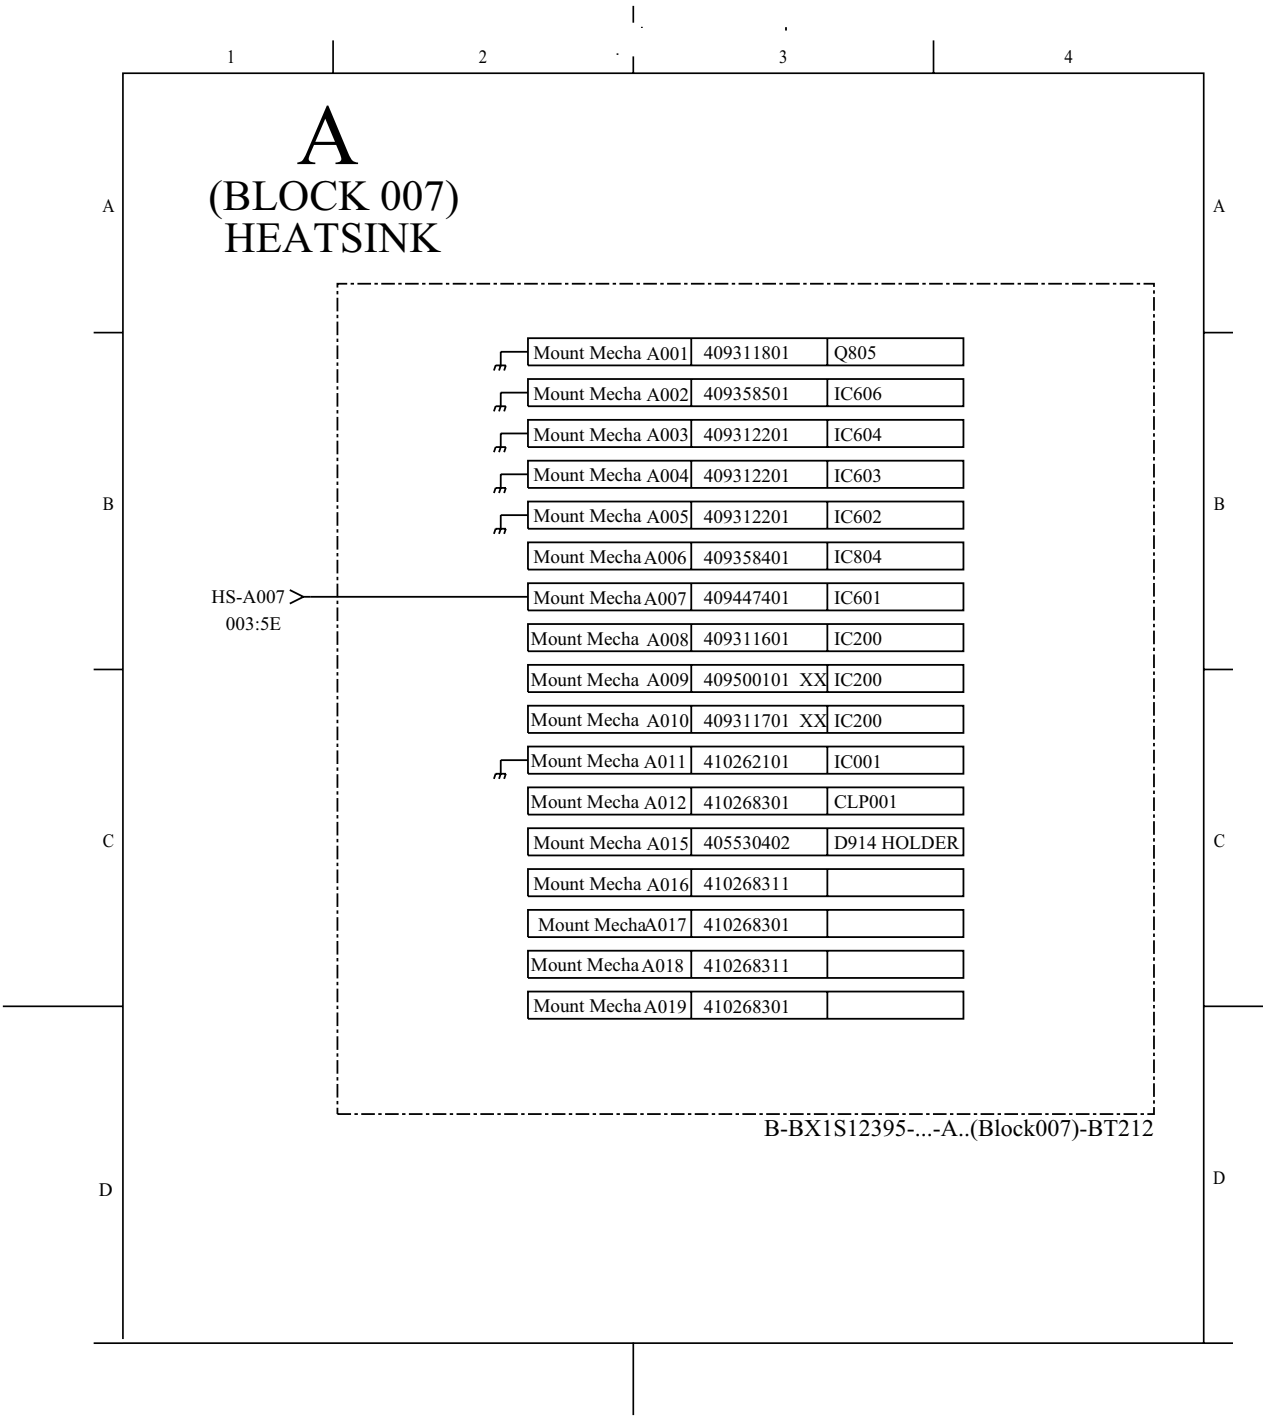


4-4. VOLTAGE MEASUREMENT AND WAVEFORM

A BOARD VOLTAGE LIST AND WAVEFORM

Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]		
IC001	1	0		35	2.2		76	0		
	2	0		36	(2.1)[3.3]		77	(1.3)[4.2]		
	3	1.7		37	3.3		78	1.3		
	4	3.3		38	(2.3)[0]		79	1.3		
	5	3.3		39	2.5		80	1.3		
	6	0		40	0		81	0		
	7	3.3		41	(0)[2.0]		82	(4.2)[5.0]		
	8	0		42	(0)[2.0]		83	2.1		
	9	(3.4)[3.3]		43	(0.4)[1.6]		84	(2.0)[3.1]		
	10	*		44	(1.0)[0]		85	1.6		
	11	*		45	(1.1)[8.4]		<div>⑨ PAL</div> 			
	<div>① PAL</div> 			46	0					
				47	(1.3)[4.2]		<div>⑨ NTSC</div> 			
				48	(1.2)[1.3]					
	<div>① NTSC</div> 			<div>⑤ PAL</div> 			<div>⑨ NTSC</div> 			
	12	(0)[1.7]		<div>⑤ NTSC</div> 			86	(1.2)[1.3]		
	13	(1.3)[2.5]					<div>⑩</div> 			
	14	(2.5)[5.0]		49	(1.2)[2.2]					
	15	(4.2)[2.0]		50	(1.2)[2.2]		<div>⑩</div> 			
	16	2.0		51	(1.2)[1.3]					
	17	2.3		52	0		87	2.0		
	18	(0)[1.9]		53	1.5		<div>⑪ PAL</div> 			
	19	2.3		54	2.0					
	20	2.3		55	1.4		<div>⑪ NTSC</div> 			
	21	(3.4)[4.0]		56	(0)[2.2]					
	<div>② PAL</div> 			57	2.1		<div>⑪ NTSC</div> 			
				58	2.1					
	<div>② NTSC</div> 			59	1.5		<div>⑪ NTSC</div> 			
				60	(7.4)[6.4]					
	22	1.6		61	(7.5)[6.4]		<div>⑪ NTSC</div> 			
	<div>③</div> 			62	3.3					
				63	3.3		<div>⑪ NTSC</div> 			
	23	2.0		64	(1.4)[1.3]					
	<div>④</div> 			65	(3.3)[3.4]		<div>⑪ NTSC</div> 			
				<div>⑥ NTSC</div> 						
	24	(2.0)[1.1]		88	3.3					
	25	2.0		<div>⑦</div> 			89	0		
	26	2.4					90	3.3		
	27	2.0		66	0.4		91	1.6		
	28	(0.5)[0]		<div>⑦</div> 			92	0		
	29	(2.0)[0.2]					93	1.7		
	30	0.2		67	(0.4)[1.4]		94	3.3		
	31	3.0		<div>⑧</div> 			95	0		
	32	0.4					96	(0.6)[1.7]		
	33	(1.1)[0]		68	0		97	3.1		
	34	2.2		69	5.0		98	(0.7)[0.4]		
				70	(1.2)[1.3]		99	(3.3)[0.3]		
				71	(0)[1.3]		100	(1.4)[1.7]		
				72	1.3		101	0		
				73	2.0		102	3.3		
				74	1.7		103	0.2		
				75	1.2		104	(2.3)[2.4]		
							105	2.7		
							106	(0.7)[0.2]		
							107	3.3		
							108	(3.1)[4.2]		
							109	4.0		
							110	3.3		
							111	4.2		
							112	0.6		
							113	(0.5)[0.2]		
							114	0.4		
							115	0.3		
							116	(0.6)[0.3]		
							117	2.0		

A BOARD VOLTAGE LIST AND WAVEFORM

Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]
	118	0	IC802	1	3.5	Q016	B	0
	119	(0.1)[0.4]		2	3.2		C	0
	120	4.1		3	3.2		E	0
	121	0		4	0	Q100	B	3.01
	122	0		5	4.0		C	9.0
	123	3.3		6	4.0		E	(2.0)[2.2]
	124	1.7		7	(0.5)[4.0]	Q101	B	0
	125	0		8	9.1		C	9.0
	126	3.3	IC803	1	0		E	0.5
	127	(0.5)[3.1]		2	0	Q102	B	3.06
	128	(0)[3.2]		3	0		C	(2.3)[2.1]
IC002	VCC	3.3		4	0		E	9.0
	OUT	3.1		5	0	Q103	B	3.3
	GRN	0		6	0		C	(3.2)[0.1]
IC003	1	0		7	0		E	0
	2	0		8	0	Q104	B	(1.3)[0.1]
	3	0	IC804	1	0.4		C	0
	4	0		(17) PAL		Q105	B	(9.0)[2.0]
	5	4.0		664.0mVp-p			C	(0.4)[1.7]
	6	4.2		(17) NTSC			E	0
	7	0		744.0mVp-p		Q106	B	*
	8	3.3					C	*
IC200	1	2.0					E	*
	2	(1.3)[1.5]		2	13.6	Q111	B	(0.5)[-1.8]
	3	2.0		3	-12.0		C	(0.7)[-1.7]
	4	0.0		4	-13.0		E	(0.9)[-3.3]
	5	0.0		5	(0.2)[-14.1]	Q200	B	1.9
	6	(0.5)[1.6]					C	0.6
	7	10.1		(16)			E	0
	8	0.7		51.2Vp-p		Q201	B	20.2
	9	0					C	20.6
	10	21.0		6	14.01		E	20.6
	11	10.5		7	0.4	Q202	B	9.0
	12	*					C	0.1
IC601	1	0.5					E	8.9
	2	0.5				Q204	B	0
	3	(294)[284]					C	(0)[9.0]
	4	(3.2)[20.7]					E	0
	5	1.0				Q205	B	1.4
IC602	I	10.3					C	*
	G	9.1					E	1.4
	O	0				Q601	B	0.4
IC603	I	3.3	PH600	1	24.0		C	10.3
	G	0		2	22.5		E	0
	O	1.7		3	0.4	Q605	B	24.1
IC604	I	9.1		4	2.9		C	(20.0)[199.0]
	G	0	Q001	B	0		E	24.0
	O	5.0		C	(3.4)[1.7]	Q606	B	*
IC605	1	134		E	0		C	24.1
	2	21.2	Q006	B	3.3		E	21.0
	3	0		C	(1.0)[2.0]	Q608	B	0.2
IC606	I	2.4		E	2.0		C	20.2
	G	0	Q007	B	0		E	0
	O	3.3		C	3.3	Q609	B	0.7
IC607	1	3.3		E	0.2		C	0.3
	2	0	Q008	B	(-1.6)[-1.7]		E	0
	3	(3.3)[0]		C	-0.3	Q800	B	(1.7)[0.3]
	4	1.7		E	1.7		C	(8.2)[9.0]
	5	(1.3)[0.2]	Q009	B	(1.3)[*]		E	1.1
IC800	1	5.7		C	(1.4)[*]	Q801	B	0.5
	2	5.0		E	2.1		C	1.4
	3	5.0	Q010	B	3.4		E	0
	4	0		C	0	Q802	B	0.3
	5	4.6		E	4.1		C	4.2
	6	4.6	Q012	B	0.6		E	0
	7	4.6		C	(0.2)[0.13]	Q803	B	(-0.4)[-4.0]
	8	10.3		E	0		C	5.4
IC801	1	2.3	Q013	B	0.5		(14)	
	2	0.8		C	1.7		164.0Vp-p	
	3	1.5		E	0.1			
	4	0	Q014	B	0		E	-0.5
	5	2.7		C	0			
	6	2.3		E	0			
	7	6.0						
	8	9.0						

A BOARD VOLTAGE LIST AND WAVEFORM

Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]
Q804	B C E	134 0 134	Q810	B C E	(2.0)[0.6] (2.0)[0.5] (1.7)[1.9]	Q907	B C E	0 0 0
Q805	B	-9.2	Q814	B C E	0.7 5.0 2.0	Q908	B C E	0 0 0
Q805	<div> <div>13</div> <div>334.0Vp-p</div> </div>		Q816	B C E	* (-6.0)[-2.5] 0	Q909	B C E	0 0 0
	C E	134 0.1	Q900	B C E	1.3 (0)[1.2] (0)[2.1]	Q910	B C E	2.26 (4.3)[5.1] 1.7
Q806	B C E	6.0 9.0 6.0	Q901	B C E	-0.5 (-4.2)[1.5] 0	Q911	B C E	5.1 (9.0)[4.9] 4.5
Q807	B C E	6.0 0 (5.0)[6.1]	Q902	B C E	0 -1.7 0	Q912	B C E	0.1 0.5 0
Q808	S	0	Q903	B C E	0 0 0	Q8009	B C E	196 199 197
Q808	<div> <div>15</div> <div>9.20Vp-p</div> </div>		Q904	B C E	0 0 0	Q8010	B C E	0.5 0.9 0.3
	G D	6.0 (13.2)[14.4]	Q905	B C E	0 0 0	DY800	<div> <div>12</div> <div>2.0Vp-p</div> </div>	
Q809	B C E	* * *	Q906	B C E	0 0 0			

C BOARD VOLTAGE LIST AND WAVEFORM


Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]	Ref	Pin No.	Voltage[v]
IC751	1	1.8		4	0		9	(138)[136]
IC751	<div> <div>1</div> <div>PAL</div> <div>1.88Vp-p</div> </div>			5	5.1		<div> <div>6</div> <div>PAL</div> <div>126.0Vp-p</div> </div>	
	<div> <div>1</div> <div>NTSC</div> <div>2.0Vp-p</div> </div>			6	(196)[195] (137)[133]		<div> <div>6</div> <div>NTSC</div> <div>142.0Vp-p</div> </div>	
IC751	2	1.7		<div> <div>4</div> <div>PAL</div> <div>138.0Vp-p</div> </div>		Q701	B C E	(5.0)[6.0] 0 1.2
	<div> <div>2</div> <div>1.55Vp-p</div> </div>			<div> <div>4</div> <div>NTSC</div> <div>152.0Vp-p</div> </div>		J751	G1-1 G1-2 G1-3 G2 H1 H2 KB KG KR	0.6 0.6 0 (288)[285] 0 0 (138)[137] 151.3 (137)[133]
IC751	3	1.8		8	152			
	<div> <div>3</div> <div>2.0Vp-p</div> </div>			<div> <div>5</div> <div>PAL</div> <div>106.0Vp-p</div> </div>				
				<div> <div>5</div> <div>NTSC</div> <div>94.0Vp-p</div> </div>				

4-5. PRINTED WIRING BOARDS

PRINTED WIRING BOARDS

A [Processor, Audio, Power Supply, Deflection, Tuner, Jack]


— A Board —

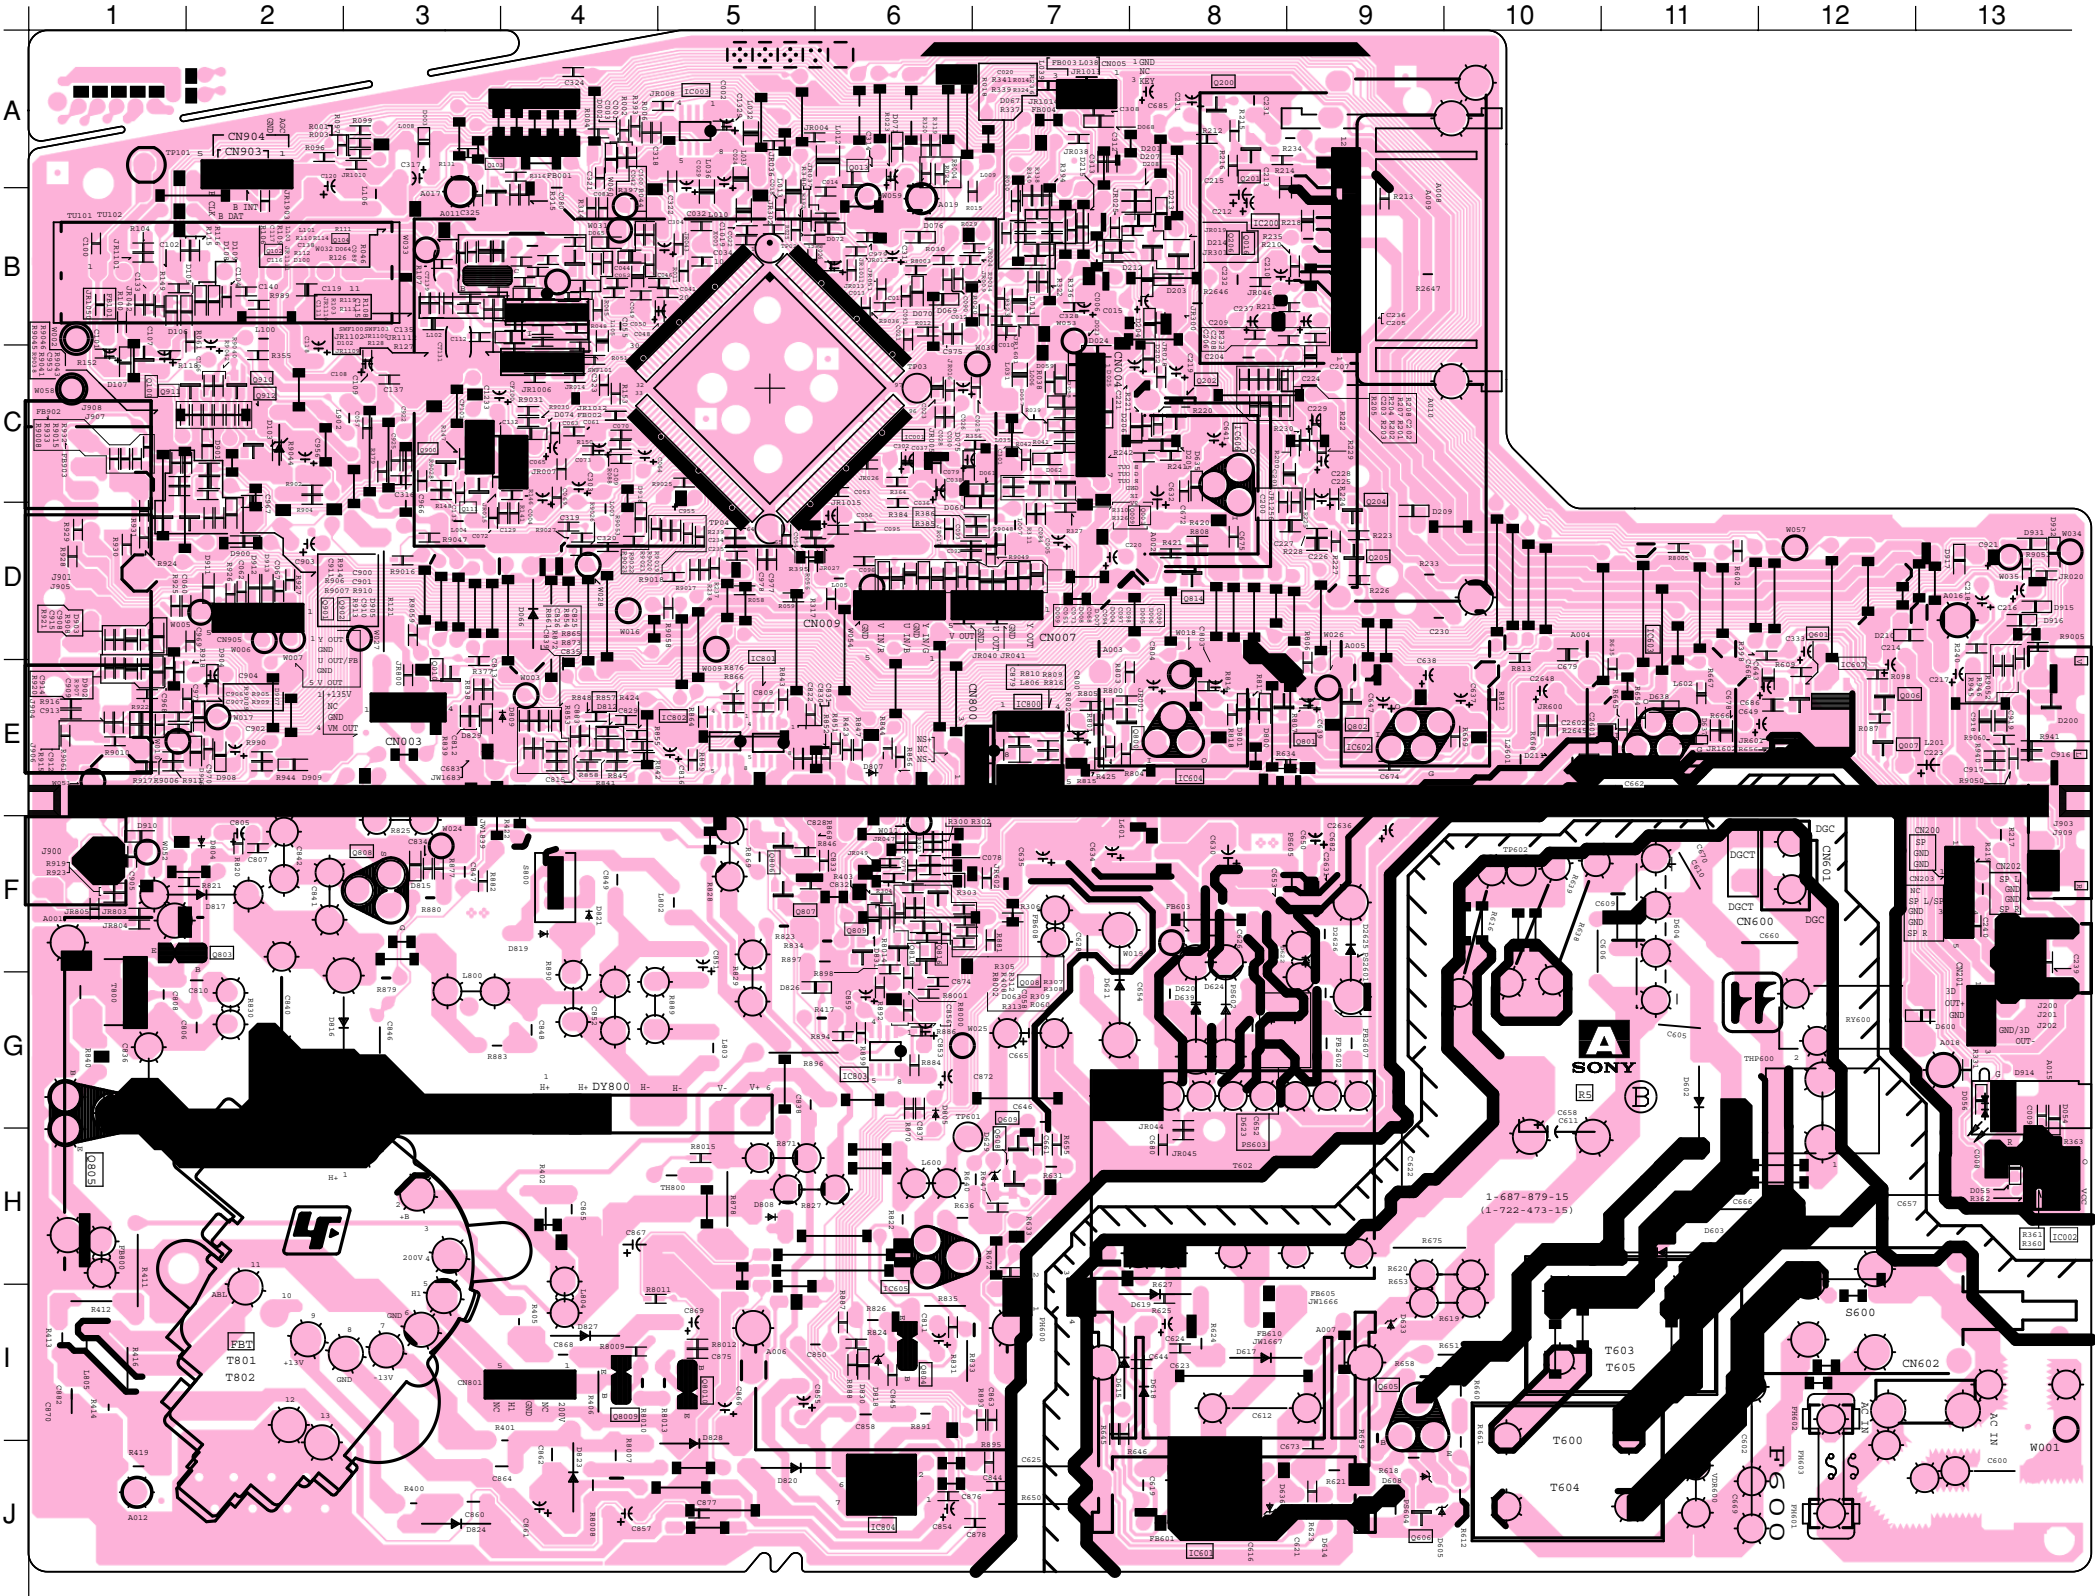

PRINTED WIRING BOARDS







C [VIDEO AMP]

– C Board –






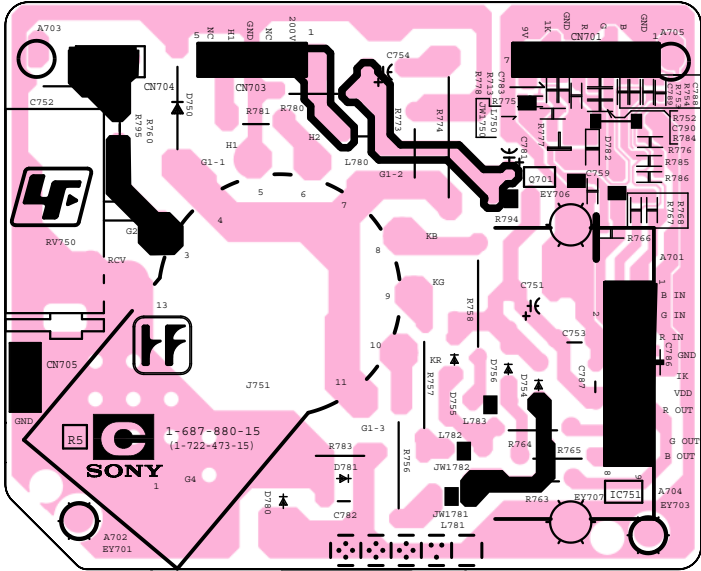


4-6. SEMICONDUCTORS







DIODE

					
BY228/A23	SPB-25MVWF	D3SB60F3	HSS82-TJ MTZJ-T-77-15 RD5.1ESB2 UPC574J 1SS133T-77	AM01AV1 D1NL20U D3S6M-F EGP20G EL1Z GP08D RU4AM-T3 S3L20UF4 10ERB20-TB3 10ERB20-TA2B5 11EQS10-TB5	MMDL914T1 RD3.3SB






TRANSISTOR

					
MA2ZD14001S0 MA77 UDZSTE-175.6B UDZSTE-179.1B UDZSTE-173.6B	1PS226-115	MSB709-RT1 MSD601-RT1 UN2211 UN2216	2SC3209LK	IRF614-037	FN155






IC

					
2SC3779C-DAA	2SC5885	2SC2611	KTA1279	STV9302A	BA033T

SOP

				
CAT24WC16J1-TE13 LM2903DT TJM4558CDT	SE135N-LF38	AN5276T	TA7805S	PQ018EF01SZH PQ09RD1SJ00H BA18BC0FP-E2

IC

	 TOP VIEW			 DIP TOP VIEW Dual In-line Package Pin 6~98
RPM7240-SH5	TDA12067H/N1B0B0PX TDA12067H/N1B0B0CL TDA11010H/N1B000QL	TDA6108AJF/N1	STR-F6264S-LF1357 STR-F6267S-LF1357	NJM4556AD

SECTION 5 EXPLODED VIEWS


NOTE:

- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

The components identified by shading and mark \triangle are critical for safety.
Replace only with part number specified.

5-1. CHASSIS

- : 7-685-648-79 SCREW +BVTP 3 × 12 TYPE2 IT-3
- : 7-685-663-71 SCREW +BVTP 4 × 16 TYPE2 IT-3

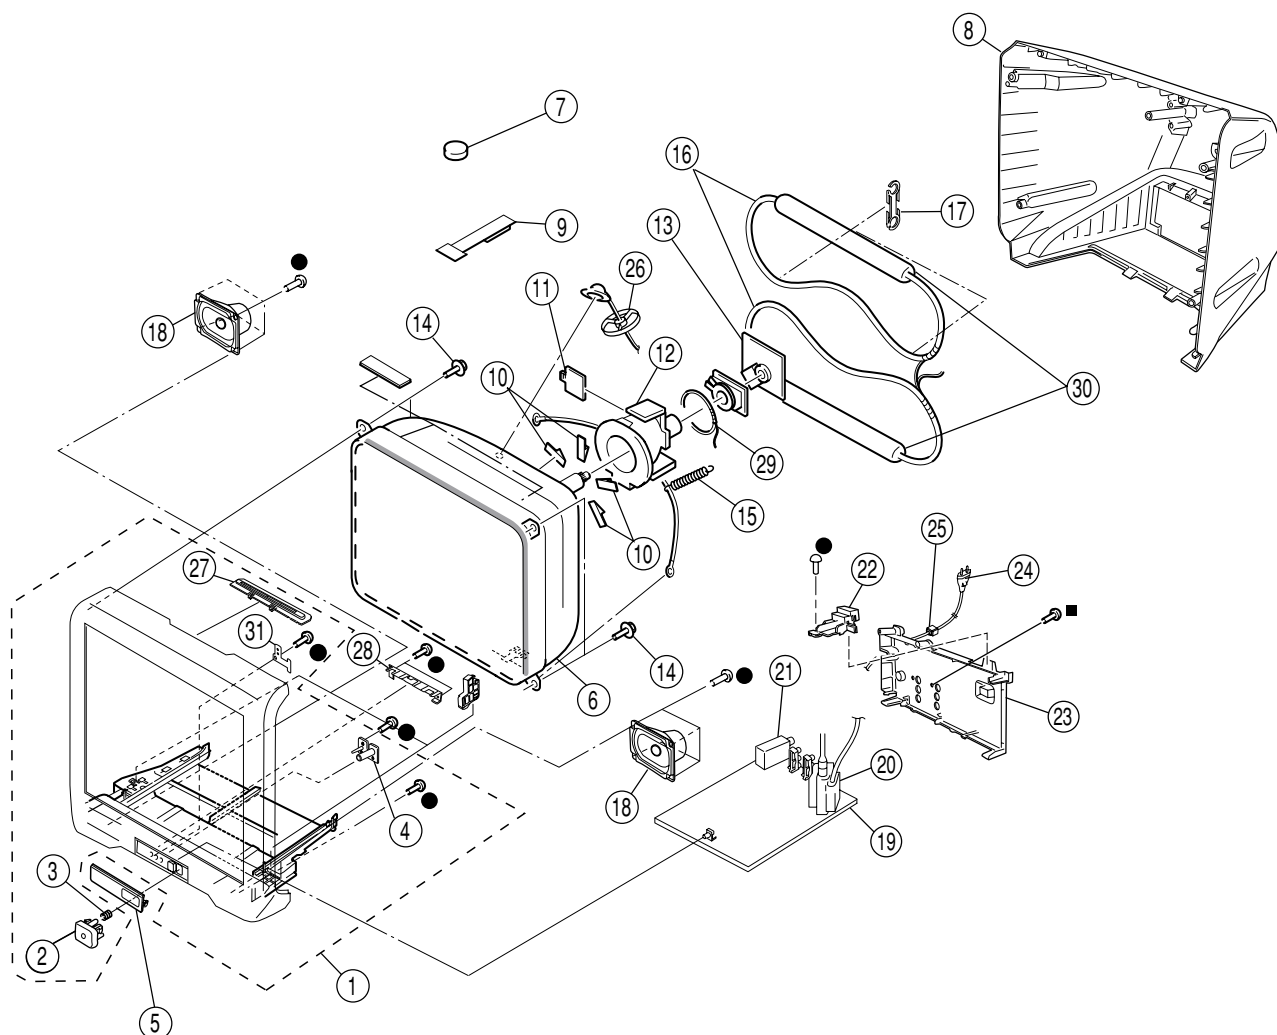

REF. NO.	PART NO.	DESCRIPTION	REMARK
1	X-2022-857-1 X-2022-274-1	BEZNET ASSY (KV-BT212M40) BEZNET ASSY (KV-BT212M50/M80/M90)	2 ~ 4, 27,31 2 ~ 4, 27,31
	X-2022-857-1 X-2022-048-1	BEZNET ASSY (KV-BT212M70) BEZNET ASSY (KV-BT212N80)	2 ~ 4, 27,31 2 ~ 4, 27,31
2	4-092-230-01	BUTTON POWER	
3	4-036-405-11	SPRING COMPRESSION	
4	* 4-092-231-01	GUIDE LIGHT	
5	4-093-582-02	DOOR CONTROL	
6	△ 8-738-809-05	PICTURE TUBE (A51LPT70X) (EXCEPT KV-BT212M40/M50(GE)/M90)	
	△ 8-738-812-05	PICTURE TUBE (A51LPT70X) (KV-BT212M40/M50(GE)/M90)	
7	1-452-032-00	MAGNET DISC	
8	4-092-938-01	COVER REAR (■ 8 SCREWS)	
9	4-094-690-01	PIECE A (90), CONV CORRECT	
10	4-046-600-11	SPACER, DY	
11	4-057-714-01	PIECE TLH CONVERGENCE	
12	△ 8-451-505-21	DEFLECTION YOKE (Y21RSA-O)	
13	* A-1062-283-A	MOUNTED PWB (VAR), C (EXCEPT KV-BT212M50(Vietnam))	
	* A-1070-642-A	MOUNTED PWB (VAR), C (KV-BT212M50(Vietnam))	
14	4-365-808-12	SCREW (5) TAPPING	
15	4-095-706-01	SPRING EXTENSION	
16	△ 1-456-280-11	DEGAUSSING COIL (EXCEPT KV-BT212N80)	
	△ 1-456-279-11	DEGAUSSING COIL (KV-BT212N80)	
17	4-093-607-01	HOLDER DGC	
18	1-825-293-11	LOUD SPEAKER (5 X 9 cm) (KV-BT212N80)	
	1-825-293-21	LOUD SPEAKER (5 X 9 cm) (EXCEPT KV-BT212N80)	
19	* A-1072-934-A * A-1071-655-A	COMPLETE PWB, A (KV-BT212M40) COMPLETE PWB, A (KV-BT212M50(Vietnam))	
	* A-1072-860-A * A-1071-756-A * A-1070-716-A	COMPLETE PWB, A (KV-BT212M50(GE)) COMPLETE PWB, A (KV-BT212M70) COMPLETE PWB, A (KV-BT212M80 (Saudi Arabia))	
	* A-1073-228-A	COMPLETE PWB, A (KV-BT212M80(Russia))	
	* A-1074-217-A * A-1071-937-A	COMPLETE PWB, A (KV-BT212M90) COMPLETE PWB, A (KV-BT212N80)	
20	△ 1-453-329-41	TRANSFORMER ASSY FLYBACK (NX-4751//M3A4)	

REF. NO.	PART NO.	DESCRIPTION	REMARK
21	1-693-659-11	TUNER (TEQE2-903A) (EXCEPT KV-BT212N80)	
	8-598-620-10	TUNER, FSS BTP-AA402 (KV-BT212N80)	
22	* 4-092-370-02	BRACKET FBT	
23	* 4-095-890-41	BRACKET TERMINAL (ICON) (KV-BT212M50/M80/M90)	
	* 4-093-758-61	BRACKET TERMINAL (KV-BT212N80)	
	* 4-095-890-11	BRACKET TERMINAL (ICON) (KV-BT212M40/M70)	
24	△ 1-824-968-11	POWER CORD (WITH CONNECTOR) (KV-BT212M40/M50(GE)/M70/M80(Russia))	
	△ 1-828-526-11	CORD POWER (KV-BT212M50(Vietnam))	
	△ 1-769-609-22	CORD POWER (WITH CONNECTOR) (KV-BT212M80(SA)/M90)	
	△ 1-827-949-12	CORD, AC POWER (WITH CONNECTOR) (KV-BT212N80)	
25	4-022-115-00	HOLDER AC CORD	
26	4-084-918-01	HOLDER HV CABLE	
27	* 4-093-771-01	COVER FRONT PANEL	
28	1-477-678-42	TOP SWITCH BLOCK (EXCEPT KV-BT212N80)	
	1-477-678-22	TOP SWITCH BLOCK (KV-BT212N80)	
29	1-452-728-61	COIL NA ROTATION(RT-154) (KV-BT212M50(Vietnam))	
	1-452-728-41	COIL NA ROTATION(RT-154) (KV-BT212M90/N80)	
30	4-069-978-01	CUSHION DGC	
31	4-093-704-01	SPRING DOOR	

A**SECTION 6
ELECTRICAL PARTS LIST****NOTE:**

The components identified by shading and mark Δ are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board name.

• Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

• All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

• All resistors are in ohms
• F : nonflammable

CAPACITORS

• MF : μ F, PF : μ F

COILS

• MMH : mH, UH : μ H

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
	* A-1072-934-A	COMPLETE PWB, A (KV-BT212M40)		C034	1-162-915-11	CERAMIC CHIP 10PF	0.50PF 50V
	* A-1071-655-A	COMPLETE PWB, A (KV-BT212M50(Vietnam))		C034		(KV-BT212M90)	
	* A-1072-860-A	COMPLETE PWB, A (KV-BT212M50(GE))		C036	1-126-933-11	ELECT 100UF	20.00% 16V
	* A-1071-756-A	COMPLETE PWB, A (KV-BT212M70)		C037	1-126-963-11	ELECT 4.7UF	20.00% 50V
	* A-1070-716-A	COMPLETE PWB, A (KV-BT212M80(Saudi Arabia))		C038	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
	* A-1073-228-A	COMPLETE PWB, A (KV-BT212M80(Russia))		C041	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
	* A-1074-217-A	COMPLETE PWB, A (KV-BT212M90)		C042	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
	* A-1071-937-A	COMPLETE PWB, A (KV-BT212N80)	*****	C044	1-164-505-11	CERAMIC CHIP 2.2UF	16V
				C046	1-162-969-11	CERAMIC CHIP 0.0068UF	10.00% 25V
				C048	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
	4-382-854-01	SCREW (M3X8), P, SW (+)		C049	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
	4-382-854-21	SCREW (M3X14), P, SW (+)		C050	1-126-964-11	ELECT 10UF	20.00% 50V
* A015	4-055-304-01	HOLDER, LED		C052	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
		<CAPACITOR>		C053	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C001	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C054	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C002	1-127-611-91	ELECT 470UF	20% 16V	C055	1-100-829-11	FILM 0.15UF	5% 250V
C002		(KV-BT212M50(Vietnam))		C056	1-126-933-11	ELECT 100UF	20.00% 16V
C002	1-126-935-11	ELECT 470UF	20.00% 16V	C057	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C002		(Except KV-BT212M50(Vietnam))		C058	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C003	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C061	1-162-967-11	CERAMIC CHIP 0.0033UF	10.00% 50V
C004	1-126-933-11	ELECT 100UF	20.00% 16V	C061		(KV-BT212N80)	
C005	1-126-933-11	ELECT 100UF	20.00% 16V	C061	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V
C006	1-126-935-11	ELECT 470UF	20.00% 16V	C061		(Except KV-BT212N80)	
C006		(KV-BT212M50(Vietnam))		C063	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C006	1-126-925-91	ELECT 470UF	20.00% 10V	C064	1-127-652-91	ELECT 2.2UF	20% 50V
C006		(Except KV-BT212M50(Vietnam))		C064		(KV-BT212M50(Vietnam))	
C008	1-126-947-11	ELECT 47UF	20.00% 35V	C064	1-126-961-11	ELECT 2.2UF	20.00% 50V
C010	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V	C065	1-126-962-11	ELECT 3.3UF	20.00% 50V
C012	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C069	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C013	1-126-933-11	ELECT 100UF	20.00% 16V	C070	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C014	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C072	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C018	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C073	1-127-652-91	ELECT 2.2UF	20% 50V
C020	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C073		(KV-BT212M50(Vietnam))	
C021	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V	C073	1-126-961-11	ELECT 2.2UF	20.00% 50V
C022	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C073		(Except KV-BT212M50(Vietnam))	
C023	1-164-505-11	CERAMIC CHIP 2.2UF	16V	C077	1-165-176-11	CERAMIC CHIP 0.047UF	10.00% 16V
C024	1-126-965-11	ELECT 22UF	20.00% 50V	C078	1-162-925-11	CERAMIC CHIP 68PF	5.00% 50V
C024		(KV-BT212M50(Vietnam))		C080	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C024	1-126-965-91	ELECT 22UF	20.00% 50V	C081	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C024		(Except KV-BT212M50(Vietnam))		C082	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C024				C082		(Except KV-BT212N80)	
C025	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C083	1-162-979-11	CERAMIC CHIP 0.0027UF	10.00% 50V
C026	1-126-947-11	ELECT 47UF	20.00% 35V	C089	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C028	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V	C090	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C029	1-126-935-11	ELECT 470UF	20.00% 16V	C091	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C029		(KV-BT212M50(Vietnam))		C092	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C029	1-126-925-91	ELECT 470UF	20.00% 10V	C093	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C029		(Except KV-BT212M50(Vietnam))		C094	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C030	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V	C095	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C032	1-162-915-11	CERAMIC CHIP 10PF	0.50PF 50V	C096	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C032		(KV-BT212M90)		C100	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V



REF NO.	PART NO.	DESCRIPTION	REMARK
C101	1-126-964-11	ELECT 10UF	20.00% 50V
C102	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C104	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C106	1-126-964-11	ELECT 10UF	20.00% 50V
C106		(KV-BT212N80)	
C106	1-126-963-11	ELECT 4.7UF	20.00% 50V
C106		(Except KV-BT212N80)	
C107	1-127-611-91	ELECT 470UF	20% 16V
C107		(KV-BT212M50(Vietnam))	
C107	1-126-935-11	ELECT 470UF	20.00% 16V
C107		(Except KV-BT212M50(Vietnam))	
C108	1-127-611-91	ELECT 470UF	20% 16V
C108		(KV-BT212M50(Vietnam))	
C108	1-126-935-11	ELECT 470UF	20.00% 16V
C108		(Except KV-BT212M50(Vietnam))	
C109	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V
C111	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C112	1-162-910-11	CERAMIC CHIP 5PF	0.25PF 50V
C112		(KV-BT212M50(Vietnam)/M90/N80)	
C115	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C115		(KV-BT212N80)	
C115	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V
C115		(Except KV-BT212N80)	
C116	1-162-968-11	CERAMIC CHIP 0.0047UF	10.00% 50V
C117	1-164-379-11	CERAMIC CHIP 43PF	5.00% 50V
C117		(KV-BT212N80)	
C117	1-162-924-11	CERAMIC CHIP 56PF	5.00% 50V
C117		(Except KV-BT212N80)	
C118	1-126-965-11	ELECT 22UF	20.00% 50V
C118		(KV-BT212M50(Vietnam))	
C118	1-126-965-91	ELECT 22UF	20.00% 50V
C118		(Except KV-BT212M50(Vietnam))	
C119	1-163-021-91	CERAMIC CHIP 0.01UF	10.00% 50V
C120	1-127-611-91	ELECT 470UF	20% 16V
C120		(KV-BT212M50(Vietnam))	
C120	1-126-935-11	ELECT 470UF	20.00% 16V
C120		(Except KV-BT212M50(Vietnam))	
C133	1-162-927-11	CERAMIC CHIP 100PF	5.00% 50V
C133		(KV-BT212N80)	
C133	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C133		(Except KV-BT212N80)	
C135	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C137	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C138	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C140	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C200	1-125-837-91	CERAMIC CHIP 1UF	10% 6.3V
C200		(KV-BT212M40/M70)	
C200	1-165-884-91	CERAMIC CHIP 2.2UF	10% 6.3V
C200		(Except KV-BT212M40/M70)	
C200	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C200		(KV-BT212M50(Vietnam))	
C201	1-125-837-91	CERAMIC CHIP 1UF	10% 6.3V
C201		(KV-BT212M40/M70)	
C201	1-125-889-91	CERAMIC CHIP 2.2UF	10% 10V
C201		(KV-BT212M50(Vietnam))	
C201	1-165-884-91	CERAMIC CHIP 2.2UF	10% 6.3V
C201		(KV-BT212M50(GE)/M80/M90/N90)	
C201	1-165-884-91	CERAMIC CHIP 2.2UF	10% 6.3V
C202	1-165-176-11	CERAMIC CHIP 0.047UF	10.00% 16V
C203	1-165-176-11	CERAMIC CHIP 0.047UF	10.00% 16V
C204	1-137-190-91	FILM 0.22UF	5.00% 50V
C204		(KV-BT212M40/M70)	

REF NO.	PART NO.	DESCRIPTION	REMARK
C204	1-137-374-11	MYLAR 0.047UF	5.00% 50V
C204		(Except KV-BT212M40/M70)	
C206	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C206		(Except KV-BT212M40/M70)	
C206	1-164-245-11	CERAMIC CHIP 0.015UF	10.00% 25V
C206		(KV-BT212M40/M70)	
C207	1-137-190-91	FILM 0.22UF	5.00% 50V
C207		(KV-BT212M40/M70)	
C207	1-137-374-11	MYLAR 0.047UF	5.00% 50V
C207		(Except KV-BT212M40/M70)	
C208	1-164-245-11	CERAMIC CHIP 0.015UF	10.00% 25V
C208		(KV-BT212M40/M70)	
C208	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C208		(Except KV-BT212M40/M70)	
C210	1-127-660-91	ELECT 100UF	20% 50V
C210		(KV-BT212M50(Vietnam))	
C210	1-126-968-11	ELECT 100UF	20.00% 50V
C210		(Except KV-BT212M50(Vietnam))	
C211	1-126-963-11	ELECT 4.7UF	20.00% 50V
C212	1-127-629-91	ELECT 1000UF	20.00% 25V
C212		(KV-BT212M50(Vietnam))	
C212	1-126-942-61	ELECT 1000UF	20.00% 25V
C212		(Except KV-BT212M50(Vietnam))	
C213	1-115-339-11	CERAMIC CHIP 0.1UF	10.00% 50V
C214	1-127-627-91	ELECT 1000UF	20.00% 25V
C214		(KV-BT212M50(Vietnam))	
C214	1-126-942-61	ELECT 1000UF	20.00% 25V
C214		(Except KV-BT212M50(Vietnam))	
C216	1-126-965-11	ELECT 22UF	20.00% 50V
C216		(KV-BT212M50(Vietnam))	
C216	1-126-965-91	ELECT 22UF	20.00% 50V
C216		(Except KV-BT212M50(Vietnam))	
C217	1-126-942-61	ELECT 1000UF	20.00% 25V
C217		(Except KV-BT212M50(Vietnam))	
C217	1-127-627-91	ELECT 1000UF	20% 25V
C217		(KV-BT212M50(Vietnam))	
C218	1-126-965-11	ELECT 22UF	20.00% 50V
C218		(KV-BT212M50(Vietnam))	
C218	1-126-965-91	ELECT 22UF	20.00% 50V
C218		(Except KV-BT212M50(Vietnam))	
C219	1-127-609-91	ELECT 220UF	20% 16V
C219		(KV-BT212M50(Vietnam))	
C219	1-126-934-11	ELECT 220UF	20.00% 16V
C219		(Except KV-BT212M50(Vietnam))	
C220	1-126-964-11	ELECT 10UF	20.00% 50V
C231	1-137-374-11	MYLAR 0.047UF	5.00% 50V
C232	1-137-374-11	MYLAR 0.047UF	5.00% 50V
C234	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C235	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C235		(Except KV-BT212M40/M70)	
C236	1-130-495-00	MYLAR 0.1UF	5.00% 50V
C237	1-130-495-00	MYLAR 0.1UF	5.00% 50V
C300	1-127-715-91	CERAMIC CHIP 0.22UF	10% 16V
C300		(Except KV-BT212N80)	
C301	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C302	1-164-505-11	CERAMIC CHIP 2.2UF	16V
C303	1-126-933-11	ELECT 100UF	20.00% 16V
C304	1-126-933-11	ELECT 100UF	20.00% 16V
C308	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C311	1-127-652-91	ELECT 2.2UF	20% 50V
C311		(KV-BT212M50(Vietnam))	
C311	1-126-961-11	ELECT 2.2UF	20.00% 50V
C311		(Except KV-BT212M50(Vietnam))	

A

The components identified by shading and mark Δ are critical for safety.
 Replace only with part number specified.

REF NO.	PART NO.	DESCRIPTION	REMARK
C312	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C313	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C314	1-126-935-11	ELECT 470UF	20.00% 16V
C314		(KV-BT212M50(Vietnam))	
C314	1-126-925-91	ELECT 470UF	20.00% 10V
C314		(Except KV-BT212M50(Vietnam))	
C316	1-125-891-11	CERAMIC CHIP 0.47UF	10.00% 10V
C317	1-127-609-91	ELECT 220UF	20% 16V
C317		(KV-BT212M50(Vietnam))	
C317	1-126-934-11	ELECT 220UF	20.00% 16V
C317		(Except KV-BT212M50(Vietnam))	
C318	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C319	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C320	1-162-923-11	CERAMIC CHIP 47PF	5.00% 50V
C321	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C322	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C323	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C325	1-164-227-11	CERAMIC CHIP 0.022UF	10.00% 25V
C328	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C333	1-126-925-91	ELECT 470UF	20.00% 10V
C333		(KV-BT212M50(Vietnam))	
C333	1-126-935-11	ELECT 470UF	20.00% 16V
C333		(Except KV-BT212M50(Vietnam)/N80)	
C600	Δ 1-119-895-51	CERAMIC 4700PF	20.00% 250V
C602	1-131-983-11	FILM 0.1UF	10% 0V
C602		(KV-BT212M50(Vietnam))	
C602	Δ 1-165-528-31	MYLAR 0.1UF	10 0V
C602		(Except KV-BT212M50(Vietnam)/N80)	
C605	1-161-830-00	CERAMIC 0.0047UF	99% 500V
C606	1-161-830-00	CERAMIC 0.0047UF	99% 500V
C609	1-161-830-00	CERAMIC 0.0047UF	99% 500V
C610	1-161-830-00	CERAMIC 0.0047UF	99% 500V
C611	1-117-751-11	ELECT(BLOCK) 220UF	20.00% 450V
C611		(KV-BT212M90)	
C611	1-165-922-11	ELECT 470UF	20% 250V
C611		(KV-BT212N80)	
C611	1-117-752-11	ELECT(BLOCK) 330UF	20.00% 450V
C611		(Except KV-BT212M90/N80)	
C612	1-117-623-11	FILM 1500PF	3.00% 1.2KV
C616	1-164-230-11	CERAMIC CHIP 220PF	5.00% 50V
C619	1-130-491-00	MYLAR 0.047UF	5.00% 50V
C619		(KV-BT212M90/N80)	
C619	1-136-167-00	FILM 0.15UF	5.00% 50V
C619		(Except KV-BT212M90/N80)	
C621	1-126-963-11	ELECT 4.7UF	20.00% 50V
C622	Δ 1-119-894-51	CERAMIC 2200PF	20.00% 250V
C623	1-162-966-11	CERAMIC CHIP 0.0022UF	10.00% 50V
C623		(KV-BT212M90)	
C623	1-162-964-11	CERAMIC CHIP 0.001UF	10.00% 50V
C623		(KV-BT212N80)	
C623	1-162-967-11	CERAMIC CHIP 0.0033UF	10.00% 50V
C623		(Except KV-BT212M90/N80)	
C624	1-127-658-91	ELECT 47UF	20% 50V
C624		(KV-BT212M50(Vietnam))	
C624	1-126-967-11	ELECT 47UF	20.00% 50V
C624		(Except KV-BT212M50(Vietnam))	
C625	Δ 1-127-942-51	CERAMIC 330PF	10% 250V
C626	1-102-228-00	CERAMIC 470PF	10.00% 500V
C628	1-117-768-91	CERAMIC 470PF	10.00% 2KV
C628		(KV-BT212N80)	
C628	1-125-772-91	CERAMIC 1500PF	10.00% 2KV
C628		(Except KV-BT212N80)	

REF NO.	PART NO.	DESCRIPTION	REMARK
C630	1-127-645-11	ELECT 3300UF	20% 35V
C630		(KV-BT212M50(Vietnam))	
C630	1-128-549-11	ELECT 3300UF	20.00% 35V
C630		(Except KV-BT212M50(Vietnam))	
C632	1-126-953-11	ELECT 2200UF	20.00% 35V
C634	1-127-625-91	ELECT 470UF	20% 25V
C634		(KV-BT212M50(Vietnam))	
C634	1-126-941-11	ELECT 470UF	20.00% 25V
C634		(Except KV-BT212M50(Vietnam))	
C635	1-127-664-91	ELECT 470UF	20% 50V
C635		(KV-BT212M50(Vietnam))	
C635	1-126-971-11	ELECT 470UF	20.00% 50V
C635		(Except KV-BT212M50(Vietnam))	
C637	1-126-933-11	ELECT 100UF	20.00% 16V
C638	1-126-933-11	ELECT 100UF	20.00% 16V
C639	1-126-933-11	ELECT 100UF	20.00% 16V
C641	1-126-933-11	ELECT 100UF	20.00% 16V
C643	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C644	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C647	1-127-611-91	ELECT 470UF	20% 16V
C647		(KV-BT212M50(Vietnam))	
C647	1-126-935-11	ELECT 470UF	20.00% 16V
C647		(Except KV-BT212M50(Vietnam))	
C649	1-126-933-11	ELECT 100UF	20.00% 16V
C652	1-102-228-00	CERAMIC 470PF	10.00% 500V
C653	1-102-228-00	CERAMIC 470PF	10.00% 500V
C654	1-102-228-00	CERAMIC 470PF	10.00% 500V
C657	Δ 1-127-942-51	CERAMIC 330PF	10% 250V
C660	1-165-539-11	FILM 0.22UF	10% 275V
C660		(KV-BT212M50(Vietnam))	
C660	Δ 1-165-529-31	MYLAR 0.22UF	10 0V
C660		(Except KV-BT212M50(Vietnam))	
C662	1-107-826-11	CERAMIC CHIP 0.1UF	10.00% 16V
C665	1-110-626-11	ELECT 330UF	20.00% 160V
C666	1-131-983-11	FILM 0.1UF	10% 0V
C666		(KV-BT212M50(Vietnam))	
C666	1-165-528-31	MYLAR 0.1UF	10 0V
C666		(Except KV-BT212M50(Vietnam))	
C668	1-126-933-11	ELECT 100UF	20.00% 16V
C669	1-165-530-11	MYLAR 0.47UF	10 275V
C669		(KV-BT212N80)	
C670	Δ 1-127-942-51	CERAMIC 330PF	10% 250V
C672	1-162-970-11	CERAMIC CHIP 0.01UF	10.00% 25V
C678	1-164-505-11	CERAMIC CHIP 2.2UF	16V
C680	1-164-315-11	CERAMIC CHIP 470PF	5.00% 50V
C682	1-115-466-91	ELECT 1000UF	20.00% 16V
C685	1-127-609-91	ELECT 220UF	20% 16V
C685		(KV-BT212M50(Vietnam))	
C685	1-126-934-11	ELECT 220UF	20.00% 16V
C685		(Except KV-BT212M50(Vietnam))	
C686	1-117-720-11	CERAMIC CHIP 4.7UF	10V
C800	1-126-963-11	ELECT 4.7UF	20.00% 50V
C800		(KV-BT212M50(Vietnam)/M90/N80)	
C803	1-126-947-11	ELECT 47UF	20.00% 35V
C803		(KV-BT212M50(Vietnam)/M90/N80)	
C804	1-126-964-11	ELECT 10UF	20.00% 50V
C804		(KV-BT212M50(Vietnam)/M90/N80)	
C805	1-127-651-91	ELECT 1UF	20% 50V
C805		(KV-BT212M50(Vietnam))	
C805	1-126-960-11	ELECT 1UF	20.00% 50V
C805		(Except KV-BT212M50(Vietnam))	
C806	1-106-375-12	MYLAR 0.022UF	5.00% 200V

The components identified by shading and mark Δ are critical for safety.
Replace only with part number specified.

A

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
C807	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	C902	1-126-957-11	ELECT 0.22UF 20.00% 50V	
C808	1-102-244-00	CERAMIC	220PF 10.00% 500V	C902		(Except KV-BT212M50(Vietnam))	
C809	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	C903	1-127-611-91	ELECT 470UF 20% 16V	
C810	1-162-318-11	CERAMIC	0.001UF 10.00% 500V	C903		(KV-BT212M50(Vietnam))	
C811	1-126-933-11	ELECT	100UF 20.00% 16V				
C822	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	C903	1-126-935-11	ELECT 470UF 20.00% 16V	
C825	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	C903		(Except KV-BT212M50(Vietnam))	
C826	1-164-227-11	CERAMIC CHIP	0.022UF 10.00% 25V	C906	1-164-346-11	CERAMIC CHIP 1UF 16V	
C828	1-126-933-11	ELECT	100UF 20.00% 16V	C906		(Except KV-BT212M40/M70)	
C830	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	C907	1-164-346-11	CERAMIC CHIP 1UF 16V	
C831	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V				
C832	1-164-230-11	CERAMIC CHIP	220PF 5.00% 50V	C910	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C833	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V	C910		(Except KV-BT212M40/M70)	
C835	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	C911	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C837	1-162-968-11	CERAMIC CHIP	0.0047UF 10.00% 50V	C912	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C838	1-100-499-21	MYLAR	0.1UF 5% 100V	C913	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C838		(KV-BT212M50(Vietnam))		C913		(Except KV-BT212M40/M70)	
C838	1-106-220-00	MYLAR	0.1UF 10.00% 100V	C916	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C838		(Except KV-BT212M50(Vietnam))		C916		(Except KV-BT212M40/M70)	
C839	1-162-966-11	CERAMIC CHIP	0.0022UF 10.00% 50V	C917	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C840	Δ 1-117-647-21	FILM	13000PF 3.00% 1.2KV	C918	1-164-346-11	CERAMIC CHIP 1UF 16V	
C841	1-107-846-11	FILM	0.1UF 5.00% 400V	C919	1-164-346-11	CERAMIC CHIP 1UF 16V	
C842	1-100-122-21	FILM	0.022UF 5% 400V	C919		(Except KV-BT212M40/M70)	
C844	1-165-176-11	CERAMIC CHIP	0.047UF 10.00% 16V	C922	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C845	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	C922		(Except KV-BT212M40/M70)	
C846	1-117-767-91	CERAMIC	330PF 10.00% 2KV	C925	1-164-315-11	CERAMIC CHIP 470PF 5.00% 50V	
C847	1-107-364-11	MYLAR	0.01UF 10.00% 200V	C925		(Except KV-BT212M40/M70)	
C848	1-107-364-11	MYLAR	0.01UF 10.00% 200V	C953	1-107-826-11	CERAMIC CHIP 0.1UF 10.00% 16V	
C849	1-106-375-12	MYLAR	0.022UF 5.00% 200V	C953		(KV-BT212M40/M70)	
C850	1-100-499-21	MYLAR	0.1UF 5% 100V				
C850		(KV-BT212M50(Vietnam))		C955	1-126-947-11	ELECT 47UF 20.00% 35V	
C850	1-106-220-00	MYLAR	0.1UF 10.00% 100V	C956	1-126-933-11	ELECT 100UF 20.00% 16V	
C850		(Except KV-BT212M50(Vietnam))		C967	1-164-505-11	CERAMIC CHIP 2.2UF 16V	
C851	1-107-675-11	ELECT	1UF 20.00% 450V	C975	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	
C852	1-117-665-11	FILM	0.33UF 5.00% 250V	C979	1-162-964-11	CERAMIC CHIP 0.001UF 10.00% 50V	
C854	1-127-636-91	ELECT	100UF 20% 35V				
C854		(KV-BT212M50(Vietnam))		C1019	1-125-891-11	CERAMIC CHIP 0.47UF 10.00% 10V	
C854	1-126-948-11	ELECT	100UF 20.00% 35V	C1233	1-126-961-11	ELECT 2.2UF 20.00% 50V	
C854		(Except KV-BT212M50(Vietnam))		C1233		(Except KV-BT212M50(Vietnam)/M90)	
C855	1-107-894-11	ELECT	220UF 20.00% 35V	C1233	1-127-652-91	ELECT 2.2UF 20% 50V	
C857	1-104-666-11	ELECT	220UF 20.00% 25V	C1233		(KV-BT212M50(Vietnam))	
C858	1-137-194-81	FILM	0.47UF 5.00% 50V	C2602	1-102-114-00	CERAMIC 470PF 10.00% 50V	
C860	1-162-318-11	CERAMIC	0.001UF 10.00% 500V	C2631	1-102-228-00	CERAMIC 470PF 10.00% 500V	
C861	1-104-666-11	ELECT	220UF 20.00% 25V	C2636	1-127-666-91	ELECT 1000UF 20% 50V	
C862	1-162-318-11	CERAMIC	0.001UF 10.00% 500V	C2636		(KV-BT212M50(Vietnam))	
C863	1-165-176-11	CERAMIC CHIP	0.047UF 10.00% 16V	C2636	1-126-972-11	ELECT 1000UF 20.00% 50V	
C867	1-165-441-81	ELECT	33UF 20% 160V	C2636		(Except KV-BT212M50(Vietnam))	
C868	1-102-228-00	CERAMIC	470PF 10.00% 500V	C2648	1-126-952-11	ELECT 1000UF 20.00% 35V	
C869	1-107-654-11	ELECT	33UF 20.00% 250V			<CONNECTOR>	
C870	1-106-387-00	MYLAR	0.068UF 10.00% 200V	* CN005	1-564-506-11	PLUG, CONNECTOR 3P	
C876	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	* CN200	1-564-507-11	PLUG, CONNECTOR 4P	
C877	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	* CN600	1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P	
C878	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	* CN601	1-691-134-11	PIN, CONNECTOR (PC BOARD) 2P	
C879	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	* CN602	Δ 1-580-843-11	PIN, CONNECTOR (POWER)	
C879		(KV-BT212M50(Vietnam)/M90/N80)					
C900	1-164-505-11	CERAMIC CHIP	2.2UF 16V	* CN800	1-564-506-11	PLUG, CONNECTOR 3P	
C901	1-164-505-11	CERAMIC CHIP	2.2UF 16V	* CN800		(KV-BT212M50(Vietnam)/M90/N80)	
C901		(Except KV-BT212M40/M70)		* CN904	1-508-743-00	PIN, CONNECTOR 5P	
C902	1-127-648-91	ELECT	0.22UF 20% 50V	CT131	1-767-774-22	TRAP, CERAMIC	
C902		(KV-BT212M50(Vietnam))		CT131		(Except KV-BT212M50(Vietnam)/M90/N80)	
				CT139	1-781-526-21	TRAP, CERAMIC (KV-BT212N80)	
				CT139	1-767-775-22	TRAP, CERAMIC	
				CT139		(Except KV-BT212M50(Vietnam)/80)	

The components identified by shading
and mark \triangle are critical for safety.
Replace only with part number specified.



REF NO.	PART NO.	DESCRIPTION	REMARK
		<DIODE>	
D002	8-719-081-97	DIODE MMDL914T1	
D003	8-719-081-97	DIODE MMDL914T1	
D023	8-719-069-60	DIODE UDZSTE-179.1B	
D024	8-719-069-60	DIODE UDZSTE-179.1B	
D025	8-719-069-60	DIODE UDZSTE-179.1B	
D054	8-719-069-55	DIODE UDZSTE-175.6B	
D055	8-719-069-55	DIODE UDZSTE-175.6B	
D056	8-719-081-97	DIODE MMDL914T1	
D057	8-719-081-97	DIODE MMDL914T1	
D058	8-719-081-97	DIODE MMDL914T1	
D059	8-719-081-97	DIODE MMDL914T1	
D060	8-719-069-55	DIODE UDZSTE-175.6B	
D061	8-719-081-97	DIODE MMDL914T1	
D062	8-719-069-55	DIODE UDZSTE-175.6B	
D063	8-719-081-97	DIODE MMDL914T1	
D064	8-719-069-55	DIODE UDZSTE-175.6B	
D065	8-719-069-55	DIODE UDZSTE-175.6B	
D066	8-719-908-03	DIODE GP08D	
D068	8-719-069-55	DIODE UDZSTE-175.6B	
D071	8-719-081-97	DIODE MMDL914T1	
D072	8-719-081-97	DIODE MMDL914T1	
D074	8-719-081-97	DIODE MMDL914T1	
D075	8-719-069-60	DIODE UDZSTE-179.1B	
D076	8-719-081-97	DIODE MMDL914T1	
D100	8-719-421-40	DIODE MA77 (Except KV-BT212N80)	
D103	8-759-157-40	IC UPC574J	
D105	8-719-081-97	DIODE MMDL914T1 (KV-BT212N80)	
D106	8-719-157-94	DIODE RD3.3SB (KV-BT212N80)	
D108	8-719-069-55	DIODE UDZSTE-175.6B	
D109	8-719-069-55	DIODE UDZSTE-175.6B	
D110	8-719-081-97	DIODE MMDL914T1 (Except KV-BT212N80)	
D111	8-719-081-97	DIODE MMDL914T1 (Except KV-BT212N80)	
D200	8-719-062-51	DIODE 1PS226-115	
D201	8-719-081-97	DIODE MMDL914T1	
D202	8-719-081-97	DIODE MMDL914T1	
D203	8-719-081-97	DIODE MMDL914T1	
D204	8-719-081-97	DIODE MMDL914T1	
D205	8-719-081-97	DIODE MMDL914T1	
D208	8-719-081-97	DIODE MMDL914T1	
D211	8-719-062-51	DIODE 1PS226-115	
D212	8-719-081-97	DIODE MMDL914T1	
D213	8-719-081-97	DIODE MMDL914T1	
D214	8-719-081-97	DIODE MMDL914T1	
D600	8-719-081-97	DIODE MMDL914T1	
D602	6-500-481-31	DIODE AM01AV1	
D603	6-500-481-31	DIODE AM01AV1	
D604	8-719-077-77	DIODE D3SB60F3	
D605	8-719-109-85	DIODE RD5.1ESB2 (Except KV-BT212N80)	
D608	8-719-109-85	DIODE RD5.1ESB2	
D608		(Except KV-BT212M90/N80)	
D614	8-719-923-86	DIODE MTZJ-T-77-15	
D614		(Except KV-BT212M90/N80)	
D615	8-719-063-70	DIODE D1NL20U (Except KV-BT212M90/N80)	
D617	6-500-567-11	DIODE 10ERB20-TA2B5	
D618	8-719-063-70	DIODE D1NL20U	
D619	6-500-567-11	DIODE 10ERB20-TA2B5	
D621	8-719-312-10	DIODE RU4AM-T3	
D622	8-719-085-37	DIODE 11EQS10-TB5	
D623	6-500-567-31	DIODE 10ERB20-TB3	
D624	8-719-510-73	DIODE S3L20UF4	

REF NO.	PART NO.	DESCRIPTION	REMARK
D629	8-719-109-85	DIODE RD5.1ESB2	
D633	8-719-923-86	DIODE MTZJ-T-77-15	
D635	8-719-083-57	DIODE UDZSTE-173.6B	
D637	8-719-072-70	DIODE MA2ZD14001S0	
D638	8-719-081-97	DIODE MMDL914T1	
D639	8-719-027-22	DIODE D3S6M-F	
D800	8-719-081-97	DIODE MMDL914T1	
D800		(KV-BT212M50(Vietnam)/M90/N80)	
D801	8-719-081-97	DIODE MMDL914T1	
D801		(KV-BT212M50(Vietnam)/M90/N80)	
D804	8-719-991-33	DIODE 1SS133T-77	
D805	8-719-991-33	DIODE 1SS133T-77	
D807	8-719-991-33	DIODE 1SS133T-77	
D808	8-719-991-33	DIODE 1SS133T-77	
D809	8-719-991-33	DIODE 1SS133T-77	
D815	8-719-069-60	DIODE UDZSTE-179.1B	
D816	6-500-764-11	DIODE BY228/23	
D817	8-719-979-85	DIODE EGP20G	
D818	8-719-109-85	DIODE RD5.1ESB2	
D819	6-500-567-31	DIODE 10ERB20-TB3	
D820	8-719-908-03	DIODE GP08D	
D821	6-500-567-31	DIODE 10ERB20-TB3	
D823	8-719-302-43	DIODE EL1Z	
D824	8-719-302-43	DIODE EL1Z	
D827	8-719-302-43	DIODE EL1Z	
D829	8-719-069-55	DIODE UDZSTE-175.6B	
D830	8-719-081-97	DIODE MMDL914T1	
D900	8-719-069-60	DIODE UDZSTE-179.1B	
D901	8-719-069-60	DIODE UDZSTE-179.1B	
D905	8-719-069-60	DIODE UDZSTE-179.1B	
D905		(Except KV-BT212M40/M70)	
D906	8-719-069-55	DIODE UDZSTE-175.6B	
D906		(Except KV-BT212M40/M70)	
D907	8-719-069-55	DIODE UDZSTE-175.6B	
D908	8-719-069-55	DIODE UDZSTE-175.6B	
D914	8-719-083-18	DIODE SPB-25MVWF	
D915	8-719-069-55	DIODE UDZSTE-175.6B	
D916	8-719-069-55	DIODE UDZSTE-175.6B	
D916		(Except KV-BT212M40/M70)	
D918	8-719-069-55	DIODE UDZSTE-175.6B	
D931	8-719-083-57	DIODE UDZSTE-173.6B	
D932	8-719-083-57	DIODE UDZSTE-173.6B	
D2625	8-719-510-73	DIODE S3L20UF4	
		<DY CONNECTOR>	
* DY800	1-580-798-11	CONNECTOR PIN (DY) 6P	
		<FUSE>	
F600	\triangle 1-576-232-21	FUSE	5A 250V
		<MFERRITE BEAD>	
FB001	1-410-397-21	FERRITE	1.1UH
FB001		(Except KV-BT212N80)	
FB101	1-414-229-11	FERRITE	0UH
FB603	1-410-397-21	FERRITE	1.1UH
FB608	1-412-911-31	FERRITE	0UH
FB800	1-410-397-21	FERRITE	1.1UH
FB2602	1-410-397-21	FERRITE	1.1UH

A

REF NO.	PART NO.	DESCRIPTION	REMARK
<FUSE HOLDER>			
FH601	1-533-223-11	FUSE HOLDER 0A 0V	
FH602	1-533-223-11	FUSE HOLDER 0A 0V	
<IC>			
IC001	6-705-434-41	IC TDA12067H/N1B0B0QV	
IC001		(KV-BT212M50(GE)/M80/N80)	
IC001	6-705-434-61	IC TDA12067H/N1B0B0CL	
IC001		(KV-BT212M50(Vietnam))	
IC001	6-705-441-41	IC TDA11010H/N1B000QL	
IC001		(KV-BT212M40/M70)	
IC001	6-705-561-11	TDA12017H/N1B0B0QR (KV-BT212M90)	
IC002	6-704-532-01	IC RPM7240-H5	
IC003	6-705-864-01	IC CAT24WC16WI-TE13	
IC200	6-703-475-01	IC AN5276T	
IC601	6-703-472-11	IC STR-F6264SLF1357 (KV-BT212M90)	
IC601	6-704-263-01	IC STR-F6267S LF1357 (Except KV-BT212M90)	
IC602	6-703-479-01	IC PQ09RD1SJ00H (KV-BT212M50(Vietnam))	
IC602	6-706-789-01	IC KIA78R09API	
IC602		(Except KV-BT212M50(Vietnam))	
IC603	6-703-478-01	IC PQ018EF01SZH	
IC604	8-759-231-53	IC TA7805S	
IC605	6-705-063-01	IC SE135N-LF38	
IC606	8-759-445-59	IC BA033T	
IC606		(KV-BT212M50(Vietnam))	
IC606	6-706-886-01	IC KIA78D33P1	
IC606		(Except KV-BT212M50(Vietnam))	
IC607	8-759-832-05	IC BA18BC0FP-E2	
IC800	8-759-356-16	IC NJM4556AD	
IC800		(KV-BT212M50(Vietnam)/M90/N80)	
IC801	6-703-708-01	IC LM2903DT	
IC802	6-701-937-01	IC TJM4558CDT	
IC804	6-703-470-01	IC STV9302A	
<JACK>			
J200	1-770-786-22	JACK	
J903	1-770-329-13	JACK, PIN 3P	
J906	1-817-296-11	PHONO JACK 3P	
J907	1-817-296-11	PHONO JACK 3P	
J907		(KV-BT212M50/M80/M90/N80)	
J908	1-817-295-11	PHONO JACK 2P	
J908		(KV-BT212M40/M70)	
<CHIP CONDUCTOR>			
JR001	1-216-864-11	SHORT CHIP 0	
JR002	1-216-864-11	SHORT CHIP 0	
JR003	1-216-864-11	SHORT CHIP 0	
JR004	1-216-864-11	SHORT CHIP 0	
JR005	1-216-864-11	SHORT CHIP 0	
JR007	1-216-864-11	SHORT CHIP 0	
JR008	1-216-864-11	SHORT CHIP 0	
JR009	1-216-864-11	SHORT CHIP 0	
JR012	1-216-864-11	SHORT CHIP 0	
JR013	1-216-864-11	SHORT CHIP 0	
JR014	1-216-864-11	SHORT CHIP 0	
JR015	1-216-864-11	SHORT CHIP 0	
JR016	1-216-864-11	SHORT CHIP 0	
JR017	1-216-864-11	SHORT CHIP 0	
JR018	1-216-864-11	SHORT CHIP 0	

REF NO.	PART NO.	DESCRIPTION	REMARK
JR019	1-216-864-11	SHORT CHIP 0	
JR020	1-216-864-11	SHORT CHIP 0	
JR024	1-216-864-11	SHORT CHIP 0	
JR025	1-216-864-11	SHORT CHIP 0	
JR026	1-216-864-11	SHORT CHIP 0	
JR027	1-216-864-11	SHORT CHIP 0	
JR036	1-216-864-11	SHORT CHIP 0	
JR037	1-216-864-11	SHORT CHIP 0	
JR038	1-216-864-11	SHORT CHIP 0	
JR040	1-216-864-11	SHORT CHIP 0	
JR041	1-216-864-11	SHORT CHIP 0	
JR042	1-216-864-11	SHORT CHIP 0	
JR043	1-216-864-11	SHORT CHIP 0	
JR046	1-216-864-11	SHORT CHIP 0	
JR047	1-216-864-11	SHORT CHIP 0	
JR049	1-216-864-11	SHORT CHIP 0	
JR051	1-216-864-11	SHORT CHIP 0	
JR300	1-216-864-11	SHORT CHIP 0	
JR301	1-216-864-11	SHORT CHIP 0	
JR302	1-216-864-11	SHORT CHIP 0	
JR600	1-216-864-11	SHORT CHIP 0	
JR601	1-216-864-11	SHORT CHIP 0	
JR602	1-216-864-11	SHORT CHIP 0	
JR1006	1-216-864-11	SHORT CHIP 0	
JR1011	1-216-864-11	SHORT CHIP 0	
JR1012	1-216-864-11	SHORT CHIP 0	
JR1013	1-216-864-11	SHORT CHIP 0	
JR1014	1-216-864-11	SHORT CHIP 0	
JR1100	1-216-864-11	SHORT CHIP 0	
JR1100		(KV-BT212N80)	
JR1101	1-216-864-11	SHORT CHIP 0	
JR1110	1-216-864-11	SHORT CHIP 0	
JR1110		(Except KV-BT212M90)	
JR1256	1-216-864-11	SHORT CHIP 0	
JR1256		(KV-BT212M40/M70)	
JR1903	1-216-864-11	SHORT CHIP 0	
<COIL>			
L003	1-414-856-11	INDUCTOR 10UH	
L004	1-414-187-11	INDUCTOR 47UH	
L005	1-414-856-11	INDUCTOR 10UH	
L006	1-414-856-11	INDUCTOR 10UH	
L007	1-414-856-11	INDUCTOR 10UH	
L008	1-414-856-11	INDUCTOR 10UH	
L009	1-414-856-11	INDUCTOR 10UH	
L010	1-469-525-91	INDUCTOR 10UH	
L011	1-469-525-91	INDUCTOR 10UH	
L012	1-412-058-11	INDUCTOR 10UH	
L013	1-469-525-91	INDUCTOR 10UH	
L031	1-469-525-91	INDUCTOR 10UH	
L032	1-469-525-91	INDUCTOR 10UH	
L033	1-469-525-91	INDUCTOR 10UH	
L035	1-469-525-91	INDUCTOR 10UH	
L036	1-469-525-91	INDUCTOR 10UH	
L100	1-414-857-11	INDUCTOR 100UH	
L101	1-414-140-11	INDUCTOR 0.68UH	
L101		(KV-BT212N80)	
L101	1-410-498-11	INDUCTOR 1.2UH	
L101		(Except KV-BT212N80)	
L102	1-410-985-42	INDUCTOR 0.22UH	
L102		(KV-BT212M90)	

The components identified by shading
and mark \triangle are critical for safety.
Replace only with part number specified.

A

REF NO.	PART NO.	DESCRIPTION	REMARK
L103	1-410-987-42	INDUCTOR	0.33UH
L105	1-410-993-42	INDUCTOR	1UH
L105		(KV-BT212N80)	
L106	1-414-187-11	INDUCTOR	47UH
L107	1-412-062-11	INDUCTOR	47UH
L600	1-412-533-21	INDUCTOR	47UH
L601	1-412-533-21	INDUCTOR	47UH
L602	1-412-529-11	INDUCTOR	22UH
L800	1-424-796-11	COIL, HORIZONTAL LINEARITY	
L802	1-406-679-11	INDUCTOR	22MH
L803	1-414-493-41	INDUCTOR	4.7MH
L805	1-408-947-00	INDUCTOR	2.2MH
L806	1-469-555-21	INDUCTOR	10UH
L806		(KV-BT212M50(Vietnam)/M90/N80)	
L902	1-414-187-11	INDUCTOR	47UH
L2601	1-412-525-31	INDUCTOR	10UH
<PHOTO COUPLER>			
PH600	\triangle 6-600-187-11	PHOTO COUPLER PC123Y22FZ0F	
<IC LINK>			
PS602	\triangle 1-533-597-42	IC LINK	5A 90V
PS603	\triangle 1-533-597-42	IC LINK	5A 90V
PS604	1-533-597-41	IC LINK	5A 90V
PS605	\triangle 1-533-597-42	IC LINK	5A 90V
PS2601	\triangle 1-533-597-42	IC LINK	5A 90V
<TRANSISTOR>			
Q001	8-729-421-22	TRANSISTOR UN2211	
Q006	8-729-424-67	TRANSISTOR UN2216	
Q007	8-729-424-67	TRANSISTOR UN2216	
Q008	8-729-010-25	TRANSISTOR MSD601-RT1	
Q010	8-729-010-05	TRANSISTOR MSB709-RT1	
Q010		(Except KV-BT212M40/M70)	
Q013	8-729-010-25	TRANSISTOR MSD601-RT1	
Q016	8-729-421-22	TRANSISTOR UN2211	
Q100	8-729-010-25	TRANSISTOR MSD601-RT1	
Q102	8-729-022-54	TRANSISTOR 2SC3779C.D-AA	
Q103	8-729-424-67	TRANSISTOR UN2216 (Except KV-BT212N80)	
Q104	8-729-424-67	TRANSISTOR UN2216 (Except KV-BT212N80)	
Q111	8-729-010-25	TRANSISTOR MSD601-RT1	
Q111		(Except KV-BT212N80)	
Q200	8-729-421-22	TRANSISTOR UN2211	
Q201	8-729-010-05	TRANSISTOR MSB709-RT1	
Q202	8-729-010-05	TRANSISTOR MSB709-RT1	
Q206	8-729-421-22	TRANSISTOR UN2211	
Q601	8-729-010-25	TRANSISTOR MSD601-RT1	
Q605	6-550-572-01	TRANSISTOR FN155 (Except KV-BT212N80)	
Q606	8-729-010-25	TRANSISTOR MSD601-RT1	
Q606		(Except KV-BT212M90/N80)	
Q608	8-729-010-25	TRANSISTOR MSD601-RT1	
Q609	8-729-010-25	TRANSISTOR MSD601-RT1	
Q800	8-729-010-25	TRANSISTOR MSD601-RT1	
Q800		(KV-BT212M50(Vietnam)/M90/N80)	
Q801	8-729-010-25	TRANSISTOR MSD601-RT1	
Q801		(KV-BT212M50(Vietnam)/M90/N80)	
Q802	8-729-010-25	TRANSISTOR MSD601-RT1	
Q802		(KV-BT212M50(Vietnam)/M90/N80)	
Q803	8-729-326-11	TRANSISTOR 2SC2611	

REF NO.	PART NO.	DESCRIPTION	REMARK
Q804	6-550-362-01	TRANSISTOR KTA1279	
Q805	6-550-410-01	TRANSISTOR 2SC5885	
Q806	8-729-010-25	TRANSISTOR MSD601-RT1	
Q807	8-729-010-05	TRANSISTOR MSB709-RT1	
Q808	8-729-053-33	TRANSISTOR IRF614-037	
Q814	8-729-010-25	TRANSISTOR MSD601-RT1	
Q900	8-729-010-05	TRANSISTOR MSB709-RT1	
Q901	8-729-424-67	TRANSISTOR UN2216	
Q902	8-729-424-67	TRANSISTOR UN2216	
Q902		(Except KV-BT212M40/M70)	
Q910	8-729-010-25	TRANSISTOR MSD601-RT1	
Q910		(KV-BT212M40/M70)	
Q911	8-729-010-25	TRANSISTOR MSD601-RT1	
Q911		(KV-BT212M40/M70)	
Q912	8-729-421-22	TRANSISTOR UN2211	
Q912		(KV-BT212M40/M70)	
Q8009	6-550-362-01	TRANSISTOR KTA1279	
Q8010	8-729-140-50	TRANSISTOR 2SC3209LK	
Q8010		(KV-BT212M50(Vietnam))	
Q8010	8-729-326-11	TRANSISTOR 2SC2611	
Q8010		(Except KV-BT212M50(Vietnam))	
<RESISTOR>			
R001	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R002	1-216-809-11	METAL CHIP	100 5% 1/10W
R003	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R004	1-216-809-11	METAL CHIP	100 5% 1/10W
R010	1-216-833-11	METAL CHIP	10K 5% 1/10W
R011	1-216-821-11	METAL CHIP	1K 5% 1/10W
R012	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R014	1-216-809-11	METAL CHIP	100 5% 1/10W
R015	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R018	1-216-809-11	METAL CHIP	100 5% 1/10W
R020	1-216-809-11	METAL CHIP	100 5% 1/10W
R021	1-216-295-91	SHORT CHIP	0 5% 1/10W
R023	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R024	1-216-809-11	METAL CHIP	100 5% 1/10W
R025	1-216-809-11	METAL CHIP	100 5% 1/10W
R026	1-216-809-11	METAL CHIP	100 5% 1/10W
R029	1-216-809-11	METAL CHIP	100 5% 1/10W
R030	1-216-809-11	METAL CHIP	100 5% 1/10W
R038	1-216-809-11	METAL CHIP	100 5% 1/10W
R039	1-216-809-11	METAL CHIP	100 5% 1/10W
R041	1-216-809-11	METAL CHIP	100 5% 1/10W
R042	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R044	1-216-834-11	METAL CHIP	12K 5% 1/10W
R045	1-216-809-11	METAL CHIP	100 5% 1/10W
R046	1-216-809-11	METAL CHIP	100 5% 1/10W
R048	1-216-809-11	METAL CHIP	100 5% 1/10W
R051	1-218-885-11	METAL CHIP	39K 0.50% 1/10W
R056	1-216-809-11	METAL CHIP	100 5% 1/10W
R058	1-216-809-11	METAL CHIP	100 5% 1/10W
R059	1-216-821-11	METAL CHIP	1K 5% 1/10W
R059		(Except KV-BT212M40/M70)	
R060	1-216-809-11	METAL CHIP	100 5% 1/10W
R061	1-216-819-11	METAL CHIP	680 5% 1/10W
R087	1-216-813-11	METAL CHIP	220 5% 1/10W
R088	1-216-816-11	METAL CHIP	390 5% 1/10W
R088		(KV-BT212N80)	
R088	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R088		(Except KV-BT212N80)	

A

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
R096	1-216-813-11	METAL CHIP 220	5% 1/10W	R203	1-216-864-11	SHORT CHIP 0 (KV-BT212M40/M70)	
R097	1-216-813-11	METAL CHIP 220	5% 1/10W	R203	1-216-832-11	METAL CHIP 8.2K 5% 1/10W	
R098	1-216-813-11	METAL CHIP 220	5% 1/10W	R203		(Except KV-BT212M40/M70)	
R099	1-216-813-11	METAL CHIP 220	5% 1/10W	R204	1-216-829-11	METAL CHIP 4.7K 5% 1/10W	
R100	1-216-821-11	METAL CHIP 1K	5% 1/10W	R204		(KV-BT212M40/M70)	
R103	1-211-981-11	METAL CHIP 33	0.50% 1/10W	R204	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R106	1-216-832-11	METAL CHIP 8.2K	5% 1/10W	R204		(Except KV-BT212M40/M70)	
R106		(KV-BT212N80)		R205	1-216-837-11	METAL CHIP 22K 5% 1/10W	
R106	1-216-829-11	METAL CHIP 4.7K	5% 1/10W	R205		(Except KV-BT212M40/M70)	
R106		(Except KV-BT212N80)		R207	1-216-819-11	METAL CHIP 680 5% 1/10W	
R107	1-216-826-11	METAL CHIP 2.7K	5% 1/10W	R207		(KV-BT212M40/M70)	
R107		(KV-BT212N80)		R207	1-216-832-11	METAL CHIP 8.2K 5% 1/10W	
R107	1-216-828-11	METAL CHIP 3.9K	5% 1/10W	R207		(Except KV-BT212M40/M70)	
R107		(Except KV-BT212N80)		R208	1-216-819-11	METAL CHIP 680 5% 1/10W	
R108	1-216-820-11	METAL CHIP 820	5% 1/10W	R208		(KV-BT212M40/M70)	
R108		(KV-BT212N80)		R208	1-216-832-11	METAL CHIP 8.2K 5% 1/10W	
R108	1-216-821-11	METAL CHIP 1K	5% 1/10W	R208		(Except KV-BT212M40/M70)	
R108		(Except KV-BT212N80)		R210	1-216-839-11	METAL CHIP 33K 5% 1/10W	
R109	1-216-021-00	RES-CHIP 68	5% 1/10W	R210		(KV-BT212M40/M70)	
R109		(KV-BT212N80)		R210	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
R109	1-216-019-00	RES-CHIP 56	5% 1/10W	R210		(Except KV-BT212M40/M70)	
R109		(Except KV-BT212N80)		R211	1-216-839-11	METAL CHIP 33K 5% 1/10W	
R110	1-216-821-11	METAL CHIP 1K	5% 1/10W	R211		(KV-BT212M40/M70)	
R110		(Except KV-BT212N80)		R211	1-216-830-11	METAL CHIP 5.6K 5% 1/10W	
R111	1-216-833-11	METAL CHIP 10K	5% 1/10W	R211		(Except KV-BT212M40/M70)	
R111		(Except KV-BT212N80)		R212	1-216-864-11	SHORT CHIP 0	
R112	1-218-867-11	METAL CHIP 6.8K	0.50% 1/10W	R213	1-216-835-11	METAL CHIP 15K 5% 1/10W	
R112		(Except KV-BT212N80)		R214	1-216-835-11	METAL CHIP 15K 5% 1/10W	
R113	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R215	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R113		(Except KV-BT212N80)		R216	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R114	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R217	1-249-411-11	CARBON 330 5% 1/4W	
R114		(Except KV-BT212N80)		R218	1-216-295-91	SHORT CHIP 0	
R115	1-216-809-11	METAL CHIP 100	5% 1/10W	R219	1-249-411-11	CARBON 330 5% 1/4W	
R116	1-216-809-11	METAL CHIP 100	5% 1/10W	R220	1-216-864-11	SHORT CHIP 0	
R118	1-216-809-11	METAL CHIP 100	5% 1/10W	R221	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R119	1-211-981-11	METAL CHIP 33	0.50% 1/10W	R234	1-249-401-11	CARBON 47 5% 1/4W	
R121	1-215-925-11	METAL OXIDE 22K	5% 3W	R235	1-249-401-11	CARBON 47 5% 1/4W	
R128	1-216-864-11	SHORT CHIP 0		R236	1-216-833-11	METAL CHIP 10K 5% 1/10W	
R128		(KV-BT212M50(Vietnam)/M90/N80)		R237	1-216-809-11	METAL CHIP 100 5% 1/10W	
R131	1-216-809-11	METAL CHIP 100	5% 1/10W	R237		(Except KV-BT212M40/M70)	
R131		(Except KV-BT212N80)		R238	1-216-809-11	METAL CHIP 100 5% 1/10W	
R149	1-218-839-11	METAL CHIP 470	0.50% 1/10W	R238		(Except KV-BT212M40/M70)	
R149		(KV-BT212N80)		R239	1-216-809-11	METAL CHIP 100 5% 1/10W	
R149	1-216-864-11	SHORT CHIP 0		R239		(KV-BT212M40/M70)	
R149		(Except KV-BT212N80)		R241	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R150	1-216-809-11	METAL CHIP 100	5% 1/10W	R242	1-216-825-11	METAL CHIP 2.2K 5% 1/10W	
R152	1-216-864-11	SHORT CHIP 0		R300	1-216-809-11	METAL CHIP 100 5% 1/10W	
R153	1-216-853-11	METAL CHIP 470K	5% 1/10W	R301	1-216-859-11	METAL CHIP 1.5M 5% 1/10W	
R153		(Except KV-BT212M90)		R303	1-216-861-11	METAL CHIP 2.2M 5% 1/10W	
R154	1-216-821-11	METAL CHIP 1K	5% 1/10W	R304	1-216-845-11	METAL CHIP 100K 5% 1/10W	
R154		(Except KV-BT212N80)		R307	1-216-864-11	SHORT CHIP 0	
R155	1-216-837-11	METAL CHIP 22K	5% 1/10W	R309	1-216-857-11	METAL CHIP 1M 5% 1/10W	
R155		(Except KV-BT212N80)		R310	1-216-821-11	METAL CHIP 1K 5% 1/10W	
R200	1-216-864-11	SHORT CHIP 0		R311	1-216-841-11	METAL CHIP 47K 5% 1/10W	
R200		(KV-BT212M40/M70)		R312	1-216-857-11	METAL CHIP 1M 5% 1/10W	
R200	1-216-832-11	METAL CHIP 8.2K	5% 1/10W	R313	1-216-847-11	METAL CHIP 150K 5% 1/10W	
R200		(Except KV-BT212M40/M70)		R314	1-218-867-11	METAL CHIP 6.8K 0.50% 1/10W	
R201	1-216-829-11	METAL CHIP 4.7K	5% 1/10W	R315	1-218-867-11	METAL CHIP 6.8K 0.50% 1/10W	
R201		(KV-BT212M40/M70)		R317	1-216-827-11	METAL CHIP 3.3K 5% 1/10W	
R201	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R320	1-218-863-11	METAL CHIP 4.7K 0.50% 1/10W	
R201		(Except KV-BT212M40/M70)		R322	1-218-863-11	METAL CHIP 4.7K 0.50% 1/10W	
R202	1-216-837-11	METAL CHIP 22K	5% 1/10W	R323	1-216-809-11	METAL CHIP 100 5% 1/10W	
R202		(Except KV-BT212M40/M70)					

A

The components identified by shading
and mark Δ are critical for safety.
Replace only with part number specified.

REF NO.	PART NO.	DESCRIPTION	REMARK
R324	1-216-864-11	SHORT CHIP 0	
R331	1-216-809-11	METAL CHIP 100	5% 1/10W
R336	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R337	1-216-817-11	METAL CHIP 470	5% 1/10W
R338	1-216-825-11	METAL CHIP 2.2K	5% 1/10W
R339	1-216-809-11	METAL CHIP 100	5% 1/10W
R340	1-216-833-11	METAL CHIP 10K	5% 1/10W
R341	1-216-809-11	METAL CHIP 100	5% 1/10W
R355	1-216-837-11	METAL CHIP 22K	5% 1/10W
R356	1-216-864-11	SHORT CHIP 0	
R360	1-216-864-11	SHORT CHIP 0	
R363	1-216-864-11	SHORT CHIP 0	
R364	1-216-821-11	METAL CHIP 1K	5% 1/10W
R377	1-216-823-11	METAL CHIP 1.5K	5% 1/10W
R377		(Except KV-BT212M40/M70)	
R379	1-216-843-11	METAL CHIP 68K	5% 1/10W
R380	1-216-809-11	METAL CHIP 100	5% 1/10W
R384	1-216-809-11	METAL CHIP 100	5% 1/10W
R385	1-216-809-11	METAL CHIP 100	5% 1/10W
R386	1-216-809-11	METAL CHIP 100	5% 1/10W
R392	1-216-833-11	METAL CHIP 10K	5% 1/10W
R393	1-216-809-11	METAL CHIP 100	5% 1/10W
R394	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R395	1-216-845-11	METAL CHIP 100K	5% 1/10W
R397	1-216-125-00	RES-CHIP 1.5M	5% 1/10W
R398	1-216-797-11	METAL CHIP 10	5% 1/10W
R400	1-260-288-11	CARBON 0.47	5% 1/2W
R401	1-260-288-11	CARBON 0.47	5% 1/2W
R405	1-260-288-11	CARBON 0.47	5% 1/2W
R406	1-260-127-11	CARBON 220K	5% 1/2W
R411	1-214-909-00	METAL 68K	1% 1/2W
R412	1-214-761-00	METAL 22K	1% 1/4W
R413	1-215-449-00	METAL 15K	1% 1/4W
R414	1-260-336-11	CARBON 4.7K	5% 1/2W
R416	1-260-107-11	CARBON 4.7K	5% 1/2W
R420	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R421	1-216-833-11	METAL CHIP 10K	5% 1/10W
R423	1-216-864-11	SHORT CHIP 0	
R424	1-218-899-11	METAL CHIP 150K	0.50% 1/16W
R602	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R609	1-216-833-11	METAL CHIP 10K	5% 1/10W
R612	1-215-425-00	METAL 1.5K	1% 1/4W
R612		(Except KV-BT212M90/N80)	
R612	1-215-429-00	METAL 2.2K	10% 1/4W
R612		(KV-BT212M90)	
R616	1-205-998-11	CEMENTED 1	5% 10W
R616		(KV-BT212M50(Vietnam))	
R616	1-245-528-11	METAL 1.5	5% 10W
R616		(KV-BT212M90)	
R616	1-245-527-11	METAL 1	5% 10W
R616		(Except KV-BT212M50(Vietnam)/M90)	
R618	1-249-432-11	CARBON 18K	5% 1/4W
R618		(Except KV-BT212M90/N80)	
R619	1-216-363-21	METAL OXIDE 0.33	5% 2W
R619		(KV-BT212M90)	
R619	1-216-361-00	METAL OXIDE 0.22	5% 2W
R619		(Except KV-BT212M90)	
R620	1-216-362-21	METAL OXIDE 0.27	5% 2W
R620		(Except KV-BT212M90)	
R620	1-216-363-21	METAL OXIDE 0.33	5% 2W
R620		(KV-BT212M90)	
R621	1-249-409-11	CARBON 220	5% 1/4W

REF NO.	PART NO.	DESCRIPTION	REMARK
R623	1-218-877-11	METAL CHIP 18K	0.50% 1/10W
R623		(Except KV-BT212M90/N80)	
R624	1-215-429-00	METAL 2.2K	1% 1/4W
R625	1-216-864-11	SHORT CHIP 0	
R627	1-249-385-11	CARBON 2.2	5% 1/4W
R631	1-249-425-11	CARBON 4.7K	5% 1/4W
R634	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R635	1-216-833-11	METAL CHIP 10K	5% 1/10W
R636	1-249-421-11	CARBON 2.2K	5% 1/4W
R638	1-240-262-11	CEMENTED 0.68	5% 10W
R638		(KV-BT212M50(Vietnam))	
R638	1-245-528-11	METAL 1.5	5% 10W
R638		(KV-BT212M90)	
R638	1-245-526-11	METAL 0.68	5% 10W
R638		(Except KV-BT212M50(Vietnam)/M90)	
R645	1-218-899-11	METAL CHIP 150K	0.50% 1/16W
R646	1-218-851-11	METAL CHIP 1.5K	0.50% 1/10W
R647	1-216-821-11	METAL CHIP 1K	5% 1/10W
R650	Δ 1-240-917-91	METAL 8.2M	5% 1W
R651	1-243-595-71	METAL OXIDE 39K	5% 2W
R651		(KV-BT212N80)	
R655	1-216-809-11	METAL CHIP 100	5% 1/10W
R656	1-249-381-11	CARBON 1	5% 1/4W
R658	1-245-480-21	METAL 560K	1% 1/4W
R658		(KV-BT212M90)	
R658	1-245-464-21	METAL 120K	1% 1/4W
R658		(Except KV-BT212M90/N80)	
R659	1-245-482-21	METAL 680K	1% 1/4W
R659		(KV-BT212M90)	
R659	1-245-470-21	METAL 220K	1% 1/4W
R659		(Except KV-BT212M90/N80)	
R660	1-245-478-21	METAL 470K	1% 1/4W
R660		(Except KV-BT212M90/N80)	
R661	1-245-480-21	METAL 560K	1% 1/4W
R661		(Except KV-BT212M90/N80)	
R667	1-216-821-11	METAL CHIP 1K	5% 1/10W
R668	1-216-839-11	METAL CHIP 33K	5% 1/10W
R800	1-216-825-11	METAL CHIP 2.2K	5% 1/10W
R800		(KV-BT212M50(Vietnam)/M90/N80)	
R801	1-216-864-11	SHORT CHIP 0	
R801		(KV-BT212M50(Vietnam)/M90/N80)	
R802	1-216-864-11	SHORT CHIP 0	
R802		(KV-BT212M50(Vietnam)/M90/N80)	
R803	1-216-833-11	METAL CHIP 10K	5% 1/10W
R803		(KV-BT212M50(Vietnam)/M90/N80)	
R804	1-216-864-11	SHORT CHIP 0	
R804		(KV-BT212M50(Vietnam)/M90/N80)	
R805	1-216-837-11	METAL CHIP 22K	5% 1/10W
R805		(KV-BT212M50(Vietnam)/M90/N80)	
R806	1-216-864-11	SHORT CHIP 0	
R806		(KV-BT212M50(Vietnam)/M90/N80)	
R807	1-216-819-11	METAL CHIP 680	5% 1/10W
R807		(KV-BT212M50(Vietnam)/M90/N80)	
R808	1-216-833-11	METAL CHIP 10K	5% 1/10W
R808		(KV-BT212M50(Vietnam)/M90/N80)	
R809	1-216-833-11	METAL CHIP 10K	5% 1/10W
R809		(KV-BT212M50(Vietnam)/M90/N80)	
R810	1-216-833-11	METAL CHIP 10K	5% 1/10W
R810		(KV-BT212M50(Vietnam)/M90/N80)	
R812	1-216-837-11	METAL CHIP 22K	5% 1/10W
R812		(KV-BT212M50(Vietnam)/M90/N80)	
R813	1-216-837-11	METAL CHIP 22K	5% 1/10W
R813		(KV-BT212M50(Vietnam)/M90/N80)	

A

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
R814	1-216-809-11	METAL CHIP 100	5% 1/10W	R893	1-218-871-11	METAL CHIP 10K	0.50% 1/10W
R814		(KV-BT212M50(Vietnam)/M90/N80)		R895	1-218-859-11	METAL CHIP 3.3K	0.50% 1/10W
R815	1-216-837-11	METAL CHIP 22K	5% 1/10W	R902	1-216-821-11	METAL CHIP 1K	5% 1/10W
R815		(KV-BT212M50(Vietnam)/M90/N80)		R904	1-216-821-11	METAL CHIP 1K	5% 1/10W
R816	1-216-864-11	SHORT CHIP 0		R905	1-216-840-11	METAL CHIP 39K	5% 1/10W
R816		(KV-BT212M50(Vietnam)/M90/N80)					
R817	1-216-833-11	METAL CHIP 10K	5% 1/10W	R906	1-216-817-11	METAL CHIP 470	5% 1/10W
R817		(KV-BT212M50(Vietnam)/M90/N80)		R909	1-216-840-11	METAL CHIP 39K	5% 1/10W
R818	1-216-833-11	METAL CHIP 10K	5% 1/10W	R909		(Except KV-BT212M40/M70)	
R818		(KV-BT212M50(Vietnam)/M90/N80)		R910	1-216-817-11	METAL CHIP 470	5% 1/10W
R820	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R910		(Except KV-BT212M40/M70)	
R821	1-216-837-11	METAL CHIP 22K	5% 1/10W	R911	1-216-813-11	METAL CHIP 220	5% 1/10W
R822	1-249-417-11	CARBON 1K	5% 1/4W	R913	1-216-853-11	METAL CHIP 470K	5% 1/10W
R823	1-245-468-21	METAL 180K	1% 1/4W	R913		(Except KV-BT212M40/M70)	
R824	1-216-839-11	METAL CHIP 33K	5% 1/10W	R914	1-216-853-11	METAL CHIP 470K	5% 1/10W
R825	1-243-606-71	METAL OXIDE 1K	5% 3W	R915	1-216-849-11	METAL CHIP 220K	5% 1/10W
R826	1-247-891-00	CARBON 330K	5% 1/4W	R916	1-216-849-11	METAL CHIP 220K	5% 1/10W
R827	1-216-369-00	METAL OXIDE 1	5% 2W	R916		(Except KV-BT212M40/M70)	
R828	1-243-606-71	METAL OXIDE 1K	5% 3W	R917	1-218-285-11	METAL CHIP 75	5% 1/10W
R829	1-243-606-71	METAL OXIDE 1K	5% 3W	R924	1-216-853-11	METAL CHIP 470K	5% 1/10W
R830	1-260-332-51	CARBON 2.2K	5% 1/2W	R931	1-216-807-11	METAL CHIP 68	5% 1/10W
R831	1-216-829-11	METAL CHIP 4.7K	5% 1/10W	R932	1-216-864-11	SHORT CHIP 0	
R833	1-260-125-11	CARBON 150K	5% 1/2W	R933	1-216-864-11	SHORT CHIP 0	
R834	1-245-468-21	METAL 180K	1% 1/4W	R933		(Except KV-BT212M40/M70)	
R835	1-260-127-11	CARBON 220K	5% 1/2W	R940	1-216-849-11	METAL CHIP 220K	5% 1/10W
R838	1-216-838-11	METAL CHIP 27K	5% 1/10W	R941	1-216-849-11	METAL CHIP 220K	5% 1/10W
				R941		(Except KV-BT212M40/M70)	
R839	1-216-864-11	SHORT CHIP 0		R945	1-216-833-11	METAL CHIP 10K	5% 1/10W
R843	1-216-864-11	SHORT CHIP 0		R946	1-216-833-11	METAL CHIP 10K	5% 1/10W
R844	1-218-867-11	METAL CHIP 6.8K	0.50% 1/10W	R946		(Except KV-BT212M40/M70)	
R846	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R989	1-216-833-11	METAL CHIP 10K	5% 1/10W
R847	1-216-833-11	METAL CHIP 10K	5% 1/10W	R2646	1-249-381-11	CARBON 1	5% 1/4W
R851	1-216-821-11	METAL CHIP 1K	5% 1/10W	R2647	1-249-429-11	CARBON 10K	5% 1/4W
R852	1-218-871-11	METAL CHIP 10K	0.50% 1/10W	R8003	1-216-809-11	METAL CHIP 100	5% 1/10W
R853	1-218-859-11	METAL CHIP 3.3K	0.50% 1/10W	R8003		(KV-BT212M50(Vietnam)/M90/N80)	
R854	1-218-877-11	METAL CHIP 18K	0.50% 1/10W	R8004	1-216-809-11	METAL CHIP 100	5% 1/10W
R855	1-218-871-11	METAL CHIP 10K	0.50% 1/10W	R8004		(KV-BT212M50(Vietnam)/M90/N80)	
R856	1-218-871-11	METAL CHIP 10K	0.50% 1/10W	R8005	1-218-871-11	METAL CHIP 10K	0.50% 1/10W
R859	1-218-883-11	METAL CHIP 33K	0.50% 1/10W	R8005		(KV-BT212M50(Vietnam)/M90/N80)	
R861	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R8009	1-218-867-11	METAL CHIP 6.8K	0.50% 1/10W
R864	1-218-865-11	METAL CHIP 5.6K	0.50% 1/10W	R8010	1-245-464-21	METAL 120K	1% 1/4W
R865	1-216-821-11	METAL CHIP 1K	5% 1/10W	R8011	1-216-841-11	METAL CHIP 47K	5% 1/10W
R866	1-218-895-11	METAL CHIP 100K	0.50% 1/10W	R8012	1-216-841-11	METAL CHIP 47K	5% 1/10W
R868	1-249-393-11	CARBON 10	5% 1/4W	R8013	1-245-462-21	METAL 100K	1% 1/4W
R869	1-249-381-11	CARBON 1	5% 1/4W	R9005	1-216-864-11	SHORT CHIP 0	
R870	1-218-859-11	METAL CHIP 3.3K	0.50% 1/10W	R9006	1-216-864-11	SHORT CHIP 0	
R871	1-243-692-71	METAL OXIDE 220	5% 1W	R9007	1-216-864-11	SHORT CHIP 0 (KV-BT212M40/M70)	
R872	1-216-864-11	SHORT CHIP 0		R9008	1-216-864-11	SHORT CHIP 0 (KV-BT212M40/M70)	
R873	1-216-841-11	METAL CHIP 47K	5% 1/10W	R9009	1-216-864-11	SHORT CHIP 0 (KV-BT212M40/M70)	
R876	1-216-833-11	METAL CHIP 10K	5% 1/10W	R9017	1-216-809-11	METAL CHIP 100	5% 1/10W
R877	1-218-895-11	METAL CHIP 100K	0.50% 1/10W	R9018	1-216-809-11	METAL CHIP 100	5% 1/10W
R878	1-216-349-00	METAL OXIDE 1	5% 1W	R9019	1-216-809-11	METAL CHIP 100	5% 1/10W
R879	1-245-470-21	METAL 220K	1% 1/4W	R9020	1-216-809-11	METAL CHIP 100	5% 1/10W
R880	1-245-470-21	METAL 220K	1% 1/4W	R9021	1-216-809-11	METAL CHIP 100	5% 1/10W
R881	1-218-871-11	METAL CHIP 10K	0.50% 1/10W	R9022	1-216-809-11	METAL CHIP 100	5% 1/10W
R882	1-216-825-11	METAL CHIP 2.2K	5% 1/10W	R9023	1-216-809-11	METAL CHIP 100	5% 1/10W
R883	1-249-421-11	CARBON 2.2K	5% 1/4W	R9025	1-216-809-11	METAL CHIP 100	5% 1/10W
R887	1-216-837-11	METAL CHIP 22K	5% 1/10W	R9026	1-216-838-11	METAL CHIP 27K	5% 1/10W
R888	1-218-887-11	METAL CHIP 47K	0.50% 1/10W	R9026		(Except KV-BT212M40/M70)	
R889	1-243-531-71	METAL OXIDE 100	5% 3W	R9027	1-216-838-11	METAL CHIP 27K	5% 1/10W
R890	1-215-910-00	METAL OXIDE 68	5% 3W	R9028	1-216-809-11	METAL CHIP 100	5% 1/10W
R891	1-249-385-11	CARBON 2.2	5% 1/4W	R9030	1-216-809-11	METAL CHIP 100	5% 1/10W
				R9030		(Except KV-BT212M40/M70)	

The components identified by shading and mark Δ are critical for safety. Replace only with part number specified.



REF NO.	PART NO.	DESCRIPTION	REMARK
R9031	1-216-809-11	METAL CHIP 100	5% 1/10W
R9031		(Except KV-BT212M40/M70)	
R9034	1-216-809-11	METAL CHIP 100	5% 1/10W
R9034		(KV-BT212M40/M70)	
R9036	1-216-809-11	METAL CHIP 100	5% 1/10W
R9038	1-216-864-11	SHORT CHIP 0	(KV-BT212M40/M70)
R9040	1-216-857-11	METAL CHIP 1M	5% 1/10W
R9040		(KV-BT212M40/M70)	
R9041	1-216-857-11	METAL CHIP 1M	5% 1/10W
R9041		(KV-BT212M40/M70)	
R9042	1-216-827-11	METAL CHIP 3.3K	5% 1/10W
R9042		(KV-BT212M40/M70)	
R9043	1-216-821-11	METAL CHIP 1K	5% 1/10W
R9043		(KV-BT212M40/M70)	
R9044	1-216-817-11	METAL CHIP 470	5% 1/10W
R9044		(KV-BT212M40/M70)	
R9045	1-216-809-11	METAL CHIP 100	5% 1/10W
R9045		(KV-BT212M40/M70)	
R9046	1-216-825-11	METAL CHIP 2.2K	5% 1/10W
R9046		(KV-BT212M40/M70)	
R9047	1-216-833-11	METAL CHIP 10K	5% 1/10W
R9047		(KV-BT212M40/M70)	
R9050	1-216-864-11	SHORT CHIP 0	(Except KV-BT212M40/M70)
R9050		(Except KV-BT212M40/M70)	
R9051	1-216-864-11	SHORT CHIP 0	(KV-BT212M40/M70)
R9051		(KV-BT212M40/M70)	
R9053	1-218-285-11	METAL CHIP 75	5% 1/10W
R9060	1-216-864-11	SHORT CHIP 0	(KV-BT212M40/M70)
R9061	1-216-864-11	SHORT CHIP 0	(KV-BT212M40/M70)
<RELAY>			
RY600	Δ 1-755-198-12	RELAY, AC POWER	
<SWITCH>			
S600	Δ 1-571-433-31	SWITCH, PUSH (AC POWER)	
S800	1-572-707-11	SWITCH, LEVER	
SWF100	1-781-040-11	FILTER, SURFACE WAVE (K082)	
SWF100		(KV-BT212M50(Vietnam)/M90)	
SWF100	1-795-890-11	SAW FILTER (KV-BT212N80)	
SWF100	1-781-042-11	FILTER, SURFACE WAVE	(Except KV-BT212M50(Vietnam)/M90/N80)
SWF100		(Except KV-BT212M50(Vietnam)/M90/N80)	
SWF101	1-795-506-11	FILTER, SURFACE WAVE (KV-BT212N80)	
SWF101	1-767-302-11	FILTER, SURFACE WAVE	(KV-BT212M50(Vietnam)/M90)
SWF101		(KV-BT212M50(Vietnam)/M90)	
<TRANSFORMER>			
T600	Δ 1-456-354-11	LINE FILTER COIL (Except KV-BT212N80)	
T602	Δ 1-439-698-11	CONVERTER TRANSFORMER (SRT)	
T602		(KV-BT212M90)	
T602	Δ 1-439-697-11	CONVERTER TRANSFORMER (SRT)	
T602		(KV-BT212N80)	
T602	Δ 1-439-695-11	CONVERTER TRANSFORMER (SRT)	
T602		(Except KV-BT212M90/N80)	
T603	Δ 1-456-354-11	LINE FILTER COIL (Except KV-BT212N80)	
T604	1-424-461-11	TRANSFORMER, LINE FILTER	(KV-BT212N80)
T604		(KV-BT212N80)	
T605	1-424-461-11	TRANSFORMER, LINE FILTER	(KV-BT212N80)
T605		(KV-BT212N80)	

REF NO.	PART NO.	DESCRIPTION	REMARK
T800	1-435-374-11	TRANSFORMER, FERRITE (HDT)	
T800		(KV-BT212M50(Vietnam))	
T800	1-437-936-21	FERRITE TRANSFORMER (HDT)	
T800		(Except KV-BT212M50(Vietnam))	
T801	Δ 1-453-329-41	TRANSFORMER ASSY FLYBACK	
T801		(NX-4751//M3A4)	
<THERMISTOR>			
THP600	Δ 1-805-568-11	PTC THERMISTOR (KV-BT212M50(Vietnam))	
THP600	Δ 1-809-539-11	THERMISTOR, POSITIVE (KV-BT212N80)	
THP600	Δ 1-804-530-11	THERMISTOR, POSITIVE	
THP600		(Except KV-BT212M50(Vietnam)/N80)	
TP02	1-536-354-00	POST PIN	
TP03	1-536-354-00	POST PIN	
TP04	1-536-354-00	POST PIN	
TP601	1-536-354-00	POST PIN	
TP602	1-536-354-00	POST PIN	
<TUNER>			
TU101	8-598-620-10	TUNER, FSS BTP-AA402 (KV-BT212N80)	
TU102	1-693-659-11	TUNER (TEQE2-903A) (Except KV-BT212N80)	
<VARISTOR>			
VDR600	1-804-991-21	VARISTOR (KV-BT212N80)	
VDR600	1-804-995-21	VARISTOR (Except KV-BT212N80)	
<CRYSTAL>			
X001	1-813-311-21	QUARTS CRYSTAL UNIT	

		* A-1070-642-A	MOUNTED PWB (VAR), C
			(KV-BT212M50(Vietnam))
		* A-1062-283-A	MOUNTED PWB (VAR), C
			(Except KV-BT212M50(Vietnam))

		4-382-854-01	SCREW (M3X8), P, SW (+)
<CAPACITOR>			
C751	1-107-961-91	ELECT	10UF 20.00% 250V
C752	1-115-350-51	CERAMIC	0.0047UF 2KV
C754	1-107-651-11	ELECT	4.7UF 20.00% 250V
C781	1-107-651-11	ELECT	4.7UF 20.00% 250V
C782	1-102-074-00	CERAMIC	0.001UF 10.00% 50V
C783	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C786	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C787	1-164-645-11	CERAMIC 1000PF	10.00% 500V
<CONNECTOR>			
* CN701	1-564-510-11	PLUG, CONNECTOR 7P	
* CN703	1-564-508-11	PLUG, CONNECTOR 5P	
CN704	1-695-915-11	TAB (CONTACT)	
CN705	1-695-915-11	TAB (CONTACT)	

The components identified by shading
and mark \triangle are critical for safety.
Replace only with part number specified.

C

REF NO. PART NO. DESCRIPTION REMARK

<DIODE>

D750 8-719-908-03 DIODE GP08D
D754 8-719-970-83 DIODE HSS82-TJ
D755 8-719-970-83 DIODE HSS82-TJ
D756 8-719-970-83 DIODE HSS82-TJ
D780 8-719-991-33 DIODE 1SS133T-77

D781 8-719-991-33 DIODE 1SS133T-77
D782 8-719-069-55 DIODE UDZSTE-175.6B

<IC>

IC751 6-703-482-01 IC TDA6108AJF/N1

<JACK>

J751 \triangle 1-451-544-11 SOCKET, CRT

<COIL>

L780 1-410-667-31 INDUCTOR 22UH
(KV-BT212M50(Vietnam))
L780 1-414-742-21 INDUCTOR 22UH
(Except KV-BT212M50(Vietnam))

<RESISTOR>

R713 1-216-864-11 SHORT CHIP 0
R752 1-216-819-11 METAL CHIP 680 5% 1/10W
R753 1-216-819-11 METAL CHIP 680 5% 1/10W
R754 1-216-819-11 METAL CHIP 680 5% 1/10W
R756 1-219-746-11 METAL 1K 5% 1/2W

R757 1-219-746-11 METAL 1K 5% 1/2W
R758 1-219-746-11 METAL 1K 5% 1/2W
R763 1-260-087-11 CARBON 100 5% 1/2W
R764 1-260-087-11 CARBON 100 5% 1/2W
R765 1-260-087-11 CARBON 100 5% 1/2W

R773 1-260-132-11 CARBON 560K 5% 1/2W
R774 1-215-912-11 METAL OXIDE 150 5% 3W
R780 1-260-131-11 CARBON 470K 5% 1/2W
R781 1-243-950-71 RES, OXIDE METAL FILM 0.56
R783 1-260-087-11 CARBON 100 5% 1/2W

R794 1-249-377-11 CARBON 0.47 5% 1/4W
R795 1-260-352-11 CARBON 100K 5% 1/2W

<VARIABLE RESISTOR>

RV750 1-241-656-11 RES, ADJ, METAL FILM 110M

REF NO. PART NO. DESCRIPTION REMARK

<ACCESSORIES AND PACKING MATERIALS>

1-417-151-51 MATCHING TRANSFORMER, ANTENNA
(KV-BT212M40/M50(GE)/M80(Saudi Arabia))
1-417-151-22 MATCHING TRANSFORMER, ANTENNA
(KV-BT212M50(Vietnam))
1-501-730-11 ANTENNA, TELESCOPIC
(KV-BT212M40/M50(GE)/M80(Saudi Arabia))
1-754-114-11 ANTENNA, TELESCOPIC
(KV-BT212M50(Vietnam))
* 2-067-522-01 BAG, PROTECTION (KV-BT212M40/M50(GE)/
M80(Saudi Arabia)/M90)

* 4-062-162-11 BAG, PROTECTION (KV-BT212M50(Vietnam))
* 4-395-957-01 BAG, PROTECTION
(KV-BT212M70/M80(Russia)/N80)
2-149-900-11 MANUAL, INSTRUCTION
(KV-BT212M40/M50(GE))
2-176-886-11 MANUAL, INSTRUCTION
(KV-BT212M50(Vietnam))
2-177-116-11 MANUAL, INSTRUCTION
(KV-BT212M70/M80(Russia))

2-159-365-11 MANUAL, INSTRUCTION
(KV-BT212M80(Saudi Arabia))
2-178-463-11 MANUAL, INSTRUCTION (KV-BT212M90)
2-177-205-11 MANUAL, INSTRUCTION (KV-BT212N80)
3-701-910-00 SCREW, SPECIAL (DIA. 3.8X20)
4-392-004-51 CLIP (KV-BT212M50(Vietnam))

4-392-004-11 CLIP (Except KV-BT212M50(Vietnam))
4-392-003-11 BAND, HOLD (Except KV-BT212M50(Vietnam))
4-392-003-51 BAND, HOLD (KV-BT212M50(Vietnam))
* 4-092-242-02 INDIVIDUAL CARTON
(Except KV-BT212M50(Vietnam)/N80)
* 4-096-837-01 INDIVIDUAL CARTON
(KV-BT212M50(Vietnam))

* 4-103-327-01 INDIVIDUAL CARTON (KV-BT212N80)
* 4-098-964-01 CUSHION, UPPER
(Except KV-BT212M50(Vietnam)/N80)
* 4-092-173-01 CUSHION, UPPER (KV-BT212M50(Vietnam))
* 4-102-912-01 CUSHION(PULP), UPPER (KV-BT212N80)
* 4-098-965-01 CUSHION, LOWER
(Except KV-BT212M50(Vietnam)/N80)

* 4-092-174-01 CUSHION, LOWER (KV-BT212M50(Vietnam))
* 2-050-491-01 CUSHION, LOWER (KV-BT212N80)

<REMOTE COMMANDER>

1-478-009-11 REMOTE COMMANDER (RM-W101)
(Except KV-BT212N80)
4-084-290-01 REMOTE COMMANDER BATTERY COVER
(RM-W101)
1-477-845-11 REMOTE COMMANDER (RM-W150)
(KV-BT212N80)
9-939-697-01 REMOTE COMMANDER BATTERY COVER
(RM-W150)

SUPPLEMENT-1

BX1S CHASSIS

<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>	<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>
KV-BT212M40	RM-W101	E	SCC-U98S-A				
KV-BT212M50	RM-W101	Vietnam	SCC-V07P-A				
KV-BT212M50	RM-W101	GE	SCC-V04M-A				
KV-BT212M70	RM-W101	Russia	SCC-V13B-A				
KV-BT212M80	RM-W101	Saudi Arabia	SCC-V10S-A				
KV-BT212M80	RM-W101	Russia	SCC-V13C-A				
KV-BT212M90	RM-W101	Hong Kong	SCC-U97L-A				
KV-BT212N80	RM-W150	Taiwan	SCC-V05K-A				

SUBJECT : NEW MODEL ADDITION KV-BT212M80(E)

<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>
KV-BT212M40	RM-W101	E	SCC-U98S-A
KV-BT212M50	RM-W101	Vietnam	SCC-V07P-A
KV-BT212M50	RM-W101	GE	SCC-V04M-A
KV-BT212M70	RM-W101	Russia	SCC-V13B-A
KV-BT212M80	RM-W101	Saudi Arabia	SCC-V10S-A
KV-BT212M80	RM-W101	Russia	SCC-V13C-A
KV-BT212M80	RM-W101	E	SCC-U98W-A
KV-BT212M90	RM-W101	Hong Kong	SCC-U97L-A
KV-BT212N80	RM-W150	Taiwan	SCC-V05K-A

Note: There is one new model KV-BT212M80(E) added to this Service Manual.
Thus, this supplement shows the differences of this new model from the previous BT212.

ITEM INFORMATION

No. OPB1

Item	Speed Search		Home Theatre	Wide Screen	M (GA)	B/G	I	D/K	DEC
KV-BT212M80(E)	0	1	0	0	1	1	1	1	79

SPEED SEARCH (Time of speed search)

00 = disabled (original cycle speed)

01 = 4 time speed from the original

10 = 6 time speed from the original

11 = 8 time speed from the original

TV System Selection

0 = disabled, 1 = enabled

Home Theatre

1 = Home Theatre mode available

Wide Screen

1 = Wide Screen model

No. OPB2

Item	Party Mode	PAM(GA)	Component	Composite(SCART)		SECAM	Color Decoding		DEC
KV-BT212M80(E)	0	0	0	1	0	1	0	0	20

Party Mode

(karaoke function)

0 = not available, 1 = available

PAM

Portable Audio Mode - GA

0 = not available, 1 = available

Component

(Component [YCbCr] Terminals)

0 = not available, 1 = available

Composite

(No. of Composite Terminals)

BX1S/BX1L Basic 00 = no composite terminal

BX1L-Full : 00 = no composite terminal

01 = 1 composite terminal

01 = 2 composite terminals

10 = 2 composite terminals

10 = 3 composite terminals

11 = 3 composite terminals

11 = 4 composite terminals

SECAM

(SECAM Color System)

0 = disabled, 1 = enabled

Color decoding

(Color Crystal Selection)

00 = PAL/NTSC (Multi)

01 = NTSC (3.58MHz)

10 = PAL/NTSC (4.43MHz)

11 = PAL/NTSC (Tri-Norma)

No. OPB3

Item	HDEV	NICAM ST	NICAM BI	A2 ST	Thai Bilingual	US ST	Korean ST	MONO	DEC
KV-BT212M80(E)	0	0	0	0	0	0	0	0	00

HDEV

(High Deviation Mode)

0 = disabled, 1 = enabled

NICAM ST

(NICAM Stereo)

0 = disabled, 1 = enabled

NICAM BI

(NICAM Bilingual)

0 = disabled, 1 = enabled

A2 ST/BI

(A2 [West German]

Stereo/Bilingual)

0 = disabled, 1 = enabled

Thai Bilingual

(A2 [Thai] Bilingual)

or Force SAP if US ST is active

0 = disabled, 1 = enabled

US ST

(JP/US Stereo)

0 = disabled, 1 = enabled

Korean ST

(Korean Stereo)

0 = disabled, 1 = enabled

MONO

(Monaural Model)

0 = Stereo (SSD) Model

1 = Monaural Model

No. OPB4

Item	SMAT	1 spk Models	VM	Equalizer	Surround		Top	Text	DEC
KV-BT212M80(E)	1	0	0	0	0	0	0	0	128

SMAT Surround Matrix 0 = Active, 1 = Passive
1 spk Models 1 Speaker Models 0 = 2 or 3 Speaker Models, 1 = 1 speaker Models

VM (Velocity Modulation) 0 = disabled, 1 = enabled
Equalizer (5-band Equalizer Model) 0 = Bass/Treble Model, 1 = Equalizer Model
Surround (Surround Selection) 00 = Off/Simulated/Surround
01 = Off/Simulated/SRS (3D) Surround
10 = Off/Simulated/WOW/TruSurround
11 = Off/Simulated/WOW/TruSurround/Virtual Bolby (not working now)

TOP (Forced TOP) 0 = Auto Mode (TOP/FLOF), 1 = Forced TOP
TEXT (Teletext Model) 0 = Non-Teletext Model, 1 = Teletext Model

No. OPB5

Item	Full Surround	No Surround	COSMIC ASD	ASD	Tilt	IP Plus	IP	Wide	DEC
KV-BT212M80(E)	0	0	1	0	0	1	1	0	38

Full Surround (Full Surround option-no for EURO model) 0 = Normal Surround Model
1 = Full Surround Model (Off/simulated/surround/SRS/WOW/TruSurround)

No Surround (No Surround Model) 0 = Surround Model, 1 = Non-Surround Model
Cosmic ASD Automatic Standard Detection Using COSMIC (Non-Stereo) 0 = disabled, 1 = enabled

ASD (Automatic Standard Detection) 0 = disabled, 1 = enabled
Tilt (Tilt Correction/PIC Rotation) 0 = disabled, 1 = enabled
IP Plus (Intelligent Picture Plus) 0 = disabled, 1 = enabled
IP (Intelligent Picture) 0 = disabled, 1 = enabled
Wide (Wide Mode/V-Compressed) 0 = disabled, 1 = enabled

No. OPB6

Item	GA US	3D OSD	Feature 2	Feature 1	OSD Language Selection				DEC
KV-BT212M80(E)	0	0	0	0	0	1	0	0	04

GA US	(US Model Destination)	0 = US/CANADA/Latin 1 = Taiwan/Korea/Philippine (Wake-up timer enable) (GA Surround Spec:OFF, SIMULATED, SRS)
3D OSD	(BX1L Full version GA Multi Destination ONLY)	0 = Normal with 3D Intelligent picture OSD 1 = Disable 3D Intelligent picture OSD
Feature 2	(Temporary for BX1L)	0 = Comb Not available 1 = Comb available
Feature 1	(Temporary for BX1L)	0 = PiP Not Available 1 = PiP available
OSD Language Selection		
	US (GA NTSC)	1x1x = Complicated Chinese 1xx1 = Korean (note: for BX1L, combination of C.Chinese & Korean not available)
	GA	1xxx = Simplified Chinese x1xx = Arabic xx1x = Thai xxx1 = Vietnamese


4-5. PRINTED WIRING BOARDS AND PARTS LOCATION

PRINTED WIRING BOARDS


A [Processor, Audio, Power Supply, Deflection, Tuner, Jack, Heat Sink]

– A Board –

(KV-BT212M80(E))

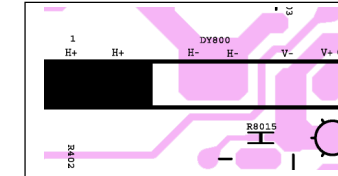**NOTE:**


The circuit indicated at left contains high voltage of over 1220 Vp-p. Please pay attention when inspecting or repairing it to prevent an electric shock.

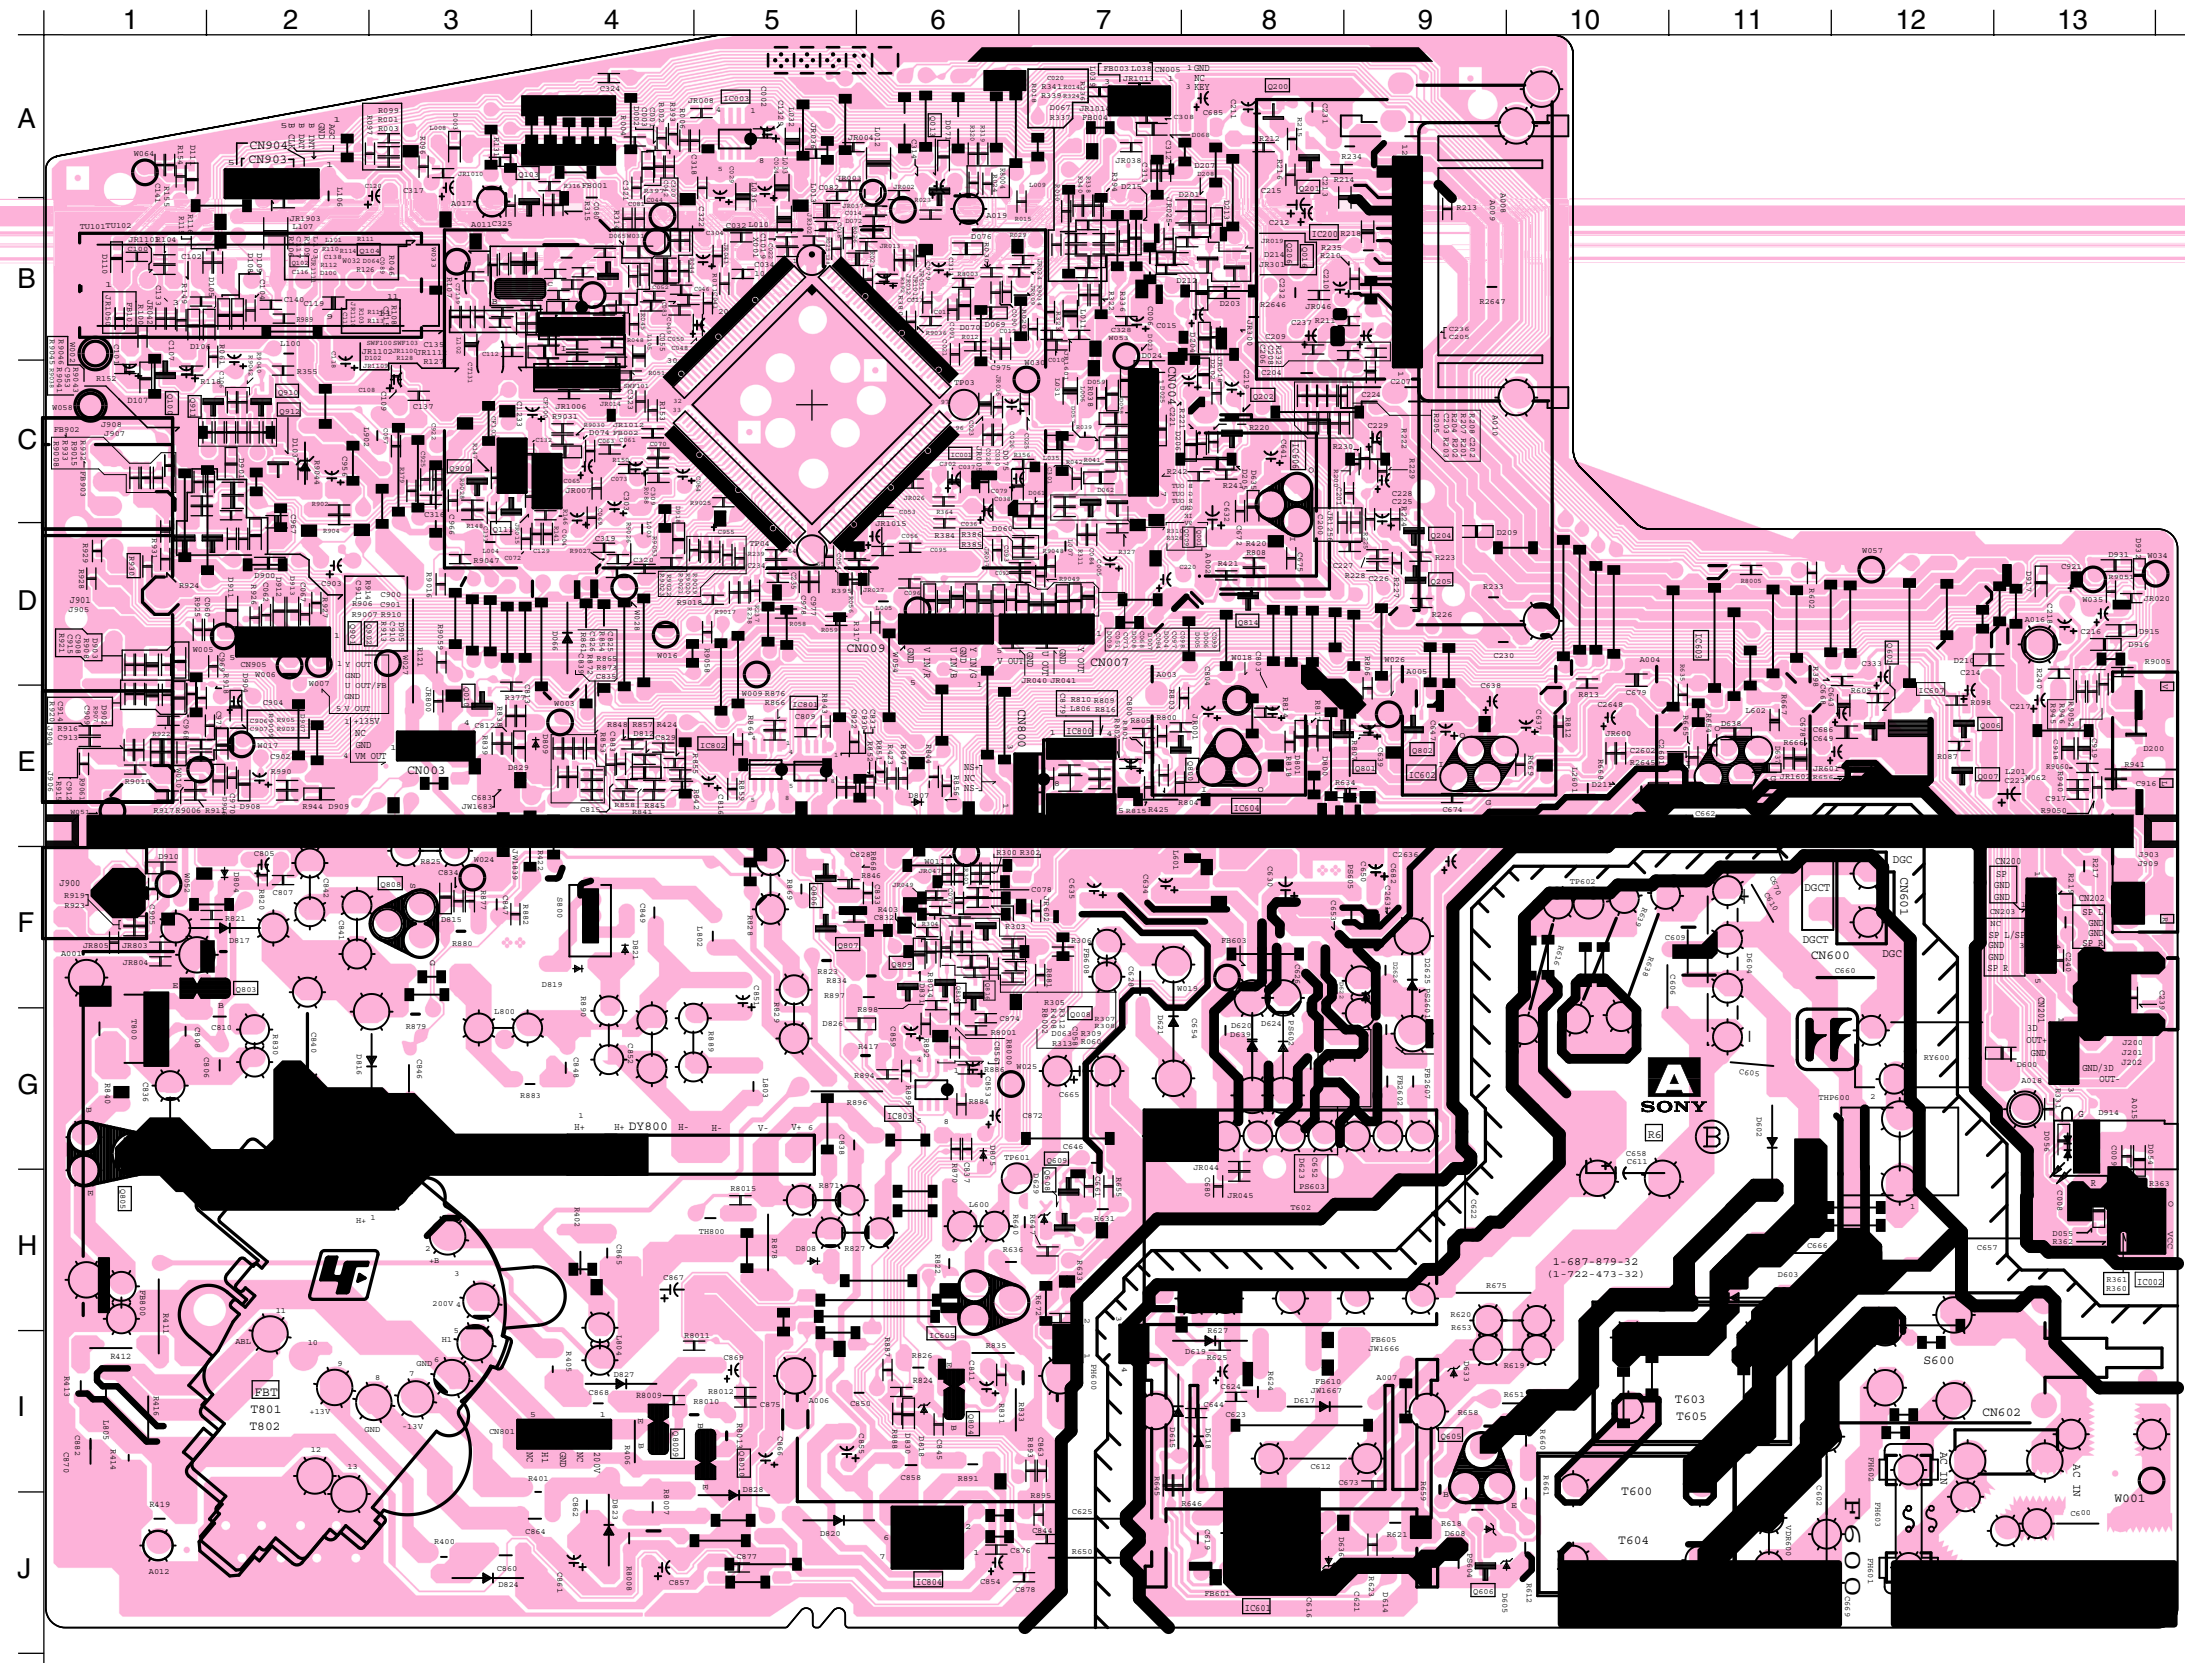

PRINTED WIRING BOARDS

C [VIDEO AMP]

– C Board –
(KV-BT212M80(E))

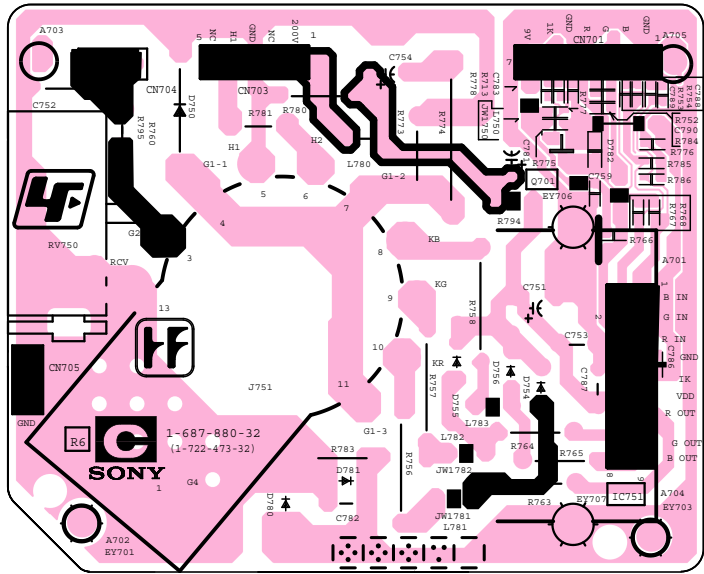

SECTION 5 EXPLODED VIEWS

NOTE:


- Items with no part number and no description are not stocked because they are seldom required for routine service.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

The components identified by shading and mark \triangle are critical for safety. Replace only with part number specified.

5-1. CHASSIS

- : 7-685-648-79 SCREW +BVTP 3 × 12 TYPE2 IT-3
- : 7-685-663-71 SCREW +BVTP 4 × 16 TYPE2 IT-3

Note: All the information on this section (Section 5) is for model KV-BT212M80(E)

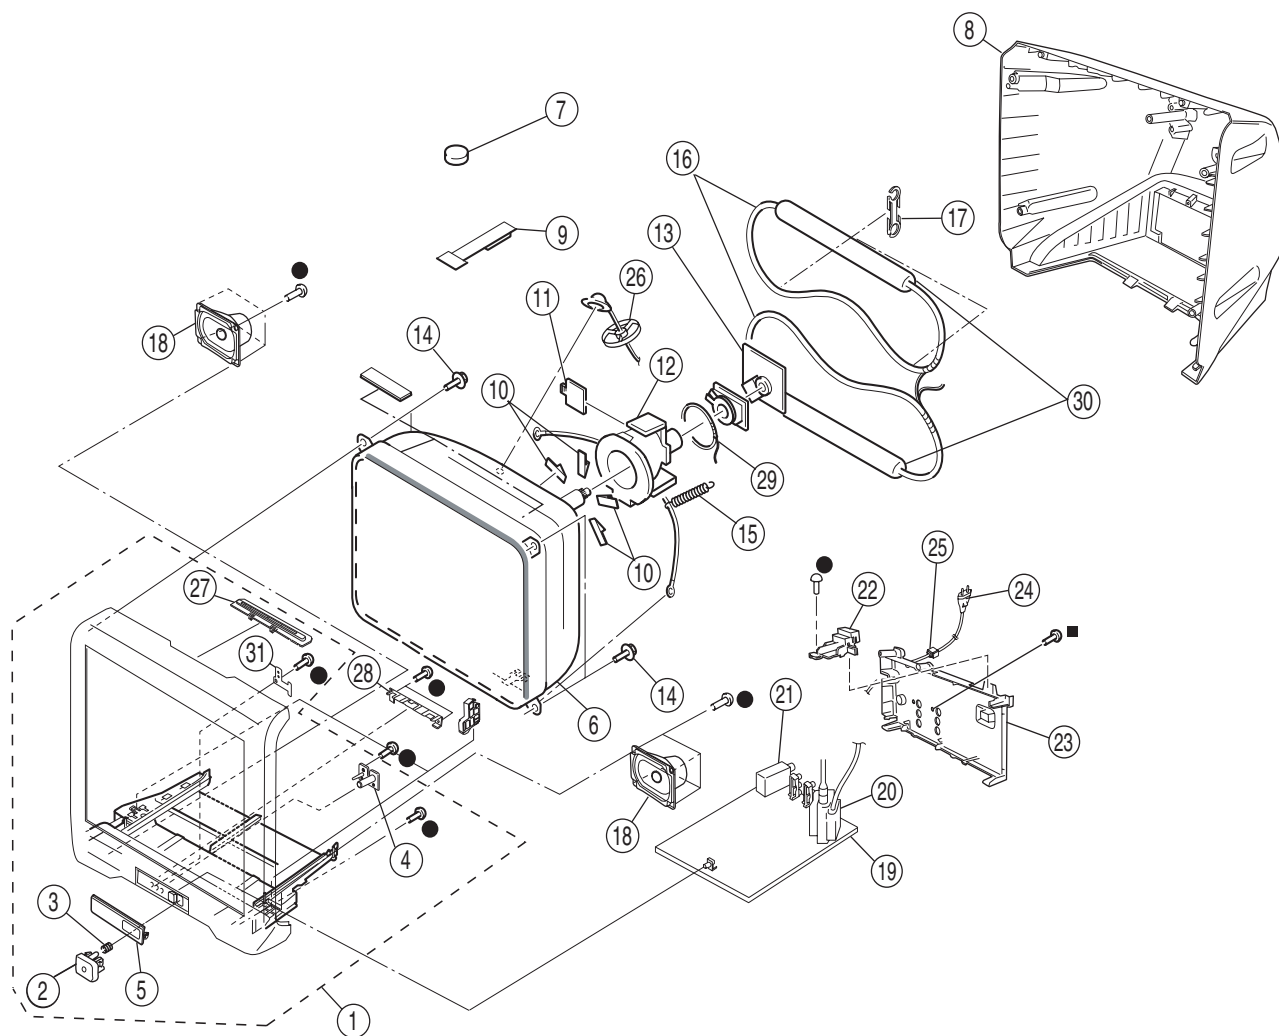

KV-BT212M40/M50/M70/M80/M90/N80

RM-W101 RM-W150

REF. NO.	PART NO.	DESCRIPTION	REMARK	REF. NO.	PART NO.	DESCRIPTION	REMARK
1	X-2023-703-1	BEZNET ASSY	2 ~ 5, 27,31	18	1-825-293-21	LOUD SPEAKER (5 X 9 CM)	
2	4-092-230-01	BUTTON POWER		19	* A-1076-819-A	COMPLETE PWB, A	
3	4-036-405-11	SPRING COMPRESSION		20	△ 1-453-329-41	TRANSFORMER ASSY FLYBACK	
4	* 4-092-231-01	GUIDE LIGHT				(NX-4751//M3A4)	
5	4-093-582-02	DOOR CONTROL					
6	△ 8-738-809-05	PICTURE TUBE (A51LPT70X)		21	1-693-659-11	TUNER	
7	1-452-032-00	MAGNET DISC		22	* 4-092-370-02	BRACKET FBT	
8	4-097-075-01	COVER REAR (■ 8 SCREWS)		23	* 4-095-890-41	BRACKET TERMINAL (ICON)	
9	4-094-690-01	PIECE A (90), CONV CORRECT		24	△ 1-823-551-11	CORD POWER (WITH CONNECTOR)	
10	4-046-600-11	SPACER, DY		25	4-022-115-21	HOLDER AC CORD	
11	4-057-714-01	PIECE TLH CONVERGENCE		26	4-084-918-01	HOLDER HV CABLE	
12	△ 8-451-505-21	DEFLECTION YOKE (Y21RSA-O)		27	* 4-093-771-01	COVER FRONT PANEL	
13	* A-1067-120-A	MOUNTED PWB (VAR), C		28	1-477-678-42	TOP SWITCH BLOCK	
14	4-057-862-11	SCREW TAPPING 5 + CROWN WASHER		29	(NOT USED FOR THIS MODEL)		
15	4-095-706-01	SPRING EXTENSION		30	4-069-978-01	CUSHION DGC	
16	△ 1-456-280-11	DEGAUSSING COIL		31	4-093-704-01	SPRING DOOR	
17	4-093-607-01	HOLDER DGC					

SECTION 6 ELECTRICAL PARTS LIST

A

NOTE:

The components identified by shading and mark \triangle are critical for safety.
Replace only with part number specified.

When indicating parts by reference number, please include the board name.

- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

- All resistors are in ohms
- F : nonflammable

CAPACITORS

- MF : μ F, PF : μ μ F

COILS

- MMH : mH, UH : μ H

Note: All the information on this section (Section 6) is for model KV-BT212M80(E)

REF NO.	PART NO.	DESCRIPTION	REMARK			REF NO.	PART NO.	DESCRIPTION	REMARK		
	* A-1076-819-A	COMPLETE PWB, A *****				C063	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
	* 4-055-304-11	HOLDER, LED				C064	1-126-961-11	ELECT	2.2UF	20.00%	50V
	* 4-102-022-01	PIN(30), WIRE				C065	1-126-962-11	ELECT	3.3UF	20.00%	50V
	4-382-854-01	SCREW (M3X8), P, SW (+)				C069	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
	4-382-854-21	SCREW (M3X14), P, SW (+)				C070	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
		<CAPACITOR>				C072	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V
C001	1-162-927-11	CERAMIC CHIP	100PF	5.00%	50V	C073	1-126-961-11	ELECT	2.2UF	20.00%	50V
C002	1-126-935-11	ELECT	470UF	20.00%	16V	C077	1-165-176-11	CERAMIC CHIP	0.047UF	10.00%	16V
C003	1-162-927-11	CERAMIC CHIP	100PF	5.00%	50V	C078	1-162-925-11	CERAMIC CHIP	68PF	5.00%	50V
C004	1-126-933-11	ELECT	100UF	20.00%	16V	C080	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V
C005	1-126-933-11	ELECT	100UF	20.00%	16V	C081	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V
C006	1-126-925-91	ELECT	470UF	20.00%	10V	C082	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V
C008	1-126-947-11	ELECT	47UF	20.00%	35V	C083	1-162-979-11	CERAMIC CHIP	0.0027UF	10.00%	50V
C010	1-164-315-11	CERAMIC CHIP	470PF	5.00%	50V	C089	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V
C012	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C090	1-162-927-11	CERAMIC CHIP	100PF	5.00%	50V
C013	1-126-933-11	ELECT	100UF	20.00%	16V	C091	1-162-927-11	CERAMIC CHIP	100PF	5.00%	50V
C014	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C092	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
C018	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C093	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
C020	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C094	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
C021	1-162-927-11	CERAMIC CHIP	100PF	5.00%	50V	C095	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
C022	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C096	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V
C023	1-164-505-11	CERAMIC CHIP	2.2UF		16V	C100	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V
C024	1-126-965-91	ELECT	22UF	20.00%	50V	C101	1-126-964-11	ELECT	10UF	20.00%	50V
C025	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C102	1-162-927-11	CERAMIC CHIP	100PF	5.00%	50V
C026	1-126-947-11	ELECT	47UF	20.00%	35V	C104	1-162-927-11	CERAMIC CHIP	100PF	5.00%	50V
C028	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C106	1-126-963-11	ELECT	4.7UF	20.00%	50V
C029	1-126-925-91	ELECT	470UF	20.00%	10V	C107	1-126-935-11	ELECT	470UF	20.00%	16V
C030	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C108	1-126-935-11	ELECT	470UF	20.00%	16V
C036	1-126-933-11	ELECT	100UF	20.00%	16V	C109	1-162-968-11	CERAMIC CHIP	0.0047UF	10.00%	50V
C037	1-126-963-11	ELECT	4.7UF	20.00%	50V	C111	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V
C038	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C112	1-162-910-11	CERAMIC CHIP	5PF	0.25PF	50V
C041	1-162-966-11	CERAMIC CHIP	0.0022UF	10.00%	50V	C115	1-162-968-11	CERAMIC CHIP	0.0047UF	10.00%	50V
C042	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C116	1-162-968-11	CERAMIC CHIP	0.0047UF	10.00%	50V
C044	1-164-505-11	CERAMIC CHIP	2.2UF		16V	C117	1-164-381-91	CERAMIC CHIP	62PF	5.00%	50V
C046	1-162-969-11	CERAMIC CHIP	0.0068UF	10.00%	25V	C118	1-126-965-91	ELECT	22UF	20.00%	50V
C048	1-127-715-91	CERAMIC CHIP	0.22UF	10%	16V	C119	1-163-021-91	CERAMIC CHIP	0.01UF	10.00%	50V
C049	1-164-227-11	CERAMIC CHIP	0.022UF	10.00%	25V	C120	1-126-935-11	ELECT	470UF	20.00%	16V
C050	1-126-964-11	ELECT	10UF	20.00%	50V	C133	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V
C052	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V	C135	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V
C053	1-164-227-11	CERAMIC CHIP	0.022UF	10.00%	25V	C137	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V
C054	1-107-826-11	CERAMIC CHIP	0.1UF	10.00%	16V	C138	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V
C055	1-100-829-31	FILM	0.15UF	5%	250V	C140	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V
C056	1-126-933-11	ELECT	100UF	20.00%	16V	C200	1-165-884-91	CERAMIC CHIP	2.2UF	10%	6.3V
C057	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V	C201	1-165-884-91	CERAMIC CHIP	2.2UF	10%	6.3V
C058	1-162-964-11	CERAMIC CHIP	0.001UF	10.00%	50V	C202	1-165-176-11	CERAMIC CHIP	0.047UF	10.00%	16V
C061	1-162-968-11	CERAMIC CHIP	0.0047UF	10.00%	50V	C203	1-165-176-11	CERAMIC CHIP	0.047UF	10.00%	16V
						C204	1-137-374-11	MYLAR	0.047UF	5.00%	50V
						C206	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V
						C207	1-137-374-11	MYLAR	0.047UF	5.00%	50V
						C208	1-162-970-11	CERAMIC CHIP	0.01UF	10.00%	25V

A

The components identified by shading
and mark Δ are critical for safety.
Replace only with part number specified.

REF NO.	PART NO.	DESCRIPTION	REMARK
C210	1-126-968-11	ELECT	100UF 20.00% 50V
C211	1-126-963-11	ELECT	4.7UF 20.00% 50V
C212	1-126-942-61	ELECT	1000UF 20.00% 25V
C213	1-115-339-11	CERAMIC CHIP	0.1UF 10.00% 50V
C214	1-126-942-61	ELECT	1000UF 20.00% 25V
C216	1-126-965-91	ELECT	22UF 20.00% 50V
C217	1-126-942-61	ELECT	1000UF 20.00% 25V
C218	1-126-965-91	ELECT	22UF 20.00% 50V
C219	1-126-934-11	ELECT	220UF 20.00% 16V
C220	1-126-964-11	ELECT	10UF 20.00% 50V
C231	1-137-374-11	MYLAR	0.047UF 5.00% 50V
C232	1-137-374-11	MYLAR	0.047UF 5.00% 50V
C234	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V
C235	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V
C236	1-130-495-00	MYLAR	0.1UF 5.00% 50V
C237	1-130-495-00	MYLAR	0.1UF 5.00% 50V
C300	1-127-715-91	CERAMIC CHIP	0.22UF 10% 16V
C301	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V
C302	1-164-505-11	CERAMIC CHIP	2.2UF 16V
C303	1-126-933-11	ELECT	100UF 20.00% 16V
C304	1-126-933-11	ELECT	100UF 20.00% 16V
C308	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C311	1-126-961-11	ELECT	2.2UF 20.00% 50V
C312	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C313	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C314	1-126-925-91	ELECT	470UF 20.00% 10V
C316	1-125-891-11	CERAMIC CHIP	0.47UF 10.00% 10V
C317	1-126-934-11	ELECT	220UF 20.00% 16V
C318	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
C319	1-162-923-11	CERAMIC CHIP	47PF 5.00% 50V
C320	1-162-923-11	CERAMIC CHIP	47PF 5.00% 50V
C321	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C322	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C323	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C325	1-164-227-11	CERAMIC CHIP	0.022UF 10.00% 25V
C328	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C333	1-126-925-91	ELECT	470UF 20.00% 10V
C600	Δ 1-119-895-51	CERAMIC	4700PF 20.00% 250V
C602	Δ 1-165-528-31	MYLAR	0.1UF 10 0V
C605	1-161-830-00	CERAMIC	0.0047UF 99% 500V
C606	1-161-830-00	CERAMIC	0.0047UF 99% 500V
C609	1-161-830-00	CERAMIC	0.0047UF 99% 500V
C610	1-161-830-00	CERAMIC	0.0047UF 99% 500V
C611	1-117-752-11	ELECT(BLOCK)	330UF 20.00% 450V
C612	1-117-623-11	FILM	1500PF 3.00% 1.2KV
C616	1-164-230-11	CERAMIC CHIP	220PF 5.00% 50V
C619	1-136-167-00	FILM	0.15UF 5.00% 50V
C621	1-126-963-11	ELECT	4.7UF 20.00% 50V
C622	Δ 1-119-894-51	CERAMIC	2200PF 20.00% 250V
C623	1-162-967-11	CERAMIC CHIP	0.0033UF 10.00% 50V
C624	1-126-967-11	ELECT	47UF 20.00% 50V
C625	Δ 1-127-942-51	CERAMIC	330PF 10% 250V
C626	1-102-228-00	CERAMIC	470PF 10.00% 500V
C628	1-125-772-91	CERAMIC	1500PF 10.00% 2KV
C630	1-128-549-11	ELECT	3300UF 20.00% 35V
C632	1-126-953-11	ELECT	2200UF 20.00% 35V
C634	1-126-941-11	ELECT	470UF 20.00% 25V
C635	1-126-971-11	ELECT	470UF 20.00% 50V
C637	1-126-933-11	ELECT	100UF 20.00% 16V
C638	1-126-933-11	ELECT	100UF 20.00% 16V
C639	1-126-933-11	ELECT	100UF 20.00% 16V
C641	1-126-933-11	ELECT	100UF 20.00% 16V


REF NO.	PART NO.	DESCRIPTION	REMARK
C643	1-117-720-11	CERAMIC CHIP	4.7UF 10V
C644	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V
C647	1-126-935-11	ELECT	470UF 20.00% 16V
C649	1-126-933-11	ELECT	100UF 20.00% 16V
C652	1-102-228-00	CERAMIC	470PF 10.00% 500V
C653	1-102-228-00	CERAMIC	470PF 10.00% 500V
C654	1-102-228-00	CERAMIC	470PF 10.00% 500V
C657	Δ 1-127-942-51	CERAMIC	330PF 10% 250V
C660	Δ 1-165-529-31	MYLAR	0.22UF 10 0V
C662	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
C665	1-110-626-11	ELECT	330UF 20.00% 160V
C666	1-165-528-31	MYLAR	0.1UF 10 0V
C668	1-126-933-11	ELECT	100UF 20.00% 16V
C670	Δ 1-127-942-51	CERAMIC	330PF 10% 250V
C672	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C678	1-164-505-11	CERAMIC CHIP	2.2UF 16V
C680	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V
C682	1-115-466-91	ELECT	1000UF 20.00% 16V
C685	1-126-934-11	ELECT	220UF 20.00% 16V
C686	1-117-720-11	CERAMIC CHIP	4.7UF 10V
C805	1-126-960-11	ELECT	1UF 20.00% 50V
C806	1-106-375-12	MYLAR	0.022UF 5.00% 200V
C807	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C808	1-102-244-00	CERAMIC	220PF 10.00% 500V
C809	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C810	1-162-318-11	CERAMIC	0.001UF 10.00% 500V
C811	1-126-933-11	ELECT	100UF 20.00% 16V
C822	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C825	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C826	1-164-227-11	CERAMIC CHIP	0.022UF 10.00% 25V
C828	1-126-933-11	ELECT	100UF 20.00% 16V
C830	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C831	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
C832	1-164-230-11	CERAMIC CHIP	220PF 5.00% 50V
C833	1-107-826-11	CERAMIC CHIP	0.1UF 10.00% 16V
C835	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V
C837	1-162-968-11	CERAMIC CHIP	0.0047UF 10.00% 50V
C838	1-106-220-00	MYLAR	0.1UF 10.00% 100V
C839	1-162-966-11	CERAMIC CHIP	0.0022UF 10.00% 50V
C840	Δ 1-117-647-21	FILM	13000PF 3.00% 1.2KV
C841	1-107-846-11	FILM	0.1UF 5.00% 400V
C842	1-100-122-21	FILM	0.022UF 5% 400V
C844	1-165-176-11	CERAMIC CHIP	0.047UF 10.00% 16V
C845	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V
C846	1-117-767-91	CERAMIC	330PF 10.00% 2KV
C847	1-107-364-11	MYLAR	0.01UF 10.00% 200V
C848	1-107-364-11	MYLAR	0.01UF 10.00% 200V
C849	1-106-375-12	MYLAR	0.022UF 5.00% 200V
C850	1-106-220-00	MYLAR	0.1UF 10.00% 100V
C851	1-107-675-11	ELECT	1UF 20.00% 450V
C852	1-117-665-11	FILM	0.33UF 5.00% 250V
C854	1-126-948-11	ELECT	100UF 20.00% 35V
C855	1-107-894-11	ELECT	220UF 20.00% 35V
C857	1-104-666-11	ELECT	220UF 20.00% 25V
C858	1-137-194-81	FILM	0.47UF 5.00% 50V
C860	1-162-318-11	CERAMIC	0.001UF 10.00% 500V
C861	1-104-666-11	ELECT	220UF 20.00% 25V
C862	1-162-318-11	CERAMIC	0.001UF 10.00% 500V
C863	1-165-176-11	CERAMIC CHIP	0.047UF 10.00% 16V
C867	1-165-441-51	ELECT	33UF 20% 160V
C868	1-102-228-00	CERAMIC	470PF 10.00% 500V

The components identified by shading
and mark Δ are critical for safety.
Replace only with part number specified.

A

REF NO.	PART NO.	DESCRIPTION	REMARK	REF NO.	PART NO.	DESCRIPTION	REMARK
C869	1-107-654-11	ELECT	33UF 20.00% 250V	D064	8-719-069-55	DIODE UDZSTE-175.6B	
C870	1-106-387-00	MYLAR	0.068UF 10.00% 200V	D065	8-719-069-55	DIODE UDZSTE-175.6B	
C876	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	D066	8-719-908-03	DIODE GP08D	
C877	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	D068	8-719-069-55	DIODE UDZSTE-175.6B	
C878	1-162-970-11	CERAMIC CHIP	0.01UF 10.00% 25V	D071	8-719-081-97	DIODE MMDL914T1	
C900	1-164-505-11	CERAMIC CHIP	2.2UF 16V	D072	8-719-081-97	DIODE MMDL914T1	
C901	1-164-505-11	CERAMIC CHIP	2.2UF 16V	D074	8-719-081-97	DIODE MMDL914T1	
C902	1-126-957-11	ELECT	0.22UF 20.00% 50V	D075	8-719-069-60	DIODE UDZSTE-179.1B	
C903	1-126-935-11	ELECT	470UF 20.00% 16V	D076	8-719-081-97	DIODE MMDL914T1	
C906	1-164-346-11	CERAMIC CHIP	1UF 16V	D100	8-719-421-40	DIODE MA77	
C907	1-164-346-11	CERAMIC CHIP	1UF 16V	D103	8-759-157-40	IC UPC574J	
C910	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D108	8-719-069-55	DIODE UDZSTE-175.6B	
C911	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D109	8-719-069-55	DIODE UDZSTE-175.6B	
C912	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D110	8-719-081-97	DIODE MMDL914T1	
C913	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D111	8-719-081-97	DIODE MMDL914T1	
C916	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D200	8-719-062-51	DIODE 1PS226-115	
C917	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D201	8-719-081-97	DIODE MMDL914T1	
C918	1-164-346-11	CERAMIC CHIP	1UF 16V	D202	8-719-081-97	DIODE MMDL914T1	
C919	1-164-346-11	CERAMIC CHIP	1UF 16V	D203	8-719-081-97	DIODE MMDL914T1	
C922	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D204	8-719-081-97	DIODE MMDL914T1	
C925	1-164-315-11	CERAMIC CHIP	470PF 5.00% 50V	D205	8-719-081-97	DIODE MMDL914T1	
C955	1-126-947-11	ELECT	47UF 20.00% 35V	D208	8-719-081-97	DIODE MMDL914T1	
C956	1-126-933-11	ELECT	100UF 20.00% 16V	D211	8-719-062-51	DIODE 1PS226-115	
C967	1-164-505-11	CERAMIC CHIP	2.2UF 16V	D212	8-719-081-97	DIODE MMDL914T1	
C975	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	D213	8-719-081-97	DIODE MMDL914T1	
C979	1-162-964-11	CERAMIC CHIP	0.001UF 10.00% 50V	D214	8-719-081-97	DIODE MMDL914T1	
C1019	1-125-891-11	CERAMIC CHIP	0.47UF 10.00% 10V	D600	8-719-081-97	DIODE MMDL914T1	
C1233	1-126-961-11	ELECT	2.2UF 20.00% 50V	D602	6-500-481-31	DIODE AM01AV1	
C2602	1-102-114-00	CERAMIC	470PF 10.00% 50V	D603	6-500-481-31	DIODE AM01AV1	
C2631	1-102-228-00	CERAMIC	470PF 10.00% 500V	D604	8-719-077-77	DIODE D3S3B60F3	
C2636	1-126-972-11	ELECT	1000UF 20.00% 50V	D605	8-719-109-85	DIODE RD5.1ESB2	
C2648	1-126-952-11	ELECT	1000UF 20.00% 35V	D608	8-719-109-85	DIODE RD5.1ESB2	
<CONNECTOR>				D614	8-719-923-86	DIODE MTZJ-T-77-15	
* CN005	1-564-506-11	PLUG, CONNECTOR 3P		D615	8-719-063-70	DIODE D1NL20U	
* CN200	1-564-507-11	PLUG, CONNECTOR 4P		D617	6-500-567-11	DIODE 10ERB20-TA2B5	
* CN600	1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P		D618	8-719-063-70	DIODE D1NL20U	
* CN601	1-691-134-11	PIN, CONNECTOR (PC BOARD) 2P		D619	6-500-567-11	DIODE 10ERB20-TA2B5	
* CN602 Δ	1-580-843-11	PIN, CONNECTOR (POWER)		D621	8-719-312-10	DIODE RU4AM-T3	
* CN904	1-508-743-00	PIN, CONNECTOR 5P		D622	8-719-085-37	DIODE 11EQS10-TB5	
CT131	1-767-774-22	TRAP, CERAMIC		D623	6-500-567-31	DIODE 10ERB20-TB3	
CT139	1-767-775-22	TRAP, CERAMIC		D624	8-719-510-73	DIODE S3L20UF4	
<DIODE>				D629	8-719-109-85	DIODE RD5.1ESB2	
D002	8-719-081-97	DIODE MMDL914T1		D633	8-719-923-86	DIODE MTZJ-T-77-15	
D003	8-719-081-97	DIODE MMDL914T1		D635	8-719-083-57	DIODE UDZSTE-173.6B	
D023	8-719-069-60	DIODE UDZSTE-179.1B		D637	8-719-072-70	DIODE MA2ZD14001S0	
D024	8-719-069-60	DIODE UDZSTE-179.1B		D638	8-719-081-97	DIODE MMDL914T1	
D025	8-719-069-60	DIODE UDZSTE-179.1B		D639	8-719-027-22	DIODE D3S6M-F	
D054	8-719-069-55	DIODE UDZSTE-175.6B		D804	8-719-991-33	DIODE 1SS133T-77	
D055	8-719-069-55	DIODE UDZSTE-175.6B		D805	8-719-991-33	DIODE 1SS133T-77	
D056	8-719-081-97	DIODE MMDL914T1		D807	8-719-991-33	DIODE 1SS133T-77	
D057	8-719-081-97	DIODE MMDL914T1		D808	8-719-991-33	DIODE 1SS133T-77	
D058	8-719-081-97	DIODE MMDL914T1		D809	8-719-991-33	DIODE 1SS133T-77	
D059	8-719-081-97	DIODE MMDL914T1		D815	8-719-069-60	DIODE UDZSTE-179.1B	
D060	8-719-069-55	DIODE UDZSTE-175.6B		D816	8-719-081-00	DIODE BY228/A52A/	
D061	8-719-081-97	DIODE MMDL914T1		D817	8-719-971-66	DIODE RGP15J-6040G23	
D062	8-719-069-55	DIODE UDZSTE-175.6B		D818	8-719-109-85	DIODE RD5.1ESB2	
D063	8-719-081-97	DIODE MMDL914T1		D819	6-500-567-31	DIODE 10ERB20-TB3	
				D820	8-719-908-03	DIODE GP08D	
				D821	6-500-567-31	DIODE 10ERB20-TB3	
				D823	8-719-302-43	DIODE EL1Z	
				D824	8-719-302-43	DIODE EL1Z	
				D827	8-719-302-43	DIODE EL1Z	

AThe components identified by shading
and mark \triangle are critical for safety.
Replace only with part number specified.

REF NO.	PART NO.	DESCRIPTION	REMARK	
D829	8-719-069-55	DIODE UDZSTE-175.6B		
D830	8-719-081-97	DIODE MMDL914T1		
D900	8-719-069-60	DIODE UDZSTE-179.1B		
D901	8-719-069-60	DIODE UDZSTE-179.1B		
D905	8-719-069-60	DIODE UDZSTE-179.1B		
D906	8-719-069-55	DIODE UDZSTE-175.6B		
D907	8-719-069-55	DIODE UDZSTE-175.6B		
D908	8-719-069-55	DIODE UDZSTE-175.6B		
D914	8-719-083-18	DIODE SPB-25MVWF		
D915	8-719-069-55	DIODE UDZSTE-175.6B		
D916	8-719-069-55	DIODE UDZSTE-175.6B		
D918	8-719-069-55	DIODE UDZSTE-175.6B		
D931	8-719-083-57	DIODE UDZSTE-173.6B		
D932	8-719-083-57	DIODE UDZSTE-173.6B		
D2625	8-719-510-73	DIODE S3L20UF4		
<DY CONNECTOR>				
* DY800	1-580-798-11	CONNECTOR PIN (DY)	6P	
<FUSE>				
F600	 1-576-232-12	FUSE	5A	250V
<FERRITE BEAD>				
FB001	1-410-397-21	FERRITE	1.1UH	
FB101	1-414-229-11	FERRITE	0UH	
FB603	1-410-397-21	FERRITE	1.1UH	
FB608	1-412-911-31	FERRITE	0UH	
FB800	1-410-397-21	FERRITE	1.1UH	
FB2602	1-410-397-21	FERRITE	1.1UH	
<FUSE HOLDER>				
FH601	1-533-223-11	FUSE HOLDER	0A	0V
FH602	1-533-223-11	FUSE HOLDER	0A	0V
<IC>				
IC001	6-705-434-41	IC TDA12067H/N1B0B0QV		
IC002	6-704-532-01	IC RPM7240-H5		
IC003	6-705-864-01	IC CAT24WC16WI-TE13		
IC200	6-703-475-01	IC AN5276T		
IC601	6-704-263-01	IC STR-F6267S LF1357		
IC602	6-706-789-01	IC KIA78R09API		
IC603	6-703-478-01	IC PQ018EF01SZH		
IC604	8-759-231-53	IC TA7805S		
IC605	6-705-063-01	IC SE135N-LF38		
IC606	6-706-886-01	IC KIA78D33P1		
IC607	8-759-832-05	IC BA18BC0FP-E2		
IC801	6-703-708-01	IC LM2903DT		
IC802	6-701-937-01	IC TJM4558CDT		
IC804	6-703-470-01	IC STV9302A		
<JACK>				
J200	1-770-786-22	JACK		
J903	1-770-329-13	JACK, PIN 3P		
J906	1-817-296-11	PHONO JACK	3P	
J907	1-817-296-11	PHONO JACK	3P	

REF NO.	PART NO.	DESCRIPTION	REMARK
<CHIP CONDUCTOR>			
JR001	1-216-864-11	SHORT CHIP	0
JR002	1-216-864-11	SHORT CHIP	0
JR003	1-216-864-11	SHORT CHIP	0
JR004	1-216-864-11	SHORT CHIP	0
JR005	1-216-864-11	SHORT CHIP	0
JR007	1-216-864-11	SHORT CHIP	0
JR008	1-216-864-11	SHORT CHIP	0
JR009	1-216-864-11	SHORT CHIP	0
JR012	1-216-864-11	SHORT CHIP	0
JR013	1-216-864-11	SHORT CHIP	0
JR014	1-216-864-11	SHORT CHIP	0
JR015	1-216-864-11	SHORT CHIP	0
JR016	1-216-864-11	SHORT CHIP	0
JR017	1-216-864-11	SHORT CHIP	0
JR018	1-216-864-11	SHORT CHIP	0
JR019	1-216-864-11	SHORT CHIP	0
JR020	1-216-864-11	SHORT CHIP	0
JR024	1-216-864-11	SHORT CHIP	0
JR025	1-216-864-11	SHORT CHIP	0
JR026	1-216-864-11	SHORT CHIP	0
JR027	1-216-864-11	SHORT CHIP	0
JR036	1-216-864-11	SHORT CHIP	0
JR037	1-216-864-11	SHORT CHIP	0
JR038	1-216-864-11	SHORT CHIP	0
JR040	1-216-864-11	SHORT CHIP	0
JR041	1-216-864-11	SHORT CHIP	0
JR042	1-216-864-11	SHORT CHIP	0
JR043	1-216-864-11	SHORT CHIP	0
JR046	1-216-864-11	SHORT CHIP	0
JR047	1-216-864-11	SHORT CHIP	0
JR049	1-216-864-11	SHORT CHIP	0
JR051	1-216-864-11	SHORT CHIP	0
JR300	1-216-864-11	SHORT CHIP	0
JR301	1-216-864-11	SHORT CHIP	0
JR302	1-216-864-11	SHORT CHIP	0
JR600	1-216-864-11	SHORT CHIP	0
JR601	1-216-864-11	SHORT CHIP	0
JR602	1-216-864-11	SHORT CHIP	0
JR1006	1-216-864-11	SHORT CHIP	0
JR1011	1-216-864-11	SHORT CHIP	0
JR1012	1-216-864-11	SHORT CHIP	0
JR1013	1-216-864-11	SHORT CHIP	0
JR1014	1-216-864-11	SHORT CHIP	0
JR1101	1-216-864-11	SHORT CHIP	0
JR1110	1-216-864-11	SHORT CHIP	0
JR1903	1-216-864-11	SHORT CHIP	0
<COIL>			
L003	1-414-856-11	INDUCTOR	10UH
L004	1-414-187-11	INDUCTOR	47UH
L005	1-414-856-11	INDUCTOR	10UH
L006	1-414-856-11	INDUCTOR	10UH
L007	1-414-856-11	INDUCTOR	10UH
L008	1-414-856-11	INDUCTOR	10UH
L009	1-414-856-11	INDUCTOR	10UH
L010	1-469-525-91	INDUCTOR	10UH
L011	1-469-525-91	INDUCTOR	10UH
L012	1-412-058-11	INDUCTOR	10UH

The components identified by shading
and mark \triangle are critical for safety.
Replace only with part number specified.

A

REF NO.	PART NO.	DESCRIPTION	REMARK
L013	1-469-525-91	INDUCTOR	10UH
L031	1-469-525-91	INDUCTOR	10UH
L032	1-469-525-91	INDUCTOR	10UH
L033	1-469-525-91	INDUCTOR	10UH
L035	1-469-525-91	INDUCTOR	10UH
L036	1-469-525-91	INDUCTOR	10UH
L100	1-414-857-11	INDUCTOR	100UH
L101	1-410-498-11	INDUCTOR	1.2UH
L103	1-410-985-42	INDUCTOR	0.22UH
L106	1-414-187-11	INDUCTOR	47UH
L107	1-412-062-11	INDUCTOR	47UH
L600	1-412-533-21	INDUCTOR	47UH
L601	1-412-533-21	INDUCTOR	47UH
L602	1-412-529-11	INDUCTOR	22UH
L800	1-424-796-11	COIL, HORIZONTAL LINEARITY	
L802	1-406-679-11	INDUCTOR	22MH
L803	1-414-493-41	INDUCTOR	4.7MH
L805	1-408-947-00	INDUCTOR	2.2MH
L902	1-414-187-11	INDUCTOR	47UH
L2601	1-412-525-31	INDUCTOR	10UH

<PHOTO COUPLER>

PH600 \triangle 6-600-187-11 PHOTO COUPLER PC123Y22FZ0F

<IC LINK>

PS602	\triangle 1-533-597-42	IC LINK	5A	90V
PS603	\triangle 1-533-597-42	IC LINK	5A	90V
PS604	1-533-597-41	IC LINK	5A	90V
PS605	\triangle 1-533-597-42	IC LINK	5A	90V
PS2601	\triangle 1-533-597-42	IC LINK	5A	90V

<TRANSISTOR>

Q001	8-729-421-22	TRANSISTOR UN2211	
Q006	8-729-424-67	TRANSISTOR UN2216	
Q007	8-729-424-67	TRANSISTOR UN2216	
Q008	8-729-010-25	TRANSISTOR MSD601-RT1	
Q010	8-729-010-05	TRANSISTOR MSB709-RT1	
Q013	8-729-010-25	TRANSISTOR MSD601-RT1	
Q016	8-729-421-22	TRANSISTOR UN2211	
Q100	8-729-010-25	TRANSISTOR MSD601-RT1	
Q102	8-729-022-54	TRANSISTOR 2SC3779C,D-AA	
Q103	8-729-424-67	TRANSISTOR UN2216	
Q104	8-729-424-67	TRANSISTOR UN2216	
Q111	8-729-010-25	TRANSISTOR MSD601-RT1	
Q200	8-729-421-22	TRANSISTOR UN2211	
Q201	8-729-010-05	TRANSISTOR MSB709-RT1	
Q202	8-729-010-05	TRANSISTOR MSB709-RT1	
Q206	8-729-421-22	TRANSISTOR UN2211	
Q601	8-729-010-25	TRANSISTOR MSD601-RT1	
Q605	6-550-572-01	TRANSISTOR FN155	
Q606	8-729-010-25	TRANSISTOR MSD601-RT1	
Q608	8-729-010-25	TRANSISTOR MSD601-RT1	
Q609	8-729-010-25	TRANSISTOR MSD601-RT1	
Q803	8-729-326-11	TRANSISTOR 2SC2611	
Q804	6-550-362-01	TRANSISTOR KTA1279	
Q805	6-550-410-01	TRANSISTOR 2SC5885	
Q806	8-729-010-25	TRANSISTOR MSD601-RT1	
Q807	8-729-010-05	TRANSISTOR MSB709-RT1	
Q808	8-729-053-33	TRANSISTOR IRF614-037	

REF NO.	PART NO.	DESCRIPTION	REMARK
Q814	8-729-010-25	TRANSISTOR MSD601-RT1	
Q900	8-729-010-05	TRANSISTOR MSB709-RT1	
Q901	8-729-424-67	TRANSISTOR UN2216	
Q902	8-729-424-67	TRANSISTOR UN2216	
Q8009	6-550-362-01	TRANSISTOR KTA1279	
Q8010	8-729-326-11	TRANSISTOR 2SC2611	
<RESISTOR>			
R001	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R002	1-216-809-11	METAL CHIP	100 5% 1/10W
R003	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R004	1-216-809-11	METAL CHIP	100 5% 1/10W
R010	1-216-833-11	METAL CHIP	10K 5% 1/10W
R011	1-216-821-11	METAL CHIP	1K 5% 1/10W
R012	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R014	1-216-809-11	METAL CHIP	100 5% 1/10W
R015	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R018	1-216-809-11	METAL CHIP	100 5% 1/10W
R020	1-216-809-11	METAL CHIP	100 5% 1/10W
R021	1-216-295-91	SHORT CHIP	0 5% 1/10W
R023	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R024	1-216-809-11	METAL CHIP	100 5% 1/10W
R025	1-216-809-11	METAL CHIP	100 5% 1/10W
R026	1-216-809-11	METAL CHIP	100 5% 1/10W
R029	1-216-809-11	METAL CHIP	100 5% 1/10W
R030	1-216-809-11	METAL CHIP	100 5% 1/10W
R038	1-216-809-11	METAL CHIP	100 5% 1/10W
R039	1-216-809-11	METAL CHIP	100 5% 1/10W
R041	1-216-809-11	METAL CHIP	100 5% 1/10W
R042	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R044	1-216-834-11	METAL CHIP	12K 5% 1/10W
R045	1-216-809-11	METAL CHIP	100 5% 1/10W
R046	1-216-809-11	METAL CHIP	100 5% 1/10W
R048	1-216-809-11	METAL CHIP	100 5% 1/10W
R051	1-218-885-11	METAL CHIP	39K 0.50% 1/10W
R056	1-216-809-11	METAL CHIP	100 5% 1/10W
R058	1-216-809-11	METAL CHIP	100 5% 1/10W
R059	1-216-821-11	METAL CHIP	1K 5% 1/10W
R060	1-216-809-11	METAL CHIP	100 5% 1/10W
R061	1-216-819-11	METAL CHIP	680 5% 1/10W
R087	1-216-813-11	METAL CHIP	220 5% 1/10W
R088	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R096	1-216-813-11	METAL CHIP	220 5% 1/10W
R097	1-216-813-11	METAL CHIP	220 5% 1/10W
R098	1-216-813-11	METAL CHIP	220 5% 1/10W
R099	1-216-813-11	METAL CHIP	220 5% 1/10W
R100	1-216-821-11	METAL CHIP	1K 5% 1/10W
R103	1-211-981-11	METAL CHIP	33 0.50% 1/10W
R106	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R107	1-216-828-11	METAL CHIP	3.9K 5% 1/10W
R108	1-216-821-11	METAL CHIP	1K 5% 1/10W
R109	1-216-019-00	RES-CHIP	56 5% 1/10W
R110	1-216-821-11	METAL CHIP	1K 5% 1/10W
R111	1-216-833-11	METAL CHIP	10K 5% 1/10W
R112	1-218-867-11	METAL CHIP	6.8K 0.50% 1/10W
R113	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R114	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R115	1-216-809-11	METAL CHIP	100 5% 1/10W
R116	1-216-809-11	METAL CHIP	100 5% 1/10W
R118	1-216-809-11	METAL CHIP	100 5% 1/10W
R119	1-211-981-11	METAL CHIP	33 0.50% 1/10W

A

REF NO.	PART NO.	DESCRIPTION	REMARK
R121	1-215-925-11	METAL OXIDE	22K 5% 3W
R128	1-216-864-11	SHORT CHIP	0
R131	1-216-809-11	METAL CHIP	100 5% 1/10W
R149	1-216-864-11	SHORT CHIP	0
R150	1-216-809-11	METAL CHIP	100 5% 1/10W
R152	1-216-864-11	SHORT CHIP	0
R153	1-216-853-11	METAL CHIP	470K 5% 1/10W
R154	1-216-821-11	METAL CHIP	1K 5% 1/10W
R155	1-216-837-11	METAL CHIP	22K 5% 1/10W
R200	1-216-832-11	METAL CHIP	8.2K 5% 1/10W
R201	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R202	1-216-837-11	METAL CHIP	22K 5% 1/10W
R203	1-216-832-11	METAL CHIP	8.2K 5% 1/10W
R204	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R205	1-216-837-11	METAL CHIP	22K 5% 1/10W
R207	1-216-832-11	METAL CHIP	8.2K 5% 1/10W
R208	1-216-832-11	METAL CHIP	8.2K 5% 1/10W
R210	1-216-830-11	METAL CHIP	5.6K 5% 1/10W
R211	1-216-830-11	METAL CHIP	5.6K 5% 1/10W
R212	1-216-864-11	SHORT CHIP	0
R213	1-216-835-11	METAL CHIP	15K 5% 1/10W
R214	1-216-835-11	METAL CHIP	15K 5% 1/10W
R215	1-216-833-11	METAL CHIP	10K 5% 1/10W
R216	1-216-833-11	METAL CHIP	10K 5% 1/10W
R217	1-249-411-11	CARBON	330 5% 1/4W
R218	1-216-295-91	SHORT CHIP	0
R219	1-249-411-11	CARBON	330 5% 1/4W
R220	1-216-864-11	SHORT CHIP	0
R221	1-216-821-11	METAL CHIP	1K 5% 1/10W
R234	1-249-401-11	CARBON	47 5% 1/4W
R235	1-249-401-11	CARBON	47 5% 1/4W
R236	1-216-833-11	METAL CHIP	10K 5% 1/10W
R237	1-216-809-11	METAL CHIP	100 5% 1/10W
R238	1-216-809-11	METAL CHIP	100 5% 1/10W
R241	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R242	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R300	1-216-809-11	METAL CHIP	100 5% 1/10W
R301	1-216-859-11	METAL CHIP	1.5M 5% 1/10W
R303	1-216-861-11	METAL CHIP	2.2M 5% 1/10W
R304	1-216-845-11	METAL CHIP	100K 5% 1/10W
R307	1-216-864-11	SHORT CHIP	0
R309	1-216-857-11	METAL CHIP	1M 5% 1/10W
R310	1-216-821-11	METAL CHIP	1K 5% 1/10W
R311	1-216-841-11	METAL CHIP	47K 5% 1/10W
R312	1-216-857-11	METAL CHIP	1M 5% 1/10W
R313	1-216-847-11	METAL CHIP	150K 5% 1/10W
R314	1-218-867-11	METAL CHIP	6.8K 0.50% 1/10W
R315	1-218-867-11	METAL CHIP	6.8K 0.50% 1/10W
R317	1-216-827-11	METAL CHIP	3.3K 5% 1/10W
R320	1-218-863-11	METAL CHIP	4.7K 0.50% 1/10W
R322	1-218-863-11	METAL CHIP	4.7K 0.50% 1/10W
R323	1-216-809-11	METAL CHIP	100 5% 1/10W
R324	1-216-864-11	SHORT CHIP	0
R331	1-216-809-11	METAL CHIP	100 5% 1/10W
R336	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R337	1-216-817-11	METAL CHIP	470 5% 1/10W
R338	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R339	1-216-809-11	METAL CHIP	100 5% 1/10W
R340	1-216-833-11	METAL CHIP	10K 5% 1/10W
R341	1-216-809-11	METAL CHIP	100 5% 1/10W
R355	1-216-837-11	METAL CHIP	22K 5% 1/10W
R356	1-216-864-11	SHORT CHIP	0

REF NO.	PART NO.	DESCRIPTION	REMARK
R360	1-216-864-11	SHORT CHIP	0
R363	1-216-864-11	SHORT CHIP	0
R364	1-216-821-11	METAL CHIP	1K 5% 1/10W
R377	1-216-823-11	METAL CHIP	1.5K 5% 1/10W
R379	1-216-843-11	METAL CHIP	68K 5% 1/10W
R380	1-216-809-11	METAL CHIP	100 5% 1/10W
R384	1-216-809-11	METAL CHIP	100 5% 1/10W
R385	1-216-809-11	METAL CHIP	100 5% 1/10W
R386	1-216-809-11	METAL CHIP	100 5% 1/10W
R392	1-216-833-11	METAL CHIP	10K 5% 1/10W
R393	1-216-809-11	METAL CHIP	100 5% 1/10W
R394	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R395	1-216-845-11	METAL CHIP	100K 5% 1/10W
R397	1-216-125-00	RES-CHIP	1.5M 5% 1/10W
R398	1-216-797-11	METAL CHIP	10 5% 1/10W
R400	1-260-288-11	CARBON	0.47 5% 1/2W
R401	1-260-288-11	CARBON	0.47 5% 1/2W
R405	1-260-288-11	CARBON	0.47 5% 1/2W
R406	1-260-127-11	CARBON	220K 5% 1/2W
R411	1-214-909-00	METAL	68K 1% 1/2W
R412	1-214-761-00	METAL	22K 1% 1/4W
R413	1-215-449-00	METAL	15K 1% 1/4W
R414	1-260-336-11	CARBON	4.7K 5% 1/2W
R416	1-260-107-11	CARBON	4.7K 5% 1/2W
R420	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R421	1-216-833-11	METAL CHIP	10K 5% 1/10W
R423	1-216-864-11	SHORT CHIP	0
R424	1-218-899-11	METAL CHIP	150K 0.50% 1/16W
R602	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R609	1-216-833-11	METAL CHIP	10K 5% 1/10W
R612	1-215-425-00	METAL	1.5K 1% 1/4W
R616	1-245-527-11	METAL	1 5% 10W
R618	1-249-432-11	CARBON	18K 5% 1/4W
R619	1-216-361-00	METAL OXIDE	0.22 5% 2W
R620	1-216-362-21	METAL OXIDE	0.27 5% 2W
R621	1-249-409-11	CARBON	220 5% 1/4W
R623	1-218-877-11	METAL CHIP	18K 0.50% 1/10W
R624	1-215-429-00	METAL	2.2K 1% 1/4W
R625	1-216-864-11	SHORT CHIP	0
R627	1-249-385-11	CARBON	2.2 5% 1/4W
R631	1-249-425-11	CARBON	4.7K 5% 1/4W
R634	1-216-829-11	METAL CHIP	4.7K 5% 1/10W
R635	1-216-833-11	METAL CHIP	10K 5% 1/10W
R636	1-249-421-11	CARBON	2.2K 5% 1/4W
R638	1-245-526-11	METAL	0.68 5% 10W
R645	1-218-899-11	METAL CHIP	150K 0.50% 1/16W
R646	1-218-851-11	METAL CHIP	1.5K 0.50% 1/10W
R647	1-216-821-11	METAL CHIP	1K 5% 1/10W
R650	1-247-289-00	METAL	8.2M 5% 1W
R655	1-216-809-11	METAL CHIP	100 5% 1/10W
R656	1-249-381-11	CARBON	1 5% 1/4W
R658	1-245-464-21	METAL	120K 1% 1/4W
R659	1-245-470-21	METAL	220K 1% 1/4W
R660	1-245-478-21	METAL	470K 1% 1/4W
R661	1-245-480-21	METAL	560K 1% 1/4W
R667	1-216-821-11	METAL CHIP	1K 5% 1/10W
R668	1-216-839-11	METAL CHIP	33K 5% 1/10W
R820	1-216-825-11	METAL CHIP	2.2K 5% 1/10W
R821	1-216-837-11	METAL CHIP	22K 5% 1/10W
R822	1-249-417-11	CARBON	1K 5% 1/4W
R823	1-245-468-21	METAL	180K 1% 1/4W
R824	1-216-839-11	METAL CHIP	33K 5% 1/10W

The components identified by shading
and mark \triangle are critical for safety.
Replace only with part number specified.

A

REF NO.	PART NO.	DESCRIPTION	REMARK
R825	1-243-606-71	METAL OXIDE 1K	5% 3W
R826	1-247-891-00	CARBON 330K	5% 1/4W
R827	1-216-369-00	METAL OXIDE 1	5% 2W
R828	1-243-606-71	METAL OXIDE 1K	5% 3W
R829	1-243-606-71	METAL OXIDE 1K	5% 3W
R830	1-260-332-51	CARBON 2.2K	5% 1/2W
R831	1-216-829-11	METAL CHIP 4.7K	5% 1/10W
R833	1-260-125-11	CARBON 150K	5% 1/2W
R834	1-245-468-21	METAL 180K	1% 1/4W
R835	1-260-127-11	CARBON 220K	5% 1/2W
R838	1-216-838-11	METAL CHIP 27K	5% 1/10W
R839	1-216-864-11	SHORT CHIP 0	
R843	1-216-864-11	SHORT CHIP 0	
R844	1-218-867-11	METAL CHIP 6.8K	0.50% 1/10W
R846	1-216-825-11	METAL CHIP 2.2K	5% 1/10W
R847	1-216-833-11	METAL CHIP 10K	5% 1/10W
R851	1-216-821-11	METAL CHIP 1K	5% 1/10W
R852	1-218-871-11	METAL CHIP 10K	0.50% 1/10W
R853	1-218-859-11	METAL CHIP 3.3K	0.50% 1/10W
R854	1-218-877-11	METAL CHIP 18K	0.50% 1/10W
R855	1-218-871-11	METAL CHIP 10K	0.50% 1/10W
R856	1-218-871-11	METAL CHIP 10K	0.50% 1/10W
R859	1-218-883-11	METAL CHIP 33K	0.50% 1/10W
R861	1-216-825-11	METAL CHIP 2.2K	5% 1/10W
R864	1-218-865-11	METAL CHIP 5.6K	0.50% 1/10W
R865	1-216-821-11	METAL CHIP 1K	5% 1/10W
R866	1-218-895-11	METAL CHIP 100K	0.50% 1/10W
R868	1-249-393-11	CARBON 10	5% 1/4W
R869	1-249-381-11	CARBON 1	5% 1/4W
R870	1-218-859-11	METAL CHIP 3.3K	0.50% 1/10W
R871	1-243-692-71	METAL OXIDE 220	5% 1W
R872	1-216-864-11	SHORT CHIP 0	
R873	1-216-841-11	METAL CHIP 47K	5% 1/10W
R876	1-216-833-11	METAL CHIP 10K	5% 1/10W
R877	1-218-895-11	METAL CHIP 100K	0.50% 1/10W
R878	1-216-349-00	METAL OXIDE 1	5% 1W
R879	1-245-470-21	METAL 220K	1% 1/4W
R880	1-245-470-21	METAL 220K	1% 1/4W
R881	1-218-871-11	METAL CHIP 10K	0.50% 1/10W
R882	1-216-825-11	METAL CHIP 2.2K	5% 1/10W
R883	1-249-421-11	CARBON 2.2K	5% 1/4W
R887	1-216-837-11	METAL CHIP 22K	5% 1/10W
R888	1-218-887-11	METAL CHIP 47K	0.50% 1/10W
R889	1-243-531-71	METAL OXIDE 100	5% 3W
R890	1-215-910-00	METAL OXIDE 68	5% 3W
R891	1-249-385-11	CARBON 2.2	5% 1/4W
R893	1-218-871-11	METAL CHIP 10K	0.50% 1/10W
R895	1-218-859-11	METAL CHIP 3.3K	0.50% 1/10W
R902	1-216-821-11	METAL CHIP 1K	5% 1/10W
R904	1-216-821-11	METAL CHIP 1K	5% 1/10W
R905	1-216-840-11	METAL CHIP 39K	5% 1/10W
R906	1-216-817-11	METAL CHIP 470	5% 1/10W
R909	1-216-840-11	METAL CHIP 39K	5% 1/10W
R910	1-216-817-11	METAL CHIP 470	5% 1/10W
R911	1-216-813-11	METAL CHIP 220	5% 1/10W
R913	1-216-853-11	METAL CHIP 470K	5% 1/10W
R914	1-216-853-11	METAL CHIP 470K	5% 1/10W
R915	1-216-849-11	METAL CHIP 220K	5% 1/10W
R916	1-216-849-11	METAL CHIP 220K	5% 1/10W
R917	1-218-285-11	METAL CHIP 75	5% 1/10W
R924	1-216-853-11	METAL CHIP 470K	5% 1/10W

REF NO.	PART NO.	DESCRIPTION	REMARK
R931	1-216-807-11	METAL CHIP 68	5% 1/10W
R932	1-216-864-11	SHORT CHIP 0	
R933	1-216-864-11	SHORT CHIP 0	
R940	1-216-849-11	METAL CHIP 220K	5% 1/10W
R941	1-216-849-11	METAL CHIP 220K	5% 1/10W
R945	1-216-833-11	METAL CHIP 10K	5% 1/10W
R946	1-216-833-11	METAL CHIP 10K	5% 1/10W
R989	1-216-833-11	METAL CHIP 10K	5% 1/10W
R2646	1-249-381-11	CARBON 1	5% 1/4W
R2647	1-249-429-11	CARBON 10K	5% 1/4W
R8009	1-218-867-11	METAL CHIP 6.8K	0.50% 1/10W
R8010	1-245-464-21	METAL 120K	1% 1/4W
R8011	1-216-841-11	METAL CHIP 47K	5% 1/10W
R8012	1-216-841-11	METAL CHIP 47K	5% 1/10W
R8013	1-245-462-21	METAL 100K	1% 1/4W
R9005	1-216-864-11	SHORT CHIP 0	
R9006	1-216-864-11	SHORT CHIP 0	
R9017	1-216-809-11	METAL CHIP 100	5% 1/10W
R9018	1-216-809-11	METAL CHIP 100	5% 1/10W
R9019	1-216-809-11	METAL CHIP 100	5% 1/10W
R9020	1-216-809-11	METAL CHIP 100	5% 1/10W
R9021	1-216-809-11	METAL CHIP 100	5% 1/10W
R9022	1-216-809-11	METAL CHIP 100	5% 1/10W
R9023	1-216-809-11	METAL CHIP 100	5% 1/10W
R9025	1-216-809-11	METAL CHIP 100	5% 1/10W
R9026	1-216-838-11	METAL CHIP 27K	5% 1/10W
R9027	1-216-838-11	METAL CHIP 27K	5% 1/10W
R9028	1-216-809-11	METAL CHIP 100	5% 1/10W
R9030	1-216-809-11	METAL CHIP 100	5% 1/10W
R9031	1-216-809-11	METAL CHIP 100	5% 1/10W
R9036	1-216-809-11	METAL CHIP 100	5% 1/10W
R9050	1-216-864-11	SHORT CHIP 0	
R9053	1-218-285-11	METAL CHIP 75	5% 1/10W
<RELAY>			
RY600	\triangle 1-755-198-12	RELAY, AC POWER	
<SWITCH>			
S600	\triangle 1-786-649-12	SWITCH, AC POWER PUSH	
S800	1-572-707-11	SWITCH, LEVER	
SWF100	1-781-040-11	FILTER, SURFACE WAVE (K082)	
SWF101	1-767-302-11	FILTER, SURFACE WAVE	
<TRANSFORMER>			
T600	\triangle 1-456-354-11	LINE FILTER COIL	
T602	\triangle 1-439-695-11	CONVERTER TRANSFORMER (SRT)	
T603	\triangle 1-456-354-11	LINE FILTER COIL	
T800	1-437-936-21	FERRITE TRANSFORMER (HDT)	
T801	\triangle 1-453-329-41	TRANSFORMER ASSY FLYBACK	
T801		(NX-4751//M3A4)	
<THERMISTOR>			
THP600	\triangle 1-804-530-11	THERMISTOR, POSITIVE	
TP02	1-536-354-00	POST PIN	
TP03	1-536-354-00	POST PIN	
TP04	1-536-354-00	POST PIN	
TP601	1-536-354-00	POST PIN	



The components identified by shading
and mark Δ are critical for safety.
Replace only with part number specified.

Table with 4 columns: REF NO., PART NO., DESCRIPTION, REMARK. Rows include components like TP602, TU102, VDR600, X001, capacitors (C751-C787), connectors (CN701-CN705), diodes (D750-D782), IC (IC751), and socket (J751).

Table with 4 columns: REF NO., PART NO., DESCRIPTION, REMARK. Rows include components like L780, resistors (R713-R795), variable resistor (RV750), accessories (2-187-513-11 to 4-096-835-01), and remote commander (1-478-009-11, 4-084-290-01).

SUPPLEMENT-2


BX1S CHASSIS

<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>	<u>MODEL</u>	<u>COMMANDER</u>	<u>DEST.</u>	<u>CHASSIS NO.</u>
KV-BT212M40	RM-W101	E	SCC-U98S-A				
KV-BT212M50	RM-W101	Vietnam	SCC-V07P-A				
KV-BT212M50	RM-W101	GE	SCC-V04M-A				
KV-BT212M70	RM-W101	Russia	SCC-V13B-A				
KV-BT212M80	RM-W101	Saudi Arabia	SCC-V10S-A				
KV-BT212M80	RM-W101	Russia	SCC-V13C-A				
KV-BT212M80	RM-W101	E	SCC-U98W-A				
KV-BT212M90	RM-W101	Hong Kong	SCC-U97L-A				
KV-BT212N80	RM-W150	Taiwan	SCC-V05K-A				

SUBJECT : Part Change

SECTION 5 EXPLODED VIEWS 5-1. CHASSIS

(Refer Page 58, 59)

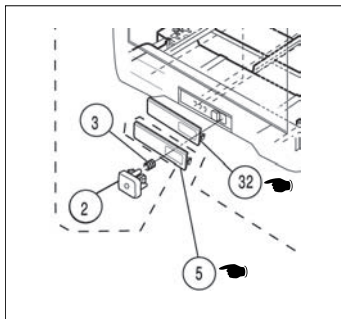

<u>REF. NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>REMARK</u>
5	2-059-995-13	DOOR PRINTING (KV-BT212M40/M70)	
	2-059-995-23	DOOR PRINTING (B2) (KV-BT212M50(GE)/M80(SAUDI ARABIA))	
	2-059-995-63	DOOR PRINTING (B2) (KV-BT212M90)	
	2-059-995-02	DOOR PRINTING (B2) (KV-BT212N80(TAIWAN))	
32	4-093-582-02	DOOR, CONTROL (KV-BT212M50(VIETNAM))	

(Refer Page 80)

<u>REF. NO.</u>	<u>PART NO.</u>	<u>DESCRIPTION</u>	<u>REMARK</u>
5	2-176-839-33	DOOR PRINTING (B2) (KV-BT212M80(E))	