
Haier


CAUTION:

READ THIS MANUAL CAREFULLY
TO DIAGNOSE TROUBLE CORRECTLY
BEFORE OFFERING SERVICE

SERVICE MANUAL

COLOR TV

MODEL: HL26S

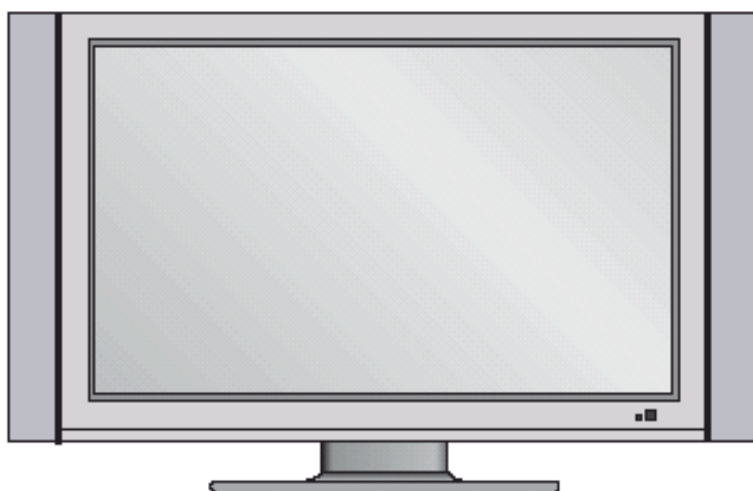

**THIS MANUAL IS USED BY QUALIFIED APPLIANCE TECHNICIANS ONLY.
HAIER DOES NOT ASSUME ANY RESPONSIBILITY FOR
PROPERTY DAMAGE OR
PERSONAL INJURY FOR IMPROPER SERVICE PROCEDURES DONE
BY ONE UNQUALIFIED PERSON.**

C O N T E N T

1. Features-----	3
2. Safety Precautions-----	5
3. Images of Module and Circuit Boards-----	7
4. Key IC Description& Trouble Shooting Guide	
-----	10
5.Signal Flowing Chart-----	14
6. Bus Control Adjustment-----	15
7. Circuit Diagram -----	30
8. Connection Sketch Interpretat-----	49

—、Features

	Factory model(reference only)	L26V6-A8
	HAC model	HL26S
Options	Functions	
General	Screen size (inches)	26
	Display type	LCD
	Aspect ratio	16:9
Video	Resolution	1366*768
	Brightness	500 cm/2
	Contrast	800:1
	Response time(ms)	8ms
	Display Capabilities	480i/480P/720P/1080i
	Viewing Angle	H:160/V:150
	Color display	16.2million
	Active Matrix TFT	yes
	PC mode (VGA, SVGA, XVGA)	WXGA\SXGA\XGA\SVGA\VGA
Video Features	Tuner	Integrated NTSC&ATSC
	HD-ready	yes
	Video Signal System	NTSC/ATSC(8VSB,Clear QAM)
	Color Temperature	Standard,Cool,Warm
	Progressive Scan	yes
	Digital Comb Filter	3D
	Video Noise Reduction	yes
	Picture Modes	standard,vivid,mild,custom
	# of preset channels	181
	Screen Mode (4:3)	yes
	Wide Mode (16:9)	yes
	Wide Mode (PC)	yes
	Auto adjustment (PC)	yes
	Phase (PC) Only	yes
	H/V edge correction	yes
Audio	Number Of Speakers	2
	Speakers Type	Built-in(Side)
	Speaker Size	4 7/8" X 1 1/2" (2 pcs)
	Watts Per Channel	7W
	Audio Power Output	7W*2
Audio Features	Stereo Surround Sound	yes
	MTS Stereo	yes
	Sound Mode	Live、POP、Rock、Custom
	Tone Control	yes
	Speakers ON/OFF	N/A
	Mute	yes

Convenience Features	Semi transparent Menu	yes
	Zoom	yes
	V-Chip	yes
	Close Caption (Basic,Digital,Advance)	yes
	Teletext	N/A
	Multilingual Display	E/F/S
	Auto Channel Programming	yes
	Channel Caption	yes
	Channel Label	yes
	Channel Skip/Add	yes
	Favorite Channel	yes
	Program Guide Access(TV guide)	N/A
	Clock	yes
	Programmable Timer	yes
	Sleep Timer	yes
	Alarm (Auto timer on/off)	yes
	Picture-In-Picture	N/A
	Freeze Picture	yes
	Remote Control	HTR-282D (Universal)
Input \ Output	ATSC/NTSC Tuner	1
	HDMI Input	2
	Component Video Input	2
	Composite Video Input	2
	S-Video Input	1
	RF Input	1
	PC Input	1
	USB Port	1
	Analog Audio Input	2 for component, 2 for composite and S-video
	PC Audio Input	1 (VGA and HDMI-to-DVI)
	Audio Out (Fixed/Variable)	1(optical)
	Headphone jack	1
	AV Output	1
Compliance	Vesa	yes
Power	Internal power Supply	yes
	Power Consumption (in Operation)	150W
	Power Consumption (in Standby)	1W
	Power Voltage	120V
	Power Frequency	60Hz
Information	Panel Supplier	CMO
	Chipset	BCM3551

二、 Safety Precautions

IMPORTANT SAFETY INSTRUCTIONS

Read all of the instructions before using this appliance. When using this appliance, always exercise basic safety precautions, including the following:

- 1) Save these Instructions ---the safety and operating instructions should be retained for future reference.
- 2) All warning on the appliance and in the operating instructions should be followed.
- 3) Cleaning --- Unplug from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use only dry cloth for cleaning.
- 4) Attachments ---do not use attachments not recommended by the manufacturer as they may cause hazards.
- 5) Water and moisture -- do not place this product near water, for example, near a bathtub, wash bowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.
- 6) Accessories ---do not place this unit on an unstable cart, stand, tripod, bracket, or table. Use only with a cart, stand, tripod, bracket, or table recommend by the manufacture, or sold with the unit.
- 7) Ventilation ---Slots and openings in the cabinets and the back or bottom are provided for ventilation. These openings must not be blocked. In a built in installation such a bookcase or rack do not install product unless proper ventilation is provided.
- 8) Power Source ---this TV should be operated only from the type of power source indicated on the rating label. If you are not sure of the type of power supply to your home, consult your appliance dealer or local power company.
- 9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet. To prevent electric shock, ensure the grounding pin on the AC cord power plug is securely connected.
- 10) Power cord protection ---Power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them. Pay particular attention to cords or plugs, convenience receptacle, and the point where they exit from the appliance.
- 11) Lighting precaution ---for added protection for this product during a lighting storm or when it is left unattended for long period of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the product due to lighting and power line surges.
- 12) Never push objects of any kind into this product through openings as they may touch dangerous voltage point or short out parts that could result in a fire or electric shock. Avoid spilling liquid of any kind on the product.
- 13) Servicing ---do not attempt to service the product by yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to authorized service personnel.
- 14) Unplug this unit from the wall outlet and refer servicing to qualified service personnel under the following conditions:
 - a. When the power supply cord or plug is damaged or frayed.


-
- b.If liquid has been spilled, or objects have been fallen into the unit.
 - c.If the unit has been exposed to rain or water.
 - d.If the unit does not operate normally by following the operating instructions.
Adjust only those controls that are covered by the operating instructions, as improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the unit to its normal operation.
 - e.If the unit has been dropped or damaged in any way.
 - f.When the unit exhibits a distinct change in performance; this indicates a need for service.

15)Heat --- The product should be situated away heat source such as radiators, heat registers, stoves, or other products (Including amplifiers) that product heat.

16)Overloading ---Do not overload wall outlets and extension cord as this can result in a risk of fire or electric shock.

三、Images of Module and Circuit Boards

a: Signal flow-chart

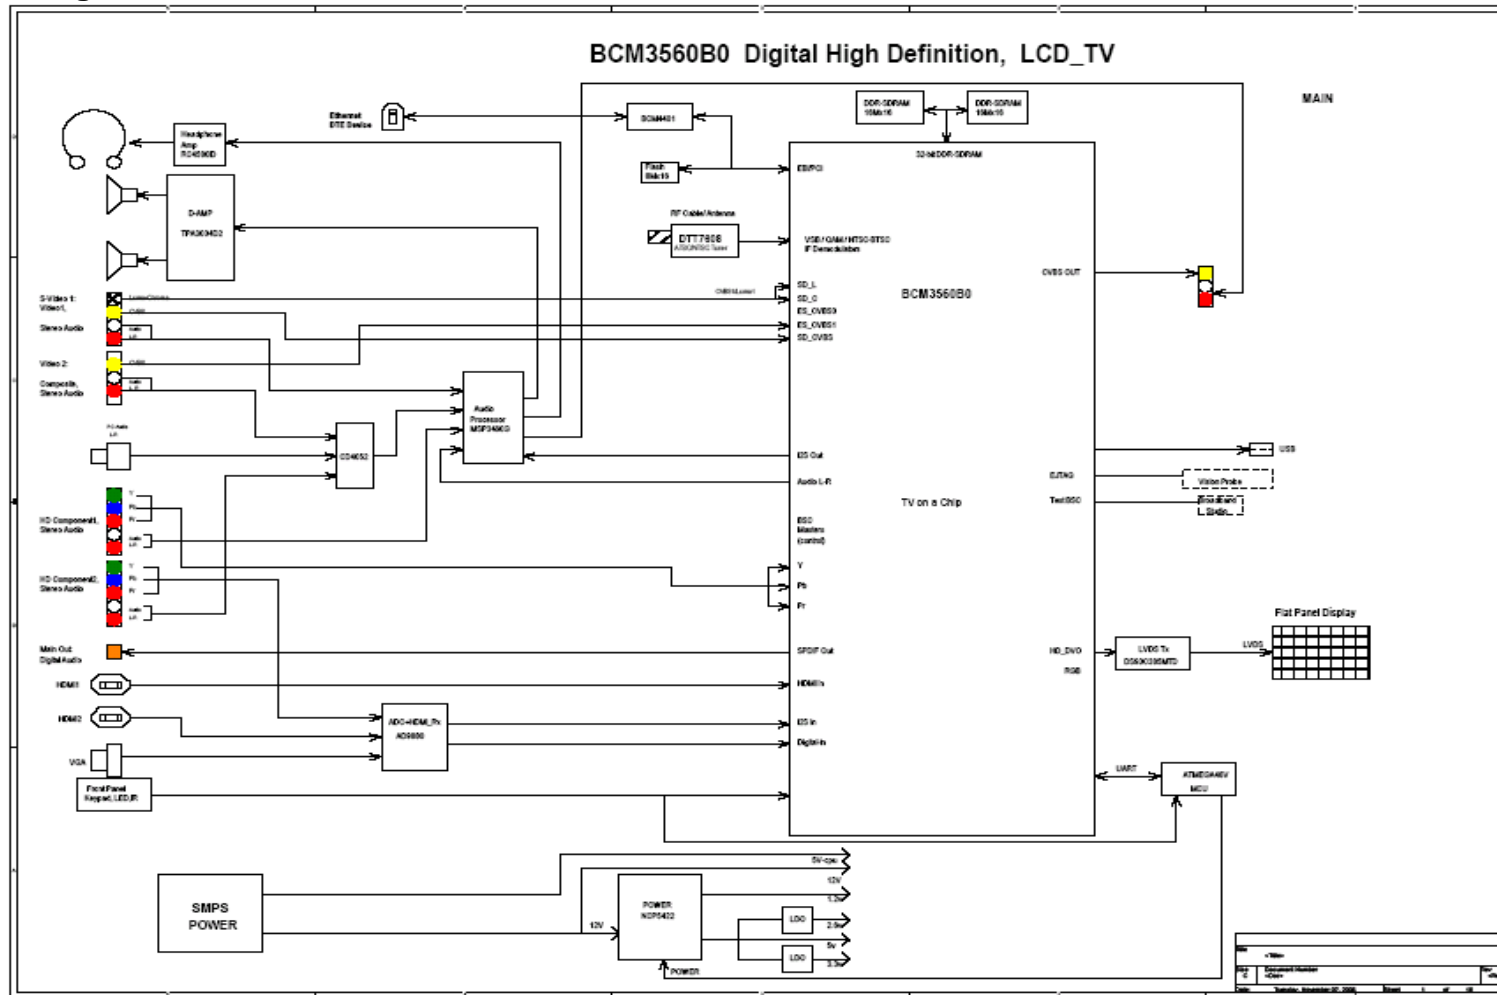


b. Printed Circuit IC Board

1) head-on board



2) rear board

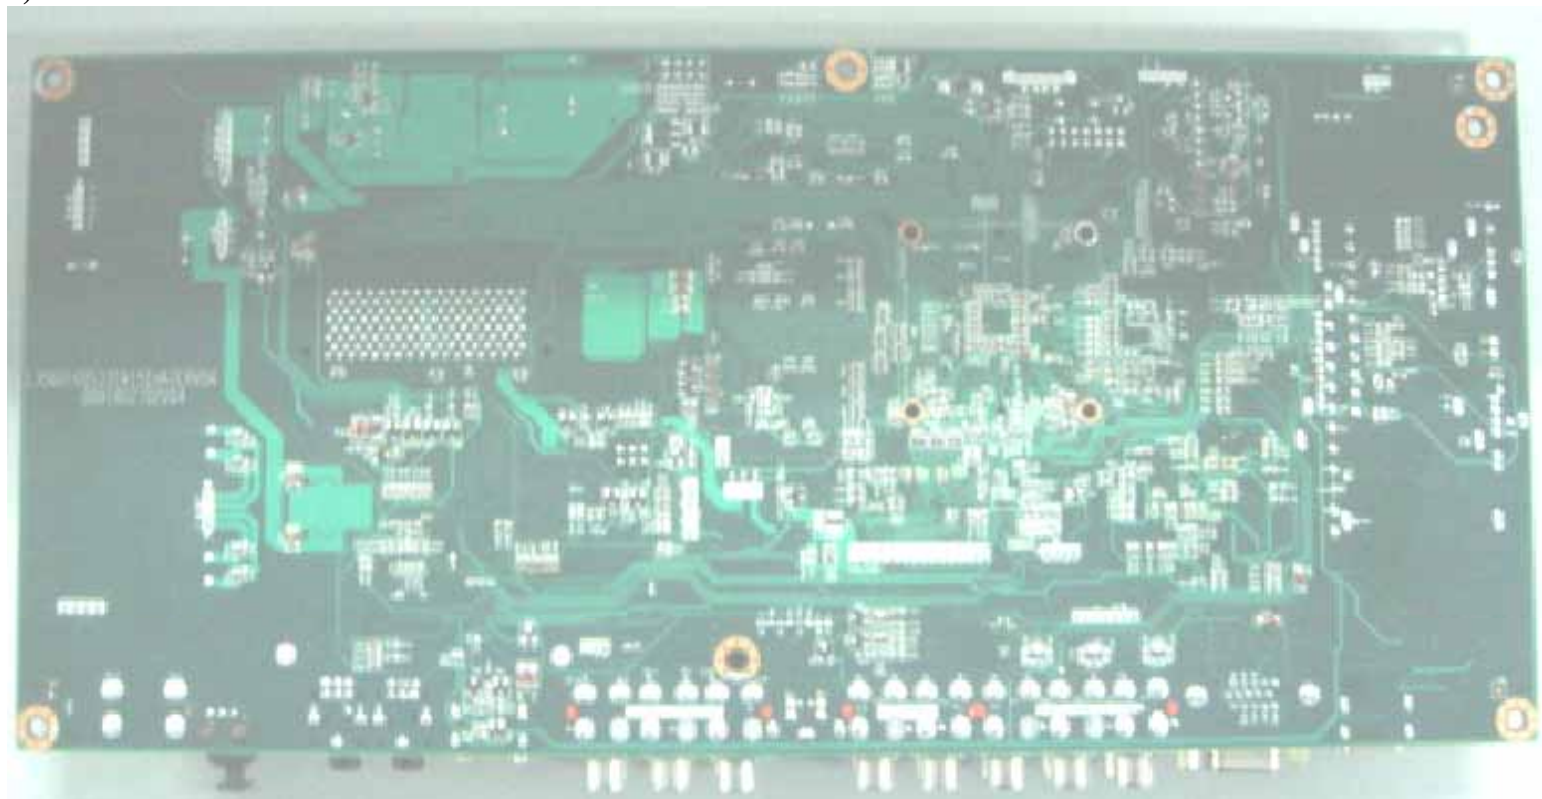

三、 Key IC Description& Trouble Shooting Guide

1. Key IC Description

1) BCM3551

FEATURES

- **Complete Analog and Digital Television System-on-Chip**
- **ATSC and Digital Cable Ready Compatible**
 - ATSC, 4-1024 QAM and out-of-band receivers
 - Direct CableCARD™ interface
- **On-chip Analog Signal Processing**
 - 3D Y/C comb separation
 - On-chip IF demodulator
 - NTSC/PAL analog video decoder
 - Supports direct 480i, 480p, 720p, 1080i analog inputs
 - BTSC and A2 audio decoder
 - 10-bit analog video processing
- **Integrated Video Processing**
 - Picture Enhancement Processor (PEP™)
 - Independent color and luma adjustment blocks
 - Multiframe per pixel motion adaptive deinterlacing
- **Digital Video and Audio Capability**
 - ATSC-compliant, all-format MP@HL MPEG-2 HD Video decoder
 - Dolby digital and MPEG audio decoder
 - Digital video input/output supporting HD/SD and VESA formats
 - 10-bit digital video out
- **NTSC/PAL HD/SD Video Encoder**
- **Integrated Analog Circuitry**
 - On chip A/Ds for video, IF, and OOB signals
 - Four DACs for baseband video outputs
 - Dual channel audio DACs for L-R audio
- **High-Quality Graphics and Video Scaling capability**
- **Integrated HDMI/DVI Receiver with HDCP support**
- **USB 2.0**
- **On-chip 250-MHz 32-bit CPU**

SUMMARY OF BENEFITS

- **Highly integrated solution combining the functionality of a complete television on a single chip.**
- **Superior ATSC signal reception and demodulation under both static and dynamic multipath conditions.**
- **Integration of field proven QAM and out-of-band receivers.**
- **PEP advanced video signal processing provides an elevated viewing experience through edge and color enhancements.**
- **Motion adaptive per pixel deinterlacing produces superior display of interlaced video on progressive displays.**
- **3D/2D comb filter with per pixel adaptive motion detection delivers superior Y/C separation.**
- **High quality on-chip video scaling provides extensive non-linear conversion of 4:3 images for display on 16:9 televisions.**
- **On-chip support to convert all inputs (480i, 480p, 720p, 1080i) to all outputs (480i, 480p, 720p, 1080i) in both digital and analog formats.**
- **Advanced graphics engine provides rich user interface environment.**
- **Direct 10-bit digital video support for interfacing with LCD, Plasma, and DLP panels preserves signal integrity and image quality.**
- **Comprehensive integration of A/Ds and DACs supports direct audio/video inputs/outputs simplifying system design and cost.**
- **Full peripheral support eliminates need for additional components including, USB 2.0, LED/Keypad, smartcard, BSC/SPI master, IR receiver/blaster, PWM and dual UARTs.**

2) MSP3460

Multistandard Sound Processor Family

Release Note: Revision bars indicate significant changes to the previous edition. The hardware and software description in this document is valid for the MSP 34x0G version C12 and following versions.

1. Introduction

The MSP 34x0G family of single-chip Multistandard Sound Processors covers the sound processing of all analog TV-Standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing, starting with analog sound IF signal-in, down to processed analog AF-out, is performed on a single chip. Figure 1–1 shows a simplified functional block diagram of the MSP 34x0G.

These TV sound processing ICs now include versions for processing the multichannel television sound (MTS) signal conforming to the standard recommended by the Broadcast Television Systems Committee (BTSC). The DBX noise reduction, or alternatively, Micronas Noise Reduction (MNR) is performed alignment free.

Other processed standards are the Japanese FM-FM multiplex standard (EIA-J) and the FM Stereo Radio standard.

Current ICs have to perform adjustment procedures in order to achieve good stereo separation for BTSC and EIA-J. The MSP 34x0G has optimum stereo performance without any adjustments.

All MSP 34xxG versions are pin compatible to the MSP 34xxD. Only minor modifications are necessary to adapt a MSP 34xxD controlling software to the MSP 34xxG. The MSP 34x0G further simplifies controlling software. Standard selection requires a single I²C transmission only.

The MSP 34x0G has built-in automatic functions: The IC is able to detect the actual sound standard automatically (Automatic Standard Detection). Furthermore, pilot levels and identification signals can be evaluated internally with subsequent switching between mono/stereo/bilingual; no I²C interaction is necessary (Automatic Sound Selection).

The MSP 34x0G can handle very high FM deviations even in conjunction with NICAM processing. This is especially important for the introduction of NICAM in China.

The ICs are produced in submicron CMOS technology. The MSP 34x0G is available in the following packages: PSDIP64-1, PSDIP52-1/-2, PMQFP80-11, and PMQFP64-2.

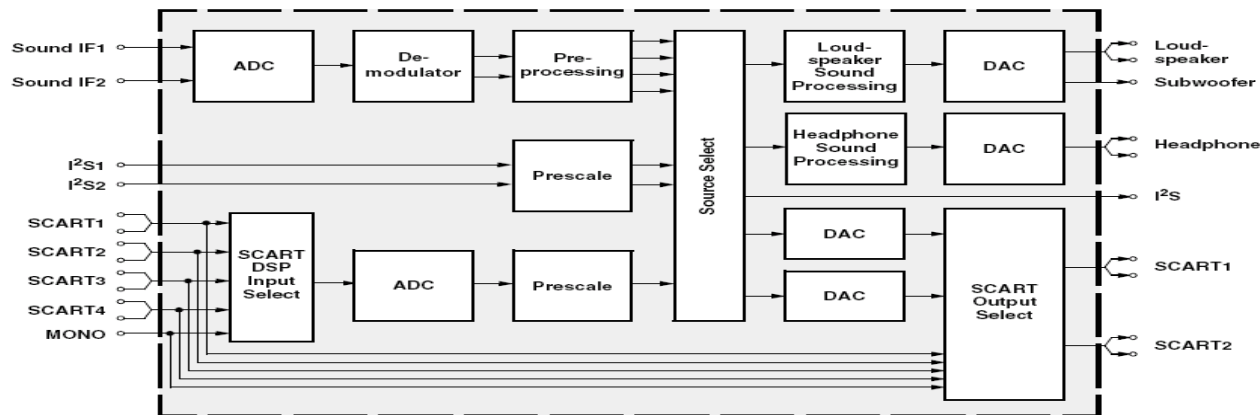


Fig. 1–1: Simplified functional block diagram of the MSP 34x0G

3)AD9880

FEATURES

Analog/HDMI dual interface
 Supports high bandwidth digital content protection
 RGB-to-YCbCr 2-way color conversion
 Automated clamping level adjustment
 1.8 V/3.3 V power supply
 100-lead LQFP Pb-free package
 RGB and YCbCr output formats

Analog interface

8-bit triple ADC
 100 MSPS maximum conversion rate
 Macrovision® detection
 2:1 Input mux
 Full sync processing
 Sync detect for hot plugging
 Midscale clamping

Digital video interface

HDMI v 1.1, DVI v 1.0
 150 MHz HDMI receiver
 Supports high bandwidth digital content protection (HDCP 1.1)

Digital audio interface

HDMI 1.1-compatible audio interface
 S/PDIF (IEC90658-compatible) digital audio output
 Multichannel I²S audio output (up to 8 channels)

APPLICATIONS

Advanced TV
 HDTV
 Projectors
 LCD monitor

GENERAL DESCRIPTION

The AD9880 offers designers the flexibility of an analog interface and high definition multimedia interface (HDMI) receiver integrated on a single chip. Also included is support for high bandwidth digital content protection (HDCP).

Analog Interface

The AD9880 is a complete 8-bit 150 MSPS monolithic analog interface optimized for capturing component video (YPbPr) and RGB graphics signals. Its 150 MSPS encode rate capability and full power analog bandwidth of 330 MHz supports all HDTV formats (up to 1080 p) and FPD resolutions up to SXGA (1280 × 1024 @ 75 Hz).

The analog interface includes a 150 MHz triple ADC with internal 1.25 V reference, a phase-locked loop (PLL), and programmable gain, offset, and clamp control. The user provides only 1.8 V and 3.3 V power supplies, analog input, and Hsync. Three-state

FUNCTIONAL BLOCK DIAGRAM

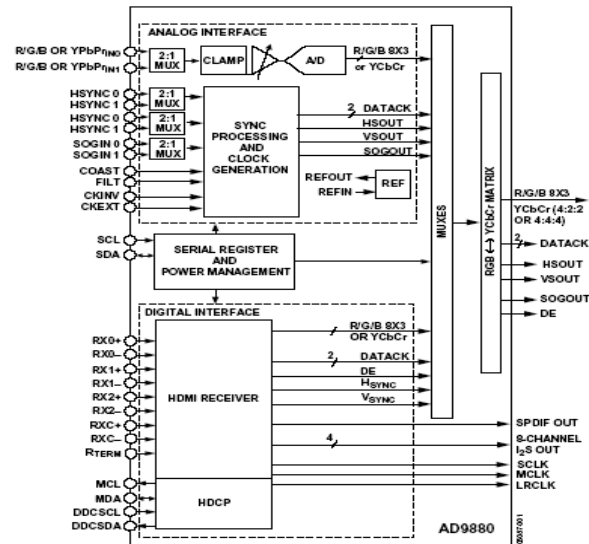


Figure 1.

CMOS outputs can be powered from 1.8 V to 3.3 V. The AD9880's on-chip PLL generates a pixel clock from Hsync. Pixel clock output frequencies range from 12 MHz to 150 MHz. PLL clock jitter is typically less than 700 ps p-p at 150 MHz. The AD9880 also offers full sync processing for composite sync and sync-on-green (SOG) applications.

Digital Interface

The AD9880 contains a HDMI 1.1-compatible receiver and supports all HDTV formats (up to 1080 p and 720 p) and display resolutions up to SXGA (1280 × 1024 @ 75 Hz). The receiver features an intrapair skew tolerance of up to one full clock cycle. With the inclusion of HDCP, displays can now receive encrypted video content. The AD9880 allows for authentication of a video receiver, decryption of encoded data at the receiver, and renewability of the authentication during transmission, as specified by the HDCP v 1.1 protocol.

Fabricated in an advanced CMOS process, the AD9880 is provided in a space-saving, 100-lead LQFP surface-mount Pb-free plastic package and is specified over the 0°C to 70°C temperature range.


2. Trouble Shooting Guide

For the sake of time and cost, it is strongly recommended that you check out the problem by yourself according to the instructions listed hereunder before contacting the after-sales service for technical assistance.

No picture, no sound	Verify if the television is properly plugged. Verify if the television is properly supplied power. Verify if electricity is available.
Blank screen	Verify if correct signals are input. Press INPUT button to change signal input to TV input. Restart the television if power supply is interrupted.
No sound	Press Mute button and verify if Mute mode is set. Switch to other channel and verify if the same problem happens. Press VOL+ button to see if the problem can be solved.
Poor sound	Verify if sound system is correct. Refer to some chapter for adjust.
No picture in some channel	Verify if correct channel is selected. Adjust the antenna. Make adjustments by Fine Tune and Manual Scan.
No color for some channel program (black and white)	Verify if the same problem exists in other channels. Check out of picture and sound systems. Refer to relative instructions in the Manual for color adjust.
Spots with some or all pictures	Verify if the antenna is correctly connected. Verify if the antenna is in good condition. Make fine adjustment of channel.
Horizontal/vertical bars or picture shaking	Check for local interference such as an electrical appliance or power tool.
Television out of control	Disconnect the television from power supply and, 10 seconds later, connect the television to the power supply. If the problem still exists, contact authorized after-sales service for technical assistance.

Note: Do not leave the television with static picture in an extended period as it may result in residual image on your television screen.

五、Signal Flowing Chart

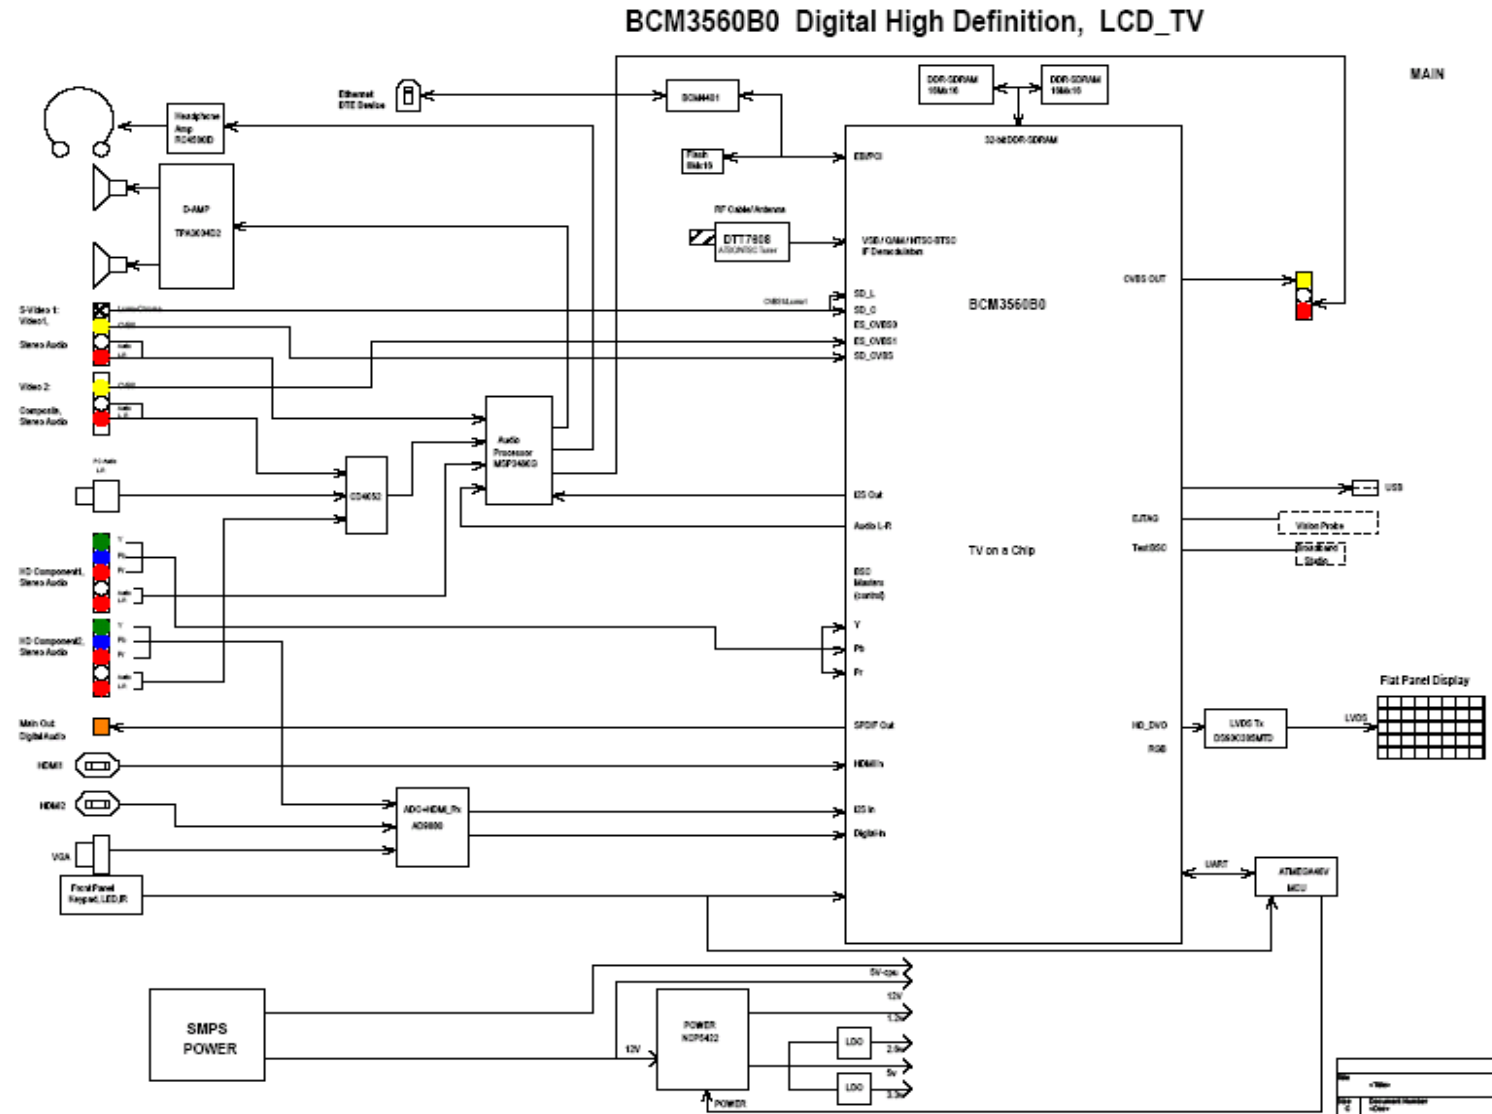

六、 Bus Control Adjustment


1) Factory Mode

Using the remote controller to enter into Factory Menu.

Press Menu to call main menu displaying on the screen. And then press “9”, “4”, “4”, “3”, “OK” in turn. You will see the screen displaying as following. You can check the version of the software, adjust some settings. But we don't advise you change this settings. because of the TV has already hold in the state of optimality. If you have to change this settings, please connect with the local service center.

The following are the detail descriptions for the menu items.


1. Factory menu

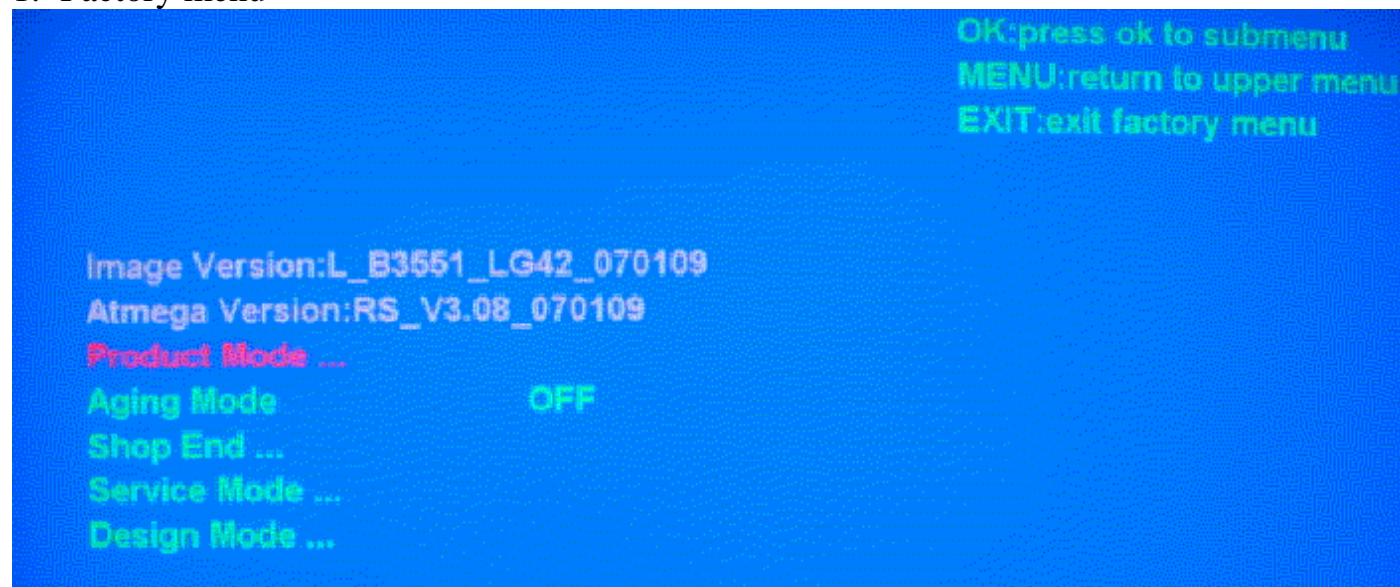

2. Image Version, Atmega Version

Image Version: This is the current software version.

Atmega Version: The serial number, it is recorded for this board.

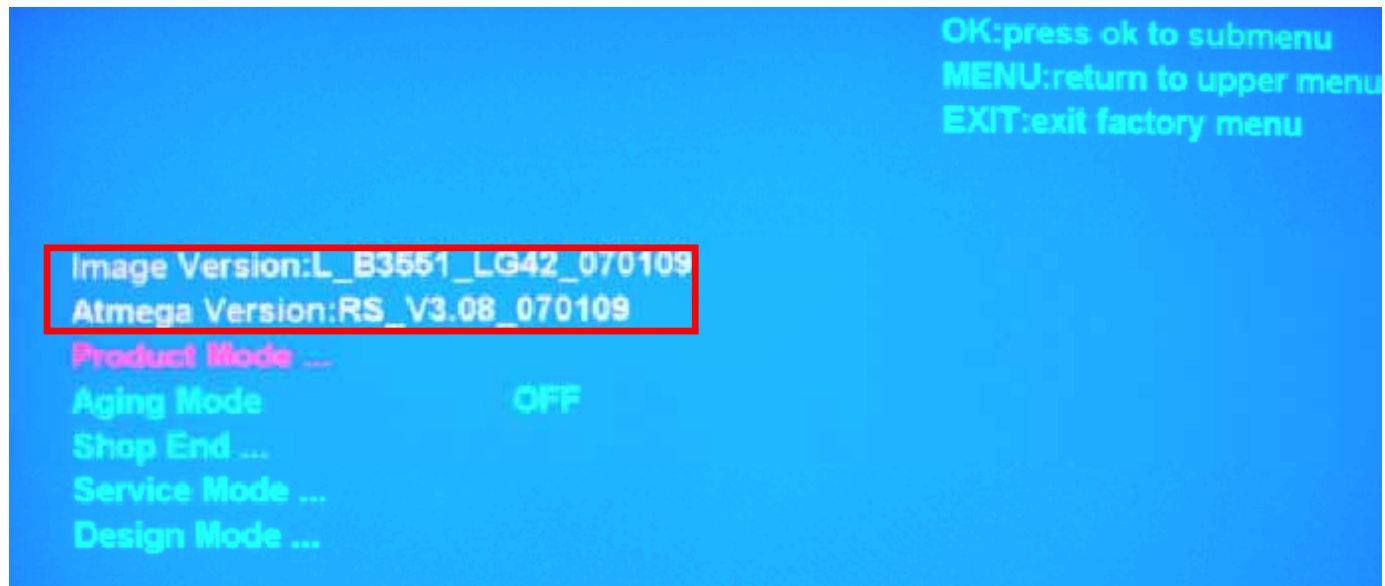


3.OK MENU EXIT

OK: press OK to submenu

MENU: return to upper menu



EXIT: Press "EXIT" of the remote controller to exit from factory menu

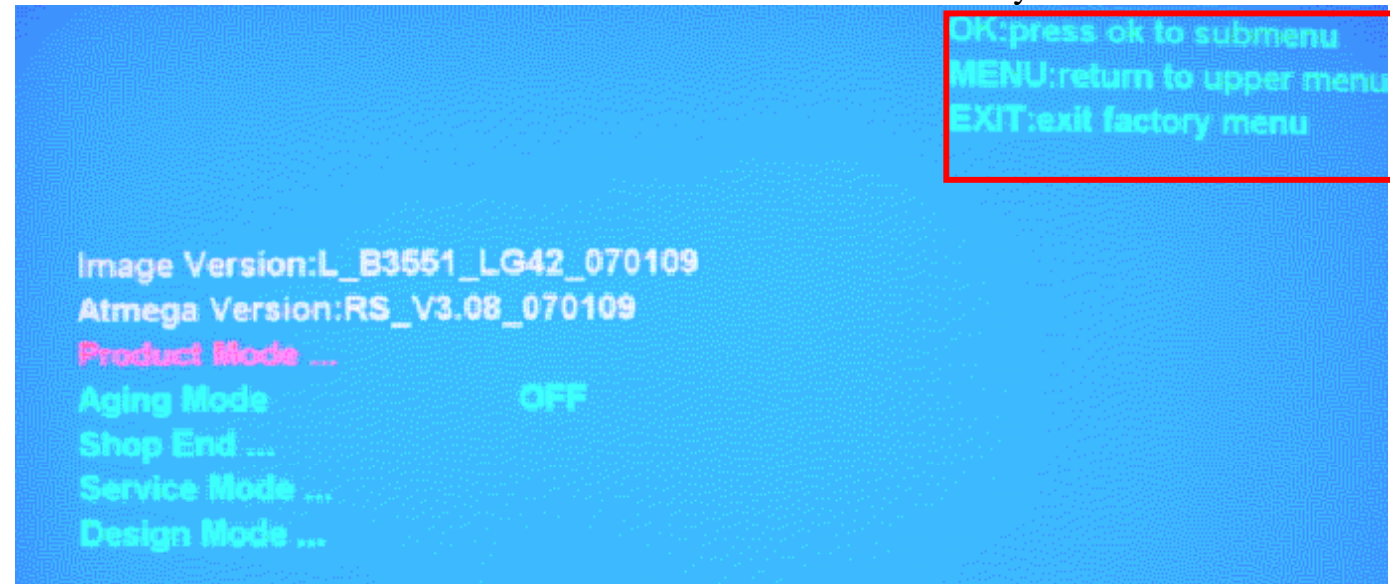


4. Operate in Factory Menu

There are 5 items in the root Product Mode, Aging Mode, Shop End, Service Mode, Design Mode.


1) Product Mode includes 3 items, White Balance Setting, Back Light Set to Factory Default Value. Do not change the value commonly.

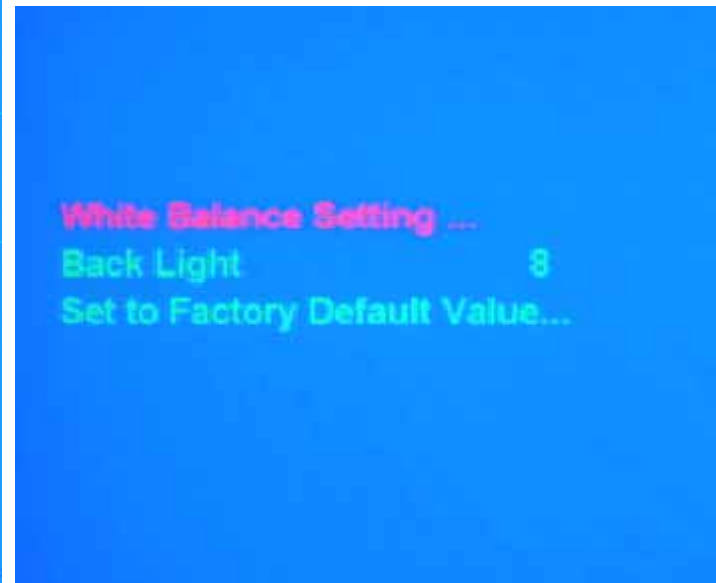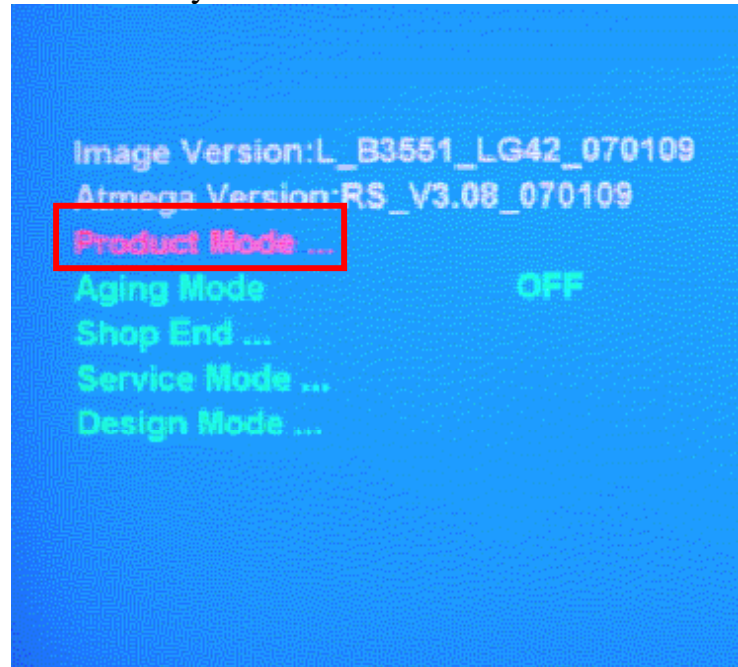


2) Aging Mode This is for factory run-in testing.

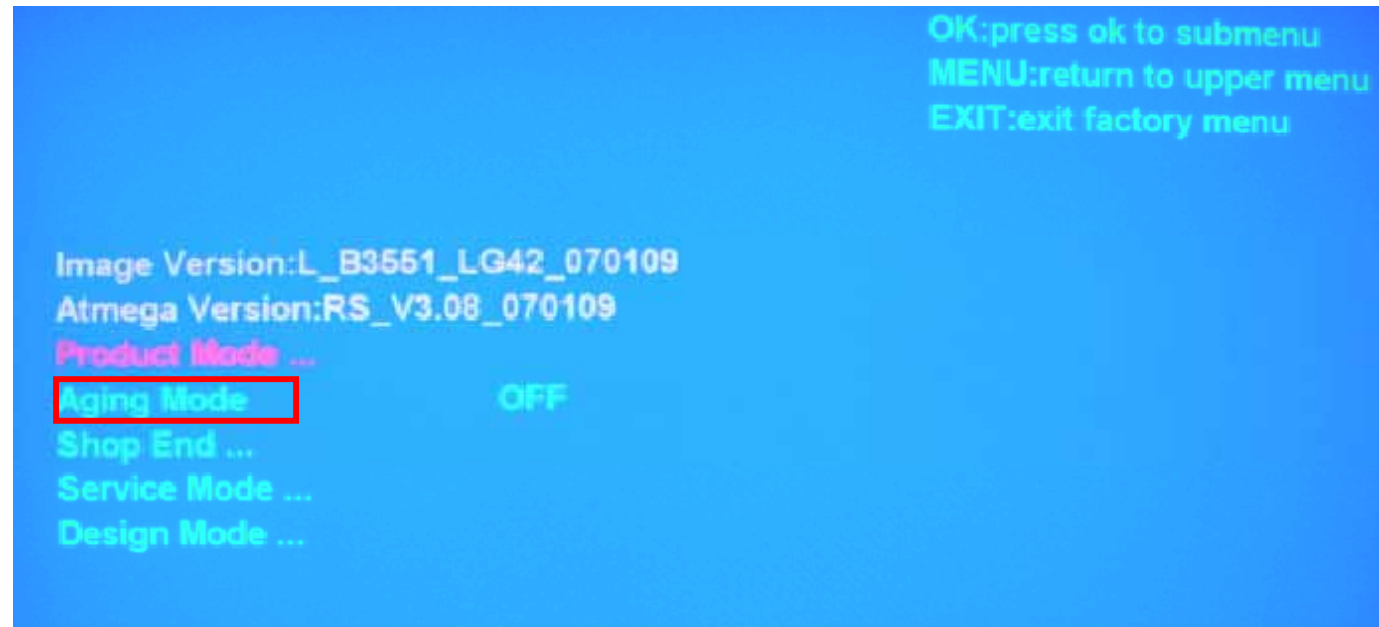



3) Shop End is for debugging, and do not change anything commonly.

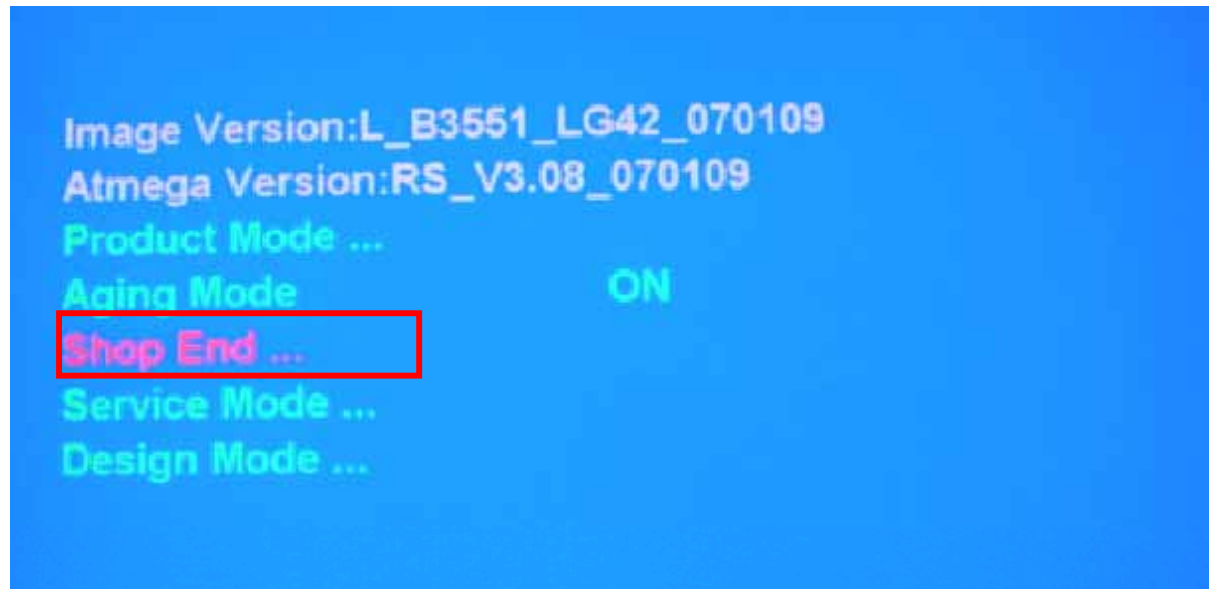

4)Service Mode is for debugging, and do not change anything commonly.


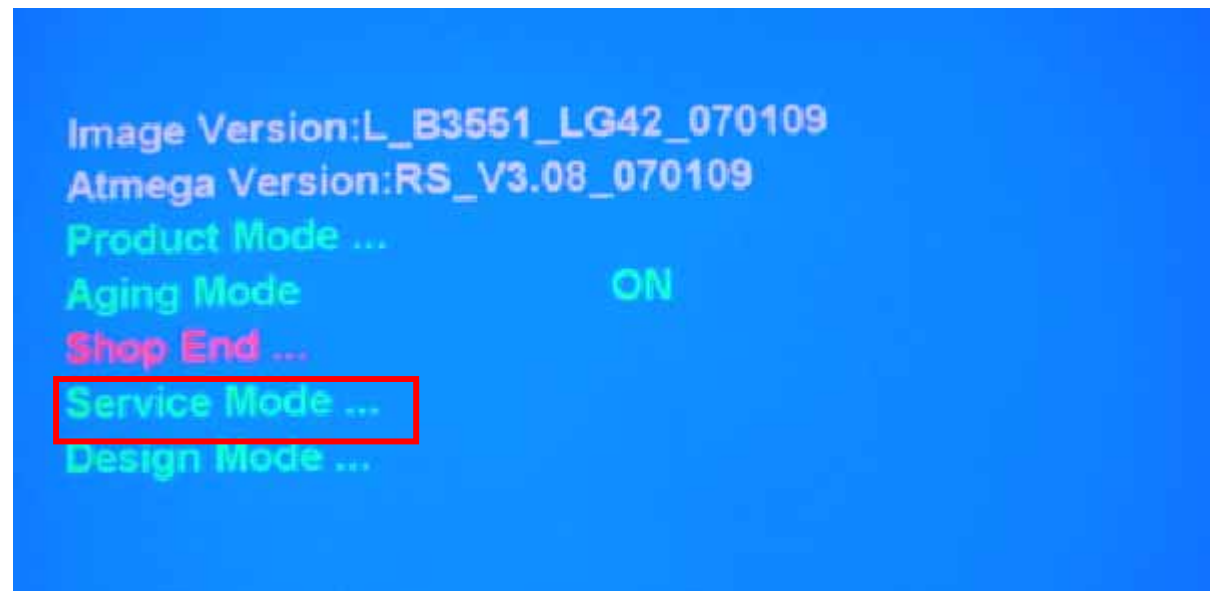


5) Design Mode includes 4 items, Video Setting, Audio Setting, Screen Setting, Others

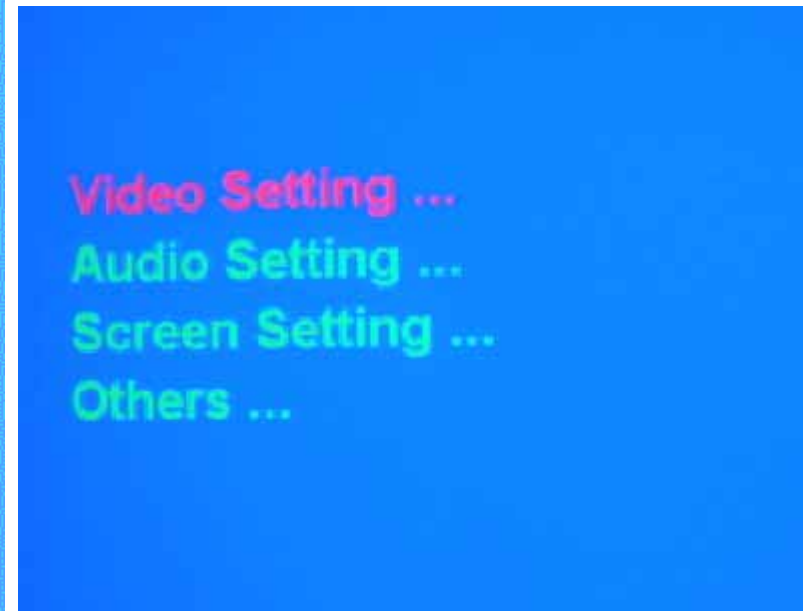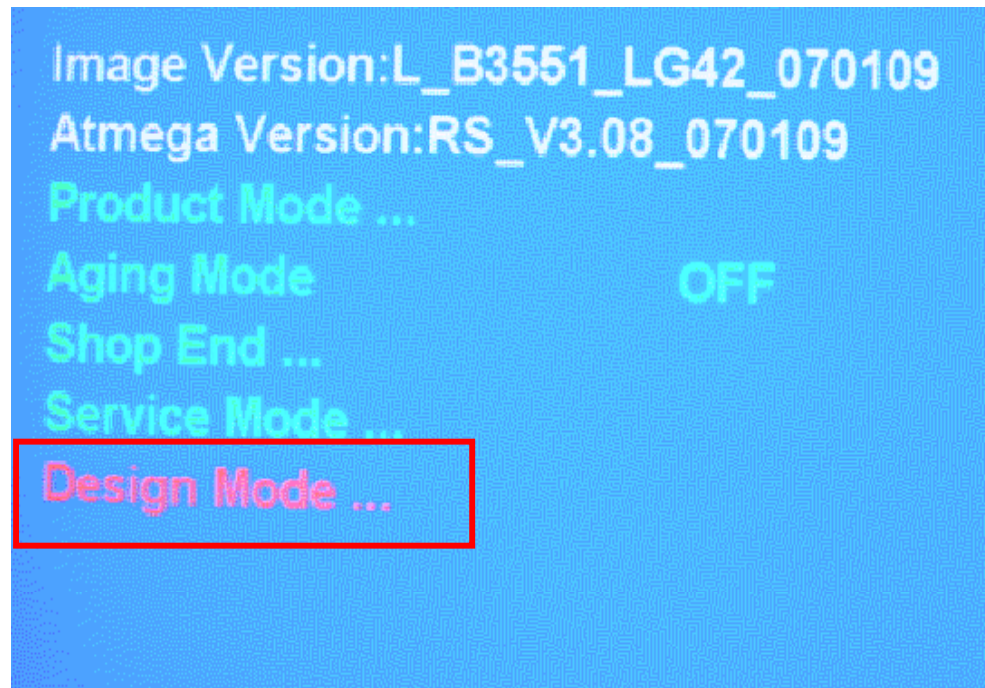


a. Video Setting includes 4 items, Threshold, Picture Mode, ADC Auto Adjust, Gray Step.


Threshold allows you to change the adjustable range of brightness, contrast, chroma, hue and sharpness. Picture Mode allows you to change the state of picture mode, such as Vivid mode, Standard mode and Mild mode. ADC Auto Adjust and Gray Step are for debugging, and do not change anything.

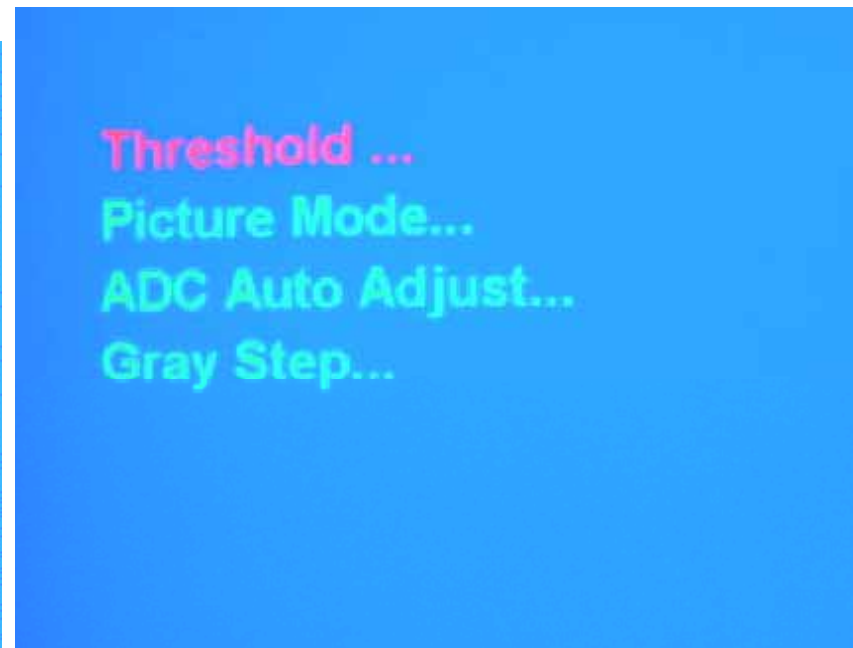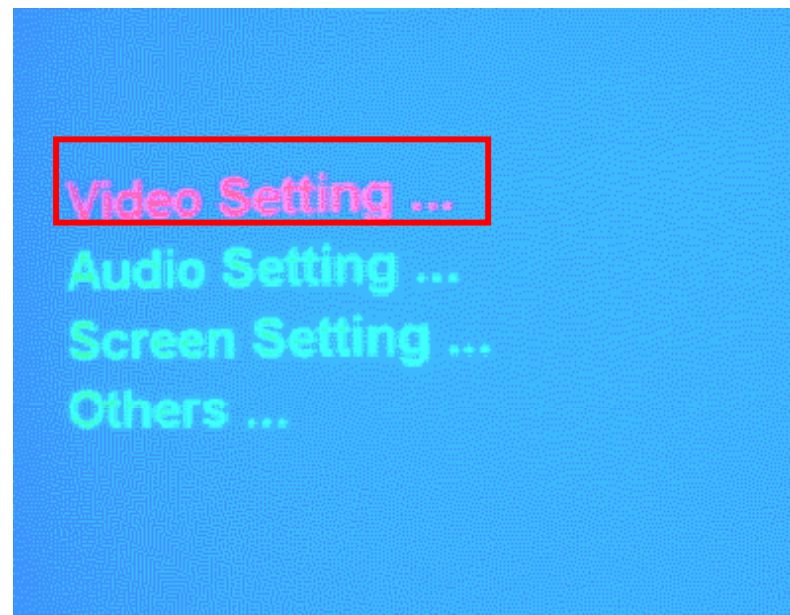


b. Audio Setting includes 4 items, Sound Effect, Sound Mode, Sound Curve, Headphone Sound curve. All these items are for debugging, and do not change anything commonly.

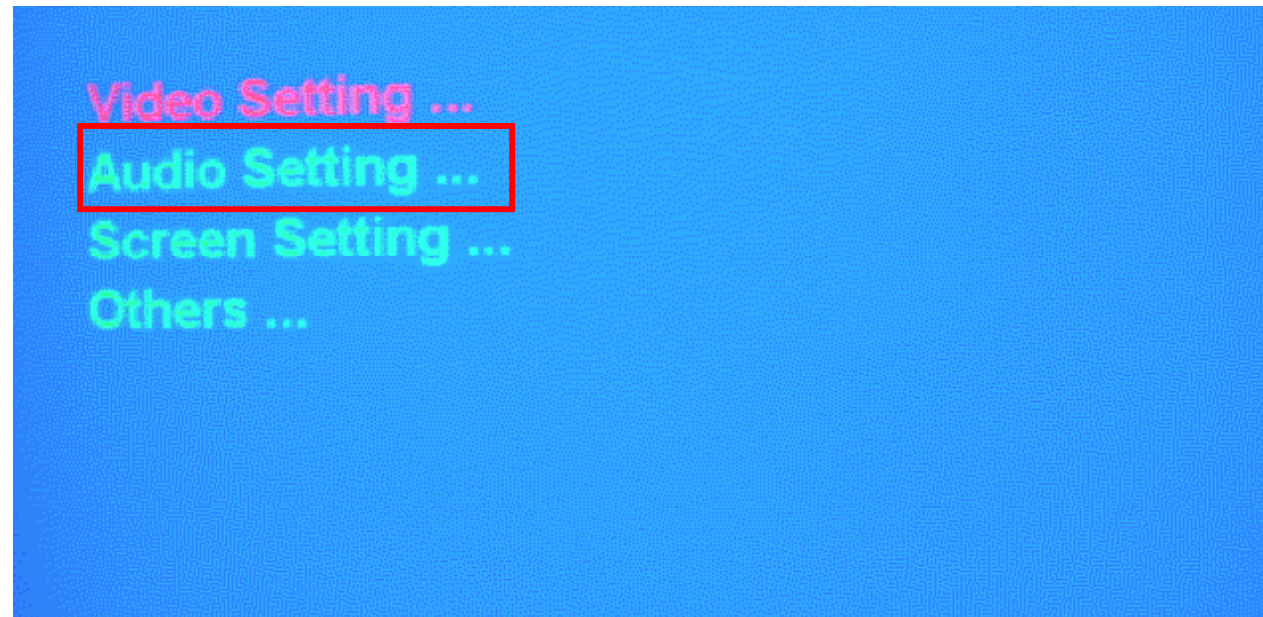

c. Screen Setting allows you to change V-SIZE, V-POSITION, H-SIZE, H-POSITION of the screen displaying. Normally you need not to change anything.

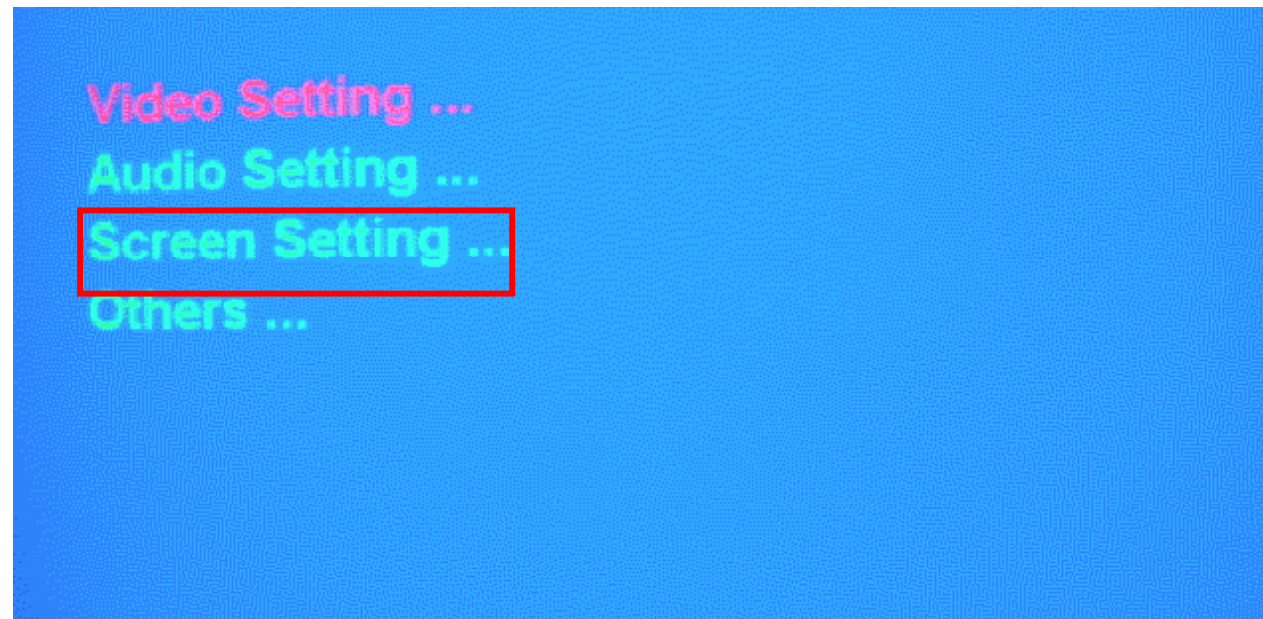

d. Others including 2 items, Audio Output and Set E2prom to default. Audio Output allows you to change the volume of Audio Output. Set E2prom to default will Clear all changing you have made to the TV set's software setting, such as Channel list you have tuned, volume, brightness, and etc. and initialize TV set's software to the state like a new TV set buyed right now.

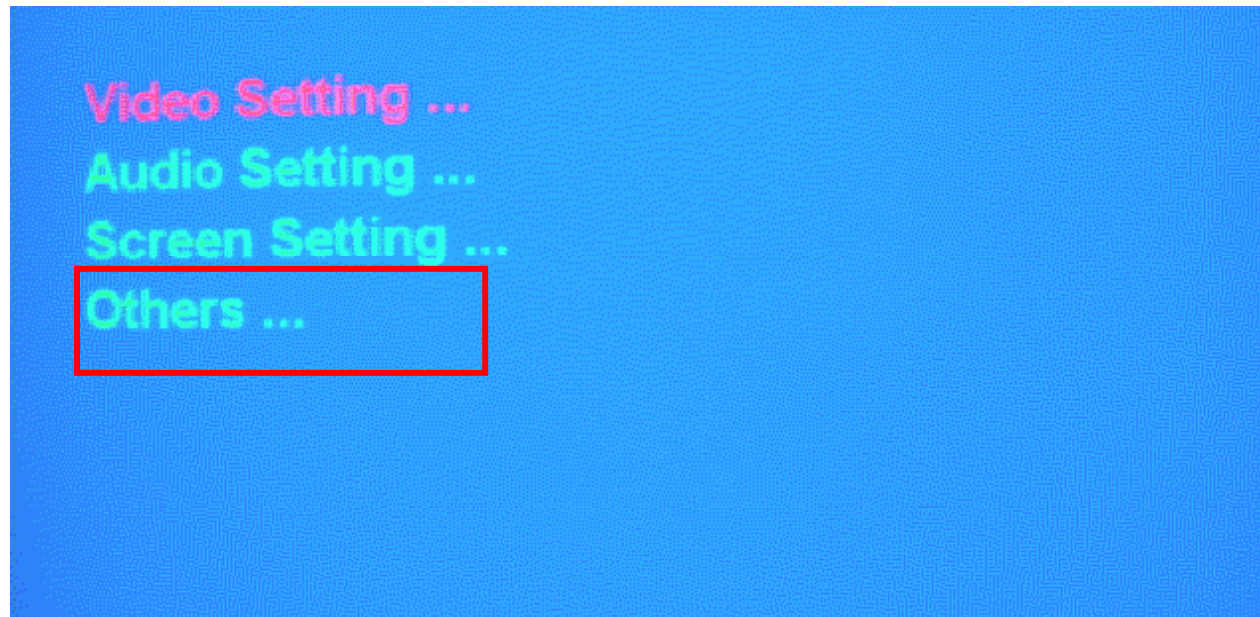


Remark:

The date of the chart only is a example, please don't adjust the factory mode base on it.


2) Others

HL26B/BG HL32B/BG HL37B/BG HL40BG HL42B/BG

- 1.INPUT: all input sourcedisplay and OK confirm.
- 2.CH-/+: Program minus and plus, menu options
- 3.VOL-/+: Volume increase and decrease, menu reset and entry
- 4.MENU: Menu display
- 5.POWER: Is used to activate the display or return to standby mode.

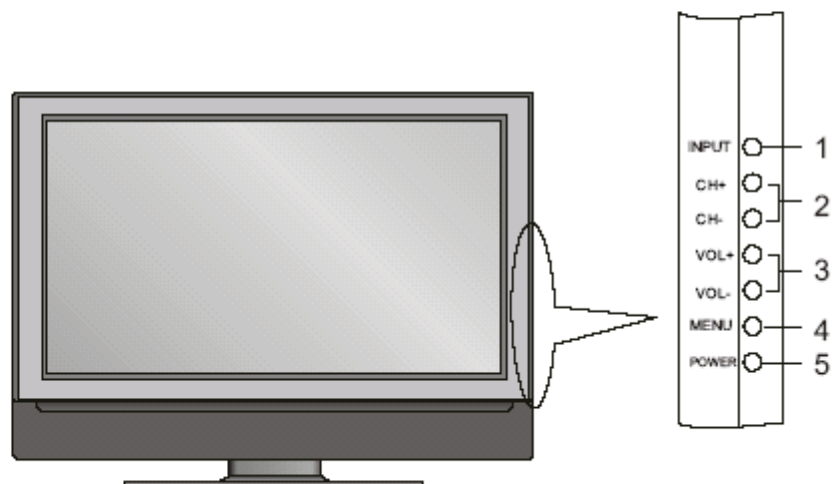


Back panel controls

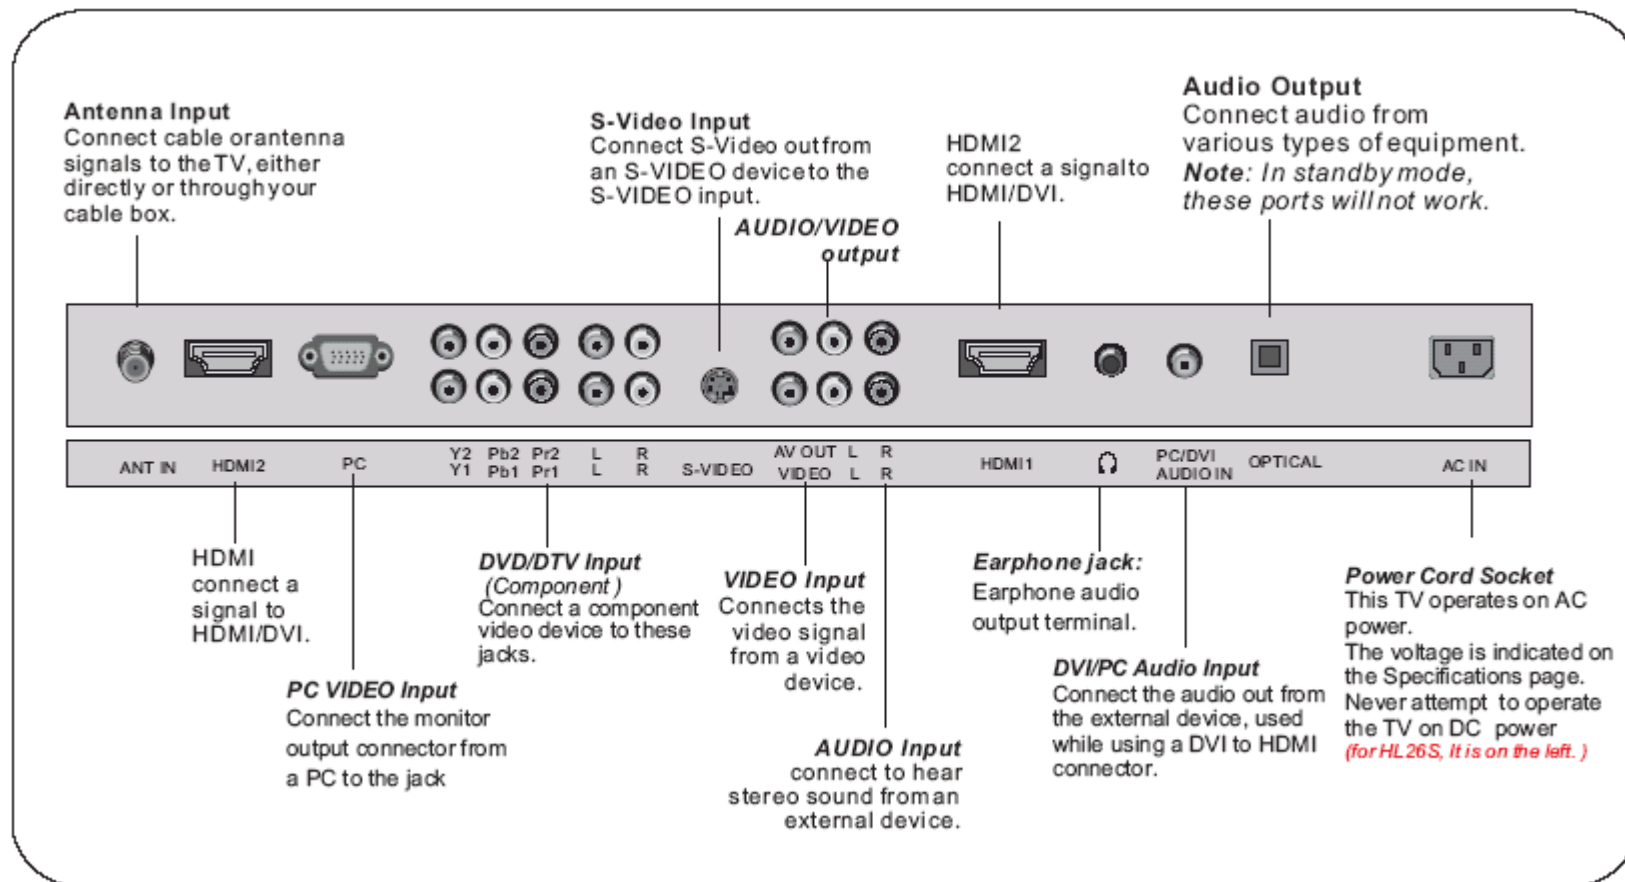

Universal Remote Controller

- The remote controller cannot be operated unless the batteries are properly loaded.
- When using the remote control, aim it at the remote control sensor on the TV.


Function introduction

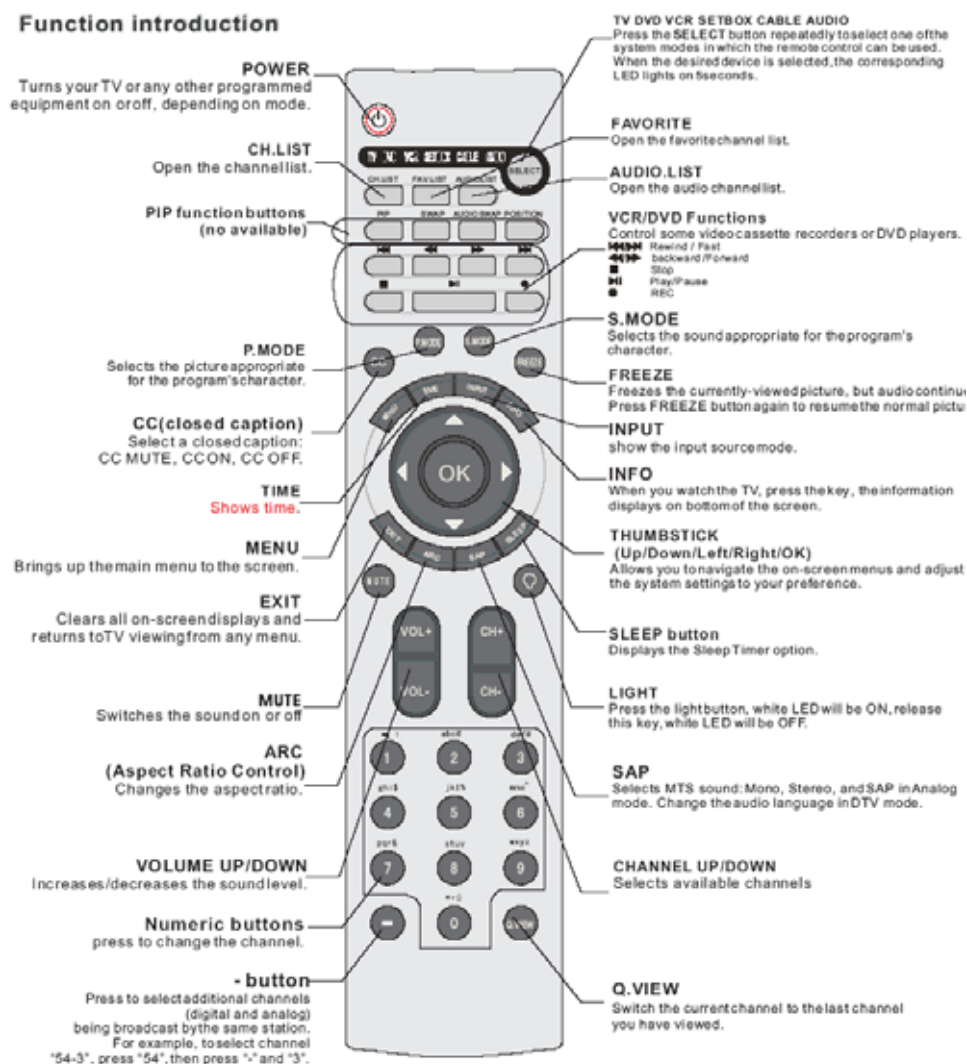


七、Circuit Diagram


1. BCM signal flowing chart
2. Circuit Diagram


BCM3560B0 Digital High Definition, LCD_TV

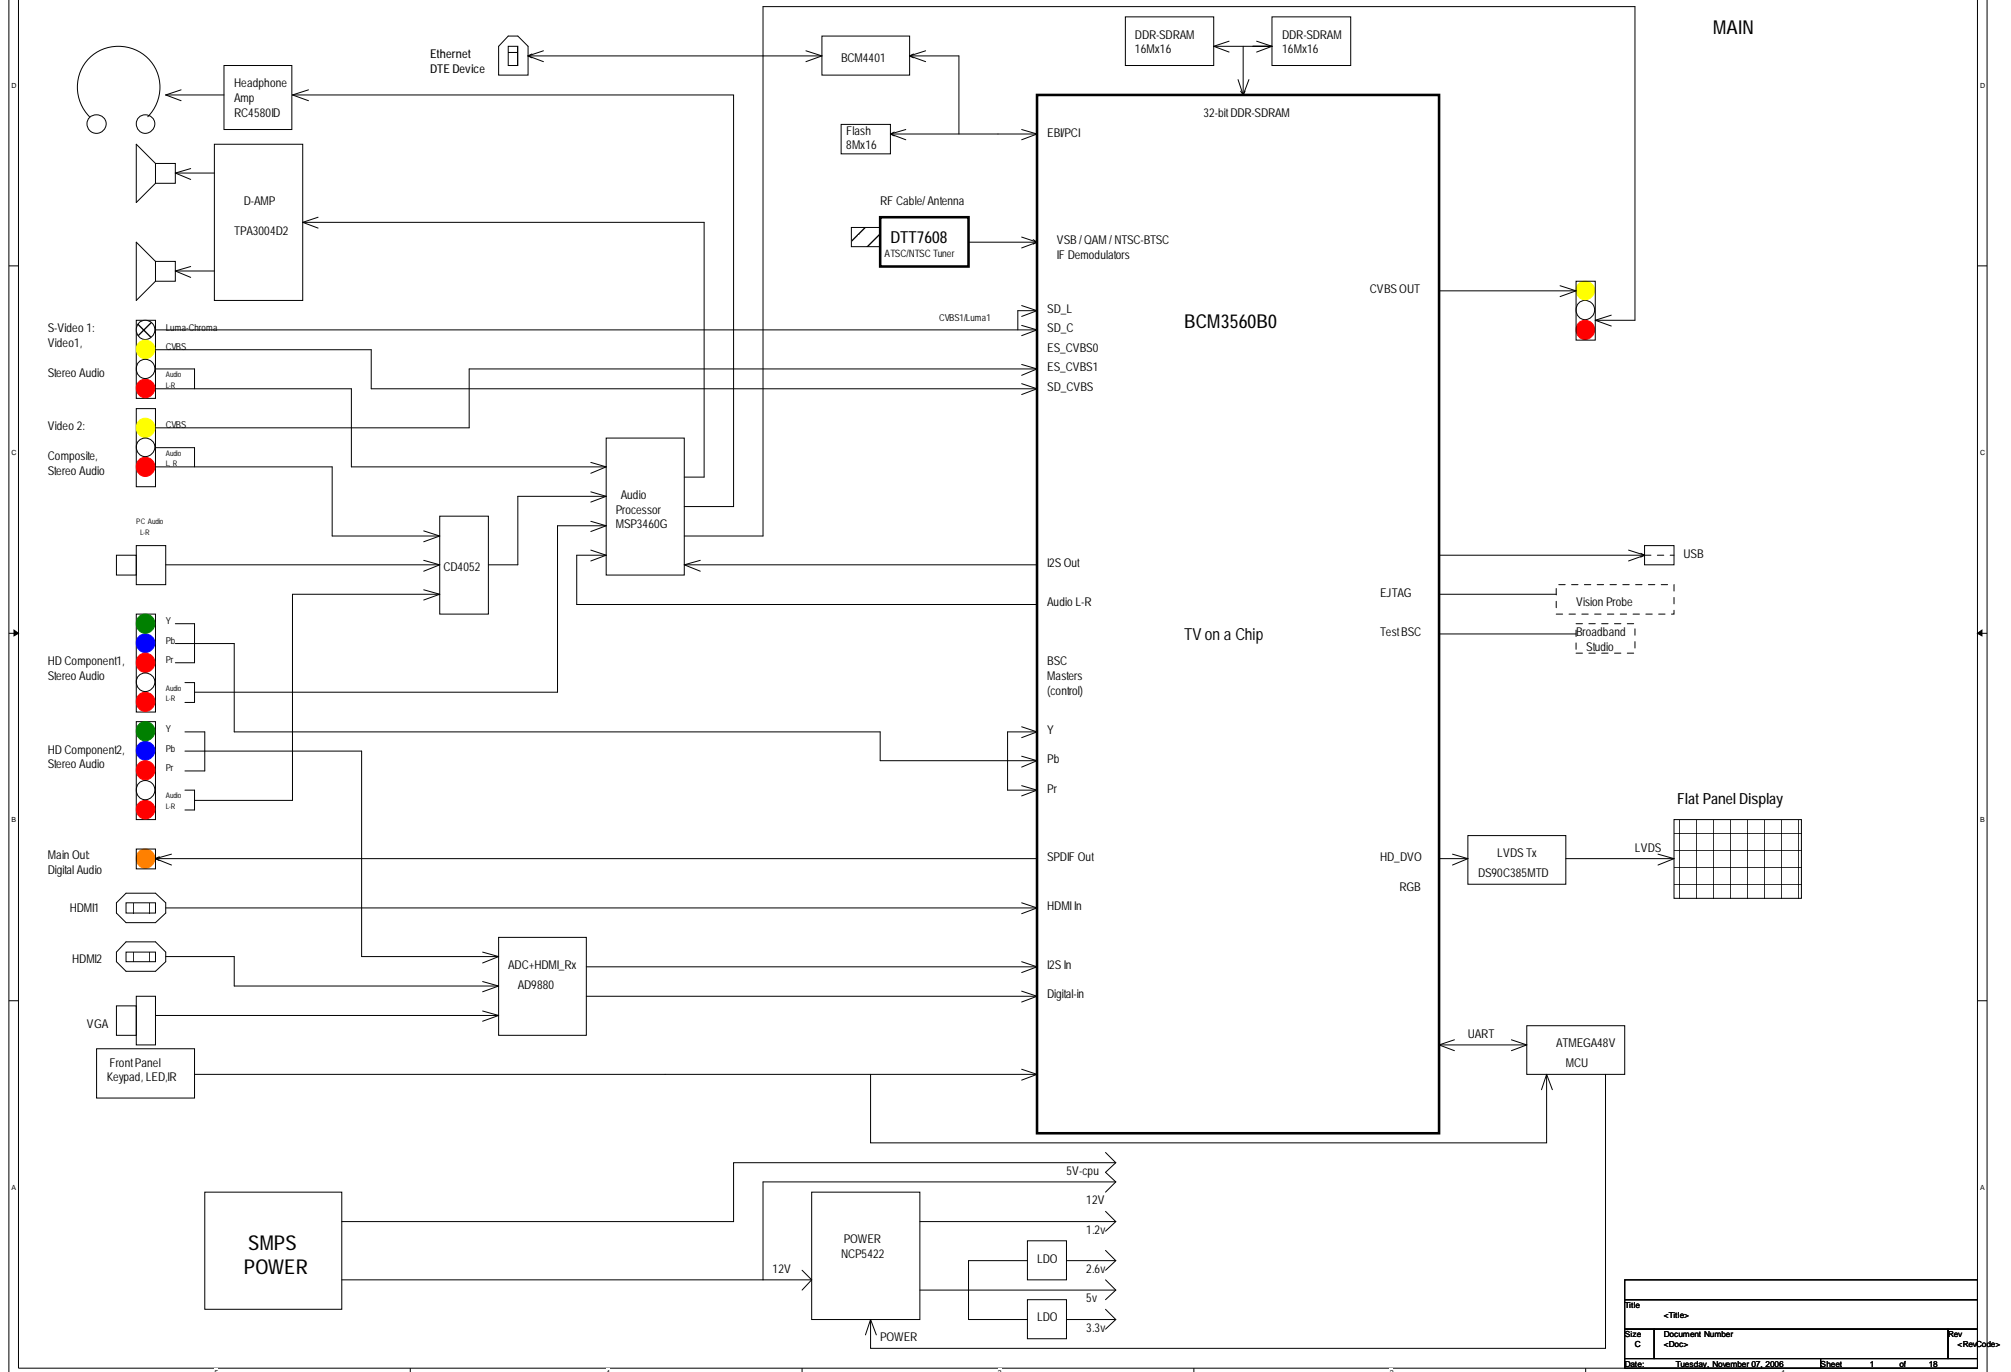




Title	<Title>	Rev	<Rev/Code>
Size	Document Number		
C	<Doc>		
Date:	Tuesday, November 07, 2006	Sheet	1 of 18

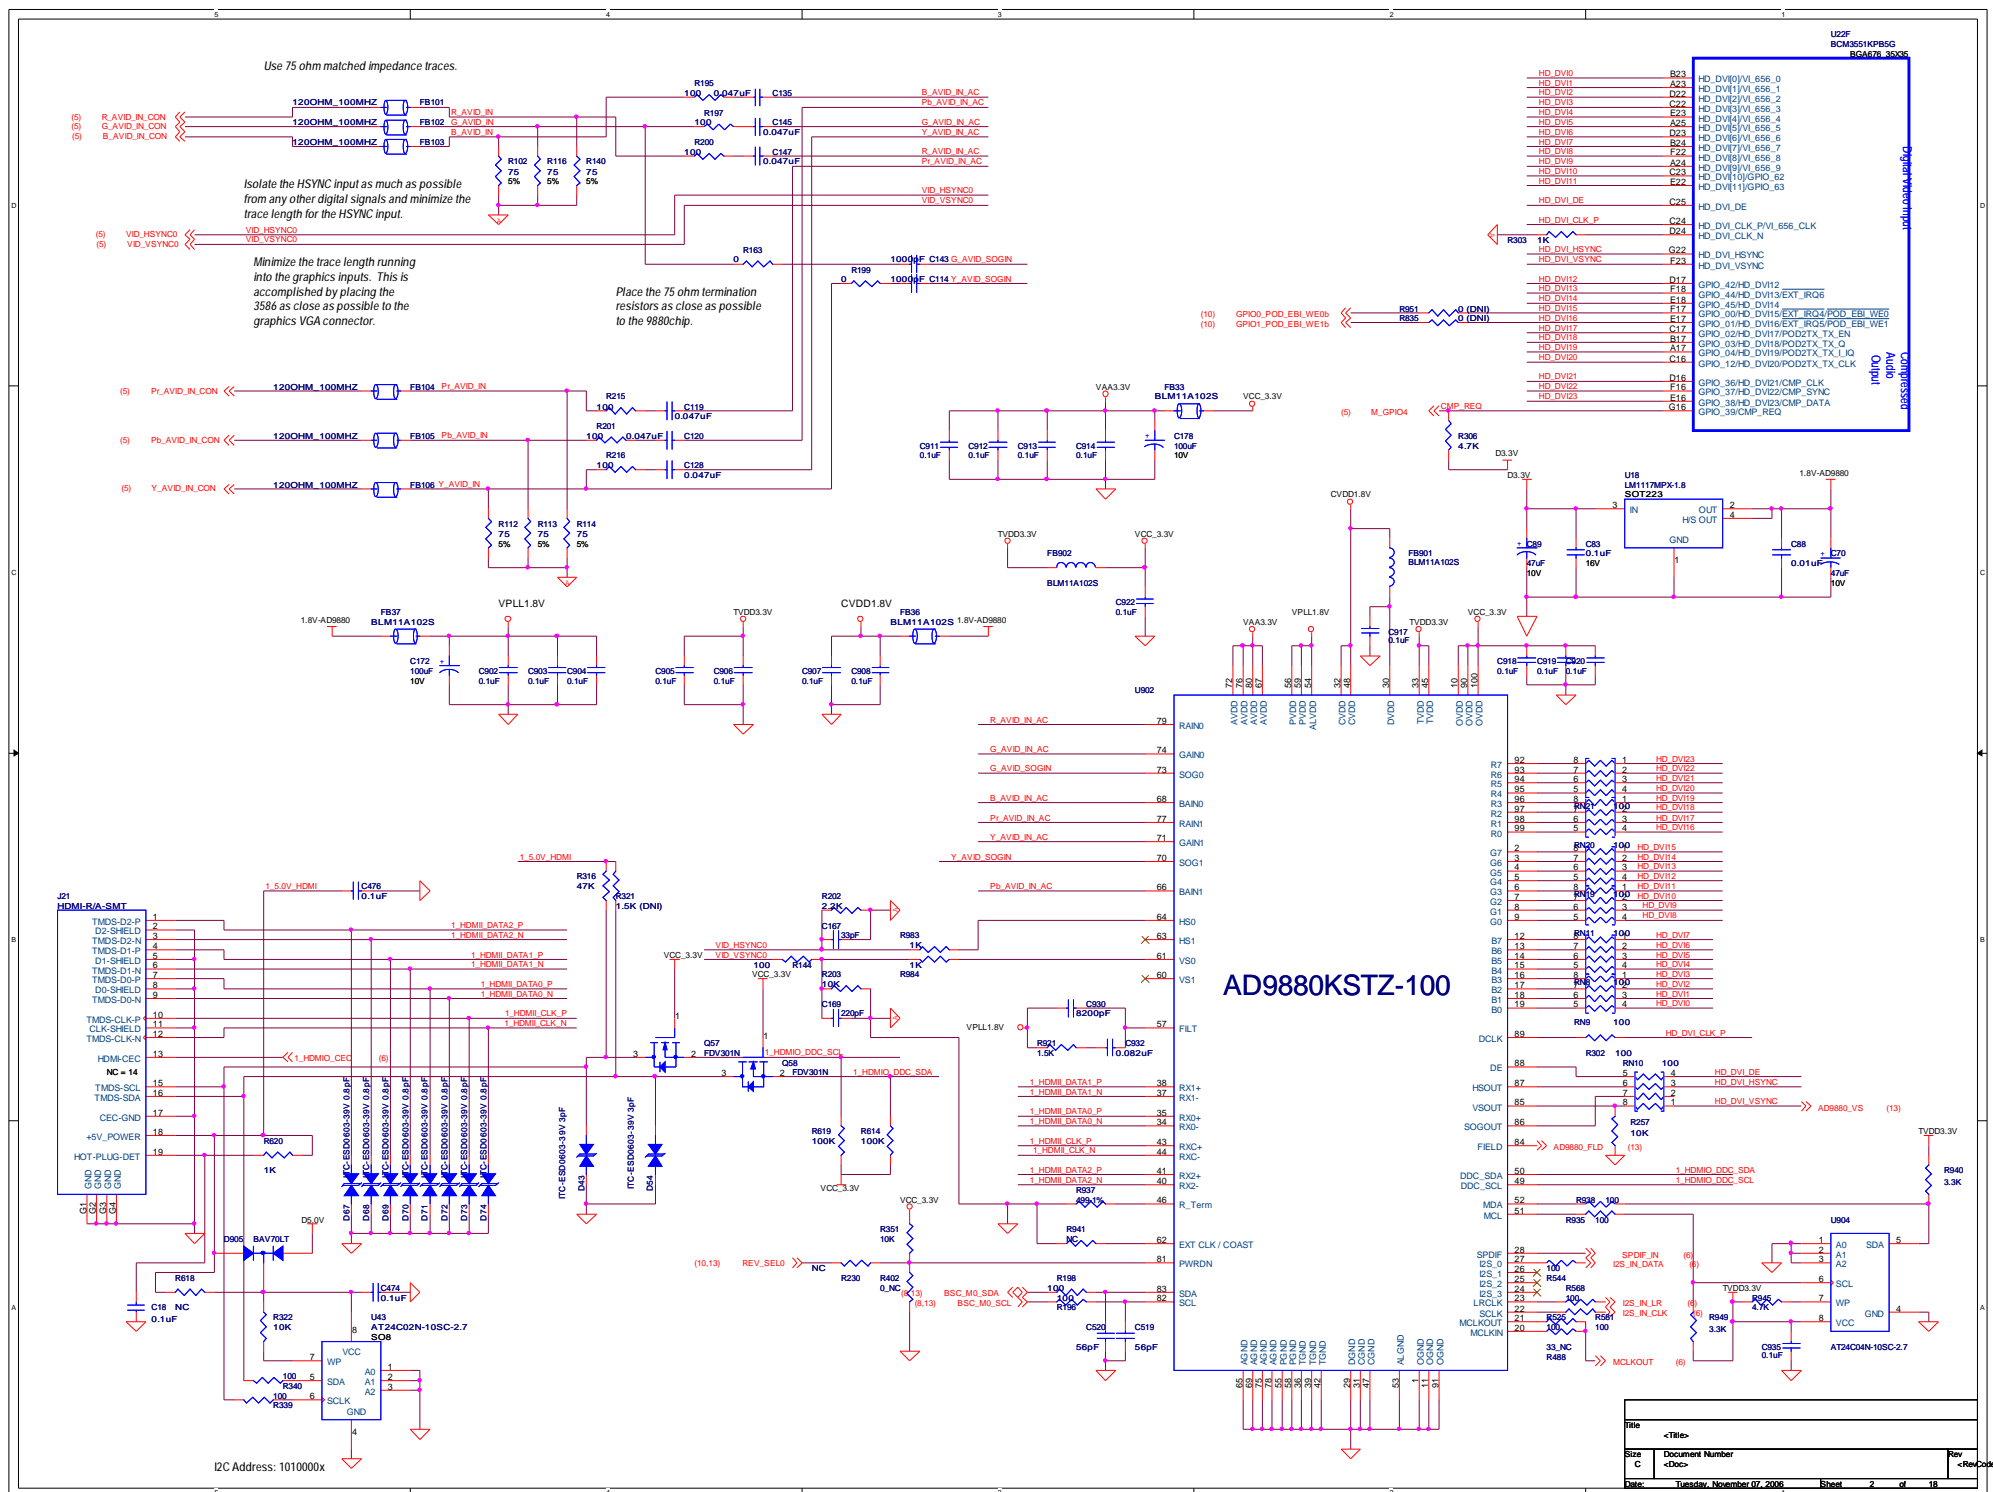

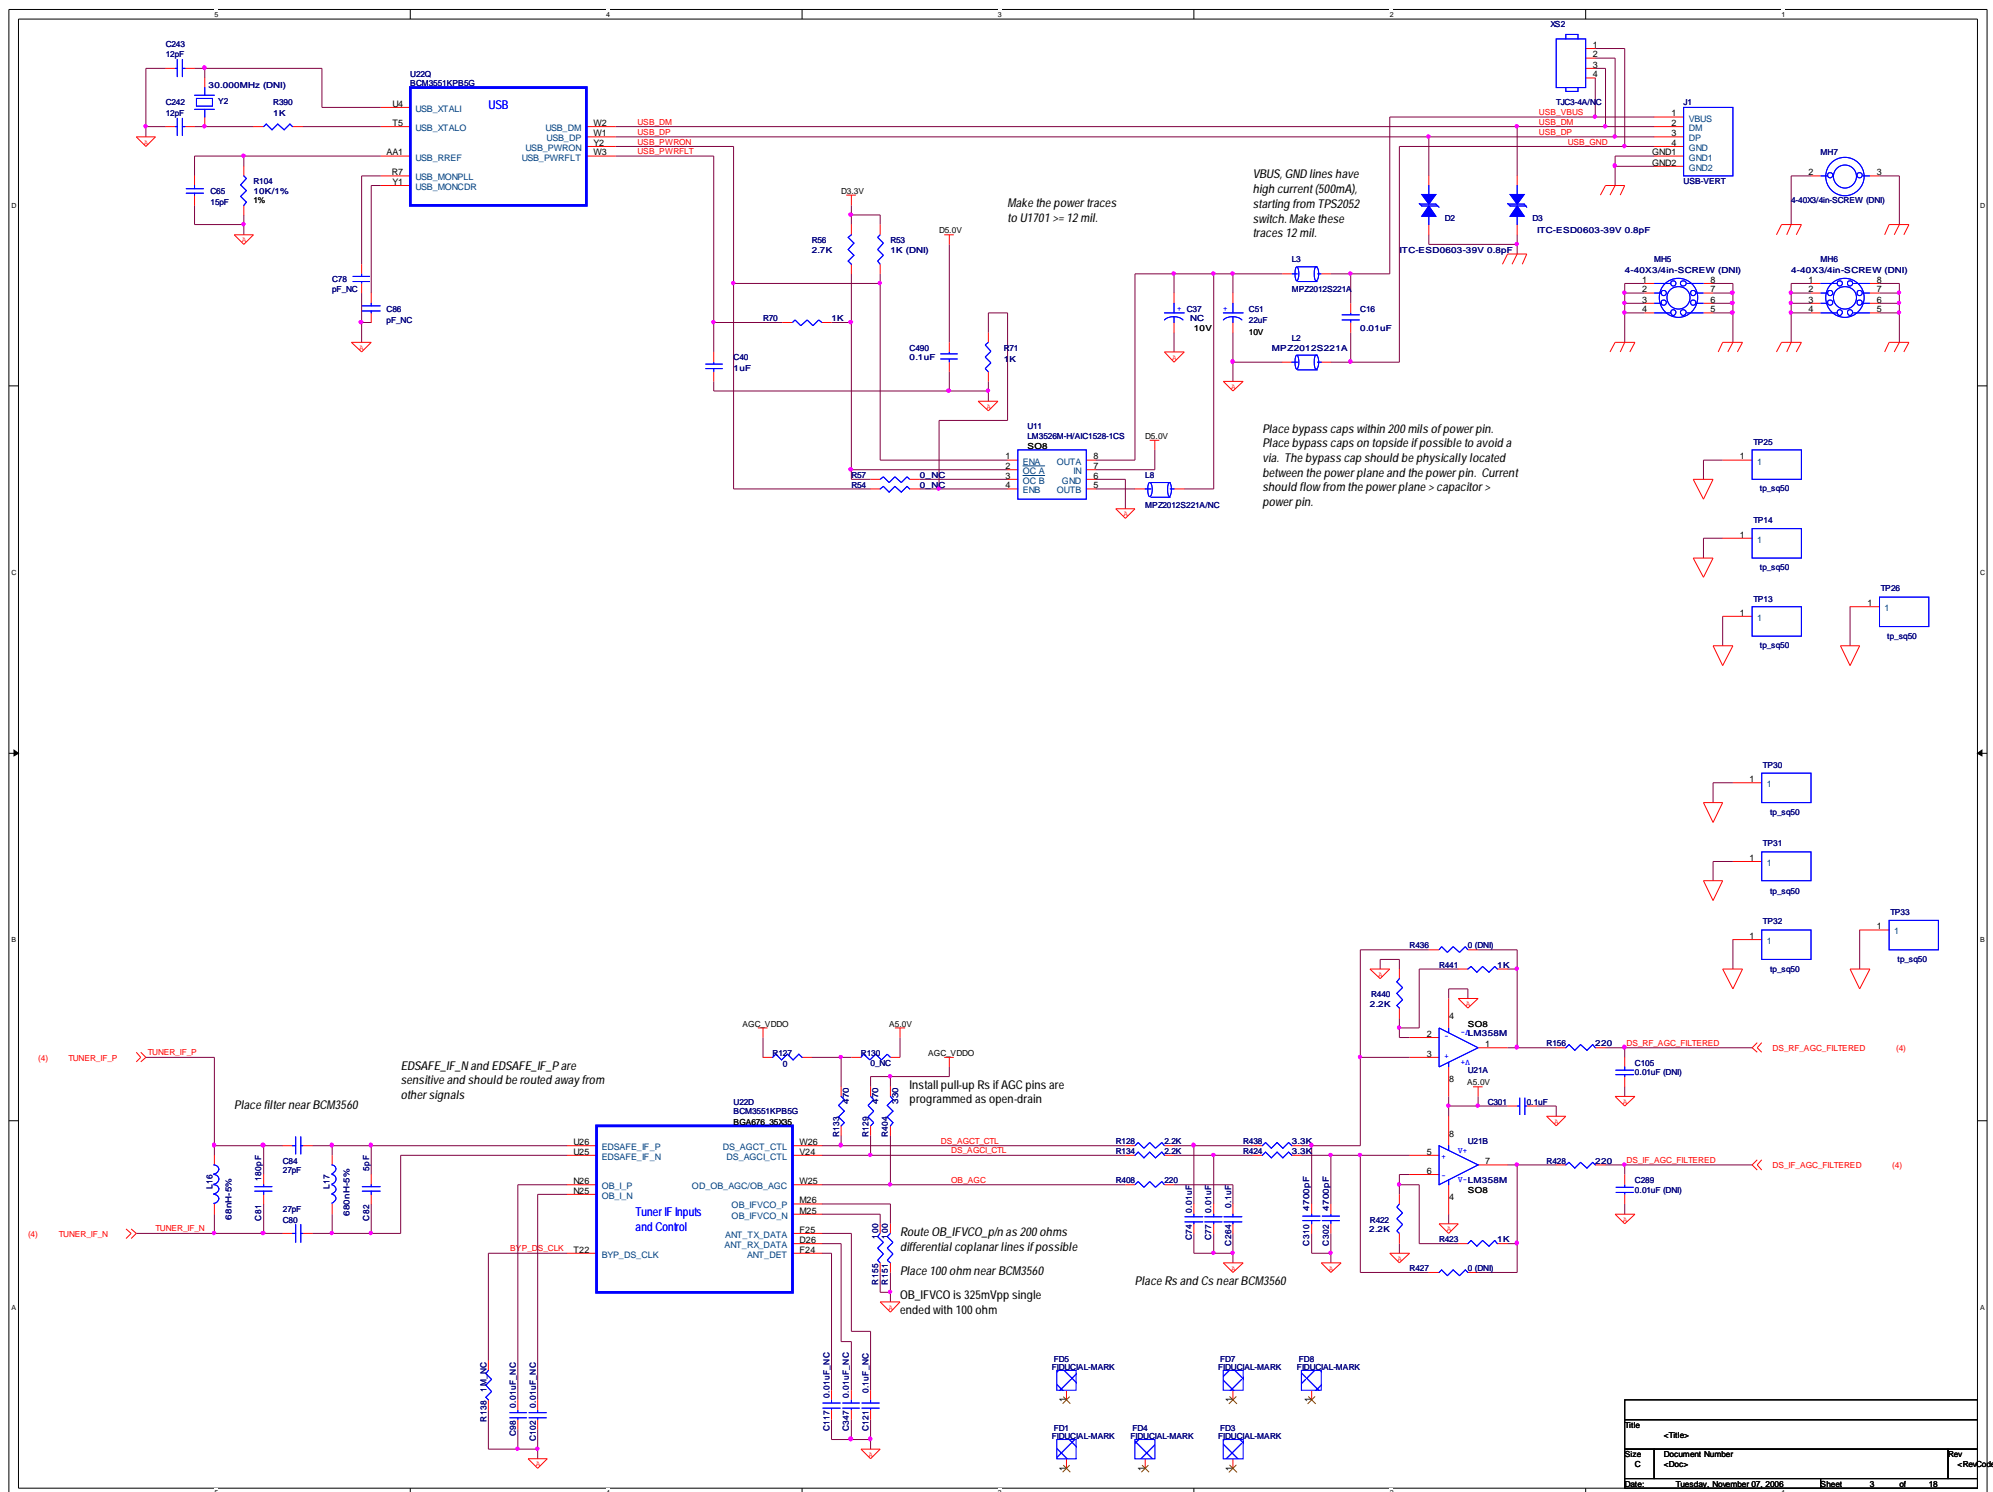





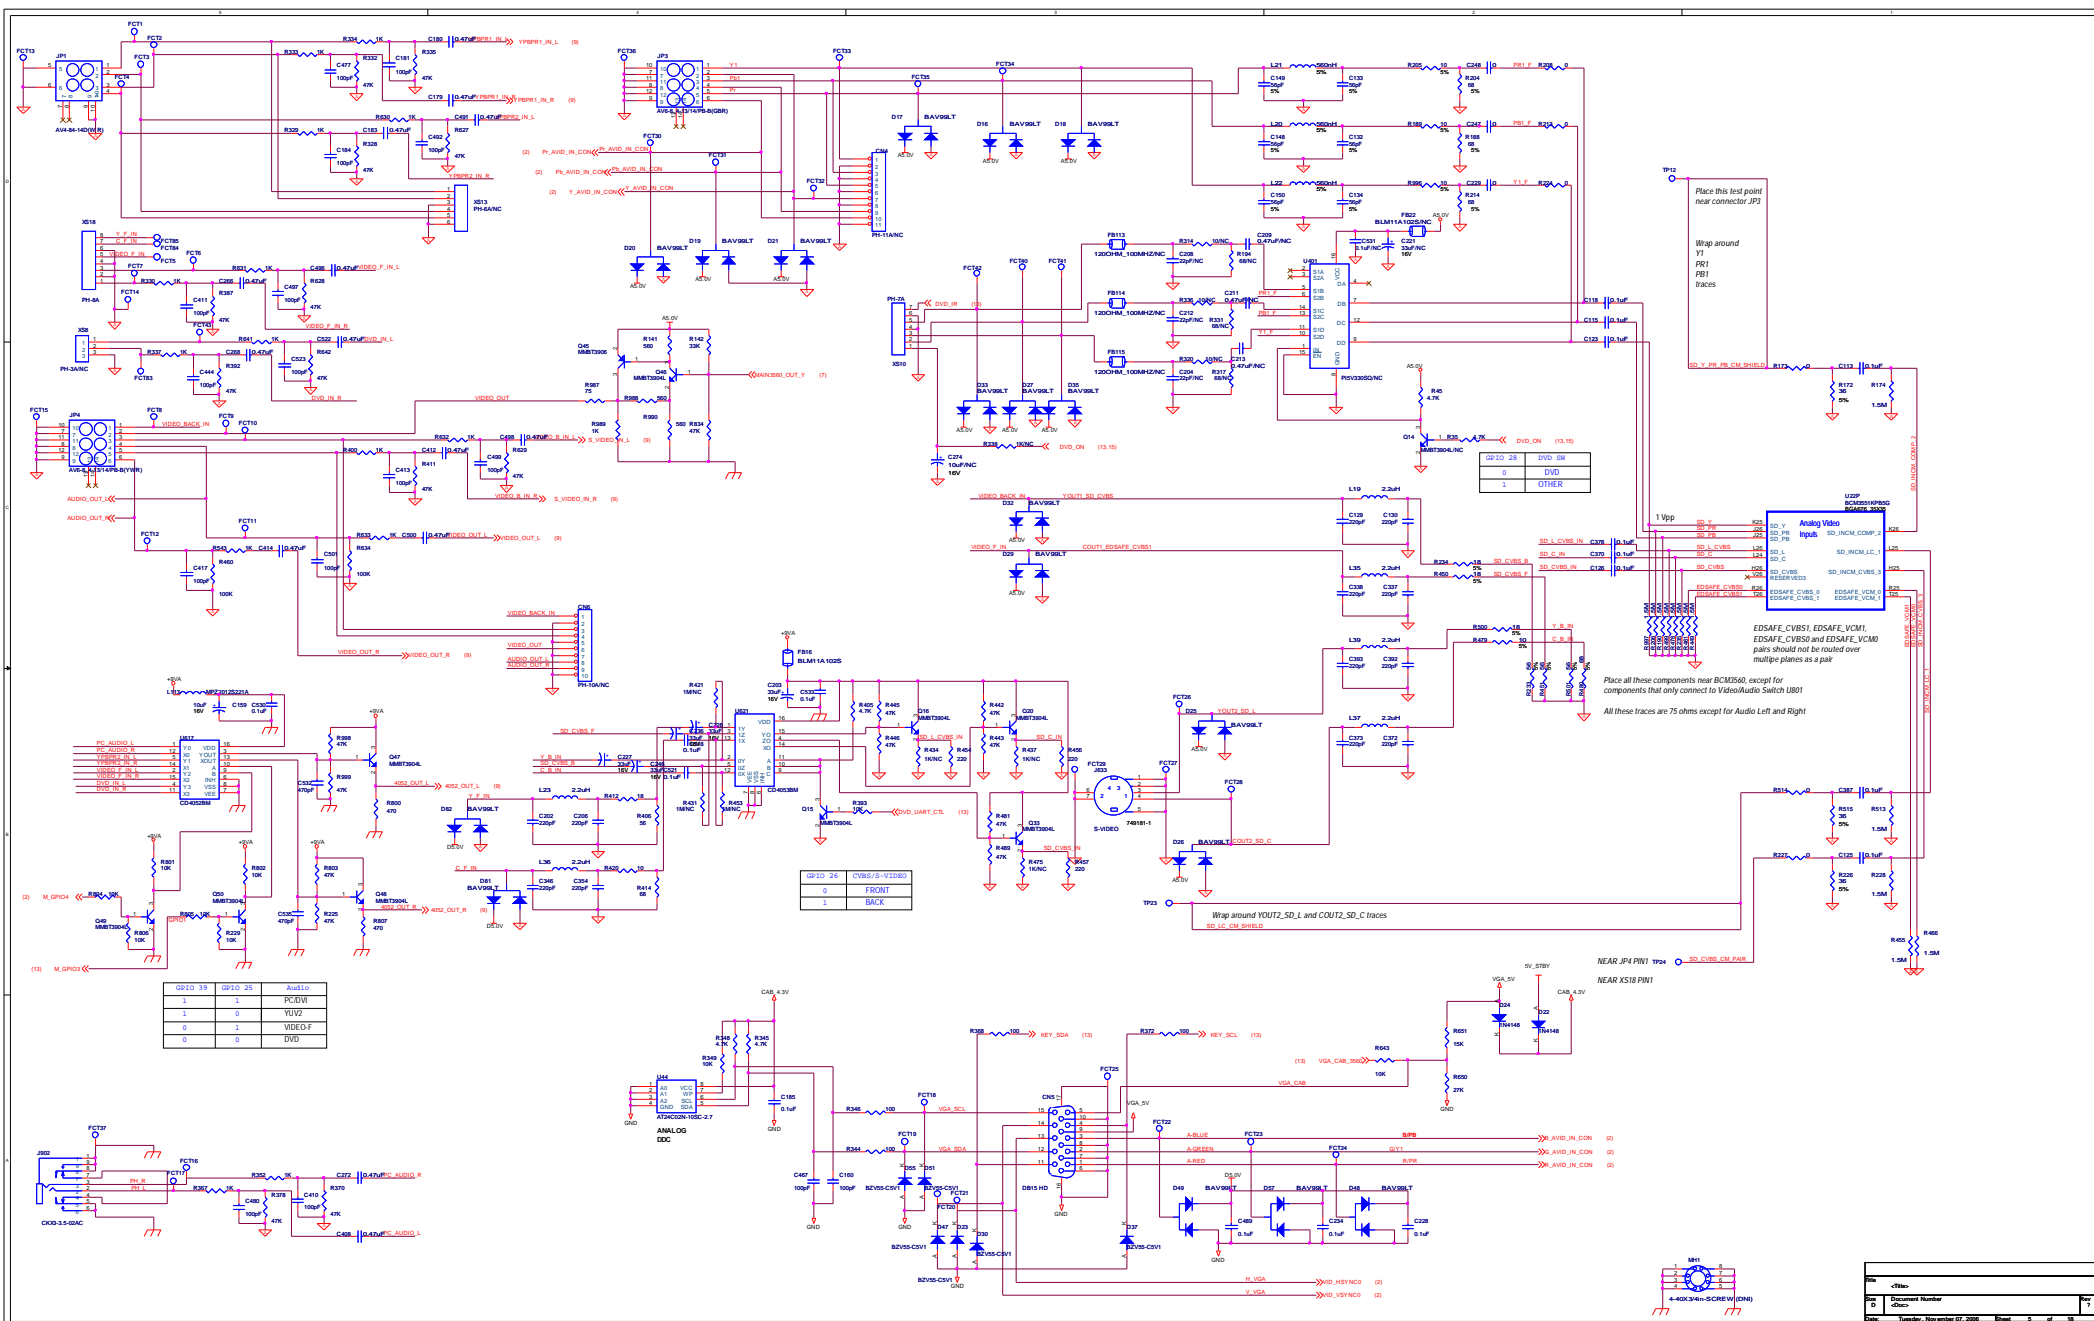



Title <Title>			
Size C	Document Number <Doc>		Rev 7
Date:	Tuesday, November 07, 2006	Sheet	6 of 18

VDAC_AVDD33 needs to be very clean. If you use switching supplies, consider using a small linear regulator for this supply. (250 mA worst case)
Route VDAC_AVDD33 as a wide trace or fill area on the top layer of the PCB all the way to the connector

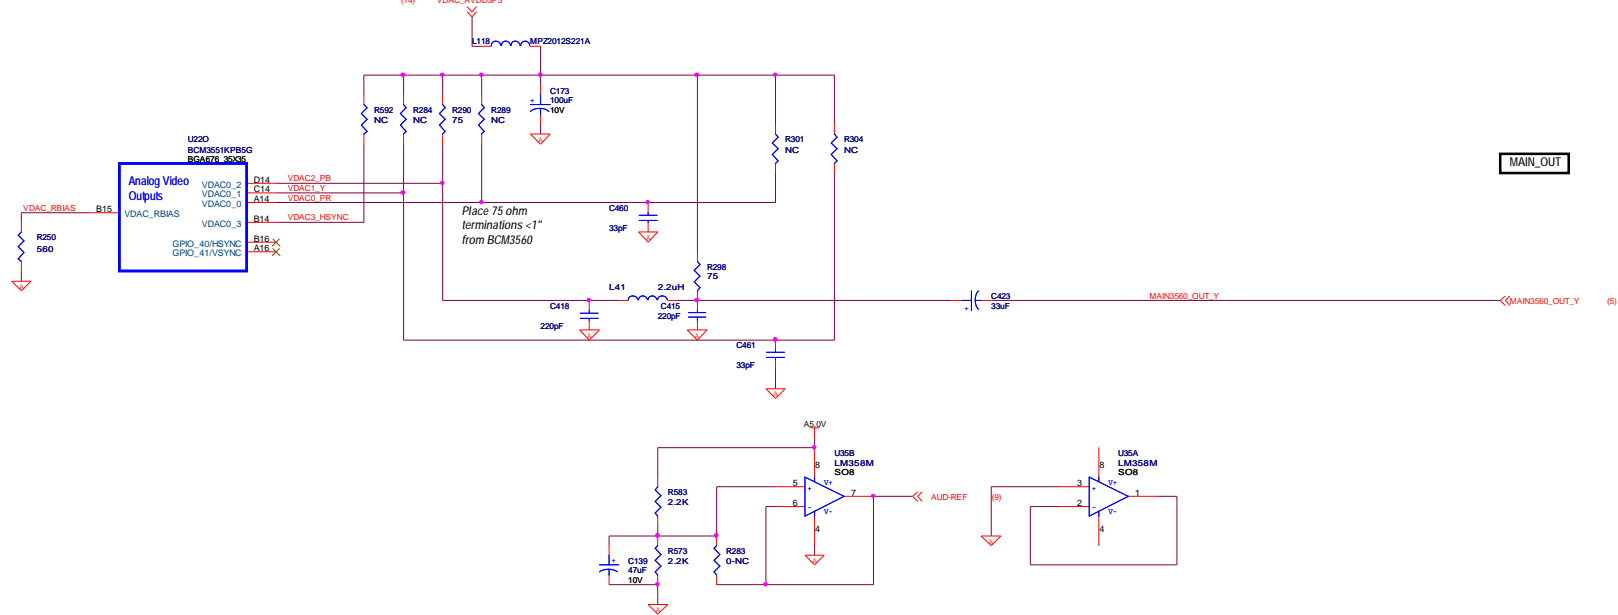



Title		<Title>
Size	Document Number	Rev
C	<Doc>	7
Date: Tuesday, November 07, 2006		Sheet 7 of 18

U22E
BCK3551KP85G
BGA478 30X36


Digital Video Output

DVO_0	F10	DVO_0
DVO_1	C10	DVO_1
DVO_2	D10	DVO_2
DVO_3	E10	DVO_3
DVO_4	B9	DVO_4
DVO_5	C9	DVO_5
DVO_6	D9	DVO_6
DVO_7	E9	DVO_7
DVO_8	F9	DVO_8
DVO_9	G9	DVO_9
DVO_10	H9	DVO_10
DVO_11	A7	DVO_11
DVO_12	B7	DVO_12
DVO_13	C7	DVO_13
DVO_14	D7	DVO_14
DVO_15	E7	DVO_15
DVO_16	F7	DVO_16
DVO_17	G7	DVO_17
DVO_18	H7	DVO_18
DVO_19	A6	DVO_19
DVO_20	B6	DVO_20
DVO_21	C6	DVO_21
DVO_22	D6	DVO_22
DVO_23	E6	DVO_23
DVO_24	F6	DVO_24
DVO_25	G6	DVO_25
DVO_26	H6	DVO_26
DVO_27	A5	DVO_27
DVO_28	B5	DVO_28
DVO_29	C5	DVO_29
DVO_30	D5	DVO_30
DVO_31	E5	DVO_31
DVO_32	F5	DVO_32
DVO_33	G5	DVO_33
DVO_34	H5	DVO_34
DVO_35	A4	DVO_35
DVO_36	B4	DVO_36
DVO_37	C4	DVO_37
DVO_38	D4	DVO_38
DVO_39	E4	DVO_39
DVO_40	F4	DVO_40
DVO_41	G4	DVO_41
DVO_42	H4	DVO_42
DVO_43	A3	DVO_43
DVO_44	B3	DVO_44
DVO_45	C3	DVO_45
DVO_46	D3	DVO_46
DVO_47	E3	DVO_47
DVO_48	F3	DVO_48
DVO_49	G3	DVO_49
DVO_50	H3	DVO_50
DVO_51	A2	DVO_51
DVO_52	B2	DVO_52
DVO_53	C2	DVO_53
DVO_54	D2	DVO_54
DVO_55	E2	DVO_55
DVO_56	F2	DVO_56
DVO_57	G2	DVO_57
DVO_58	H2	DVO_58
DVO_59	A1	DVO_59
DVO_60	B1	DVO_60
DVO_61	C1	DVO_61
DVO_62	D1	DVO_62
DVO_63	E1	DVO_63
DVO_64	F1	DVO_64
DVO_65	G1	DVO_65
DVO_66	H1	DVO_66
DVO_67	A0	DVO_67
DVO_68	B0	DVO_68
DVO_69	C0	DVO_69
DVO_70	D0	DVO_70
DVO_71	E0	DVO_71
DVO_72	F0	DVO_72
DVO_73	G0	DVO_73
DVO_74	H0	DVO_74
DVO_75	A0	DVO_75
DVO_76	B0	DVO_76
DVO_77	C0	DVO_77
DVO_78	D0	DVO_78
DVO_79	E0	DVO_79
DVO_80	F0	DVO_80
DVO_81	G0	DVO_81
DVO_82	H0	DVO_82
DVO_83	A0	DVO_83
DVO_84	B0	DVO_84
DVO_85	C0	DVO_85
DVO_86	D0	DVO_86
DVO_87	E0	DVO_87
DVO_88	F0	DVO_88
DVO_89	G0	DVO_89
DVO_90	H0	DVO_90
DVO_91	A0	DVO_91
DVO_92	B0	DVO_92
DVO_93	C0	DVO_93
DVO_94	D0	DVO_94
DVO_95	E0	DVO_95
DVO_96	F0	DVO_96
DVO_97	G0	DVO_97
DVO_98	H0	DVO_98
DVO_99	A0	DVO_99
DVO_100	B0	DVO_100
DVO_101	C0	DVO_101
DVO_102	D0	DVO_102
DVO_103	E0	DVO_103
DVO_104	F0	DVO_104
DVO_105	G0	DVO_105
DVO_106	H0	DVO_106
DVO_107	A0	DVO_107
DVO_108	B0	DVO_108
DVO_109	C0	DVO_109
DVO_110	D0	DVO_110
DVO_111	E0	DVO_111
DVO_112	F0	DVO_112
DVO_113	G0	DVO_113
DVO_114	H0	DVO_114
DVO_115	A0	DVO_115
DVO_116	B0	DVO_116
DVO_117	C0	DVO_117
DVO_118	D0	DVO_118
DVO_119	E0	DVO_119
DVO_120	F0	DVO_120
DVO_121	G0	DVO_121
DVO_122	H0	DVO_122
DVO_123	A0	DVO_123
DVO_124	B0	DVO_124
DVO_125	C0	DVO_125
DVO_126	D0	DVO_126
DVO_127	E0	DVO_127
DVO_128	F0	DVO_128
DVO_129	G0	DVO_129
DVO_130	H0	DVO_130
DVO_131	A0	DVO_131
DVO_132	B0	DVO_132
DVO_133	C0	DVO_133
DVO_134	D0	DVO_134
DVO_135	E0	DVO_135
DVO_136	F0	DVO_136
DVO_137	G0	DVO_137
DVO_138	H0	DVO_138
DVO_139	A0	DVO_139
DVO_140	B0	DVO_140
DVO_141	C0	DVO_141
DVO_142	D0	DVO_142
DVO_143	E0	DVO_143
DVO_144	F0	DVO_144
DVO_145	G0	DVO_145
DVO_146	H0	DVO_146
DVO_147	A0	DVO_147
DVO_148	B0	DVO_148
DVO_149	C0	DVO_149
DVO_150	D0	DVO_150
DVO_151	E0	DVO_151
DVO_152	F0	DVO_152
DVO_153	G0	DVO_153
DVO_154	H0	DVO_154
DVO_155	A0	DVO_155
DVO_156	B0	DVO_156
DVO_157	C0	DVO_157
DVO_158	D0	DVO_158
DVO_159	E0	DVO_159
DVO_160	F0	DVO_160
DVO_161	G0	DVO_161
DVO_162	H0	DVO_162
DVO_163	A0	DVO_163
DVO_164	B0	DVO_164
DVO_165	C0	DVO_165
DVO_166	D0	DVO_166
DVO_167	E0	DVO_167
DVO_168	F0	DVO_168
DVO_169	G0	DVO_169
DVO_170	H0	DVO_170
DVO_171	A0	DVO_171
DVO_172	B0	DVO_172
DVO_173	C0	DVO_173
DVO_174	D0	DVO_174
DVO_175	E0	DVO_175
DVO_176	F0	DVO_176
DVO_177	G0	DVO_177
DVO_178	H0	DVO_178
DVO_179	A0	DVO_179
DVO_180	B0	DVO_180
DVO_181	C0	DVO_181
DVO_182	D0	DVO_182
DVO_183	E0	DVO_183
DVO_184	F0	DVO_184
DVO_185	G0	DVO_185
DVO_186	H0	DVO_186
DVO_187	A0	DVO_187
DVO_188	B0	DVO_188
DVO_189	C0	DVO_189
DVO_190	D0	DVO_190
DVO_191	E0	DVO_191
DVO_192	F0	DVO_192
DVO_193	G0	DVO_193
DVO_194	H0	DVO_194
DVO_195	A0	DVO_195
DVO_196	B0	DVO_196
DVO_197	C0	DVO_197
DVO_198	D0	DVO_198
DVO_199	E0	DVO_199
DVO_200	F0	DVO_200
DVO_201	G0	DVO_201
DVO_202	H0	DVO_202
DVO_203	A0	DVO_203
DVO_204	B0	DVO_204
DVO_205	C0	DVO_205
DVO_206	D0	DVO_206
DVO_207	E0	DVO_207
DVO_208	F0	DVO_208
DVO_209	G0	DVO_209
DVO_210	H0	DVO_210
DVO_211	A0	DVO_211
DVO_212	B0	DVO_212
DVO_213	C0	DVO_213
DVO_214	D0	DVO_214
DVO_215	E0	DVO_215
DVO_216	F0	DVO_216
DVO_217	G0	DVO_217
DVO_218	H0	DVO_218
DVO_219	A0	DVO_219
DVO_220	B0	DVO_220
DVO_221	C0	DVO_221
DVO_222	D0	DVO_222
DVO_223	E0	DVO_223
DVO_224	F0	DVO_224
DVO_225	G0	DVO_225
DVO_226	H0	DVO_226
DVO_227	A0	DVO_227
DVO_228	B0	DVO_228
DVO_229	C0	DVO_229
DVO_230	D0	DVO_230
DVO_231	E0	DVO_231
DVO_232	F0	DVO_232
DVO_233	G0	DVO_233
DVO_234	H0	DVO_234
DVO_235	A0	DVO_235
DVO_236	B0	DVO_236
DVO_237	C0	DVO_237
DVO_238	D0	DVO_238
DVO_239	E0	DVO_239
DVO_240	F0	DVO_240
DVO_241	G0	DVO_241
DVO_242	H0	DVO_242
DVO_243	A0	DVO_243
DVO_244	B0	DVO_244
DVO_245	C0	DVO_245
DVO_246	D0	DVO_246
DVO_247	E0	DVO_247
DVO_248	F0	DVO_248
DVO_249	G0	DVO_249
DVO_250	H0	DVO_250
DVO_251	A0	DVO_251
DVO_252	B0	DVO_252
DVO_253	C0	DVO_253
DVO_254	D0	DVO_254
DVO_255	E0	DVO_255
DVO_256	F0	DVO_256
DVO_257	G0	DVO_257
DVO_258	H0	DVO_258
DVO_259	A0	DVO_259
DVO_260	B0	DVO_260
DVO_261	C0	DVO_261
DVO_262	D0	DVO_262
DVO_263	E0	DVO_263
DVO_264	F0	DVO_264
DVO_265	G0	DVO_265
DVO_266	H0	DVO_266
DVO_267	A0	DVO_267
DVO_268	B0	DVO_268
DVO_269	C0	DVO_269
DVO_270	D0	DVO_270
DVO_271	E0	DVO_271
DVO_272	F0	DVO_272
DVO_273	G0	DVO_273
DVO_274	H0	DVO_274
DVO_275	A0	DVO_275
DVO_276	B0	DVO_276
DVO_277	C0	DVO_277
DVO_278	D0	DVO_278
DVO_279	E0	DVO_279
DVO_280	F0	DVO_280
DVO_281	G0	DVO_281
DVO_282	H0	DVO_282
DVO_283	A0	DVO_283
DVO_284	B0	DVO_284
DVO_285	C0	DVO_285
DVO_286	D0	DVO_286
DVO_287	E0	DVO_287
DVO_288	F0	DVO_288
DVO_289	G0	DVO_289
DVO_290	H0	DVO_290
DVO_291	A0	DVO_291
DVO_292	B0	DVO_292
DVO_293	C0	DVO_293
DVO_294	D0	DVO_294
DVO_295	E0	DVO_295
DVO_296	F0	DVO_296
DVO_297	G0	DVO_297
DVO_298	H0	DVO_298
DVO_299	A0	DVO_299
DVO_300	B0	DVO_300
DVO_301	C0	DVO_301
DVO_302	D0	DVO_302
DVO_303	E0	DVO_303
DVO_304	F0	DVO_304
DVO_305	G0	DVO_305
DVO_306	H0	DVO_306
DVO_307	A0	DVO_307
DVO_308	B0	DVO_308
DVO_309	C0	DVO_309
DVO_310	D0	DVO_310
DVO_311	E0	DVO_311
DVO_312	F0	DVO_312
DVO_313	G0	DVO_313
DVO_314	H0	DVO_314
DVO_315	A0	DVO_315
DVO_316	B0	DVO_316
DVO_317	C0	DVO_317
DVO_318	D0	DVO_318
DVO_319	E0	DVO_319
DVO_320	F0	DVO_320
DVO_321	G0	DVO_321
DVO_322	H0	DVO_322
DVO_323	A0	DVO_323
DVO_324	B0	DVO_324
DVO_325	C0	DVO_325
DVO_326	D0	DVO_326
DVO_327	E0	DVO_327
DVO_328	F0	DVO_328
DVO_329	G0	DVO_329
DVO_330	H0	DVO_330
DVO_331	A0	DVO_331
DVO_332	B0	DVO_332
DVO_333	C0	DVO_333
DVO_334	D0	DVO_334
DVO_335	E0	DVO_335
DVO_336	F0	DVO_336
DVO_337	G0	DVO_337
DVO_338	H0	DVO_338
DVO_339	A0	DVO_339
DVO_340	B0	DVO_340
DVO_341	C0	DVO_341
DVO_342	D0	DVO_342
DVO_343	E0	DVO_343
DVO_344	F0	DVO_344
DVO_345	G0	DVO_345
DVO_346	H0	DVO_346
DVO_347	A0	DVO_347
DVO_348	B0	DVO_348
DVO_349	C0	DVO_349
DVO_350	D0	DVO_350
DVO_351	E0	DVO_351
DVO_352	F0	DVO_352
DVO_353	G0	DVO_353
DVO_354	H0	DVO_354
DVO_355	A0	DVO_355
DVO_356	B0	DVO_356
DVO_357	C0	DVO_357
DVO_358	D0	DVO_358
DVO_359	E0	DVO_359
DVO_360	F0	DVO_360
DVO_361	G0	DVO_361
DVO_362	H0	DVO_362
DVO_363	A0	DVO_363
DVO_364	B0	DVO_364
DVO_365	C0	DVO_365
DVO_366	D0	DVO_366
DVO_367	E0	DVO_367
DVO_368	F0	DVO_368
DVO_369	G0	DVO_369
DVO_370	H0	DVO_370
DVO_371	A0	DVO_371
DVO_372	B0	DVO_372
DVO_373	C0	DVO_373
DVO_374	D0	DVO_374
DVO_375	E0	DVO_375
DVO_376	F0	DVO_376
DVO_377	G0	DVO_377
DVO_378	H0	DVO_378
DVO_379	A0	DVO_379
DVO_380	B0	DVO_380
DVO_381	C0	DVO_381
DVO_382	D0	DVO_382
DVO_383	E0	DVO_383
DVO_384	F0	DVO_384
DVO_385	G0	DVO_385
DVO_386	H0	DVO_386
DVO_387	A0	DVO_387
DVO_388	B0	DVO_388
DVO_389	C0	DVO_389
DVO_390	D0	DVO_390
DVO_391	E0	DVO_391
DVO_392	F0	DVO_392
DVO_393	G0	DVO_393
DVO_394	H0	DVO_394
DVO_395	A0	DVO_395
DVO_396	B0	DVO_396
DVO_397	C0	DVO_397
DVO_398	D0	DVO_398
DVO_399	E0	DVO_399
DVO_400	F0	DVO_400
DVO_401	G0	DVO_401
DVO_402	H0	DVO_402
DVO_403	A0	DVO_403
DVO_404	B0	DVO_404
DVO_405	C0	DVO_405
DVO_406	D0	DVO_406
DVO_407	E0	DVO_407
DVO_408	F0	DVO_408
DVO_409	G0	DVO_409
DVO_410	H0	DVO_410
DVO_411	A0	DVO_411
DVO_412	B0	DVO_412
DVO_413	C0	DVO_413
DVO_414	D0	DVO_414
DVO_415	E0	DVO_415
DVO_416	F0	DVO

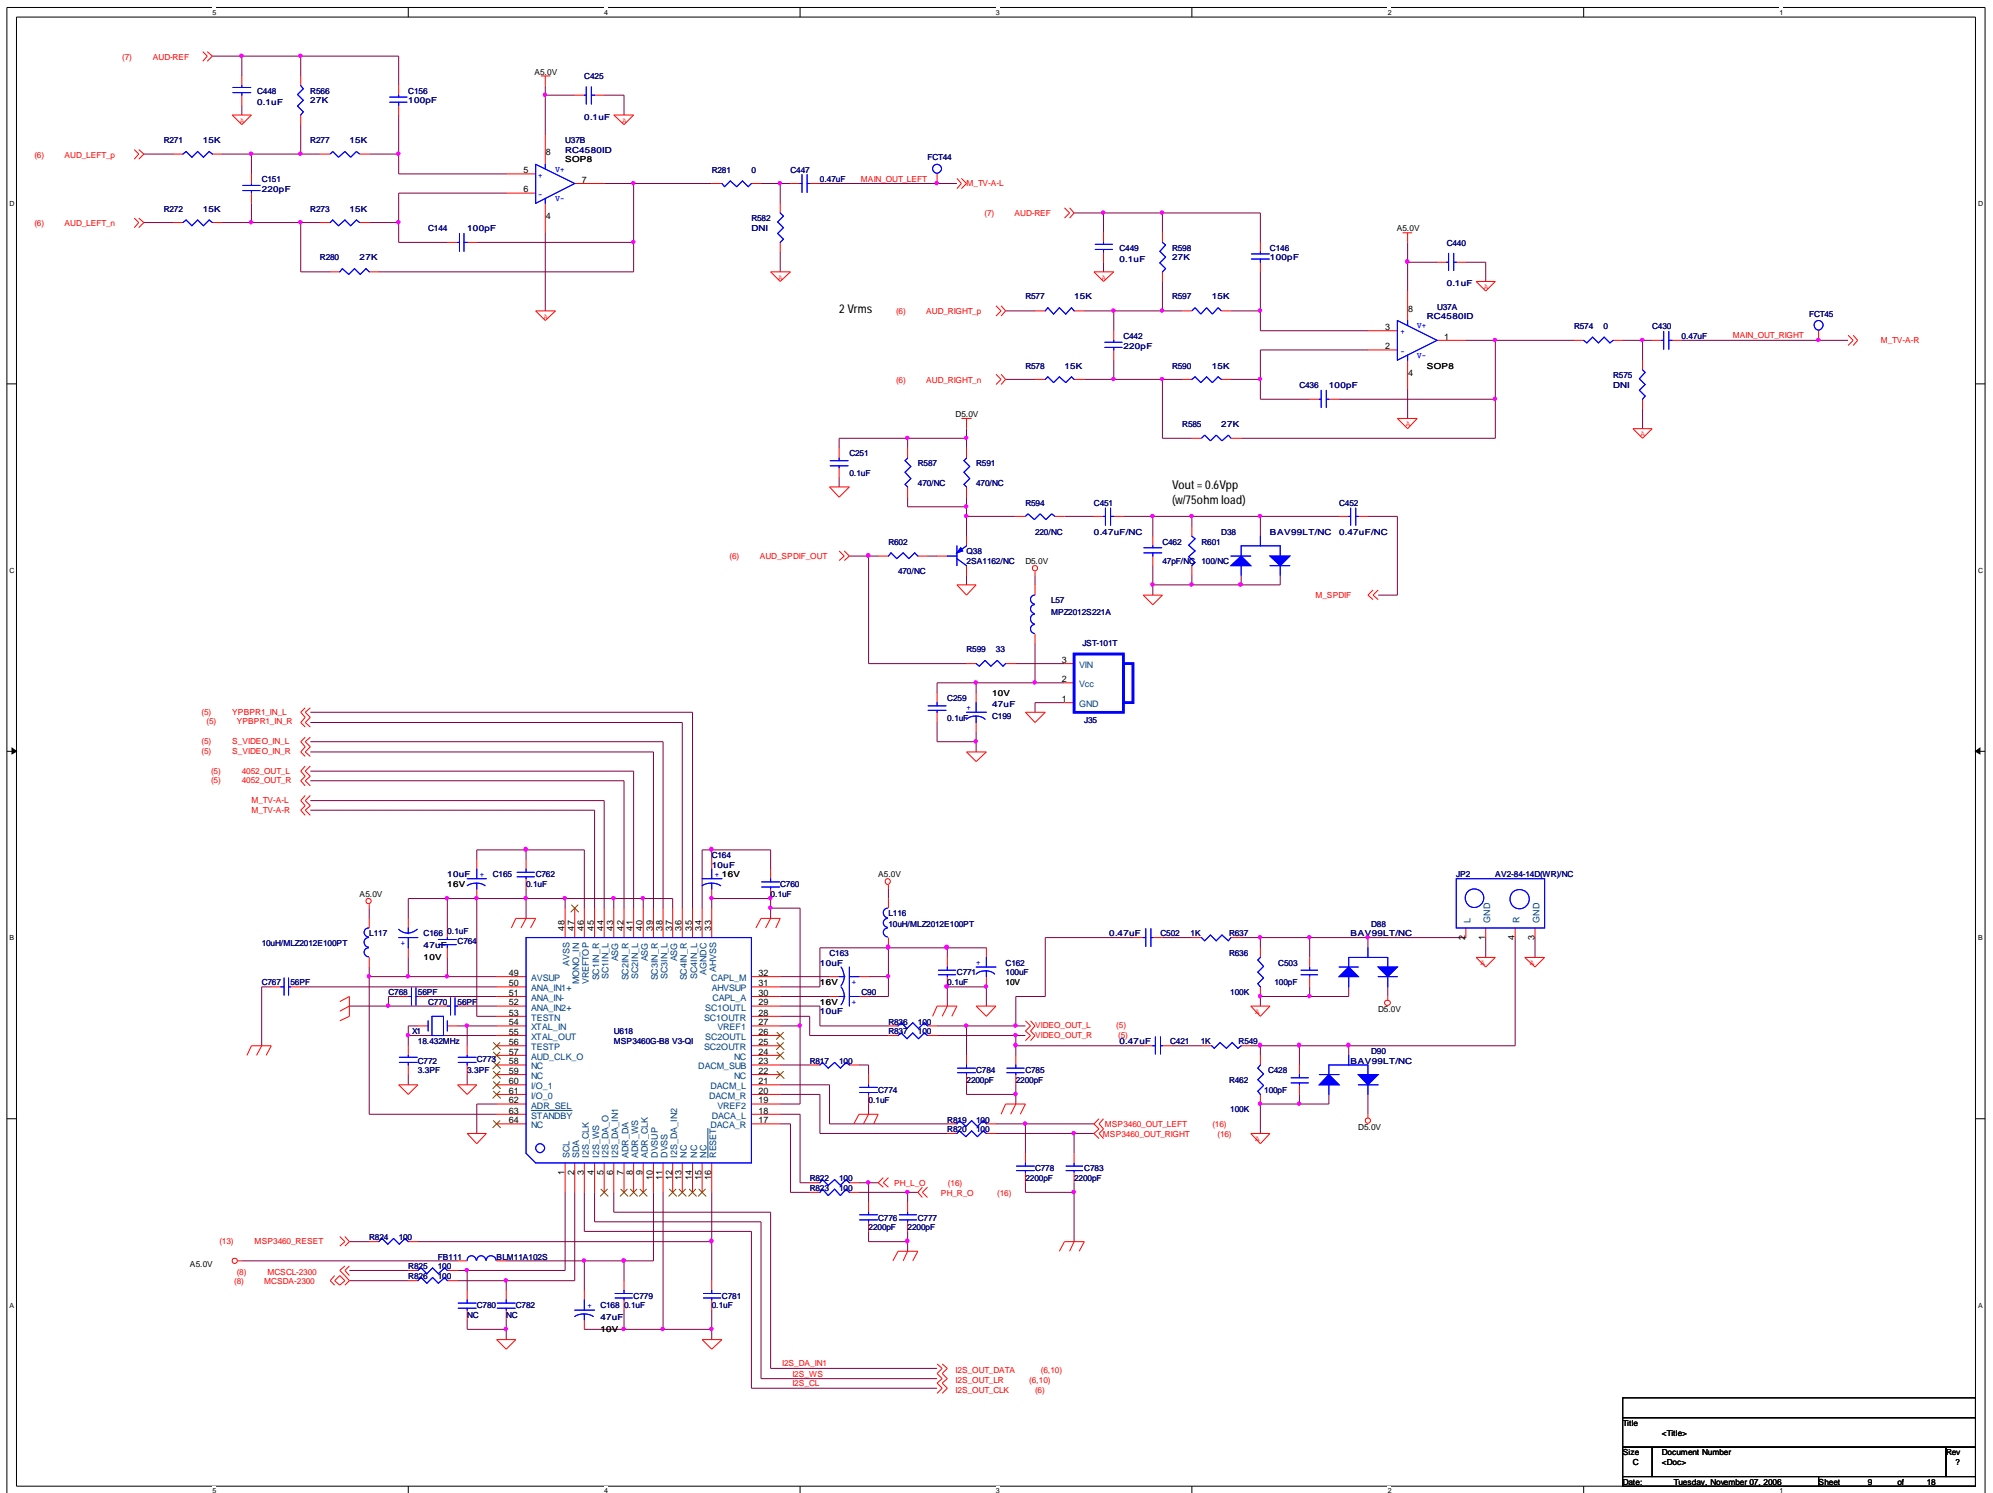

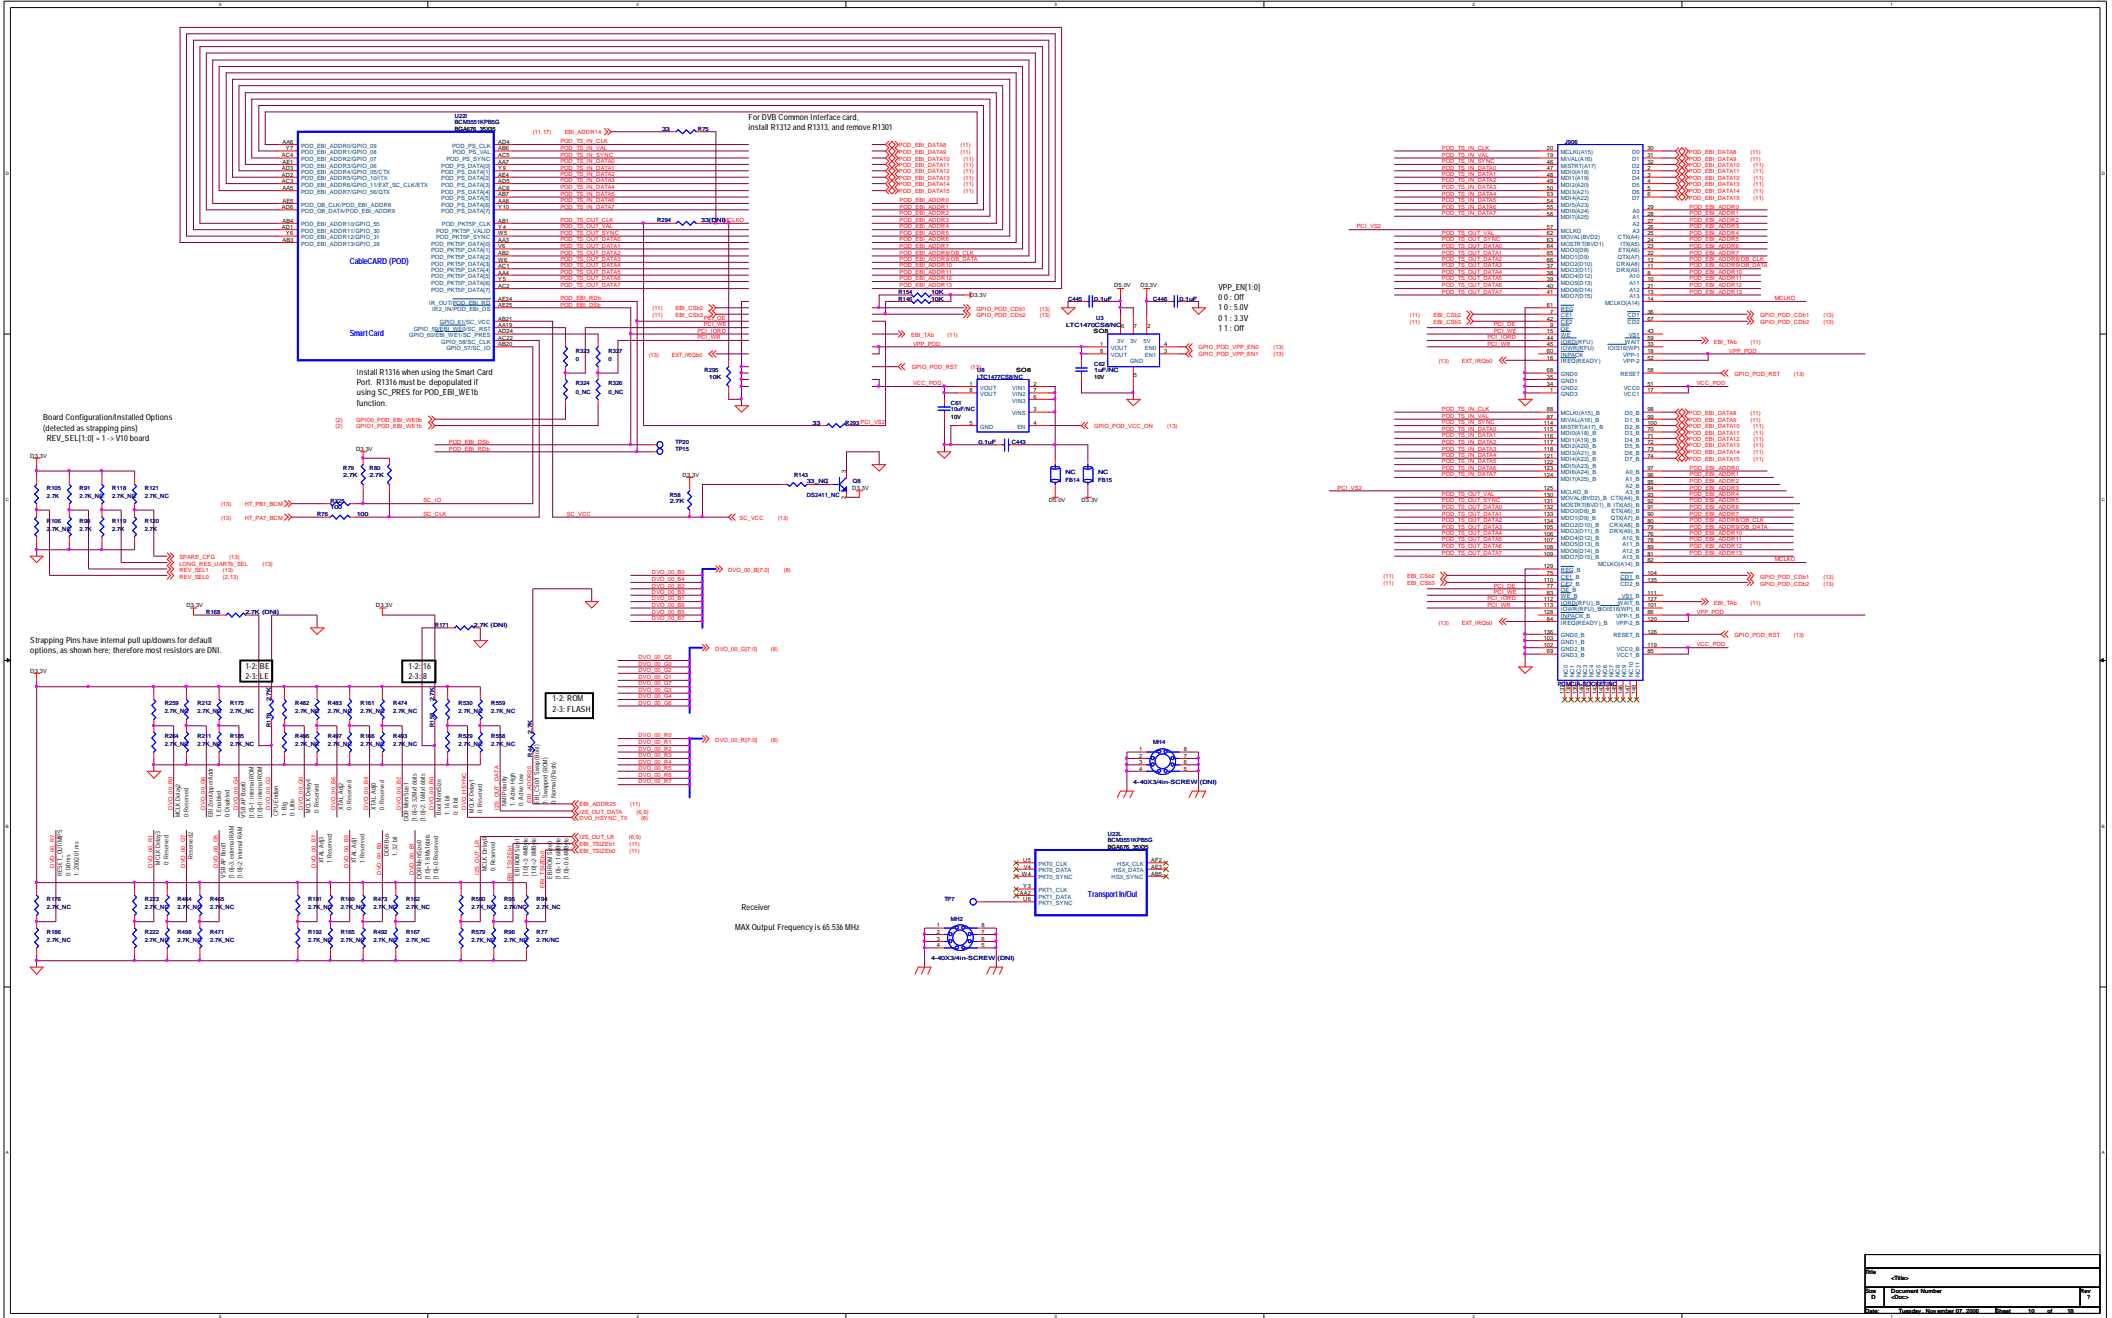



Connect PCI_VIO to 5V if any BCM3560 PCI or other digital pin is connected or pulled to a 5V source; otherwise connect PCI_VIO to 3.3V.

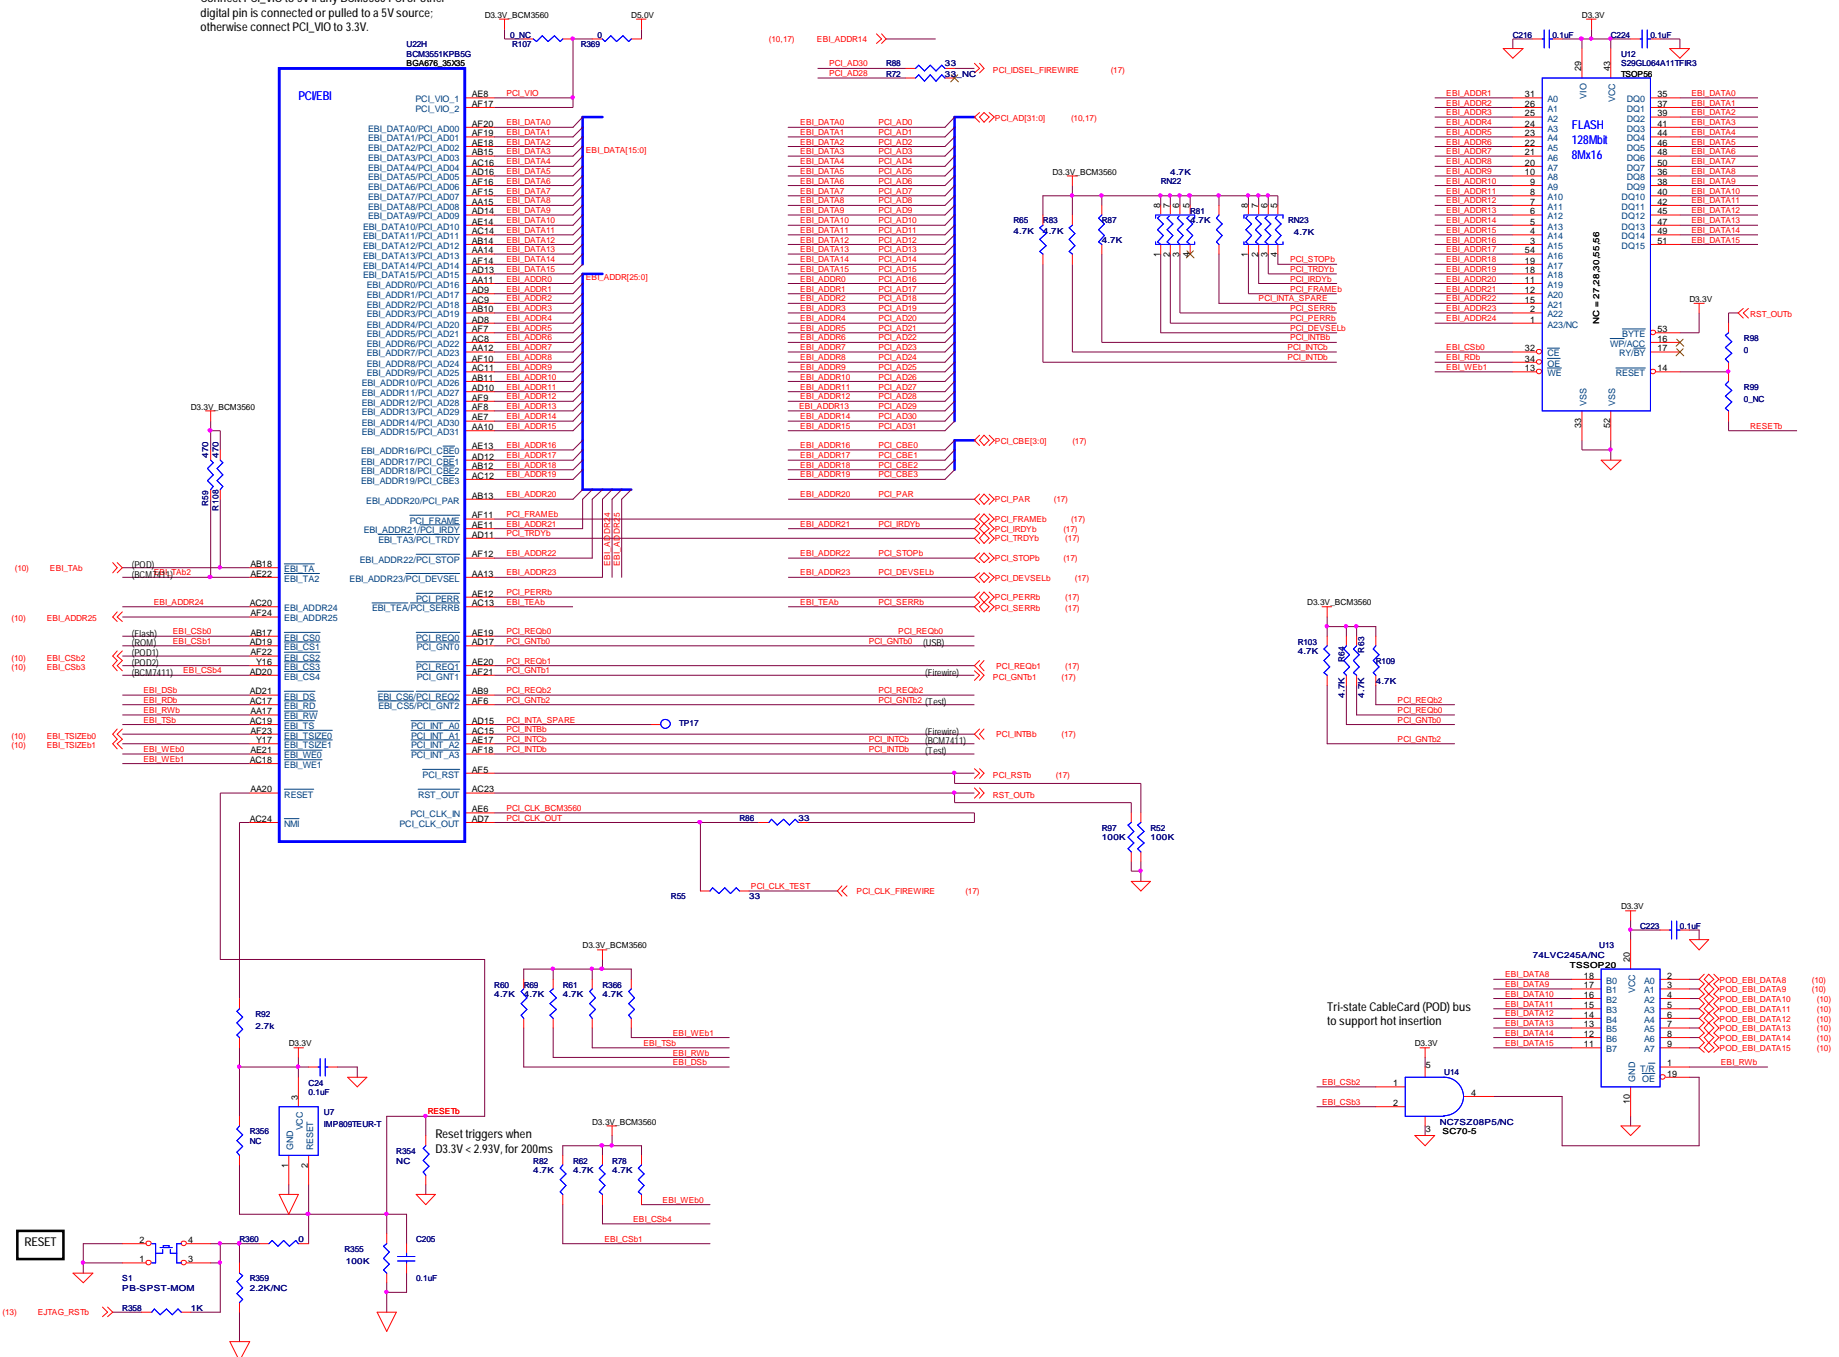


PROPRIETARY
CONFIDENTIAL

Title <Title>			
Size C	Document Number <Doc>		Rev ?
Date:	Tuesday, November 07, 2006	Sheet	11 of 18

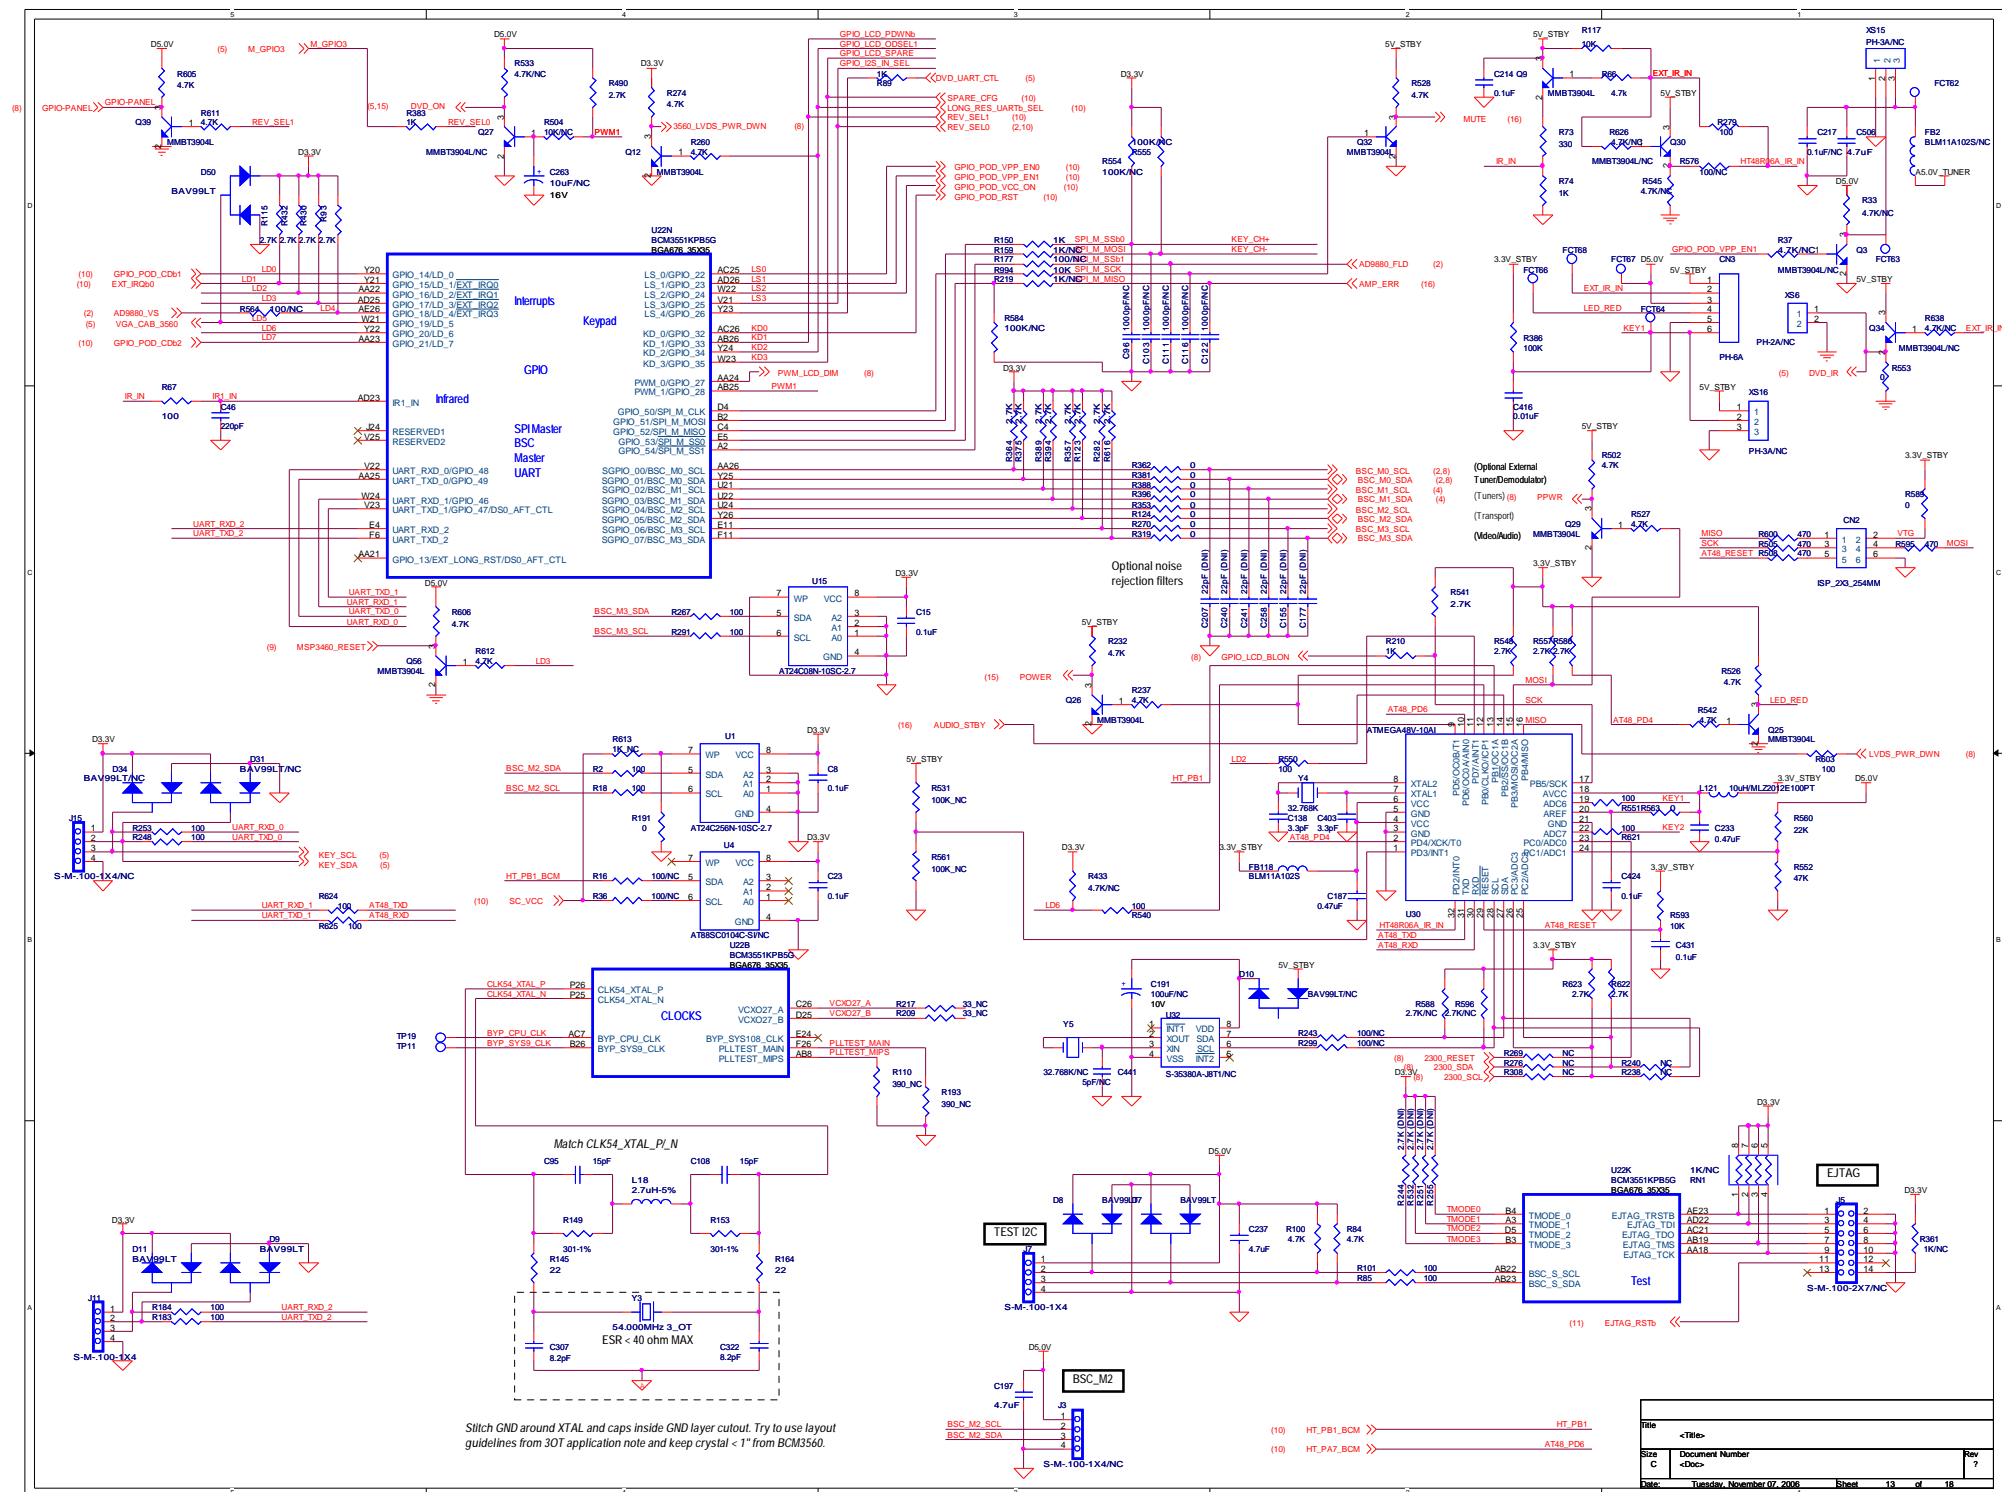


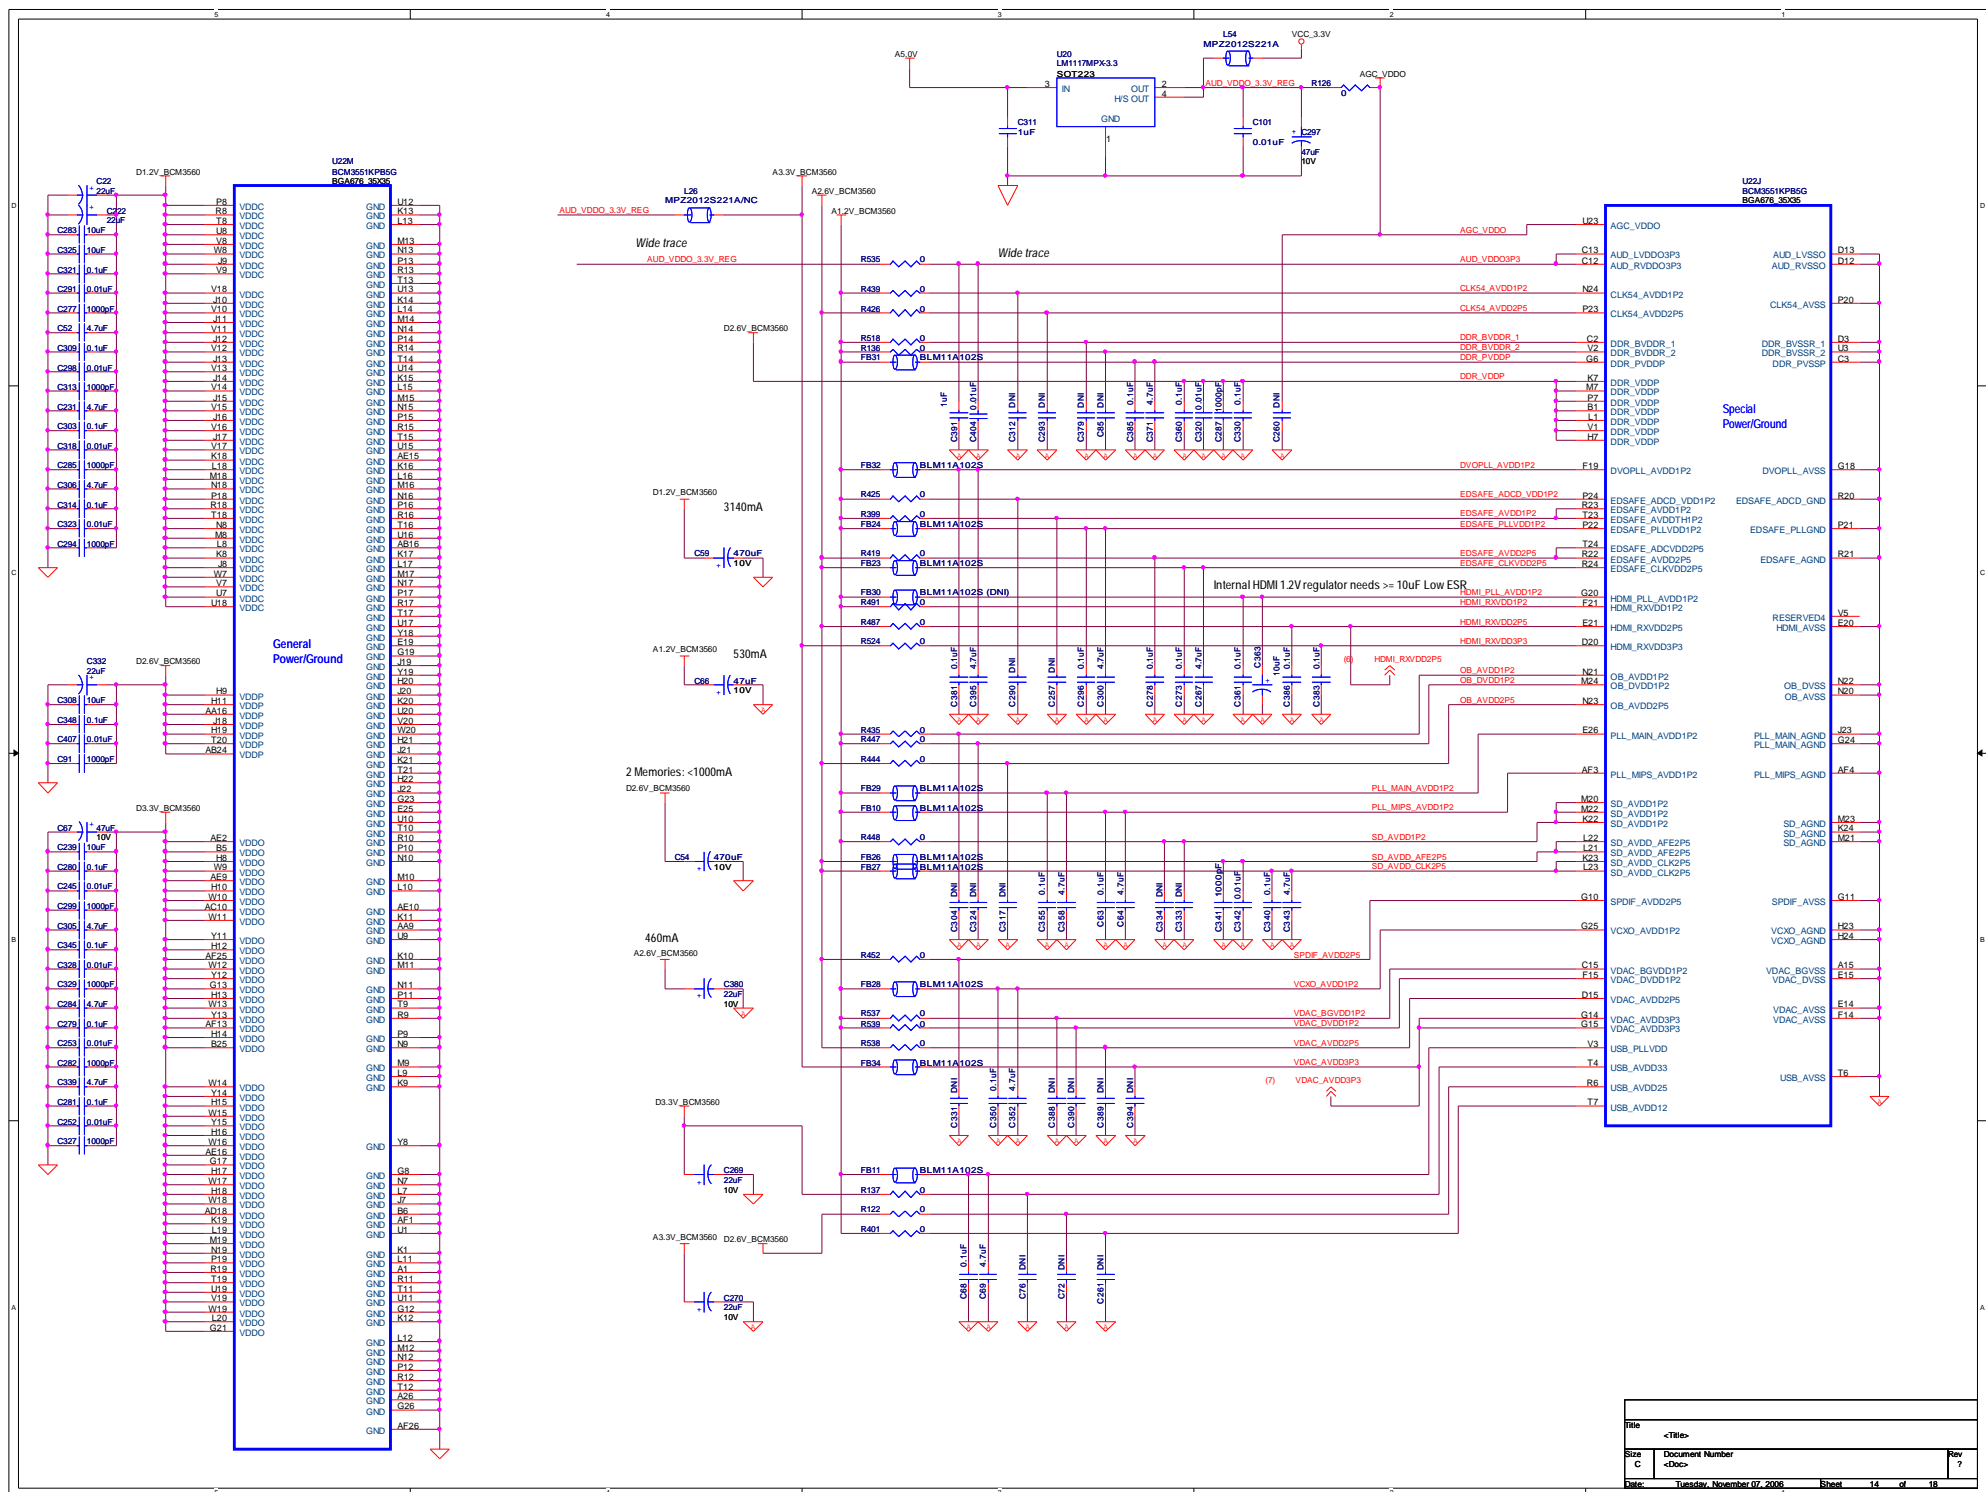


Title <Title>			
Size C	Document Number <Doc>		Rev 7
Date:	Tuesday, November 07, 2006	Sheet	14 of 18

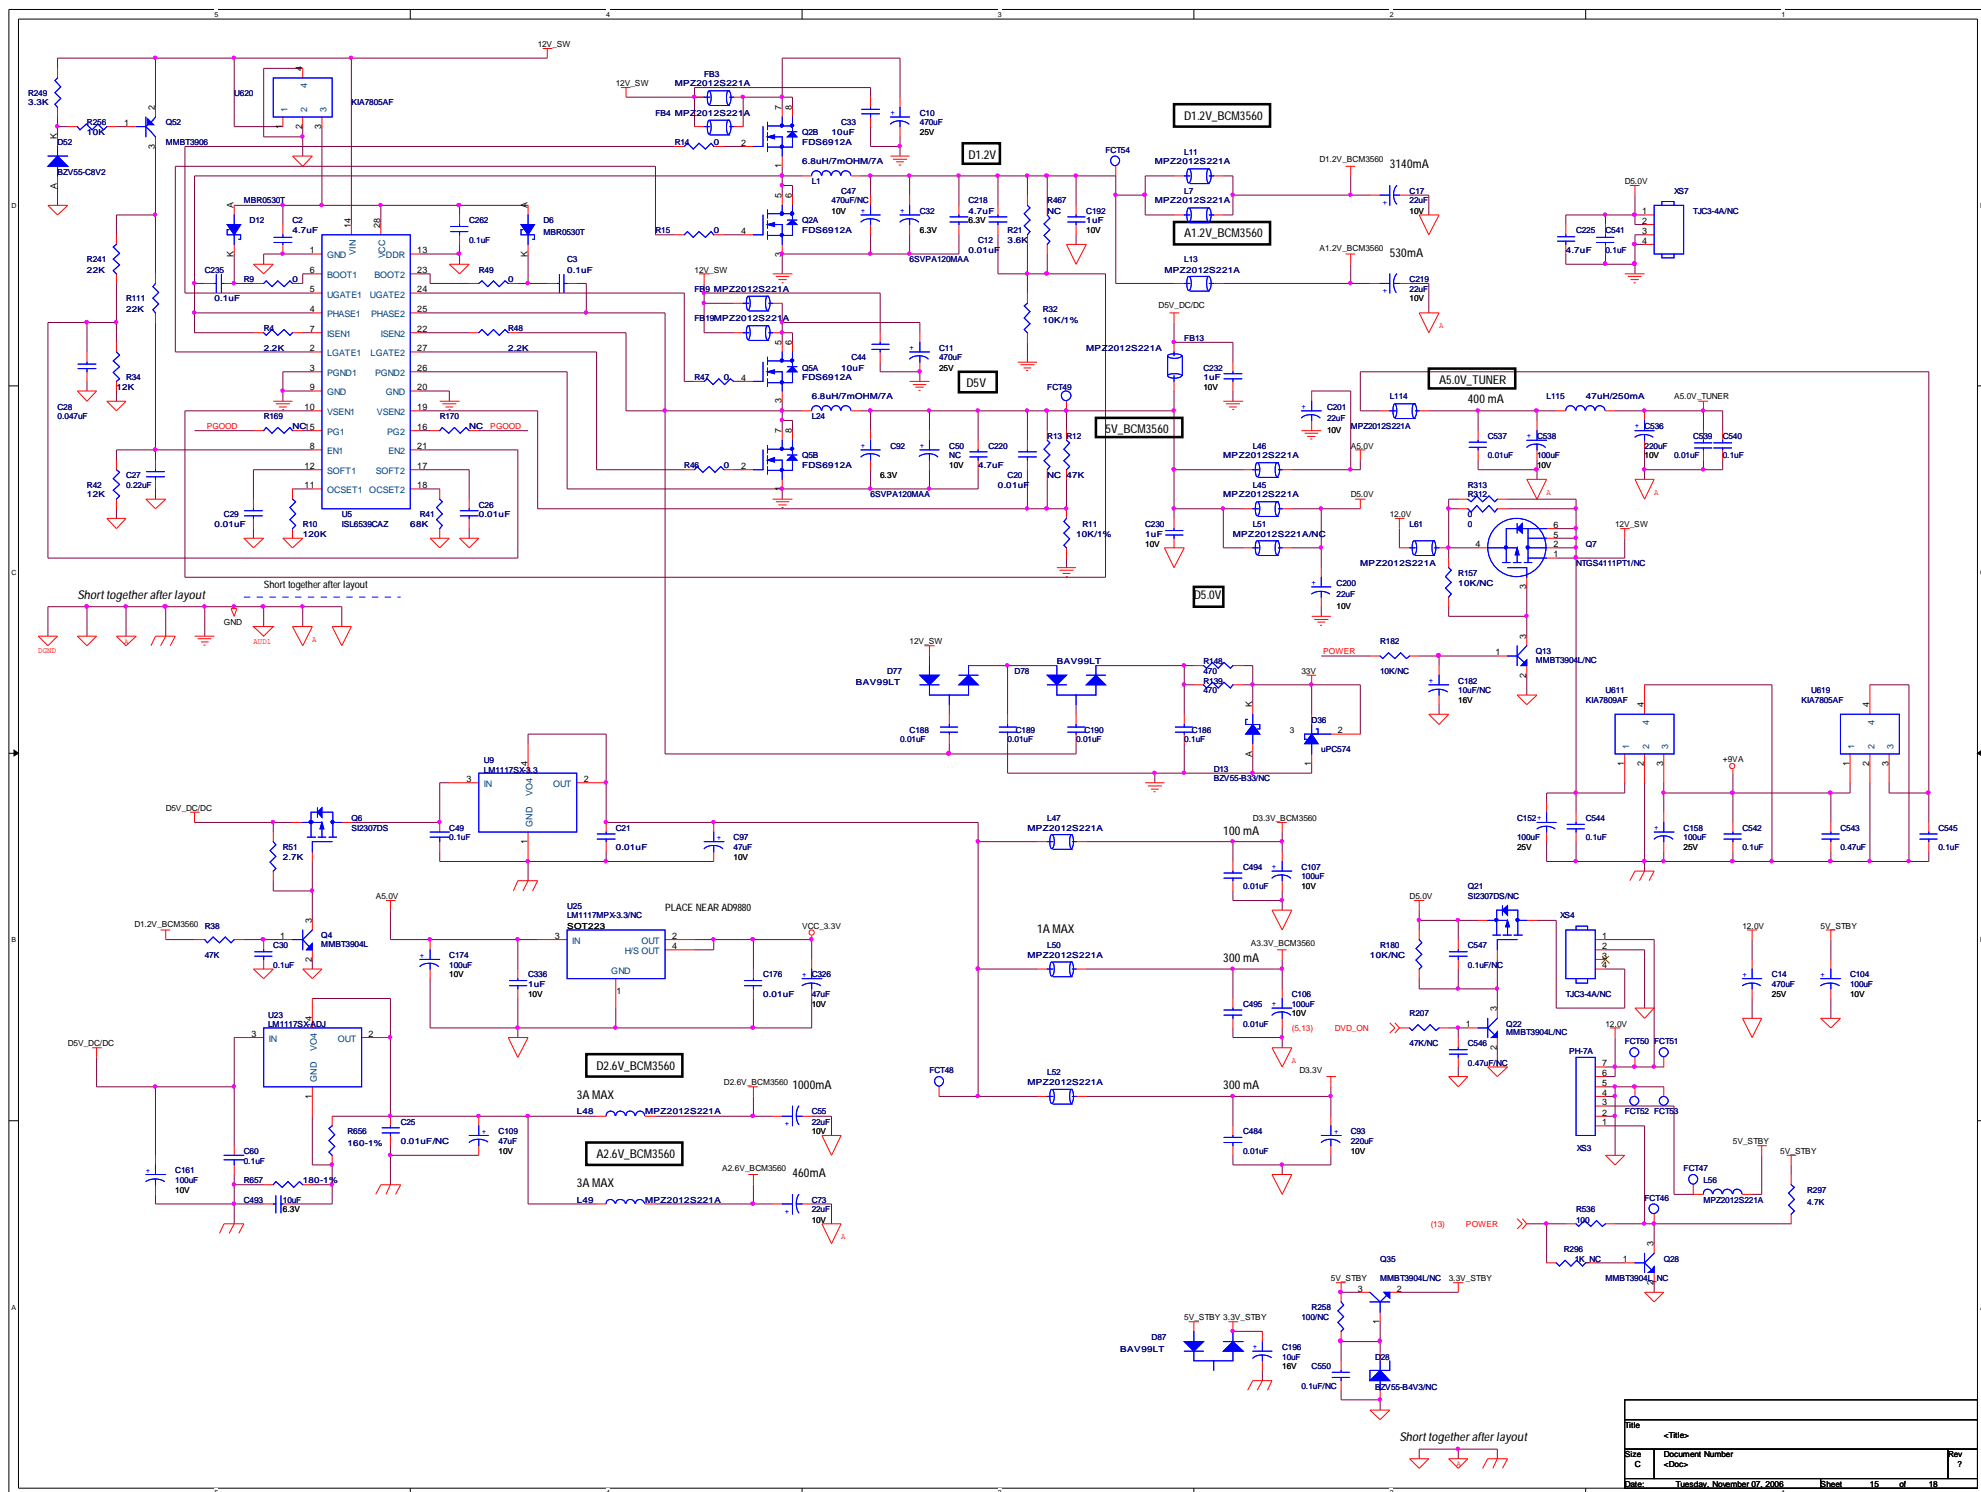

Title		
<Title>		
Size	Document Number	Rev
C	<Doc>	?
Date:	Tuesday, November 07, 2006	Sheet 15 of 18

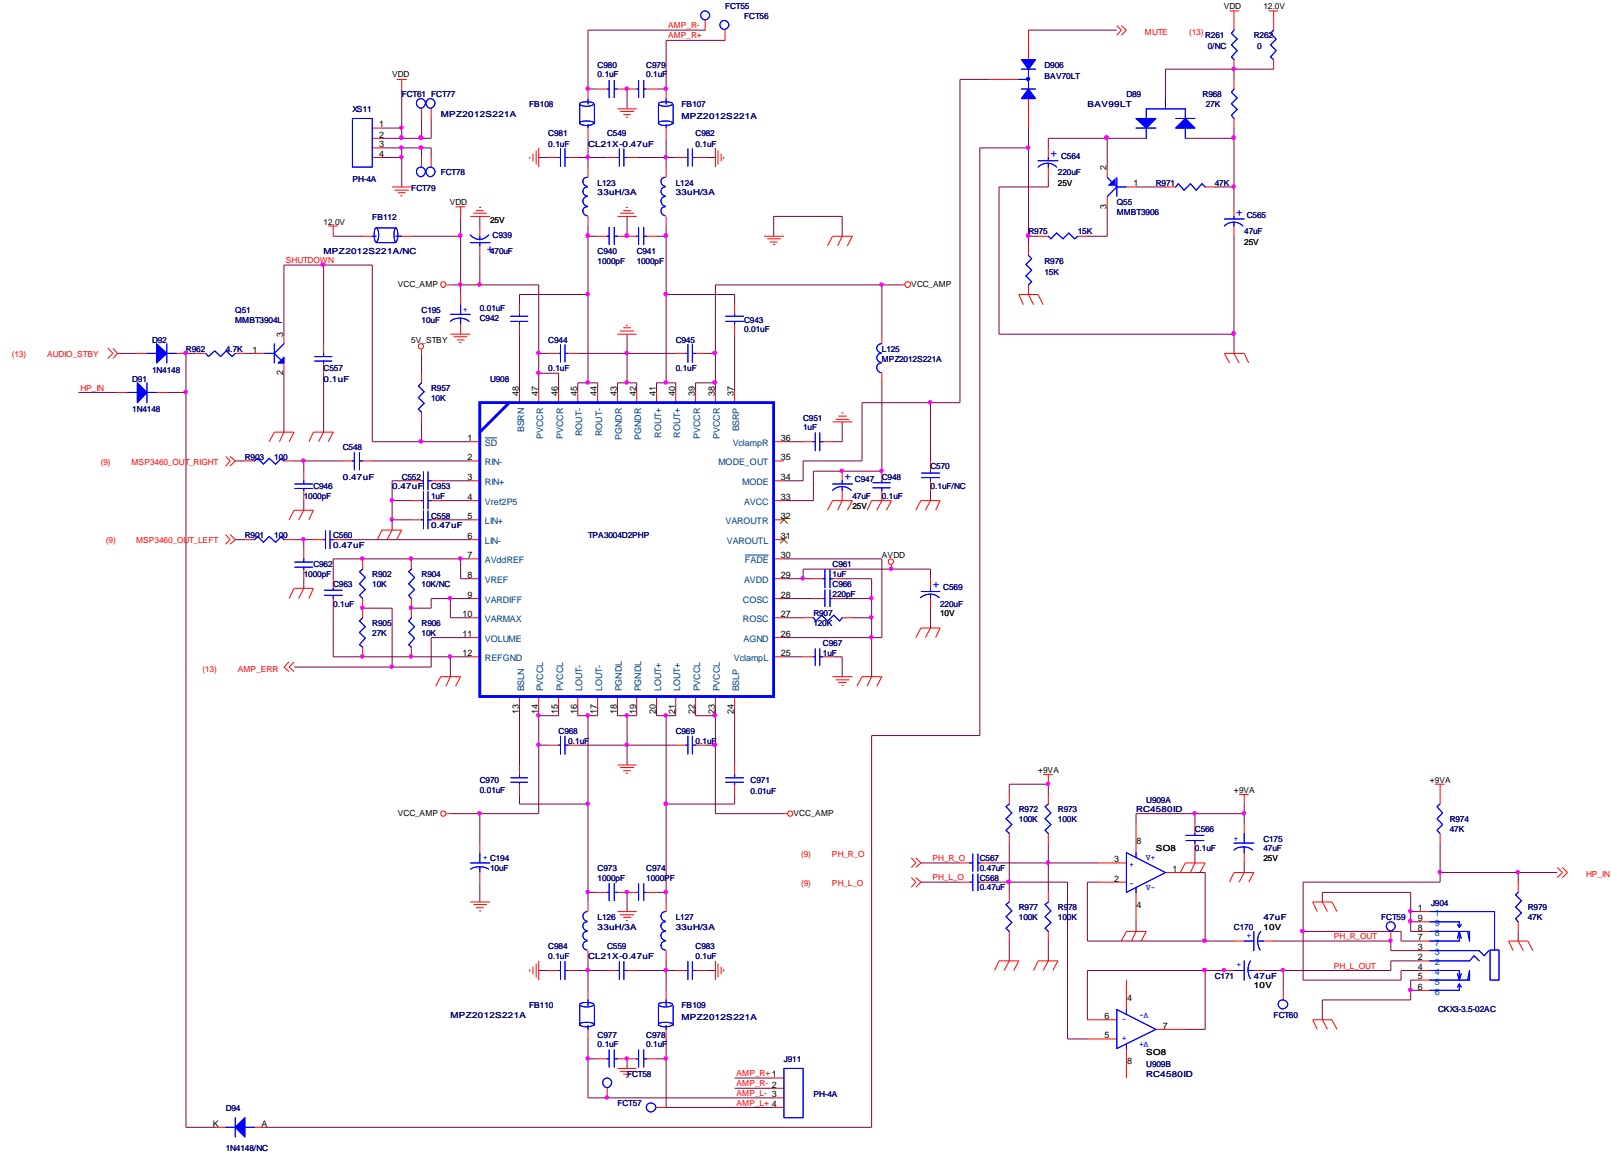

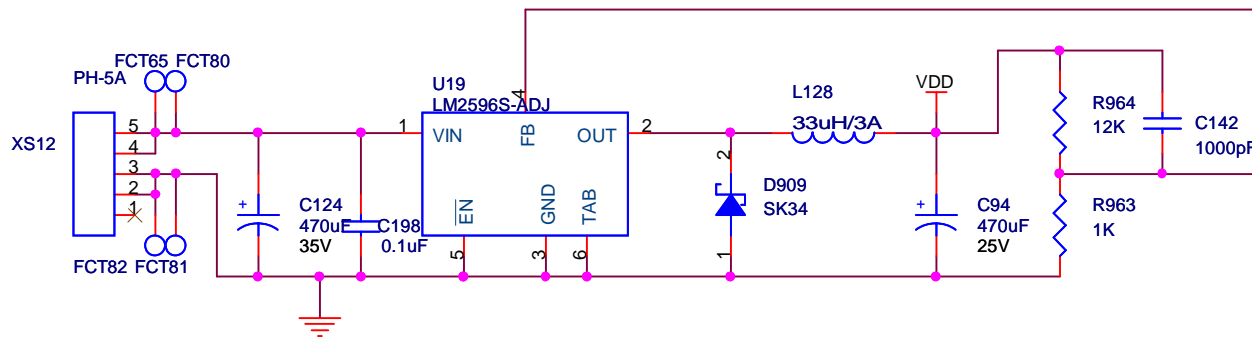

Title		
Hudson LCD TV		
Size A	Document Number <Doc>	Rev 05
Date:	Tuesday, November 07, 2006	Sheet 18 of 18

八、 Connection Sketch Interpretat

