




Mod.: TG-2100A

ADMIRAL

Mod.: TG-2100A


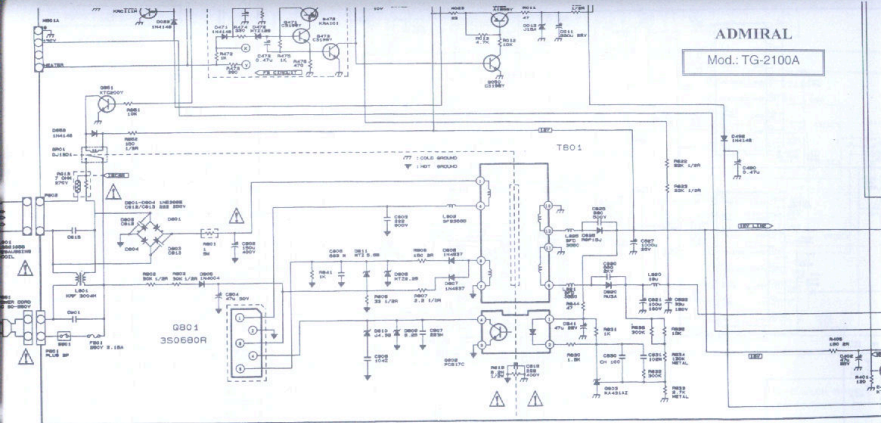


CAUTION:  ARE CRITICAL FOR SAFETY. USE OHMS DESCRIBED ON PARTS LIST ONLY.

1. ALL RESISTORS ARE 1/8W CARBON. RESISTOR VALUES OTHERWISE SPECIFIED. RESISTANCE UNIT IS "OHM".
K = 1,000 M = 1,000,000
R CARBON, R EXIDE, R CEMENT

2. ALL CAPACITORS ARE 50V CERAMIC CAPACITORS UNLESS OTHERWISE SPECIFIED. CAPACITANCE UNIT IS "pF". AX = AXIAL TYPE.
3. VOLTAGE IS MEASURED WITH D.V.M FROM POINT INDICATED TO CHASSIS GROUND. USE COLOR BAR SIGNAL WITH ALL CONTROLS AT STANDARD.

4. WAVEFORMS ARE MEASURED WITH 500 OHM POINT INDICATED TO CHASSIS GROUND. USE COLOR BAR SIGNAL WITH ALL CONTROLS AT STANDARD.

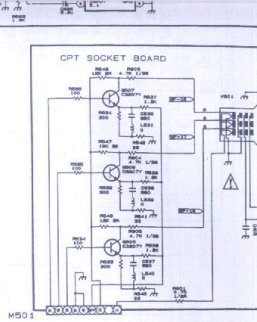

4. WAVEFORMS ARE MEASURED WITH OSCILLOSCOPE
FROM POINT INDICATED TO CHAMBER GROUND.
USING COLOR BAR SIGNAL WITH ALL CONTROLS
AT STANDARD.

Mod.: TG-2100A