



NSX-SZ80

HR

NSX-SZ83

K, EZ

SERVICE MANUAL

COMPACT DISC STEREO
RADIO CASSETTE RECORDER

BASIC TAPE MECHANISM : 2ZM-3MK2 PR7NM
BASIC CD MECHANISM : AZG-1 ZD3RNDM

- Replace this Service manual with "Revision Publishing" when it is issued.

aiwa

S/M Code No. 09-004-424-4T2

SIMPLE

DATA

ELECTRICAL MAIN PARTS LIST - 1/21

NOTE: The characters in the suffix column indicate the part usage.

80HRJSM	XX	A
83KSE	XX	B
83EZSE	XX	C
83EZSM	XX	D
REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C	606	87-010-112-040	CAP,E 100-16	A..D
C	608	87-010-178-080	CHIP CAP 1000P	A..D
C	601	87-010-186-080	CAP,CHIP 4700P	A..D
C	607	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D
C	603	87-010-320-080	CHIP CAP 68P	A..D
C	602	87-010-405-040	CAP,E 10-50	A..D
C	604	87-010-546-040	CAP,E 0.33-50	A..D
C	605	87-012-368-080	C-CAP,S 0.1-50 F	A..D
C	609	88-118-000-080	C-RES JAMPER	A
C	621	87-010-178-080	CHIP CAP 1000P	A..D
CN	603	87-099-212-010	CONN,5P 6216 V	A..D
J	602	87-A61-242-010	JACK,6.3 BLK MONO W/SW V KM	A..D
J	601	87-A61-242-010	JACK,6.3 BLK MONO W/SW V KM	A..D
Q	604	87-A30-075-080	C-TR,2SA1235F	A..D
Q	602	87-A30-076-080	C-TR,2SC3052F	A..D
Q	601	87-A30-087-080	C-FET,2SK2158	A..D
*		8A-NF6-641-110	PWB,PT 96-60	
C	1	87-010-387-080	CAP,E 470-25 SME	ABCD
C	7	87-010-917-000	CAP,E 3300-50 M SMG	ABCD
C	6	87-010-917-000	CAP,E 3300-50 M SMG	ABCD
C	8	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD
C	9	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD
C	5	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD
C	4	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD
C	16	87-010-403-080	CAP, ELECT 3.3-50V	ABCD
C	12	87-016-520-000	CAP,E 3300-65 M SMG	.BCD
C	13	87-016-520-000	CAP,E 3300-65 M SMG	.BCD
C	13	87-016-657-090	CAP,E 3300-71	A
C	12	87-016-657-090	CAP,E 3300-71	A
C	11	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD
C	10	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD
CN	2	87-A61-108-010	CONN,5P V TID-A	ABCD
CN	1	87-A61-110-010	CONN,9P V TID-A	ABCD
D	1	87-A40-547-090	DIODE,D5SBA20	ABCD
D	2	87-A40-673-090	DIODE,D10XB20	ABCD
D	21	87-020-465-080	DIODE,1SS133 (110MA)	ABCD
PT	2	8A-NF8-662-010	PT,SUB ANF-8 (E)	.BCD
PT	2	8A-NF8-663-010	PT,SUB ANF-8 (H)	
PT	2	8A-NF8-673-010	PT,SUB ANF-8 (H) KAMI	A
Q	1	87-026-245-080	TR,DTC114ES	ABCD
Q	2	87-A30-198-080	TR,KTC3199GR	ABCD
RY	2	87-A90-976-010	RELAY,AC12V SDT-S-112LMR	.BCD
RY	1	87-A91-281-010	RELAY,AC DC12V OSA-SS-212DM5	A
S	1	87-A90-165-010	SW,SL 1-2-3 SWS2301	A
T	1	87-A60-317-010	TERMINAL, 1P MSC	ABCD
T	2	87-A60-317-010	TERMINAL, 1P MSC	ABCD
C	101	87-010-178-080	CHIP CAP 1000P	ABCD
C	102	87-010-178-080	CHIP CAP 1000P	ABCD
C	108	87-010-405-080	CAP, ELECT 10-50V	ABCD
C	107	87-010-405-080	CAP, ELECT 10-50V	ABCD
C	104	87-010-545-080	CAP, ELECT 0.22-50V	ABCD
C	103	87-010-545-080	CAP, ELECT 0.22-50V	ABCD
C	107	87-016-145-080	CAP E10-50 KME	
C	108	87-016-145-080	CAP E10-50 KME	
C	112	87-010-179-080	CAP,CHIP S B1200P	ABCD
C	111	87-010-179-080	CAP,CHIP S B1200P	ABCD
C	119	87-010-197-080	CAP, CHIP 0.01 DM	ABCD
C	114	87-010-405-080	CAP, ELECT 10-50V	ABCD
C	113	87-010-405-080	CAP, ELECT 10-50V	ABCD
C	116	87-010-866-080	CAP, ELECT 10-63	.BCD
C	115	87-010-866-080	CAP, ELECT 10-63	.BCD
C	115	87-016-299-080	CAP,E 10-100 SME	A
C	116	87-016-299-080	CAP,E 10-100 SME	A
C	116	87-A12-180-080	CAP,E 10-63 M 105 KME	
C	115	87-A12-180-080	CAP,E 10-63 M 105 KME	
C	120	87-010-197-080	CAP, CHIP 0.01 DM	ABCD
C	133	87-010-190-080	S CHIP F 0.01	ABCD
C	153	87-010-188-080	CAP,CHIP 6800P	ABCD
C	205	87-010-180-080	C-CER 1500P	ABCD
C	206	87-010-180-080	C-CER 1500P	ABCD
C	209	87-010-187-080	CAP CHIP S5600P	ABCD
C	208	87-010-401-080	CAP, ELECT 1-50V	ABCD
C	207	87-010-401-080	CAP, ELECT 1-50V	ABCD
C	201	87-A10-300-080	CAP,M 0.027-50 J	ABCD
C	203	87-A10-300-080	CAP,M 0.027-50 J	ABCD
C	202	87-A10-300-080	CAP,M 0.027-50 J	ABCD
C	204	87-A10-300-080	CAP,M 0.027-50 J	ABCD
C	216	87-010-179-080	CAP,CHIP S B1200P	ABCD

ELECTRICAL MAIN PARTS LIST - 2/21

C	215	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	210	87-010-187-080	CAP,CHIP S5600P	ABCD.....
C	217	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	218	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	212	87-010-402-080	CAP, ELECT 2.2-50V	ABCD.....
C	211	87-010-402-080	CAP, ELECT 2.2-50V	ABCD.....
C	218	87-016-141-080	CAP,E 1-50 KME
C	211	87-016-142-080	CAP,E 2.2-50 KME
C	223	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	224	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	221	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	222	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	255	87-010-190-080	S CHIP F 0.01	.BCD.....
C	256	87-010-190-080	S CHIP F 0.01	.BCD.....
C	257	87-010-190-080	S CHIP F 0.01	.BCD.....
C	258	87-010-190-080	S CHIP F 0.01	.BCD.....
C	253	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	254	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	251	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	252	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	259	87-012-368-080	C-CAP,S 0.1-50 F	.BCD.....
C	260	87-012-368-080	C-CAP,S 0.1-50 F	.BCD.....
C	401	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
CN	106	87-099-195-010	CONN,7P 6216 V	ABCD.....
CN	102	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	ABCD.....
CN	101	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	ABCD.....
CNA	101	8A-NF6-645-010	CONN ASSY,5P TID-A(530)	ABCD.....
CNA	102	8A-NF6-660-010	CONN ASSY,3P (SATE) ANF-6	ABCD.....
D	150	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	204	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	201	87-A40-269-080	C-DIODE,MC2836	ABCD.....
D	203	87-A40-313-080	C-DIODE,MC 2840	ABCD.....
D	403	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
IC	101	87-A21-418-010	IC,STK490-340	ABCD.....
IC	201	87-A21-396-010	IC,STK490-040	.BCD.....
IC	201	87-A21-397-010	IC,STK490-070	A.....
J	201	87-A61-148-010	JACK,PIN 4P R/W BLUE	ABCD.....
L	252	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
L	251	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
Q	101	87-A30-107-070	C-TR,CMBT5401	ABCD.....
Q	151	87-A30-106-040	C-TR,CMBT5551	ABCD.....
Q	203	87-A30-075-080	C-TR,2SA1235F	ABCD.....
R	129	87-A00-262-080	RES,M/F 0.15-2W J	ABCD.....
R	130	87-A00-262-080	RES,M/F 0.15-2W J	ABCD.....
R	231	87-A00-258-080	RES,M/F 0.22-1W J	ABCD.....
R	232	87-A00-258-080	RES,M/F 0.22-1W J	ABCD.....
WH	101	87-A90-459-010	HLDR,WIRE 2.5-5P	ABCD.....
C	201	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	219	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	215	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	216	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	217	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	218	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	212	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	213	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	214	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	211	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	222	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	221	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	229	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	227	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	220	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	228	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	224	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	223	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	226	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	225	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	230	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	238	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	237	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	234	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	233	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	239	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	236	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	235	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	231	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	232	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	240	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	301	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	302	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	309	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	304	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	303	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	317	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	318	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	312	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	311	87-010-260-080	CAP, ELECT 47-25V	ABCD.....

ELECTRICAL MAIN PARTS LIST - 3/21

C	310	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	319	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	316	87-A10-596-080	C-CAP,S 100P-100 J CH	ABCD.....
C	315	87-A10-596-080	C-CAP,S 100P-100 J CH	ABCD.....
C	325	87-010-186-080	CAP,CHIP 4700P	ABCD.....
C	324	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	323	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	322	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	321	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	320	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	330	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	402	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	401	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	403	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	404	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
CN	102	87-049-919-010	CONN,3P EH V WHT	ABCD.....
CN	101	87-099-195-010	CONN,7P 6216 V	ABCD.....
CN	103	87-A60-619-010	CONN,2P V 2MM JMT	ABCD.....
D	201	87-A40-748-080	ZENER,UZ5.6BSA	ABCD.....
D	301	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	317	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	319	87-A40-313-080	C-DIODE,MC 2840	ABCD.....
IC	201	87-A21-018-040	C-IC,M65849BFP631D	ABCD.....
J	301	87-A61-189-010	JACK,3.5 MONO	ABCD.....
J	302	87-A61-189-010	JACK,3.5 MONO	ABCD.....
L	302	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
L	301	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
Q	303	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	306	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	301	87-A30-086-040	C-TR,CSD1306E	ABCD.....
Q	319	87-A30-106-040	C-TR,CMBT5551	ABCD.....
Q	318	87-A30-107-070	C-TR,CMBT5401	ABCD.....
Q	311	87-A30-190-080	TR,CC5551	ABCD.....
Q	312	87-A30-190-080	TR,CC5551	ABCD.....
Q	315	89-213-703-010	TR,2SB1370F	ABCD.....
Q	314	89-420-613-010	TR,2SD2061F	ABCD.....
*		8A-NF6-615-110	PWB,COMB FRONT ANF-6	A..D.....
C	109	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	101	87-010-197-080	CAP, CHIP 0.01 DM	A..D.....
C	103	87-010-312-080	C-CAP,S 15P-50 CH	A..D.....
C	102	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	105	87-010-415-040	CAP,E 10-50 5L	A..D.....
C	106	87-010-493-040	CAP,E 0.47-50 GAS	A..D.....
C	104	87-012-157-080	C-CAP,S 330P-50 CH	A..D.....
C	108	87-A10-189-040	CAP,E 220-10	A..D.....
C	107	87-A10-189-040	CAP,E 220-10	A..D.....
C	110	87-010-178-080	CHIP CAP 1000P	A..D.....
C	115	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	116	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	114	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	118	87-012-145-080	CAP, CHIP S 270P CH	A..D.....
C	112	87-012-368-080	C-CAP,S 0.1-50 F	A..D.....
C	113	87-A10-354-080	C-CAP,S 0.047-50 K B	A..D.....
C	180	87-010-178-080	CHIP CAP 1000P	A..D.....
C	181	87-010-178-080	CHIP CAP 1000P	A..D.....
C	203	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	202	87-012-156-080	C-CAP,S 220P-50 CH	A..D.....
C	205	87-012-156-080	C-CAP,S 220P-50 CH	A..D.....
C	204	87-012-157-080	C-CAP,S 330P-50 CH	A..D.....
C	216	87-010-177-080	C-CAP,S 820P-50 SL	A..D.....
C	215	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	214	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	223	87-010-408-040	CAP,E 47-50 SME	A..D.....
C	222	87-010-421-040	CAP,E 4.7-50 5L	A..D.....
C	221	87-010-421-040	CAP,E 4.7-50 5L	A..D.....
C	224	87-012-369-080	C-CAP,S 0.047-50F	A..D.....
C	315	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	316	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	314	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	312	87-010-498-040	CAP,E 10-16 GAS	A..D.....
C	321	87-012-393-080	C-CAP,S 0.22-16 R K	A..D.....
C	384	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	387	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	383	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	385	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	382	87-010-320-080	CHIP CAP 68P	A..D.....
C	392	87-010-320-080	CHIP CAP 68P	A..D.....
C	402	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	405	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	407	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	404	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	406	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	403	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	408	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	462	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	465	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....

ELECTRICAL MAIN PARTS LIST - 4/21

C	463	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	464	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	461	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	652	87-010-183-080	C-CAP,S 2700P-50 B	A..D.....
C	653	87-010-213-080	C-CAP,S 0.015-50 B	A..D.....
C	701	87-010-406-040	CAP,E 22-50 SME	A..D.....
C	808	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	807	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	805	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
CN	104	87-099-017-010	CONN, 15P 6216 V	A..D.....
CN	101	87-099-720-010	CONN,30P TYK-B(P)	A..D.....
CN	302	87-099-195-010	CONN,7P 6216 V	A..D.....
CN	301	87-099-195-010	CONN,7P 6216 V	A..D.....
CN	604	87-099-210-010	CONN,5P 6216 H	A..D.....
CN	901	87-A60-161-010	CONN,13P H FE	A..D.....
D	105	87-020-465-080	DIODE,1SS133 (110MA)	A..D.....
D	108	87-A40-752-080	ZENER,UZ6.2BSC	A..D.....
D	385	87-A40-802-080	ZENER,UZ5.1BSC	A..D.....
D	701	87-A40-269-080	C-DIODE,MC2836	A..D.....
FL	201	8A-NF6-601-010	FL,BJ750GNK 13G-35S ANF-6	A..D.....
IC	101	8A-NF6-605-010	C-IC,LC876572V-XXX	..D.....
IC	101	8A-NF6-610-010	C-IC,LC876564V-XXX	A.....
IC	251	87-A20-914-010	IC,SPS-442-1-F	A..D.....
IC	380	87-A21-577-040	C-IC,M61506FP	A..D.....
IC	402	87-070-289-040	IC,BU 2092F	A..D.....
IC	401	87-A21-021-040	C-IC,BU2099FV	A..D.....
L	101	87-A50-333-010	COIL,OSC 9.43MHZ	A..D.....
LED	404	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	401	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	403	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	402	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	405	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	409	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	406	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	408	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	407	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	410	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	416	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	417	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	418	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	419	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	426	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	425	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	421	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	420	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	431	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A..D.....
LED	432	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A..D.....
LED	433	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A..D.....
LED	440	87-A91-665-010	LED,SELU1E10 CXM-SLF55 BLUE	A..D.....
LED	441	87-A91-665-010	LED,SELU1E10 CXM-SLF55 BLUE	A..D.....
LED	452	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	451	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	453	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	455	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	454	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	456	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	499	87-A40-317-080	LED,SLR-342VCT31 RED	A..D.....
Q	107	87-026-610-080	TR,KTC3198GR	A..D.....
Q	104	87-A30-074-080	C-TR,RT1P 141C	A..D.....
Q	102	87-A30-076-080	C-TR,2SC3052F	A..D.....
Q	101	87-A30-087-080	C-FET,2SK2158	A..D.....
Q	103	87-A30-468-080	C-TR,KRC102S-RTK	A..D.....
Q	401	87-A30-075-080	C-TR,2SA1235F	A..D.....
Q	701	87-A30-329-080	TR,CD1585BC	A..D.....
Q	704	87-A30-495-080	TR,2SA1981Y	A..D.....
S	101	87-A91-591-010	SW,RTRY RE0121PVB25FINA24	A..D.....
S	102	87-A91-664-010	SW,RTRY RE0121PVB30F	A..D.....
S	306	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	301	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	307	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	303	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	308	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	305	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	304	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	302	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	309	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	313	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	310	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	312	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	311	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	314	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	324	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	326	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	327	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	323	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	328	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	325	87-A91-024-180	SW,TACT KSH0611BT	A..D.....

ELECTRICAL MAIN PARTS LIST - 5/21

S	321	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	322	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	329	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	332	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	333	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	330	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	331	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	334	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	349	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	346	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	347	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	343	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	348	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	345	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	344	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	342	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	341	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	352	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	355	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	350	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	351	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	354	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	353	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
C	804	87-010-187-080	CAP CHIP S5600P	A.....
C	806	87-010-401-040	CAP,E 1-50 SME	A.....
C	802	87-012-154-080	C-CAP,S 150P-50 CH	A.....
C	809	87-012-155-080	C-CAP 180P-50CH	A.....
C	810	87-010-263-040	CAP,E 100-10	A.....
C	812	87-010-405-040	CAP,E 10-50	A.....
C	811	87-010-545-040	CAP,E 0.22-50 SME	A.....
D	801	87-A40-749-080	ZENER,UZ5.6BSB	A.....
IC	801	87-A21-051-040	C-IC,BU9990-03FS	A.....
L	801	87-A50-093-010	COIL,CLOCK 5.76MHZ	A.....
C	307	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	309	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	302	87-010-318-080	C-CAP,S 47P-50 CH	ABCD.....
C	301	87-010-318-080	C-CAP,S 47P-50 CH	ABCD.....
C	304	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....
C	305	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....
C	306	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....
C	303	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....
C	316	87-010-178-080	CHIP CAP 1000P	.BCD.....
C	315	87-010-178-080	CHIP CAP 1000P	.BCD.....
C	314	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	313	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	316	87-010-179-080	CAP,CHIP S B1200P	A.....
C	315	87-010-179-080	CAP,CHIP S B1200P	A.....
C	310	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	311	87-010-198-080	CAP, CHIP 0.022	ABCD.....
C	312	87-010-198-080	CAP, CHIP 0.022	ABCD.....
C	319	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	318	87-A10-201-080	C-CAP,S0.33-16 KB	.BCD.....
C	317	87-A10-201-080	C-CAP,S0.33-16 KB	.BCD.....
C	324	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	325	87-010-370-080	CAP,E 330-6.3 SME	ABCD.....
C	328	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	327	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	320	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	322	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	321	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	322	87-012-142-080	CAP, S 0.33-16	A.....
C	321	87-012-142-080	CAP, S 0.33-16	A.....
C	332	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	337	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	339	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	336	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	335	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	340	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	354	87-010-175-080	CAP 560P	ABCD.....
C	355	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	358	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	359	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	357	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	356	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	351	87-012-140-080	CAP 470P	ABCD.....
C	352	87-012-140-080	CAP 470P	ABCD.....
C	360	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	372	87-010-175-080	CAP 560P	.BCD.....
C	371	87-010-175-080	CAP 560P	.BCD.....
C	373	87-010-179-080	CAP,CHIP S B1200P	.BCD.....
C	374	87-010-179-080	CAP,CHIP S B1200P	.BCD.....
C	370	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	378	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	379	87-010-382-080	CAP, ELECT 22-25V	A.....
C	375	87-010-545-080	CAP, ELECT 0.22-50V	.BCD.....
C	376	87-010-545-080	CAP, ELECT 0.22-50V	.BCD.....
C	374	87-016-083-080	C-CAP,S 0.15-16 RK	A.....

ELECTRICAL MAIN PARTS LIST - 6/21

C	373	87-016-083-080	C-CAP,S 0.15-16 RK	A.....
C	385	87-010-184-080	CHIP CAPACITOR 3300P(K)	.BCD.....
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	381	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	383	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	382	87-010-312-080	C-CAP,S 15P-50 CH	A.....
C	382	87-010-318-080	C-CAP,S 47P-50 CH	.BCD.....
C	380	87-010-382-080	CAP, ELECT 22-25V	A.....
C	384	87-010-402-080	CAP, ELECT 2.2-50V	ABCD.....
C	387	87-012-145-080	CAP, CHIP S 270P CH	A.....
C	388	87-012-156-080	C-CAP,S 220P-50 CH	ABCD.....
C	394	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	393	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	392	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	391	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	392	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
C	393	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
C	391	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
C	394	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
CLP	301	87-A60-884-010	PIN,DIAL COATING-SHS	ABCD.....
CN	301	87-A60-620-010	CONN,3P V 2MM JMT	ABCD.....
CN	351	87-A60-625-010	CONN,8P V 2MM JMT	ABCD.....
D	352	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
FB	301	87-008-372-080	FILTER, EMI BL OIRNI	.BCD.....
IC	302	87-A20-355-010	IC,CXA1553P	.BCD.....
IC	303	87-A20-783-040	C-IC,BA7762AFS	ABCD.....
L	301	87-A50-625-010	COIL,TRAP 85KHZ (SANWA)	ABCD.....
L	302	87-A50-625-010	COIL,TRAP 85KHZ (SANWA)	ABCD.....
L	351	87-007-342-010	COIL,OSC 85K BIAS	ABCD.....
Q	357	87-026-609-080	TR,KTA1266GR	ABCD.....
Q	358	87-026-610-080	TR,KTC3198GR	ABCD.....
Q	355	87-A30-063-080	C-TR,KRA104S	ABCD.....
Q	356	87-A30-076-080	C-TR,2SC3052F	.BCD.....
Q	354	87-A30-087-080	C-FET,2SK2158	ABCD.....
Q	383	87-A30-075-080	C-TR,2SA1235F	A.....
SFR	306	87-A90-433-080	SFR,50K H NVZ6TLTA	.BCD.....
SFR	305	87-A90-433-080	SFR,50K H NVZ6TLTA	.BCD.....
SFR	304	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	301	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	302	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	303	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	352	87-A90-433-080	SFR,50K H NVZ6TLTA	ABCD.....
SH	301	87-MA6-202-010	PLATE,SHLD DECK	.BCD.....
C	104	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	105	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	111	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	112	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	113	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	114	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	116	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	115	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	122	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	121	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	162	87-010-176-080	C-CAP,S 680P-50 SL	.BCD.....
C	175	87-010-191-080	C-CAP,S 0.015-50 F	.BCD.....
C	176	87-010-191-080	C-CAP,S 0.015-50 F	.BCD.....
C	177	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	178	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	172	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	173	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	171	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	174	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
CN	101	87-A60-996-010	CONN,13P V BLK TAC-L13X-A3	ABCD.....
CNA	101	8A-NF6-670-010	CONN ASSY,2P (MUTE) ANF-6	ABCD.....
J	102	87-A60-238-010	TERMINAL,SP 4P (MSC)	ABCD.....
J	103	87-A60-929-010	JACK,DIA6.3 BLK ST W/S TAI	ABCD.....
L	101	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
L	102	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
Q	101	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	105	87-A30-269-040	C-FET,2SJ461-T1	ABCD.....
Q	113	87-A30-075-080	C-TR,2SA1235F	ABCD.....
R	163	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
R	162	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
R	161	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
R	164	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
C	974	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	973	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	979	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
C	971	87-010-381-080	CAP, ELECT 330-16V	ABCD.....
C	972	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	982	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	989	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	987	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	984	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	983	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	981	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	985	87-010-322-080	C-CAP,S 100P-50 CH	.BCD.....

ELECTRICAL MAIN PARTS LIST - 7/21

C	995	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	997	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	998	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	991	87-010-312-080	C-CAP,S 15P-50 CH	ABCD.....
C	992	87-010-312-080	C-CAP,S 15P-50 CH	ABCD.....
C	999	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABCD.....
D	804	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	991	87-017-149-080	ZENER,HZS6A2L	ABCD.....
D	992	87-020-465-080	DIODE,1SS133 (110MA)	.BCD.....
IC	991	87-070-127-110	IC,LC72131 D	ABCD.....
Q	981	87-A30-234-080	TR,CSC4115BC	ABCD.....
R	991	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
R	993	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
R	995	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
X	991	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	ABCD.....
C	779	87-010-182-080	C-CAP,S 2200P-50 B	ABCD.....
C	774	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	773	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	772	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	771	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	779	87-010-426-080	C-CAP,S 0.012-25 B
C	788	87-010-149-080	C-CAP,S 5P-50 CH	ABCD.....
C	780	87-010-182-080	C-CAP,S 2200P-50 B	ABCD.....
C	784	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	785	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	782	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	783	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	786	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	780	87-010-426-080	C-CAP,S 0.012-25 B
C	789	87-A10-592-080	C-CAP,S 0.015-50 J B	ABCD.....
C	791	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	792	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	796	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	798	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	795	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	793	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	797	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	799	87-010-407-080	CAP, ELECT 33-50V	ABCD.....
C	794	87-012-155-080	C-CAP 180P-50CH	.BCD.....
C	803	87-010-198-080	CAP, CHIP 0.022	ABCD.....
C	804	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	807	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	809	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	808	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	801	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	802	87-012-369-080	C-CAP,S 0.047-50F	ABCD.....
C	800	87-012-369-080	C-CAP,S 0.047-50F	ABCD.....
C	819	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	810	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	814	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	816	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	815	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	811	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	812	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	823	87-010-177-080	C-CAP,S 820P-50 SL	A.....
C	820	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	821	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	824	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	825	87-010-596-080	CAP, S 0.047-16	ABCD.....
C	823	87-012-349-080	C-CAP,S 1000P-50 CH	.BCD.....
D	803	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
IC	801	87-A21-560-010	IC,LA1844L-A	ABCD.....
L	801	87-A50-608-010	COIL,FM DET-N(TOK)	ABCD.....
L	802	87-A91-551-010	FLTR,PCFJZH-450 L(TOK)	.BCD.....
L	802	87-A91-552-010	FLTR,CFMT-450AL (TOK)	A.....
L	811	87-005-847-080	COIL,2.2UH(CECS)	ABCD.....
L	821	87-A50-027-010	COIL,1 POLE MPX(TOK)	ABCD.....
L	822	87-A50-027-010	COIL,1 POLE MPX(TOK)	ABCD.....
L	821	87-A50-209-010	COIL,1POLE MPX(MIT)
L	822	87-A50-209-010	COIL,1POLE MPX(MIT)
Q	801	87-A30-076-080	C-TR,2SC3052F	ABCD.....
R	790	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	869	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	875	87-010-196-080	CHIP CAPACITOR,0.1-25	.BCD.....
C	877	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	879	87-010-314-080	C-CAP,S 22P-50V	.BCD.....
C	878	87-010-316-080	C-CAP,S 33P-50 CH	.BCD.....
C	874	87-010-405-080	CAP, ELECT 10-50V	.BCD.....
C	876	87-010-405-080	CAP, ELECT 10-50V	.BCD.....
C	873	87-012-140-080	CAP 470P	.BCD.....
C	871	87-012-156-080	C-CAP,S 220P-50 CH	.BCD.....
C	872	87-012-156-080	C-CAP,S 220P-50 CH	.BCD.....
IC	861	87-A20-440-040	C-IC,BU1920FS	.BCD.....
L	861	87-005-847-080	COIL,2.2UH(CECS)	.BCD.....
Q	861	87-A30-076-080	C-TR,2SC3052F	.BCD.....
Q	863	87-A30-076-080	C-TR,2SC3052F	.BCD.....
X	861	87-A70-091-010	VIB,XTAL 4.332MHZ CSA-309	.BCD.....

ELECTRICAL MAIN PARTS LIST - 8/21

C	818	87-010-180-080	C-CER 1500P	.BCD.....
C	831	87-010-406-080	CAP, ELECT 22-50	.BCD.....
C	848	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	842	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	847	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	844	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	845	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	843	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	846	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	849	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	858	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	859	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	851	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	853	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	852	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	850	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	860	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	948	87-010-148-080	CAP, CHIP S 75P SL	A.....
C	942	87-010-149-080	C-CAP, S 5P-50 CH	.BCD.....
C	947	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	940	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	945	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	943	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	941	87-010-314-080	C-CAP, S 22P-50V	A.....
C	946	87-010-971-080	C-CAP, S 4700P-50 B J	A.....
C	948	87-012-140-080	CAP 470P	.BCD.....
C	959	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	953	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	958	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	952	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	956	87-010-263-080	CAP, ELECT 100-10V	A.....
C	957	87-010-311-080	CAP 12P	.BCD.....
C	954	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	961	87-010-152-080	C-CAP, S 8P-50 CH
C	960	87-010-196-080	CHIP CAPACITOR, 0.1-25	.BCD.....
C	962	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	964	87-010-854-080	C-CAP, S 560PCH	A.....
C	963	87-015-785-080	CHIP CAPACITOR, 0.1FZ-25Z	ABCD.....
CF	832	82-785-747-010	CF MS2 GHY R	.BCD.....
CF	832	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	831	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	831	87-008-423-010	CERAMIC FILTER, SFE10.7	.BCD.....
D	944	87-020-465-080	DIODE, 1SS133 (110MA)	.BCD.....
D	941	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	942	87-A40-270-080	C-DIODE, MC2838	.BCD.....
D	951	87-A40-618-080	VARI-CAP, SVC 348 (S/T)	A.....
FFE	831	A8-6ZA-191-130	6ZA-1 FEENM	...D.....
FFE	831	A8-6ZA-19C-170	6ZA-1 YFEENC	.BC.....
FFE	831	A8-8ZA-190-030	8ZA-1 FEUNM	A.....
FFE	831	A8-8ZA-191-030	8ZA-1 YFEUNM
FFE	831	A8-8ZA-193-070	8ZA-1 YFEUNC
J	831	87-A60-202-010	TERMINAL, ANT 4P MSP-154V-02	A.....
J	832	87-A60-403-010	TERMINAL, ANT PAL 2P HSP-312V05	.BCD.....
J	940	81-754-629-010	CONNECTOR, 2P	A.....
L	832	87-005-847-080	COIL, 2.2UH (CECS)	ABCD.....
L	942	87-A50-019-010	COIL, OSC LW (COI)	.BCD.....
L	941	87-A50-020-010	COIL, ANT LW (COI)	.BCD.....
L	941	87-A50-022-010	COIL, ANT SW (COI)	A.....
L	944	87-A50-159-010	COIL, 10MH K C2B	A.....
L	943	87-A50-522-080	COIL, 1MH K CEC	A.....
L	942	87-A50-550-010	COIL, OSC SW-2N (COI)	A.....
L	952	87-A50-430-010	COIL, ANT MW (3BSW)	A.....
L	953	87-A50-431-010	COIL, OSC MW (3BSW)	A.....
L	951	8A-NF8-667-010	COIL, AM PACK 4 (TOK)
L	951	8A-NF8-668-010	COIL, AM PACK 2 (TOK)	.BCD.....
Q	836	87-A30-489-080	C-TR, KRA107S	ABCD.....
Q	835	89-327-143-080	TR, 2SC2714 (0.1W)	ABCD.....
Q	942	87-A30-075-080	C-TR, 2SA1235F	A.....
Q	945	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	946	87-A30-086-070	C-TR, CSD1306E	A.....
Q	941	87-A30-484-080	C-TR, KRA102S	A.....
Q	953	89-503-602-080	C-FET, 2SK360E	ABCD.....
TC	942	87-011-253-080	TRIMER, 30P LAR	.BCD.....
TC	943	87-011-253-080	TRIMER, 30P LAR	A.....
TC	941	87-011-254-080	TRIMER, 20P LAR	A.....
*		8A-NF6-631-110	PWB, COMB MAIN ANF-6	ABCD.....
C	3	87-012-368-080	C-CAP, S 0.1-50 F	ABCD.....
C	4	87-012-368-080	C-CAP, S 0.1-50 F	ABCD.....
C	28	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	27	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	25	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	26	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	22	87-016-658-000	CAP, E 4700-35 M SMG	ABCD.....
C	21	87-016-658-000	CAP, E 4700-35 M SMG	ABCD.....
C	32	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	39	87-010-247-080	CAP, ELECT 100-50V	ABCD.....
C	38	87-010-247-080	CAP, ELECT 100-50V	ABCD.....

ELECTRICAL MAIN PARTS LIST - 9/21

C	34	87-010-247-080	CAP, ELECT 100-50V	ABCD.....
C	31	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	33	87-010-263-080	CAP, ELECT 100-10V
C	36	87-010-381-080	CAP, ELECT 330-16V	ABCD.....
C	35	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	40	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	60	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	82	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	81	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	80	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
CN	1	87-A60-996-010	CONN, 13P V BLK TAC-L13X-A3	ABCD.....
CN	91	87-A60-109-010	CONN, 2P V S2M-2W	ABCD.....
CNA	2	8A-NF6-630-110	CONN ASSY, 3P (VM) ANF-6	ABCD.....
D	1	87-A40-547-090	DIODE, D5SBA20	.BCD.....
D	1	87-A40-673-090	DIODE, D10XB20	A.....
D	25	87-A40-553-080	DIODE, 1N4003 LES	ABCD.....
D	29	87-A40-784-080	ZENER, UZ39BSB	ABCD.....
D	30	87-020-465-080	DIODE, 1SS133 (110MA)	ABCD.....
D	31	87-A40-764-080	ZENER, UZ10BSC	ABCD.....
D	64	87-A40-269-080	C-DIODE, MC2836	ABCD.....
D	63	87-A40-270-080	C-DIODE, MC2838	ABCD.....
D	61	87-A40-313-080	C-DIODE, MC 2840	ABCD.....
D	65	87-A40-768-080	ZENER, UZ16BSA	ABCD.....
Q	2	87-026-609-080	TR, KTA1266GR	ABCD.....
Q	5	87-026-610-080	TR, KTC3198GR	ABCD.....
Q	8	87-A30-075-080	C-TR, 2SA1235F	ABCD.....
Q	9	87-A30-318-080	TR, CSA952K	ABCD.....
Q	13	89-213-702-010	TR, 2SB1370 (1.8W)	ABCD.....
Q	84	87-026-609-080	TR, KTA1266GR	ABCD.....
Q	81	87-A30-076-080	C-TR, 2SC3052F	ABCD.....
WH	1	87-A90-510-010	HLDR, WIRE 2.5-9P	ABCD.....
C	609	87-010-181-080	CAP, CHIP S 1800P	ABCD.....
C	610	87-010-181-080	CAP, CHIP S 1800P	ABCD.....
C	616	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	613	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	619	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	618	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	611	87-010-956-080	CHIP-CAP, S 0.068-25B	ABCD.....
C	617	87-012-369-080	C-CAP, S 0.047-50F	ABCD.....
C	612	87-016-369-080	C-CAP, S 0.033-25 B K	ABCD.....
C	614	87-016-669-080	C-CAP, S 0.1-25 K B	ABCD.....
C	621	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	628	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	627	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	623	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	624	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	626	87-010-596-080	CAP, S 0.047-16	ABCD.....
C	629	87-010-596-080	CAP, S 0.047-16	ABCD.....
C	620	87-016-669-080	C-CAP, S 0.1-25 K B	ABCD.....
C	632	87-010-185-080	C-CAP, S 3900P-50 B	ABCD.....
C	631	87-010-185-080	C-CAP, S 3900P-50 B	ABCD.....
C	634	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	630	87-010-383-080	CAP, ELECT 33-25V	ABCD.....
C	639	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	637	87-A10-307-080	CAP, M 0.1-50 J	ABCD.....
C	635	87-A10-307-080	CAP, M 0.1-50 J	ABCD.....
C	638	87-A10-307-080	CAP, M 0.1-50 J	ABCD.....
C	636	87-A10-307-080	CAP, M 0.1-50 J	ABCD.....
C	643	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	644	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	642	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	641	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	679	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	673	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	671	87-010-322-080	C-CAP, S 100P-50 CH	ABCD.....
C	672	87-010-322-080	C-CAP, S 100P-50 CH	ABCD.....
C	682	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	680	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
CN	602	87-099-194-010	CONN, 6P 6216V	ABCD.....
CN	601	87-099-719-010	CONN, 30P TYK-B(X)	ABCD.....
D	603	87-020-465-080	DIODE, 1SS133 (110MA)	ABCD.....
D	602	87-A40-745-080	ZENER, UZ4.7BSA	ABCD.....
IC	601	87-A21-452-030	C-IC, BD3876KS2	ABCD.....
J	601	87-A60-885-010	JACK, PIN 6P R/W MSC	ABCD.....
Q	601	87-026-610-080	TR, KTC3198GR	ABCD.....
Q	607	87-A30-075-080	C-TR, 2SA1235F	ABCD.....
Q	606	87-A30-086-070	C-TR, CSD1306E	ABCD.....
Q	603	87-A30-087-080	C-FET, 2SK2158	.BCD.....
Q	602	87-A30-269-040	C-FET, 2SJ461-T1	.BCD.....
C	507	87-010-177-080	C-CAP, S 820P-50 SL	ABCD.....
C	506	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	502	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCD.....
C	501	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	505	87-012-141-080	CHIP-CAPACITOR, 0.22-16F	ABCD.....
C	504	87-012-393-080	C-CAP, S 0.22-16 R K	ABCD.....
C	503	87-012-393-080	C-CAP, S 0.22-16 R K	ABCD.....
C	508	87-016-669-080	C-CAP, S 0.1-25 K B	ABCD.....

ELECTRICAL MAIN PARTS LIST - 10/21

C	509	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	511	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	517	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	518	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	510	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	514	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	516	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	515	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	513	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	512	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	535	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	536	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	533	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	532	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	538	87-010-318-080	C-CAP,S 47P-50 CH	ABCD.....
C	531	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	534	87-012-156-080	C-CAP,S 220P-50 CH	ABCD.....
C	541	87-010-178-080	CHIP CAP 1000P	ABCD.....
CLP	501	87-A60-884-010	PIN,DIA1 COATING-SHS	ABCD.....
D	501	87-A40-747-080	ZENER,UZ5.1BSB	ABCD.....
FB	501	87-008-372-080	FILTER, EMI BL OIRNI	ABCD.....
IC	501	87-A21-018-040	C-IC,M65849BFP631D	ABCD.....
Q	532	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	531	87-A30-076-080	C-TR,2SC3052F	ABCD.....
C	606	87-010-112-040	CAP,E 100-16	A..D.....
C	608	87-010-178-080	CHIP CAP 1000P	A..D.....
C	601	87-010-186-080	CAP,CHIP 4700P	A..D.....
C	607	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	603	87-010-320-080	CHIP CAP 68P	A..D.....
C	602	87-010-405-040	CAP,E 10-50	A..D.....
C	604	87-010-546-040	CAP,E 0.33-50	A..D.....
C	605	87-012-368-080	C-CAP,S 0.1-50 F	A..D.....
C	609	88-118-000-080	C-RES JAMPER	A.....
C	621	87-010-178-080	CHIP CAP 1000P	A..D.....
CN	603	87-099-212-010	CONN,5P 6216 V	A..D.....
J	602	87-A61-242-010	JACK,6.3 BLK MONO W/SW V KM	A..D.....
J	601	87-A61-242-010	JACK,6.3 BLK MONO W/SW V KM	A..D.....
*		8A-NF6-641-110	PWB,PT 96-60
C	1	87-010-387-080	CAP,E 470-25 SME	ABCD.....
C	7	87-010-917-000	CAP,E 3300-50 M SMG	ABCD.....
C	6	87-010-917-000	CAP,E 3300-50 M SMG	ABCD.....
C	4	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD.....
C	9	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD.....
C	8	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD.....
C	5	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD.....
C	16	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	13	87-016-520-000	CAP,E 3300-65 M SMG	.BCD.....
C	12	87-016-520-000	CAP,E 3300-65 M SMG	.BCD.....
C	12	87-016-657-090	CAP,E 3300-71	A.....
C	13	87-016-657-090	CAP,E 3300-71	A.....
C	10	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD.....
C	11	87-A11-148-080	CAP,TC U 0.1-50 Z F	ABCD.....
CN	2	87-A61-108-010	CONN,5P V TID-A	ABCD.....
CN	1	87-A61-110-010	CONN,9P V TID-A	ABCD.....
PT	2	8A-NF8-662-010	PT,SUB ANF-8 (E)	.BCD.....
PT	2	8A-NF8-663-010	PT,SUB ANF-8 (H)
PT	2	8A-NF8-673-010	PT,SUB ANF-8 (H) KAMI	A.....
RY	2	87-A90-976-010	RELAY,AC12V SDT-S-112LMR	.BCD.....
RY	1	87-A91-281-010	RELAY,AC DC12V OSA-SS-212DM5	A.....
S	1	87-A90-165-010	SW,SL 1-2-3 SWS2301	A.....
T	1	87-A60-317-010	TERMINAL, 1P MSC	ABCD.....
T	2	87-A60-317-010	TERMINAL, 1P MSC	ABCD.....
C	102	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	101	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	108	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	107	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	103	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	104	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	108	87-016-145-080	CAP E10-50 KME
C	107	87-016-145-080	CAP E10-50 KME
C	111	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	112	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	119	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	114	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	113	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	116	87-010-866-080	CAP, ELECT 10-63	.BCD.....
C	115	87-010-866-080	CAP, ELECT 10-63	.BCD.....
C	115	87-016-299-080	CAP,E 10-100 SME	A.....
C	116	87-016-299-080	CAP,E 10-100 SME	A.....
C	115	87-A12-180-080	CAP,E 10-63 M 105 KME
C	116	87-A12-180-080	CAP,E 10-63 M 105 KME
C	120	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	133	87-010-190-080	S CHIP F 0.01	ABCD.....
C	153	87-010-188-080	CAP,CHIP 6800P	ABCD.....
C	206	87-010-180-080	C-CER 1500P	ABCD.....
C	205	87-010-180-080	C-CER 1500P	ABCD.....
C	209	87-010-187-080	CAP CHIP S5600P	ABCD.....

ELECTRICAL MAIN PARTS LIST - 11/21

C	207	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	208	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	201	87-A10-300-080	CAP,M 0.027-50 J	ABCD.....
C	204	87-A10-300-080	CAP,M 0.027-50 J	ABCD.....
C	202	87-A10-300-080	CAP,M 0.027-50 J	ABCD.....
C	203	87-A10-300-080	CAP,M 0.027-50 J	ABCD.....
C	215	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	216	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	210	87-010-187-080	CAP,CHIP S5600P	ABCD.....
C	217	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	218	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	211	87-010-402-080	CAP, ELECT 2.2-50V	ABCD.....
C	212	87-010-402-080	CAP, ELECT 2.2-50V	ABCD.....
C	218	87-016-141-080	CAP,E 1-50 KME
C	211	87-016-142-080	CAP,E 2.2-50 KME
C	223	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	224	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	222	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	221	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	256	87-010-190-080	S CHIP F 0.01	.BCD.....
C	255	87-010-190-080	S CHIP F 0.01	.BCD.....
C	257	87-010-190-080	S CHIP F 0.01	.BCD.....
C	258	87-010-190-080	S CHIP F 0.01	.BCD.....
C	254	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	253	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	259	87-012-368-080	C-CAP,S 0.1-50 F	.BCD.....
C	252	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	251	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	260	87-012-368-080	C-CAP,S 0.1-50 F	.BCD.....
C	401	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
CN	106	87-099-195-010	CONN,7P 6216 V	ABCD.....
CN	101	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	ABCD.....
CN	102	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	ABCD.....
CNA	101	8A-NF6-645-010	CONN ASSY,5P TID-A(530)	ABCD.....
CNA	102	8A-NF6-660-010	CONN ASSY,3P (SATE) ANF-6	ABCD.....
J	201	87-A61-148-010	JACK,PIN 4P R/W BLUE	ABCD.....
L	251	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
L	252	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
R	129	87-A00-262-080	RES,M/F 0.15-2W J	ABCD.....
R	130	87-A00-262-080	RES,M/F 0.15-2W J	ABCD.....
R	232	87-A00-258-080	RES,M/F 0.22-1W J	ABCD.....
R	231	87-A00-258-080	RES,M/F 0.22-1W J	ABCD.....
WH	101	87-A90-459-010	HLDR,WIRE 2.5-5P	ABCD.....
C	201	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	219	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	215	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	216	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	217	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	218	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	214	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	212	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	211	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	213	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	222	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	221	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	229	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	227	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	220	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	228	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	223	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	224	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	226	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	225	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	230	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	237	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	238	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	234	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	233	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	235	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	236	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	239	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	232	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	231	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	240	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	302	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	301	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	309	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	303	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	304	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	318	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	317	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	311	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	312	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	310	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	319	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	316	87-A10-596-080	C-CAP,S 100P-100 J CH	ABCD.....
C	315	87-A10-596-080	C-CAP,S 100P-100 J CH	ABCD.....

ELECTRICAL MAIN PARTS LIST - 12/21

C	325	87-010-186-080	CAP,CHIP 4700P	ABCD.....
C	324	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	323	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	322	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	321	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	320	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	330	87-012-368-080	C-CAP,S 0.1-50 F	BCD.....
C	402	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	401	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	404	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	403	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
CN	102	87-049-919-010	CONN,3P EH V WHT	ABCD.....
CN	101	87-099-195-010	CONN,7P 6216 V	ABCD.....
CN	103	87-A60-619-010	CONN,2P V 2MM JMT	ABCD.....
J	302	87-A61-189-010	JACK,3.5 MONO	ABCD.....
J	301	87-A61-189-010	JACK,3.5 MONO	ABCD.....
L	302	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
L	301	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
*		8A-NF6-615-110	PWB,COMB FRONT ANF-6	A..D.....
C	109	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	101	87-010-197-080	CAP, CHIP 0.01 DM	A..D.....
C	103	87-010-312-080	C-CAP,S 15P-50 CH	A..D.....
C	102	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	105	87-010-415-040	CAP,E 10-50 5L	A..D.....
C	106	87-010-493-040	CAP,E 0.47-50 GAS	A..D.....
C	104	87-012-157-080	C-CAP,S 330P-50 CH	A..D.....
C	108	87-A10-189-040	CAP,E 220-10	A..D.....
C	107	87-A10-189-040	CAP,E 220-10	A..D.....
C	110	87-010-178-080	CHIP CAP 1000P	A..D.....
C	116	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	114	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	115	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	118	87-012-145-080	CAP, CHIP S 270P CH	A..D.....
C	112	87-012-368-080	C-CAP,S 0.1-50 F	A..D.....
C	113	87-A10-354-080	C-CAP,S 0.047-50 K B	A..D.....
C	180	87-010-178-080	CHIP CAP 1000P	A..D.....
C	181	87-010-178-080	CHIP CAP 1000P	A..D.....
C	203	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	205	87-012-156-080	C-CAP,S 220P-50 CH	A..D.....
C	202	87-012-156-080	C-CAP,S 220P-50 CH	A..D.....
C	204	87-012-157-080	C-CAP,S 330P-50 CH	A..D.....
C	216	87-010-177-080	C-CAP,S 820P-50 SL	A..D.....
C	214	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	215	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	223	87-010-408-040	CAP,E 47-50 SME	A..D.....
C	221	87-010-421-040	CAP,E 4.7-50 5L	A..D.....
C	222	87-010-421-040	CAP,E 4.7-50 5L	A..D.....
C	224	87-012-369-080	C-CAP,S 0.047-50F	A..D.....
C	314	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	316	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	315	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	312	87-010-498-040	CAP,E 10-16 GAS	A..D.....
C	321	87-012-393-080	C-CAP,S 0.22-16 R K	A..D.....
C	384	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	385	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	383	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	387	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	382	87-010-320-080	CHIP CAP 68P	A..D.....
C	392	87-010-320-080	CHIP CAP 68P	A..D.....
C	402	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	406	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	405	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	407	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	408	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	403	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	404	87-010-322-080	C-CAP,S 100P-50 CH	A..D.....
C	465	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	461	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	464	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	463	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	462	87-010-196-080	CHIP CAPACITOR,0.1-25	A..D.....
C	652	87-010-183-080	C-CAP,S 2700P-50 B	A..D.....
C	653	87-010-213-080	C-CAP,S 0.015-50 B	A..D.....
C	701	87-010-406-040	CAP,E 22-50 SME	A..D.....
C	808	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	805	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	807	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
CN	104	87-099-017-010	CONN, 15P 6216 V	A..D.....
CN	101	87-099-720-010	CONN,30P TYK-B(P)	A..D.....
CN	301	87-099-195-010	CONN,7P 6216 V	A..D.....
CN	302	87-099-195-010	CONN,7P 6216 V	A..D.....
CN	604	87-099-210-010	CONN,5P 6216 H	A..D.....
CN	901	87-A60-161-010	CONN,13P H FE	A..D.....
FL	201	8A-NF6-601-010	FL,BJ750GNK 13G-35S ANF-6	A..D.....
L	101	87-A50-333-010	COIL,OSC 9.43MHZ	A..D.....
LED	402	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....

ELECTRICAL MAIN PARTS LIST - 13/21

LED	401	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	403	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	404	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	405	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	407	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	409	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	408	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	406	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	410	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	419	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	417	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	416	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	418	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	426	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	425	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	420	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	421	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A..D.....
LED	432	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A..D.....
LED	433	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A..D.....
LED	431	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A..D.....
LED	441	87-A91-665-010	LED,SELU1E10 CXM-SLF55 BLUE	A..D.....
LED	440	87-A91-665-010	LED,SELU1E10 CXM-SLF55 BLUE	A..D.....
LED	452	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	451	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	453	87-017-756-040	LED,SLR-342DCT31 ORN	A..D.....
LED	456	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	455	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	454	87-A40-496-040	LED,SLR-342MCT31 GRN	A..D.....
LED	499	87-A40-317-080	LED,SLR-342VCT31 RED	A..D.....
S	101	87-A91-591-010	SW,RTRY RE0121PVB25FINA24	A..D.....
S	102	87-A91-664-010	SW,RTRY RE0121PVB30F	A..D.....
S	304	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	305	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	308	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	306	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	303	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	309	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	302	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	307	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	301	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	311	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	312	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	313	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	314	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	310	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	325	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	324	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	329	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	327	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	323	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	322	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	326	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	328	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	321	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	330	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	332	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	333	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	331	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	334	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	345	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	344	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	343	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	346	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	347	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	341	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	348	87-A91-024-180	SW,TACT KSH0611BT	..D.....
S	342	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	349	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	351	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	354	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	353	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	352	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	350	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
S	355	87-A91-024-180	SW,TACT KSH0611BT	A..D.....
C	804	87-010-187-080	CAP CHIP S5600P	A.....
C	806	87-010-401-040	CAP,E 1-50 SME	A.....
C	802	87-012-154-080	C-CAP,S 150P-50 CH	A.....
C	809	87-012-155-080	C-CAP 180P-50CH	A.....
C	810	87-010-263-040	CAP,E 100-10	A.....
C	812	87-010-405-040	CAP,E 10-50	A.....
C	811	87-010-545-040	CAP,E 0.22-50 SME	A.....
L	801	87-A50-093-010	COIL,CLOCK 5.76MHZ	A.....
C	309	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	307	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	301	87-010-318-080	C-CAP,S 47P-50 CH	ABCD.....
C	302	87-010-318-080	C-CAP,S 47P-50 CH	ABCD.....
C	304	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....

ELECTRICAL MAIN PARTS LIST - 14/21

C	305	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....
C	306	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....
C	303	87-012-157-080	C-CAP,S 330P-50 CH	ABCD.....
C	316	87-010-178-080	CHIP CAP 1000P	.BCD.....
C	315	87-010-178-080	CHIP CAP 1000P	.BCD.....
C	315	87-010-179-080	CAP,CHIP S B1200P	A.....
C	316	87-010-179-080	CAP,CHIP S B1200P	A.....
C	313	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	314	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	310	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	312	87-010-198-080	CAP, CHIP 0.022	ABCD.....
C	311	87-010-198-080	CAP, CHIP 0.022	ABCD.....
C	319	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	318	87-A10-201-080	C-CAP,S0.33-16 KB	.BCD.....
C	317	87-A10-201-080	C-CAP,S0.33-16 KB	.BCD.....
C	324	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	325	87-010-370-080	CAP,E 330-6.3 SME	ABCD.....
C	327	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	328	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	320	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	322	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	321	87-012-141-080	CHIP-CAPACITOR,0.22-16F	.BCD.....
C	322	87-012-142-080	CAP, S 0.33-16	A.....
C	321	87-012-142-080	CAP, S 0.33-16	A.....
C	332	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	339	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	337	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	335	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	336	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	340	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	354	87-010-175-080	CAP 560P	ABCD.....
C	355	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	359	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	358	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	357	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	356	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	351	87-012-140-080	CAP 470P	ABCD.....
C	352	87-012-140-080	CAP 470P	ABCD.....
C	360	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	372	87-010-175-080	CAP 560P	.BCD.....
C	371	87-010-175-080	CAP 560P	.BCD.....
C	373	87-010-179-080	CAP,CHIP S B1200P	.BCD.....
C	374	87-010-179-080	CAP,CHIP S B1200P	.BCD.....
C	378	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	370	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	379	87-010-382-080	CAP, ELECT 22-25V	A.....
C	376	87-010-545-080	CAP, ELECT 0.22-50V	.BCD.....
C	375	87-010-545-080	CAP, ELECT 0.22-50V	.BCD.....
C	373	87-016-083-080	C-CAP,S 0.15-16 RK	A.....
C	374	87-016-083-080	C-CAP,S 0.15-16 RK	A.....
C	385	87-010-184-080	CHIP CAPACITOR 3300P(K)	.BCD.....
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	383	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	381	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	382	87-010-312-080	C-CAP,S 15P-50 CH	A.....
C	382	87-010-318-080	C-CAP,S 47P-50 CH	.BCD.....
C	380	87-010-382-080	CAP, ELECT 22-25V	A.....
C	384	87-010-402-080	CAP, ELECT 2.2-50V	ABCD.....
C	387	87-012-145-080	CAP, CHIP S 270P CH	A.....
C	388	87-012-156-080	C-CAP,S 220P-50 CH	ABCD.....
C	393	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	394	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	392	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	391	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	391	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
C	393	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
C	392	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
C	394	87-012-145-080	CAP, CHIP S 270P CH	.BCD.....
CLP	301	87-A60-884-010	PIN,DIAL COATING-SHS	ABCD.....
CN	301	87-A60-620-010	CONN,3P V 2MM JMT	ABCD.....
CN	351	87-A60-625-010	CONN,8P V 2MM JMT	ABCD.....
FB	301	87-008-372-080	FILTER, EMI BL OIRNI	.BCD.....
L	301	87-A50-625-010	COIL,TRAP 85KHZ (SANWA)	ABCD.....
L	302	87-A50-625-010	COIL,TRAP 85KHZ (SANWA)	ABCD.....
L	351	87-007-342-010	COIL,OSC 85K BIAS	ABCD.....
SFR	306	87-A90-433-080	SFR,50K H NVZ6TLTA	.BCD.....
SFR	305	87-A90-433-080	SFR,50K H NVZ6TLTA	.BCD.....
SFR	302	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	301	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	304	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	303	87-A90-557-080	SFR,33K H HOKU	.BCD.....
SFR	352	87-A90-433-080	SFR,50K H NVZ6TLTA	ABCD.....
SH	301	87-MA6-202-010	PLATE,SHLD DECK	.BCD.....
C	104	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	105	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	112	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	111	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....

ELECTRICAL MAIN PARTS LIST - 15/21

C	113	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	114	87-010-545-080	CAP, ELECT 0.22-50V	ABCD.....
C	115	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	116	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	121	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	122	87-010-546-080	CAP, ELECT 0.33-50V	ABCD.....
C	162	87-010-176-080	C-CAP,S 680P-50 SL	.BCD.....
C	175	87-010-191-080	C-CAP,S 0.015-50 F	.BCD.....
C	176	87-010-191-080	C-CAP,S 0.015-50 F	.BCD.....
C	177	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	178	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	171	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	174	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	172	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	173	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
CN	101	87-A60-996-010	CONN,13P V BLK TAC-L13X-A3	ABCD.....
CNA	101	8A-NF6-670-010	CONN ASSY,2P (MUTE) ANF-6	ABCD.....
J	102	87-A60-238-010	TERMINAL,SP 4P (MSC)	ABCD.....
J	103	87-A60-929-010	JACK,DIA6.3 BLK ST W/S TAI	ABCD.....
L	102	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
L	101	87-A50-610-010	COIL,1UH K(MDEC)	ABCD.....
R	164	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
R	163	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
R	162	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
R	161	87-A00-441-050	RES,270-1/2W J RP	ABCD.....
C	973	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	974	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	979	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
C	971	87-010-381-080	CAP, ELECT 330-16V	ABCD.....
C	972	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	982	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	989	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	983	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	987	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	984	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	981	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	985	87-010-322-080	C-CAP,S 100P-50 CH	.BCD.....
C	995	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	997	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	998	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	991	87-010-312-080	C-CAP,S 15P-50 CH	ABCD.....
C	992	87-010-312-080	C-CAP,S 15P-50 CH	ABCD.....
C	999	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABCD.....
R	991	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
R	995	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
R	993	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
X	991	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	ABCD.....
C	779	87-010-182-080	C-CAP,S 2200P-50 B	ABCD.....
C	774	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	773	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	772	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	771	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	779	87-010-426-080	C-CAP,S 0.012-25 B
C	788	87-010-149-080	C-CAP,S 5P-50 CH	ABCD.....
C	780	87-010-182-080	C-CAP,S 2200P-50 B	ABCD.....
C	786	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	782	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	785	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	783	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	784	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	780	87-010-426-080	C-CAP,S 0.012-25 B
C	789	87-A10-592-080	C-CAP,S 0.015-50 J B	ABCD.....
C	791	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	792	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	798	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	796	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	795	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	793	87-010-404-080	CAP, ELECT 4.7-50V	ABCD.....
C	797	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	799	87-010-407-080	CAP, ELECT 33-50V	ABCD.....
C	794	87-012-155-080	C-CAP 180P-50CH	.BCD.....
C	790	87-A10-592-080	C-CAP,S 0.015-50 J B	ABCD.....
C	803	87-010-198-080	CAP, CHIP 0.022	ABCD.....
C	804	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	807	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	808	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	809	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	801	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	800	87-012-369-080	C-CAP,S 0.047-50F	ABCD.....
C	802	87-012-369-080	C-CAP,S 0.047-50F	ABCD.....
C	819	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	810	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	814	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	815	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	816	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	811	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	812	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....

ELECTRICAL MAIN PARTS LIST - 16/21

C	823	87-010-177-080	C-CAP,S 820P-50 SL	A.....
C	820	87-010-179-080	CAP,CHIP S B1200P	ABCD.....
C	824	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	821	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	825	87-010-596-080	CAP, S 0.047-16	ABCD.....
C	823	87-012-349-080	C-CAP,S 1000P-50 CH	.BCD.....
L	801	87-A50-608-010	COIL,FM DET-N(TOK)	ABCD.....
L	802	87-A91-551-010	FLTR,PCFJZH-450 L(TOK)	.BCD.....
L	802	87-A91-552-010	FLTR,CFMT-450AL (TOK)	A.....
L	811	87-005-847-080	COIL,2.2UH(CECS)	ABCD.....
L	822	87-A50-027-010	COIL,1 POLE MPX(TOK)	ABCD.....
L	821	87-A50-027-010	COIL,1 POLE MPX(TOK)	ABCD.....
L	822	87-A50-209-010	COIL,1POLE MPX(MIT)
L	821	87-A50-209-010	COIL,1POLE MPX(MIT)
R	790	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	869	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	875	87-010-196-080	CHIP CAPACITOR,0.1-25	.BCD.....
C	877	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	879	87-010-314-080	C-CAP,S 22P-50V	.BCD.....
C	878	87-010-316-080	C-CAP,S 33P-50 CH	.BCD.....
C	876	87-010-405-080	CAP, ELECT 10-50V	.BCD.....
C	874	87-010-405-080	CAP, ELECT 10-50V	.BCD.....
C	873	87-012-140-080	CAP 470P	.BCD.....
C	871	87-012-156-080	C-CAP,S 220P-50 CH	.BCD.....
C	872	87-012-156-080	C-CAP,S 220P-50 CH	.BCD.....
L	861	87-005-847-080	COIL,2.2UH(CECS)	.BCD.....
X	861	87-A70-091-010	VIB,XTAL 4.332MHZ CSA-309	.BCD.....
C	818	87-010-180-080	C-CER 1500P	.BCD.....
C	831	87-010-406-080	CAP, ELECT 22-50	.BCD.....
C	849	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	844	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	842	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	847	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	848	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	845	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	843	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	846	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	858	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	859	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	853	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	852	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	851	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	850	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	860	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	948	87-010-148-080	CAP, CHIP S 75P SL	A.....
C	942	87-010-149-080	C-CAP,S 5P-50 CH	.BCD.....
C	945	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	947	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	943	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	940	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	941	87-010-314-080	C-CAP,S 22P-50V	A.....
C	946	87-010-971-080	C-CAP,S 4700P-50 B J	A.....
C	948	87-012-140-080	CAP 470P	.BCD.....
C	959	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	958	87-010-197-080	CAP, CHIP 0.01 DM	.BCD.....
C	952	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	953	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	956	87-010-263-080	CAP, ELECT 100-10V	A.....
C	957	87-010-311-080	CAP 12P	.BCD.....
C	954	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	961	87-010-152-080	C-CAP,S 8P-50 CH
C	960	87-010-196-080	CHIP CAPACITOR,0.1-25	.BCD.....
C	962	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	964	87-010-854-080	C-CAP,S 560PCH	A.....
C	963	87-015-785-080	CHIP CAPACITOR, 0.1FZ-25Z	ABCD.....
CF	832	82-785-747-010	CF MS2 GHY R	.BCD.....
CF	831	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	832	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	831	87-008-423-010	CERAMIC FILTER, SFE10.7	.BCD.....
D	951	87-A40-618-080	VARI-CAP,SVC 348(S/T)	A.....
FFE	831	A8-6ZA-191-130	6ZA-1 FEENM	...D.....
FFE	831	A8-6ZA-19C-170	6ZA-1 YFEENC	.BC.....
FFE	831	A8-8ZA-190-030	8ZA-1 FEUNM	A.....
FFE	831	A8-8ZA-191-030	8ZA-1 YFEUNM
FFE	831	A8-8ZA-193-070	8ZA-1 YFEUNC
J	831	87-A60-202-010	TERMINAL,ANT 4P MSP-154V-02	A.....
J	832	87-A60-403-010	TERMINAL,ANT PAL 2P HSP-312V05	.BCD.....
J	940	81-754-629-010	CONNECTOR, 2P	A.....
L	832	87-005-847-080	COIL,2.2UH(CECS)	ABCD.....
L	942	87-A50-019-010	COIL,OSC LW(COI)	.BCD.....
L	941	87-A50-020-010	COIL,ANT LW(COI)	.BCD.....
L	941	87-A50-022-010	COIL,ANT SW(COI)	A.....
L	944	87-A50-159-010	COIL,10MH K C2B	A.....
L	943	87-A50-522-080	COIL,1MH K CEC	A.....
L	942	87-A50-550-010	COIL,OSC SW-2N(COI)	A.....
L	952	87-A50-430-010	COIL,ANT MW(3BSW)	A.....
L	953	87-A50-431-010	COIL,OSC MW(3BSW)	A.....

ELECTRICAL MAIN PARTS LIST - 17/21

L	951	8A-NF8-667-010	COIL,AM PACK 4(TOK)
L	951	8A-NF8-668-010	COIL,AM PACK 2(TOK)	.BCD.....
TC	943	87-011-253-080	TRIMER,30P LAR	A.....
TC	942	87-011-253-080	TRIMER,30P LAR	.BCD.....
TC	941	87-011-254-080	TRIMER,20P LAR	A.....
*		8A-NF6-631-110	PWB,COMB MAIN ANF-6	ABCD.....
C	3	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	4	87-012-368-080	C-CAP,S 0.1-50 F	ABCD.....
C	25	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	27	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	28	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	26	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	22	87-016-658-000	CAP,E 4700-35 M SMG	ABCD.....
C	21	87-016-658-000	CAP,E 4700-35 M SMG	ABCD.....
C	32	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	39	87-010-247-080	CAP, ELECT 100-50V	ABCD.....
C	38	87-010-247-080	CAP, ELECT 100-50V	ABCD.....
C	34	87-010-247-080	CAP, ELECT 100-50V	ABCD.....
C	31	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	33	87-010-263-080	CAP, ELECT 100-10V
C	36	87-010-381-080	CAP, ELECT 330-16V	ABCD.....
C	35	87-010-406-080	CAP, ELECT 22-50	ABCD.....
C	40	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	60	87-010-403-080	CAP, ELECT 3.3-50V	ABCD.....
C	82	87-010-260-080	CAP, ELECT 47-25V	ABCD.....
C	81	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	80	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
CN	1	87-A60-996-010	CONN,13P V BLK TAC-L13X-A3	ABCD.....
CN	91	87-A60-109-010	CONN,2P V S2M-2W	ABCD.....
CNA	2	8A-NF6-630-110	CONN ASSY,3P (VM) ANF-6	ABCD.....
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	ABCD.....
C	609	87-010-181-080	CAP,CHIP S 1800P	ABCD.....
C	610	87-010-181-080	CAP,CHIP S 1800P	ABCD.....
C	616	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	613	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	619	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	618	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	611	87-010-956-080	CHIP-CAP,S 0.068-25B	ABCD.....
C	617	87-012-369-080	C-CAP,S 0.047-50F	ABCD.....
C	612	87-016-369-080	C-CAP,S 0.033-25 B K	ABCD.....
C	614	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	621	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	627	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	628	87-010-400-080	CAP, ELECT 0.47-50V	ABCD.....
C	623	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	624	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	629	87-010-596-080	CAP, S 0.047-16	ABCD.....
C	626	87-010-596-080	CAP, S 0.047-16	ABCD.....
C	620	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	631	87-010-185-080	C-CAP,S 3900P-50 B	ABCD.....
C	632	87-010-185-080	C-CAP,S 3900P-50 B	ABCD.....
C	634	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	630	87-010-383-080	CAP, ELECT 33-25V	ABCD.....
C	639	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	635	87-A10-307-080	CAP,M 0.1-50 J	ABCD.....
C	637	87-A10-307-080	CAP,M 0.1-50 J	ABCD.....
C	638	87-A10-307-080	CAP,M 0.1-50 J	ABCD.....
C	636	87-A10-307-080	CAP,M 0.1-50 J	ABCD.....
C	643	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	641	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	644	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	642	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	679	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	673	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
C	671	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
C	672	87-010-322-080	C-CAP,S 100P-50 CH	ABCD.....
C	682	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	680	87-010-197-080	CAP, CHIP 0.01 DM	ABCD.....
CN	602	87-099-194-010	CONN,6P 6216V	ABCD.....
CN	601	87-099-719-010	CONN,30P TYK-B(X)	ABCD.....
J	601	87-A60-885-010	JACK,PIN 6P R/W MSC	ABCD.....
C	507	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	506	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	502	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	501	87-010-263-080	CAP, ELECT 100-10V	ABCD.....
C	505	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	503	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	504	87-012-393-080	C-CAP,S 0.22-16 R K	ABCD.....
C	509	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	508	87-016-669-080	C-CAP,S 0.1-25 K B	ABCD.....
C	511	87-010-177-080	C-CAP,S 820P-50 SL	ABCD.....
C	517	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	518	87-010-183-080	C-CAP,S 2700P-50 B	ABCD.....
C	510	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCD.....
C	514	87-010-374-080	CAP, ELECT 47-10V	ABCD.....
C	515	87-010-401-080	CAP, ELECT 1-50V	ABCD.....
C	516	87-010-401-080	CAP, ELECT 1-50V	ABCD.....

ELECTRICAL MAIN PARTS LIST - 18/21

C	513	87-010-544-080	CAP, ELECT 0.1-50V	ABCD.....
C	512	87-012-141-080	CHIP-CAPACITOR,0.22-16F	ABCD.....
C	535	87-010-178-080	CHIP CAP 1000P	ABCD.....
C	536	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	532	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	533	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCD.....
C	538	87-010-318-080	C-CAP,S 47P-50 CH	ABCD.....
C	531	87-010-405-080	CAP, ELECT 10-50V	ABCD.....
C	534	87-012-156-080	C-CAP,S 220P-50 CH	ABCD.....
C	541	87-010-178-080	CHIP CAP 1000P	ABCD.....
CLP	501	87-A60-884-010	PIN,DIAL COATING-SHS	ABCD.....
FB	501	87-008-372-080	FILTER, EMI BL OIRNI	ABCD.....
Q	604	87-A30-075-080	C-TR,2SA1235F	A..D.....
Q	603	87-A30-076-080	C-TR,2SC3052F	A..D.....
Q	602	87-A30-076-080	C-TR,2SC3052F	A..D.....
Q	601	87-A30-087-080	C-FET,2SK2158	A..D.....
D	5	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	7	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	4	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	6	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	9	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	8	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	1	87-A40-547-090	DIODE,D5SBA20	ABCD.....
D	2	87-A40-673-090	DIODE,D10XB20	ABCD.....
D	16	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	17	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	18	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	19	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	12	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	10	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	13	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	11	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	15	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	14	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	21	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	20	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
Q	1	87-026-245-080	TR,DTC114ES	ABCD.....
Q	2	87-A30-198-080	TR,KTC3199GR	ABCD.....
D	101	87-A40-269-080	C-DIODE,MC2836	ABCD.....
D	103	87-A40-313-080	C-DIODE,MC 2840	ABCD.....
D	150	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	204	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	201	87-A40-269-080	C-DIODE,MC2836	ABCD.....
D	202	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	203	87-A40-313-080	C-DIODE,MC 2840	ABCD.....
D	401	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	402	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
D	403	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
IC	101	87-A21-418-010	IC,STK490-340	ABCD.....
IC	201	87-A21-396-010	IC,STK490-040	.BCD.....
IC	201	87-A21-397-010	IC,STK490-070	A....
Q	101	87-A30-107-070	C-TR,CMBT5401	ABCD.....
Q	102	87-A30-107-070	C-TR,CMBT5401	ABCD.....
Q	151	87-A30-106-040	C-TR,CMBT5551	ABCD.....
Q	150	87-A30-107-070	C-TR,CMBT5401	ABCD.....
Q	203	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	204	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	202	87-A30-107-070	C-TR,CMBT5401	ABCD.....
Q	201	87-A30-107-070	C-TR,CMBT5401	ABCD.....
Q	402	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	401	87-A30-075-080	C-TR,2SA1235F	ABCD.....
D	201	87-A40-748-080	ZENER,UZ5.6BSA	ABCD.....
D	304	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	306	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	301	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	303	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	302	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	305	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	311	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	313	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	312	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	314	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	317	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	318	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	319	87-A40-313-080	C-DIODE,MC 2840	ABCD.....
D	321	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	322	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	323	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	324	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
IC	202	87-A21-018-040	C-IC,M65849BFP631D	ABCD.....
IC	201	87-A21-018-040	C-IC,M65849BFP631D	ABCD.....
Q	308	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	307	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	303	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	304	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	305	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	306	87-A30-076-080	C-TR,2SC3052F	ABCD.....

ELECTRICAL MAIN PARTS LIST - 19/21

Q	302	87-A30-086-040	C-TR, CSD1306E	ABCD.....
Q	301	87-A30-086-040	C-TR, CSD1306E	ABCD.....
Q	319	87-A30-106-040	C-TR, CMBT5551	ABCD.....
Q	317	87-A30-107-070	C-TR, CMBT5401	ABCD.....
Q	318	87-A30-107-070	C-TR, CMBT5401	ABCD.....
Q	311	87-A30-190-080	TR, CC5551	ABCD.....
Q	312	87-A30-190-080	TR, CC5551	ABCD.....
Q	315	89-213-703-010	TR, 2SB1370F	ABCD.....
Q	316	89-213-703-010	TR, 2SB1370F	ABCD.....
Q	313	89-420-613-010	TR, 2SD2061F	ABCD.....
Q	314	89-420-613-010	TR, 2SD2061F	ABCD.....
Q	321	87-A30-075-080	C-TR, 2SA1235F	ABCD.....
Q	320	87-A30-075-080	C-TR, 2SA1235F	ABCD.....
D	105	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	107	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	101	87-020-465-080	DIODE, 1SS133 (110MA)	...D.....
D	106	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	108	87-A40-752-080	ZENER, UZ6.2BSC	A..D.....
D	302	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	304	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	305	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	301	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	306	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	303	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	308	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	309	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	307	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	312	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	316	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	313	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	314	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	311	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	310	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	318	87-020-465-080	DIODE, 1SS133 (110MA)	...D.....
D	315	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	324	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	325	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	320	87-020-465-080	DIODE, 1SS133 (110MA)	...D.....
D	328	87-020-465-080	DIODE, 1SS133 (110MA)	...D.....
D	326	87-020-465-080	DIODE, 1SS133 (110MA)	...D.....
D	327	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	330	87-020-465-080	DIODE, 1SS133 (110MA)	...D.....
D	381	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	382	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	383	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	384	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	385	87-A40-802-080	ZENER, UZ5.1BSC	A..D.....
D	401	87-020-465-080	DIODE, 1SS133 (110MA)	A..D.....
D	701	87-A40-269-080	C-DIODE, MC2836	A..D.....
D	901	87-020-465-080	DIODE, 1SS133 (110MA)	...D.....
IC	101	8A-NF6-605-010	C-IC, LC876572V-XXX	...D.....
IC	101	8A-NF6-610-010	C-IC, LC876564V-XXX	A.....
IC	251	87-A20-914-010	IC, SPS-442-1-F	A..D.....
IC	380	87-A21-577-040	C-IC, M61506FP	A..D.....
IC	402	87-070-289-040	IC, BU 2092F	A..D.....
IC	401	87-A21-021-040	C-IC, BU2099FV	A..D.....
Q	107	87-026-610-080	TR, KTC3198GR	A..D.....
Q	104	87-A30-074-080	C-TR, RT1P 141C	A..D.....
Q	105	87-A30-074-080	C-TR, RT1P 141C	A..D.....
Q	108	87-A30-074-080	C-TR, RT1P 141C	A..D.....
Q	102	87-A30-076-080	C-TR, 2SC3052F	A..D.....
Q	101	87-A30-087-080	C-FET, 2SK2158	A..D.....
Q	103	87-A30-468-080	C-TR, KRC102S-RTK	A..D.....
Q	401	87-A30-075-080	C-TR, 2SA1235F	A..D.....
Q	701	87-A30-329-080	TR, CD1585BC	A..D.....
Q	704	87-A30-495-080	TR, 2SA1981Y	A..D.....
Q	705	87-A30-495-080	TR, 2SA1981Y	A..D.....
D	801	87-A40-749-080	ZENER, UZ5.6BSB	A.....
IC	801	87-A21-051-040	C-IC, BU9990-03FS	A.....
D	353	87-020-465-080	DIODE, 1SS133 (110MA)	ABCD.....
D	352	87-020-465-080	DIODE, 1SS133 (110MA)	ABCD.....
IC	302	87-A20-355-010	IC, CXA1553P	..BCD.....
IC	303	87-A20-783-040	C-IC, BA7762AFS	ABCD.....
Q	357	87-026-609-080	TR, KTA1266GR	ABCD.....
Q	358	87-026-610-080	TR, KTC3198GR	ABCD.....
Q	359	87-026-610-080	TR, KTC3198GR	ABCD.....
Q	355	87-A30-063-080	C-TR, KRA104S	ABCD.....
Q	356	87-A30-076-080	C-TR, 2SC3052F	..BCD.....
Q	351	87-A30-087-080	C-FET, 2SK2158	ABCD.....
Q	353	87-A30-087-080	C-FET, 2SK2158	ABCD.....
Q	354	87-A30-087-080	C-FET, 2SK2158	ABCD.....
Q	361	87-A30-076-080	C-TR, 2SC3052F	ABCD.....
Q	383	87-A30-075-080	C-TR, 2SA1235F	A.....
Q	381	87-A30-076-080	C-TR, 2SC3052F	ABCD.....
Q	382	87-A30-076-080	C-TR, 2SC3052F	ABCD.....
Q	109	87-A30-076-080	C-TR, 2SC3052F	ABCD.....
Q	101	87-A30-076-080	C-TR, 2SC3052F	ABCD.....

ELECTRICAL MAIN PARTS LIST - 20/21

Q	103	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	107	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	102	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	108	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	104	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	106	87-A30-269-040	C-FET,2SJ461-T1	ABCD.....
Q	105	87-A30-269-040	C-FET,2SJ461-T1	ABCD.....
Q	113	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	110	87-A30-076-080	C-TR,2SC3052F	ABCD.....
D	804	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	991	87-017-149-080	ZENER,HZS6A2L	ABCD.....
D	992	87-020-465-080	DIODE,1SS133 (110MA)	.BCD.....
IC	991	87-070-127-110	IC,LC72131 D	ABCD.....
Q	981	87-A30-234-080	TR,CSC4115BC	ABCD.....
D	801	87-020-465-080	DIODE,1SS133 (110MA)	.BCD.....
D	803	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
IC	801	87-A21-560-010	IC,LA1844L-A	ABCD.....
Q	801	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	802	87-A30-076-080	C-TR,2SC3052F	ABCD.....
IC	861	87-A20-440-040	C-IC,BU1920FS	.BCD.....
Q	863	87-A30-076-080	C-TR,2SC3052F	.BCD.....
Q	861	87-A30-076-080	C-TR,2SC3052F	.BCD.....
D	944	87-020-465-080	DIODE,1SS133 (110MA)	.BCD.....
D	941	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	942	87-A40-270-080	C-DIODE,MC2838	.BCD.....
Q	836	87-A30-489-080	C-TR,KRA107S	ABCD.....
Q	837	87-A30-489-080	C-TR,KRA107S	A.....
Q	835	89-327-143-080	TR,2SC2714 (0.1W)	ABCD.....
Q	942	87-A30-075-080	C-TR,2SA1235F	A.....
Q	943	87-A30-075-080	C-TR,2SA1235F	A.....
Q	945	87-A30-076-080	C-TR,2SC3052F	A.....
Q	949	87-A30-076-080	C-TR,2SC3052F	A.....
Q	944	87-A30-076-080	C-TR,2SC3052F	A.....
Q	948	87-A30-086-070	C-TR,CSD1306E	ABCD.....
Q	946	87-A30-086-070	C-TR,CSD1306E	A.....
Q	941	87-A30-484-080	C-TR,KRA102S	A.....
Q	950	87-A30-086-070	C-TR,CSD1306E	A.....
Q	952	87-A30-086-070	C-TR,CSD1306E	.BCD.....
Q	951	87-A30-484-080	C-TR,KRA102S	ABCD.....
Q	953	89-503-602-080	C-FET,2SK360E	ABCD.....
D	1	87-A40-547-090	DIODE,D5SBA20	.BCD.....
D	1	87-A40-673-090	DIODE,D10XB20	A.....
D	25	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
D	26	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
D	27	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
D	28	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
D	29	87-A40-784-080	ZENER,UZ39BSB	ABCD.....
D	35	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	34	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	32	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	30	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	33	87-A40-553-080	DIODE,1N4003 LES	ABCD.....
D	31	87-A40-764-080	ZENER,UZ10BSC	ABCD.....
D	60	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	64	87-A40-269-080	C-DIODE,MC2836	ABCD.....
D	63	87-A40-270-080	C-DIODE,MC2838	ABCD.....
D	62	87-A40-313-080	C-DIODE,MC 2840	ABCD.....
D	61	87-A40-313-080	C-DIODE,MC 2840	ABCD.....
D	65	87-A40-768-080	ZENER,UZ16BSA	ABCD.....
D	84	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	85	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
Q	2	87-026-609-080	TR,KTA1266GR	ABCD.....
Q	5	87-026-610-080	TR,KTC3198GR	ABCD.....
Q	7	87-A30-075-080	C-TR,2SA1235F
Q	8	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	6	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	9	87-A30-318-080	TR,CSA952K	ABCD.....
Q	10	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	13	89-213-702-010	TR,2SB1370 (1.8W)	ABCD.....
Q	14	89-213-702-010	TR,2SB1370 (1.8W)	ABCD.....
Q	11	89-213-702-010	TR,2SB1370 (1.8W)	ABCD.....
Q	61	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	63	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	64	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	60	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	62	87-A30-076-080	C-TR,2SC3052F	ABCD.....
Q	84	87-026-609-080	TR,KTA1266GR	ABCD.....
Q	81	87-A30-076-080	C-TR,2SC3052F	ABCD.....
D	603	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	602	87-A40-745-080	ZENER,UZ4.7BSA	ABCD.....
IC	601	87-A21-452-030	C-IC,BD3876KS2	ABCD.....
Q	601	87-026-610-080	TR,KTC3198GR	ABCD.....
Q	607	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	609	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	608	87-A30-075-080	C-TR,2SA1235F	ABCD.....
Q	606	87-A30-086-070	C-TR,CSD1306E	ABCD.....
Q	605	87-A30-086-070	C-TR,CSD1306E	ABCD.....

ELECTRICAL MAIN PARTS LIST - 21/21

Q	603	87-A30-087-080	C-FET, 2SK2158	.BCD.....
Q	602	87-A30-269-040	C-FET, 2SJ461-T1	.BCD.....
D	501	87-A40-747-080	ZENER, UZ5.1BSB	ABCD.....
IC	501	87-A21-018-040	C-IC, M65849BFP631D	ABCD.....
Q	532	87-A30-075-080	C-TR, 2SA1235F	ABCD.....
Q	531	87-A30-076-080	C-TR, 2SC3052F	ABCD.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

80HRJSMXX.....	A.....
83KSEXX.....	B.....
83EZSEXX.....	C.....
83EZSMXX.....	D.....

REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	8A-NF6-002-010		CABI,FR H	A.....
	8A-NF6-003-010		CABI,BOTTOM	A.CD.....
	8A-NF6-004-110		CABI,STEEL	ABCD.....
	8A-NF6-005-010		PANEL, TOP	ABCD.....
	8A-NF6-006-010		BOX,CASS 1	A..D.....
	8A-NF6-007-010		BOX,CASS 2	A..D.....
	8A-NF6-008-010		PANEL, TRAY	ABCD.....
	8A-NF6-009-010		PANEL, CD	A..D.....
	8A-NF6-010-010		PANEL,DIRECT	A..D.....
	8A-NF6-011-010		PANEL,FR U
	8A-NF6-012-010		PANEL,FR H	A.....
	8A-NF6-013-010		PANEL,FR EZ	...D.....
	8A-NF6-014-010		WINDOW,DISPLAY H Z83
	8A-NF6-015-010		WINDOW,DISPLAY U
	8A-NF6-016-010		WINDOW,DISPLAY H	A.....
	8A-NF6-017-010		WINDOW,DISPLAY EZ Z80
	8A-NF6-018-010		WINDOW,CASS 1	A..D.....
	8A-NF6-019-010		WINDOW,CASS 2	A..D.....
	8A-NF6-033-010		WINDOW,DISPLAY EZ Z83	...D.....
	8A-NF6-041-010		RING,VOL	A..D.....
	8A-NF6-049-010		CABI,BOTTOM K	.B.....
	8A-NF6-051-010		PANEL,REAR U
	8A-NF6-052-010		PANEL,REAR LH
	8A-NF6-053-010		PANEL,REAR EZ	.BCD.....
	8A-NF6-055-010		PANEL,REAR HR	A.....
	8A-NF6-059-010		WINDOW,DISP H Z80E
	8A-NF6-081-010		COVER, REAR USM
	8A-NF6-082-010		COVER, REAR LHSM
	8A-NF6-083-010		COVER, REAR EZSM
	8A-NF6-084-010		COVER, REAR KSM Z83
	8A-NF6-085-010		COVER, REAR HRJSM	A.....
	8A-NF6-086-010		COVER, REAR SPEC LABEL
	8A-NF6-087-010		COVER, REAR LHSM Z83
	8A-NF6-088-010		COVER, REAR EZSE Z83	..C.....
	8A-NF6-089-010		COVER, REAR KSE Z83	.B.....
	8A-NF6-090-010		COVER, REAR EZSE
	8A-NF6-091-010		COVER, REAR EZSM Z83	...D.....
	8A-NF6-092-010		COVER, REAR US
	8A-NF6-093-010		COVER, REAR LHS
*	8A-NF6-001-010		CABI,FR U	...D.....
	8A-NF6-022-010		KEY,ECHO	A..D.....
	8A-NF6-023-010		KEY,ASSY FUN	A..D.....
	8A-NF6-026-010		KEY,ASSY OPE	A..D.....
	8A-NF6-029-010		KEY,GEQ	A..D.....
	8A-NF6-030-010		KNOB,RTRY JOG	A..D.....
	8A-NF6-031-010		KEY,BBE U	A.....
	8A-NF6-034-010		KEY,SPICE	A.....
	8A-NF6-035-010		KEY,CD DIRECT	A..D.....
	8A-NF6-036-010		KEY,CD EDIT	A..D.....
	8A-NF6-037-010		KEY,CD OPEN	A..D.....
	8A-NF6-045-010		KEY,ASSY POWER	A..D.....
	8A-NF6-046-010		KEY,T-BASS EZ	...D.....
	8A-NF6-047-010		KEY,T-BASS U
	8A-NFT-007-010		KEY,ASSY PRO	A..D.....
	81-532-080-010		LABEL, CASS. COMPT	A..D.....
	8A-NF6-038-010		REFLECTOR,FL	A..D.....
	8A-NF6-039-010		REFLECTOR,DECK	A..D.....
	8A-NF6-040-010		REFLECTOR,VOL	A..D.....
	8A-NF6-042-010		REFLECTOR,ECO	A..D.....
	8A-NF6-044-010		REFLECTOR,CD	A..D.....
	87-NF6-615-010		CONN ASSY,3P PB	ABCD.....
	87-NF6-616-010		CONN ASSY,8P RPB	ABCD.....
	84-ZG1-245-210		CAP,OPTICAL	ABCD.....
	82-NF5-218-010		SPR-T,EJECT 1 (SIN)	ABCD.....
	82-NF5-219-010		SPR-T,EJECT 2 (SIN)	ABCD.....
	82-NF5-229-010		PLATE,LOCK	A..D.....
	86-NF9-224-010		SPR-C,LOCK	A..D.....
	87-064-185-010		HLDR,WIRE	ABCD.....
	87-084-077-010		NYLON RIVET, 3.5-4.5	ABCD.....
	87-NF4-216-010		HLDR,LOCK 1	A..D.....
	87-NF4-217-110		HLDR,LOCK 2	A..D.....
	87-NF4-221-010		HLDR,CABLE	ABCD.....
	8A-NF6-210-010		HLDR,IC6	ABCD.....
	8A-NF6-228-010		HLDR,PWB PT 96-75	ABCD.....
	8A-NF7-226-010		HLDR,IC2-T2	ABCD.....
	8Z-NF6-210-010		DMPR,150 N	A..D.....
*	8A-NF6-205-010		GUIDE,CD	A..D.....
*	8A-NF6-213-010		HLDR,HT-SINK L	ABCD.....

MECHANICAL PARTS LIST - 2/2


*		8A-NF6-214-010	HLDR,HT-SINK R	ABCD.....
*		8A-NF6-219-010	HLDR,FAN	ABCD.....
*		8A-NF7-209-010	HLDR,PWB-M BTM	ABCD.....
*		8A-NF8-206-010	HLDR,PWB M	ABCD.....
		87-067-579-010	TAPPING SCREW, BVT2+3-8	ABCD.....
		87-067-581-010	TAPPING SCREW, BVT2+3-15	ABCD.....
		87-067-688-010	BVTT+3-6	ABCD.....
		87-067-703-010	TAPPING SCREW, BVT2+3-10	ABCD.....
		87-067-758-010	BVT2+3-12 W/O SLOT	A..D.....
		87-067-975-010	S-SCREW,IT+4-8	ABCD.....
		87-591-094-410	TAPPING SCREW, QIT+3-6	ABCD.....
		87-591-095-410	TAPPING SCREW, QIT+3-8 (GLD)	ABCD.....
		87-721-097-410	QT2+3-12 GLD	ABCD.....
		87-723-096-410	QT2+3-10W/O SLOT BL	ABCD.....
		87-B10-091-010	UTT2+3-10 W/O BLK	ABCD.....
		87-NF4-224-010	S-SCREW,IT3B+3-8 CU	ABCD.....
		8A-NF6-201-010	GUIDE,FL	A..D.....
		8A-NF6-203-010	GUIDE,OPE	A..D.....
		8A-NF6-204-010	GUIDE,DECK	A..D.....
		87-067-001-010	FW,3.1-5.4-1	ABCD.....
		87-085-185-010	BUSHING, AC CORD (E)	ABCD.....
		87-085-189-010	BUSHING, CORD (U)
		87-099-811-010	PLUG,ADPTR CONV(K)	.B.....
		87-A80-105-010	AC CORD ASSY,AZ
		87-A91-711-010	FAN, 3110GL-B4W-B34-H02 -400MM	ABCD.....
		88-905-281-110	FF-CABLE, 5P 1.25 280MM	A..D.....
		88-906-621-110	FF-CABLE,6P 1.25 620MM	ABCD.....
		88-907-151-110	FF-CABLE, 7P 1.25 150MM	ABCD.....
		88-907-421-110	FF-CABLE,7P 1.25 420MM	A..D.....
		88-913-521-110	FF-CABLE,13P 1.25 520MM	ABCD.....
		88-915-111-110	FF-CABLE,15P 1.25	A..D.....
C	870	87-018-131-080	CAP, CER 1000P-50V	.BCD.....
D	691	87-020-465-080	DIODE,1SS133 (110MA)	ABCD.....
D	692	87-A40-745-080	ZENER,UZ4.7BSA	ABCD.....
PT	101	8A-NF6-621-010	PT,U EI96-60 ANF-6
PT	101	8A-NF6-622-010	PT,LH EI96-60 ANF-6	A.....
PT	101	8A-NF6-625-010	PT,E EI96-60 ANF-6	.BCD.....
W	101	87-A80-092-010	AC CORD ASSY,E BLK SUN FAI	A.CD.....
W	101	87-A80-110-010	AC CORD ASSY,U SPT-2W
W	101	87-A80-143-010	AC CORD ASSY,E BLK	.B.....
W	101	87-A80-155-010	AC CORD ASSY,HS TS
WH	101	87-A90-459-010	HLDR,WIRE 2.5-5P	ABCD.....
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	ABCD.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

80HRJSMXX.....	A.....
83KSEXX.....	B.....
83EZSEXX.....	C.....
83EZSMXX.....	D.....
REF.NO	PARTS NO. KANRI NO.	DESCRIPTION SUFFIX
	8A-NF6-901-010	IB,H(ECA)M A.....
	8A-NF6-902-010	IB,LH(ESP)M
	8A-NF6-903-010	IB,U(ESF)M
	8A-NF6-905-010	IB,K(E)E 83 .B.....
	8A-NF6-906-010	IB,EZ(9L)E 80,83 ..C.....
	8A-NF6-912-010	IB,LH(ESP)M 83
	8A-NF6-913-010	IB,U(ESF)I
	8A-NF6-915-010	IB,K(E)M
	8A-NF6-916-010	IB,EZ(9L)M 80,83 ...D.....
	8A-NF6-922-010	IB,LH(ESP)I 80
	8A-NF6-930-010	IB,IB,HA-KIT (ARG)
	87-006-225-010	AM LOOP ANT NC2 .BCD.....
	87-006-226-010	AM-LOOPANT C0 A.....
	87-043-115-010	ANT,FEEDER FM A.....
	87-A90-118-010	ANT,WIRE FM (Z) .BCD.....
	87-A90-119-010	ANT,WIRE SW(5M) A.....
	87-A91-017-010	PLUG,CONVERSION JT-0476 A.....
	8Z-NF8-701-210	RC UNIT,RC-ZAS01 ABCD.....

SCHEMATIC DIAGRAM – 1 (MAIN 1/3 : AMP SECTION : HR)

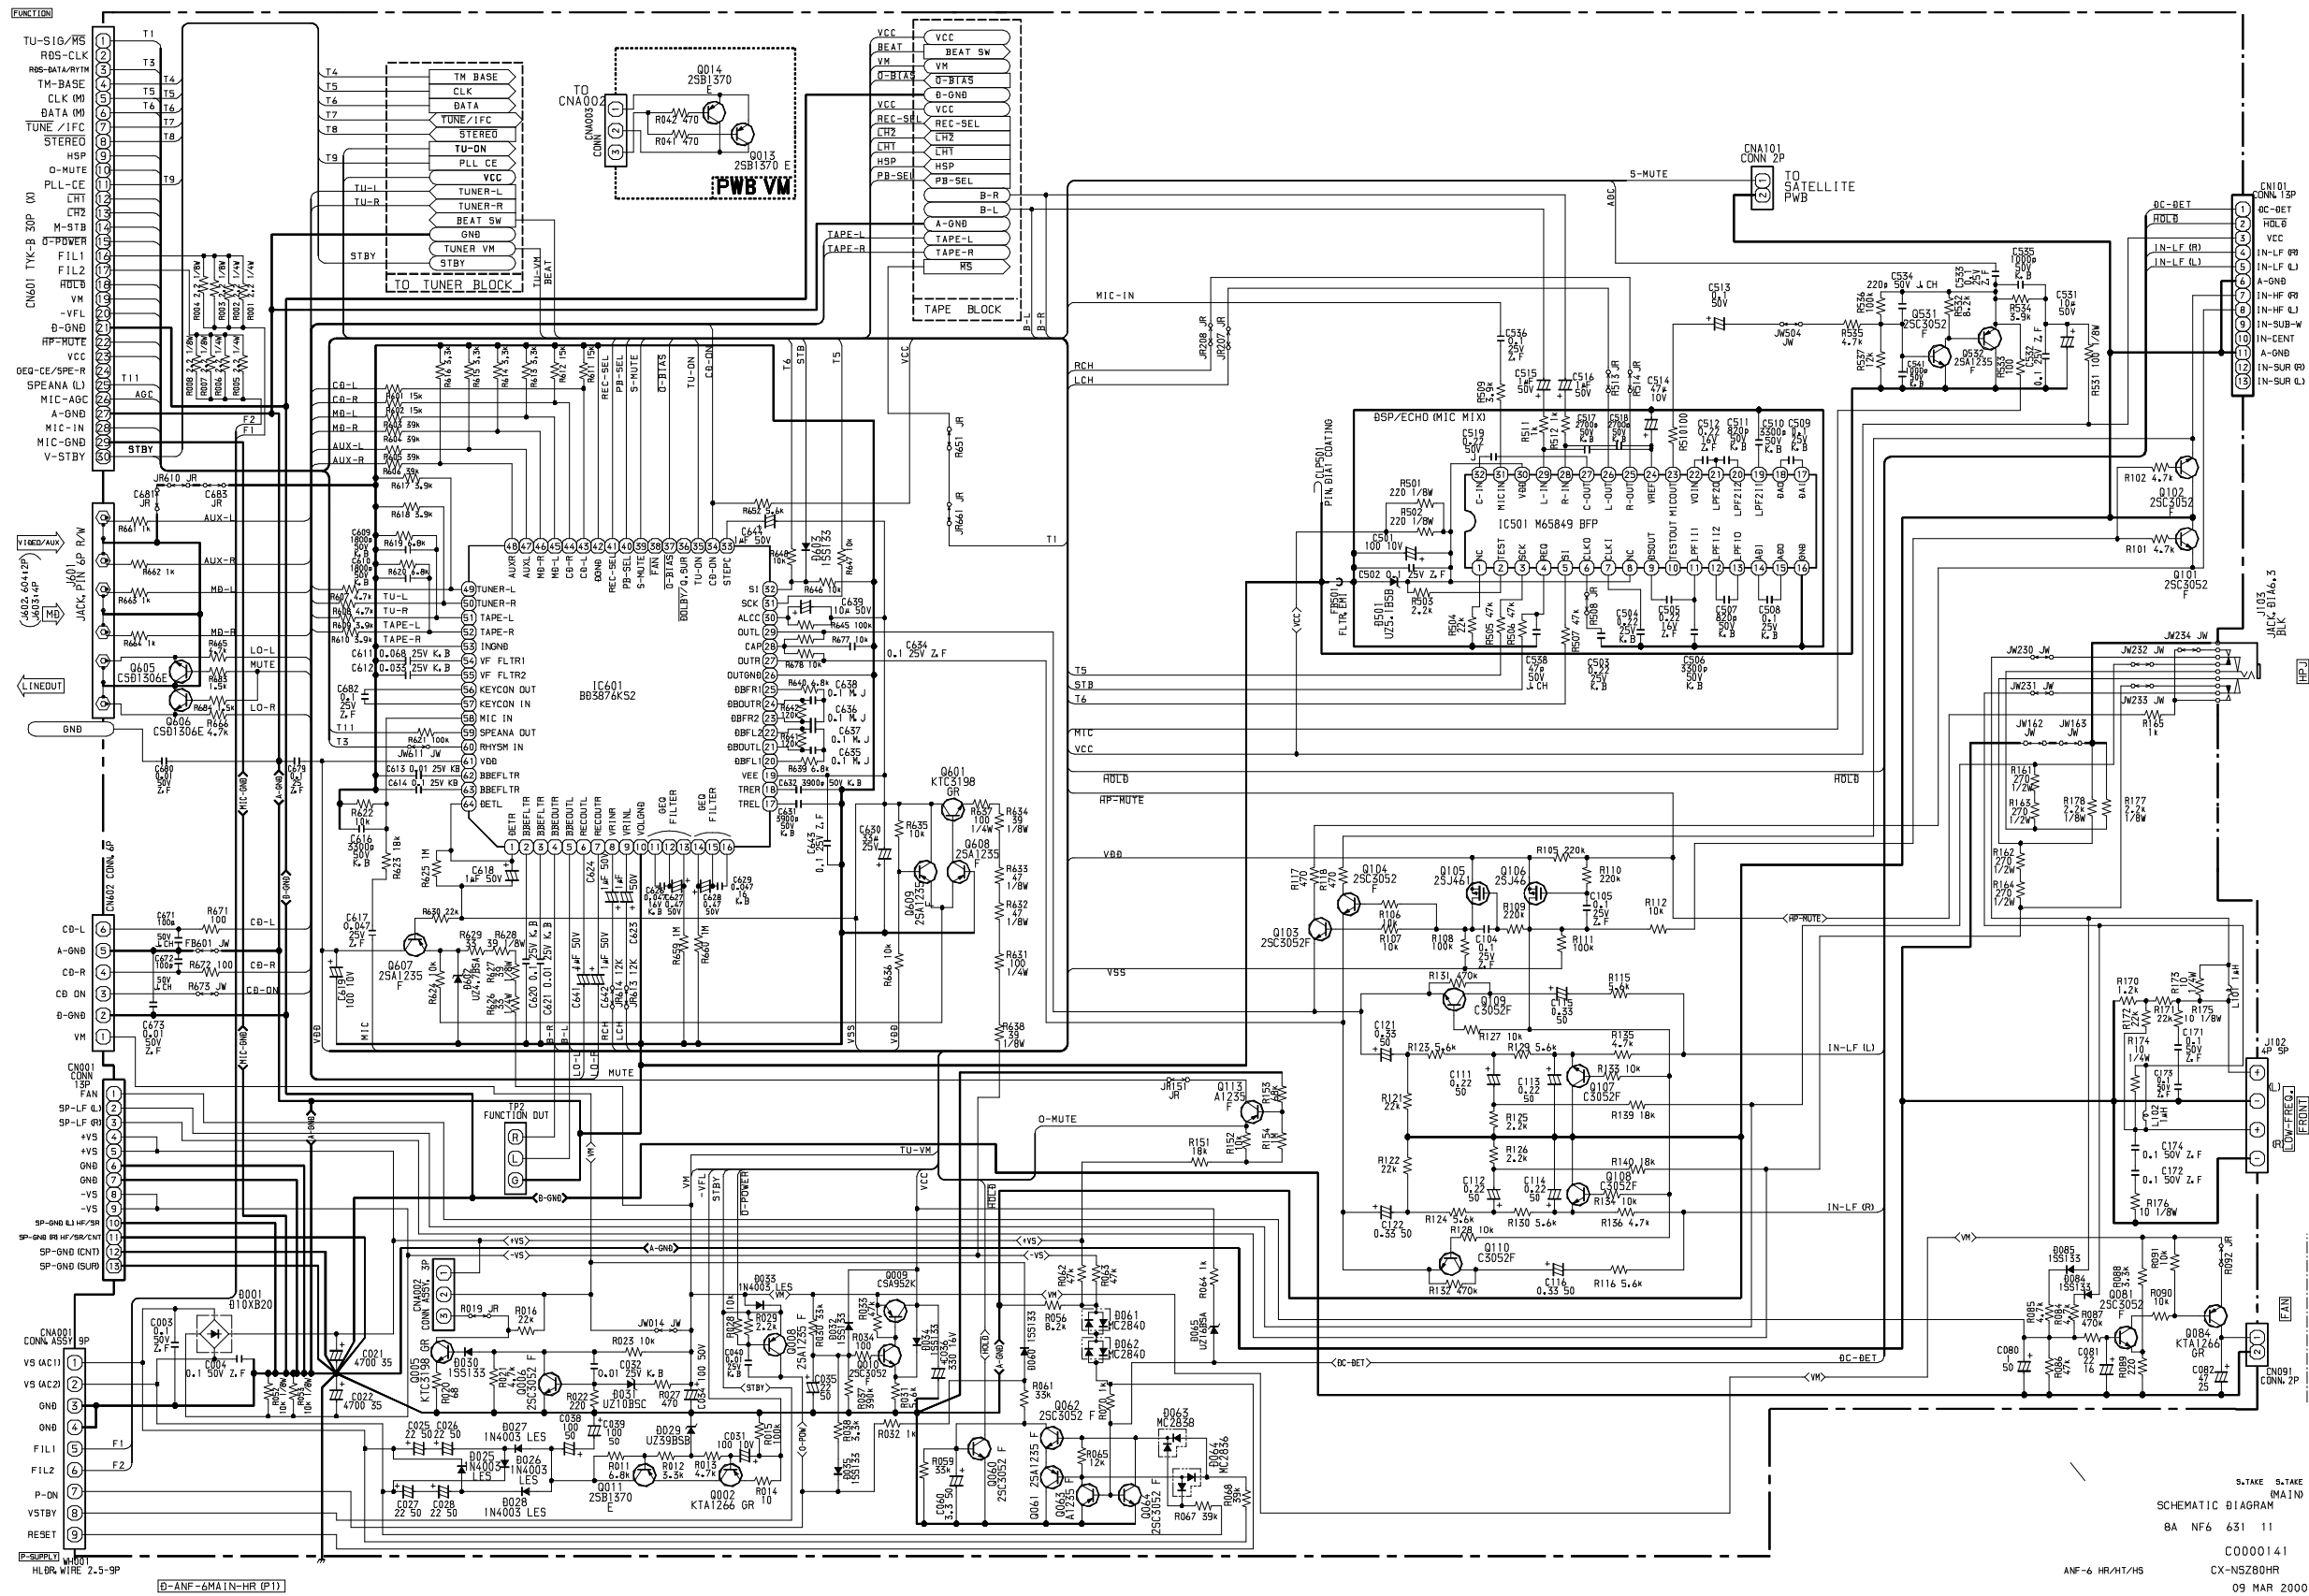

K



	USE BA7762AFS	USE HA12211
Q360	X	25K2158
R330	X	C-JR
R331	X	33K
JR336	X	C-JR

	EZ K MODEL	EXCEPT EZ K
Q356	25C3052F	X
R362	4.7K	X
R365	10K	X

S.T.


SCHEMATIC DIAG

S.TAKE S.TAKE
(DECK)
SCHEMATIC DIAGRAM
8A NF6 631 01
C0000142
ANF-6 HR/HT/HS CX-NSZ80 HR
09 MAR 2000


AM PACK

	PARTS NO./ PARTS CODE	
	U/LH, B/HB, V	EZ, K, G
1ST	8A-NF8-667-01 COIL, AM PACK4 (TOK)	8A-NF8-668-01 COIL, AM PACK (TOK)
2ND		
3RD		

*EXCEPT SW BAND MODEL (HE/HR/HC)

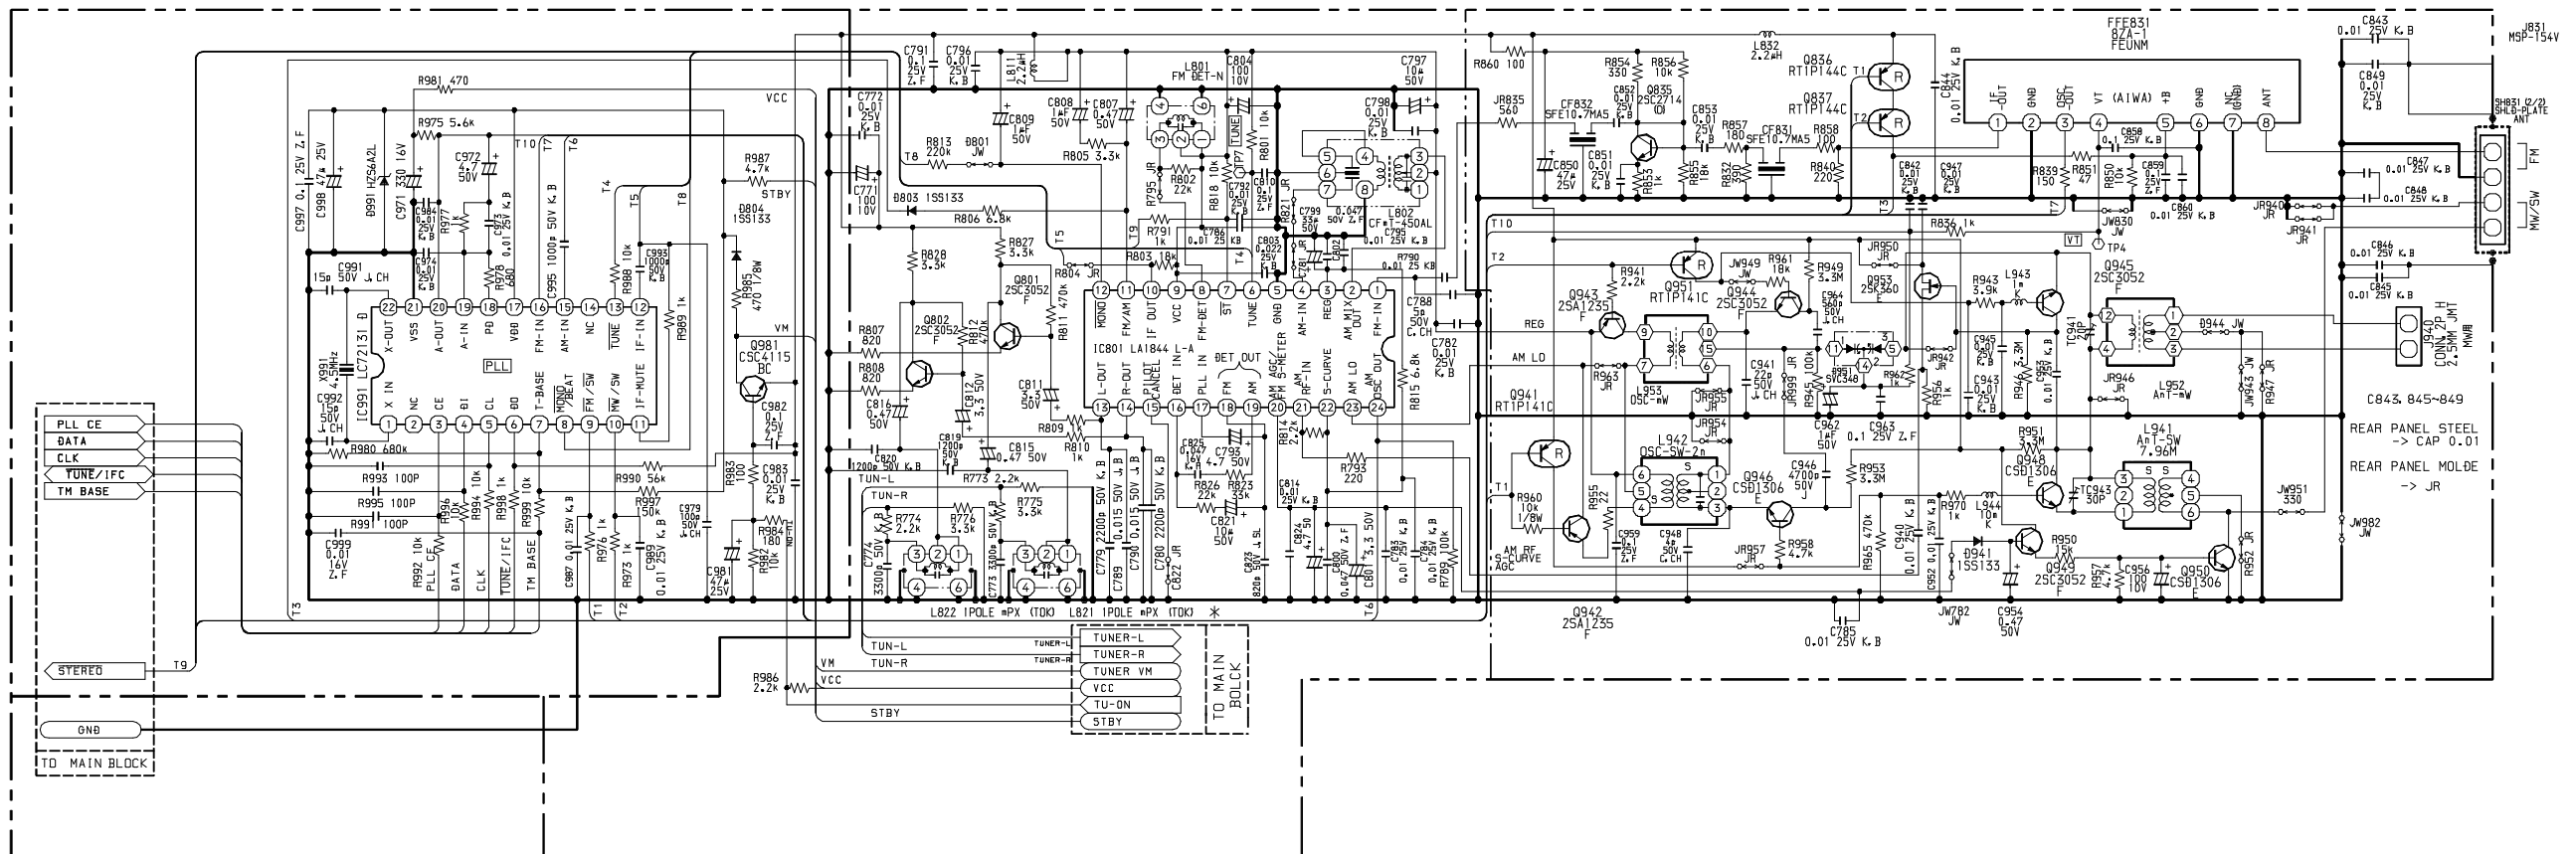


SCHEMATIC DIAGRAM – 4 (FRONT : HR)

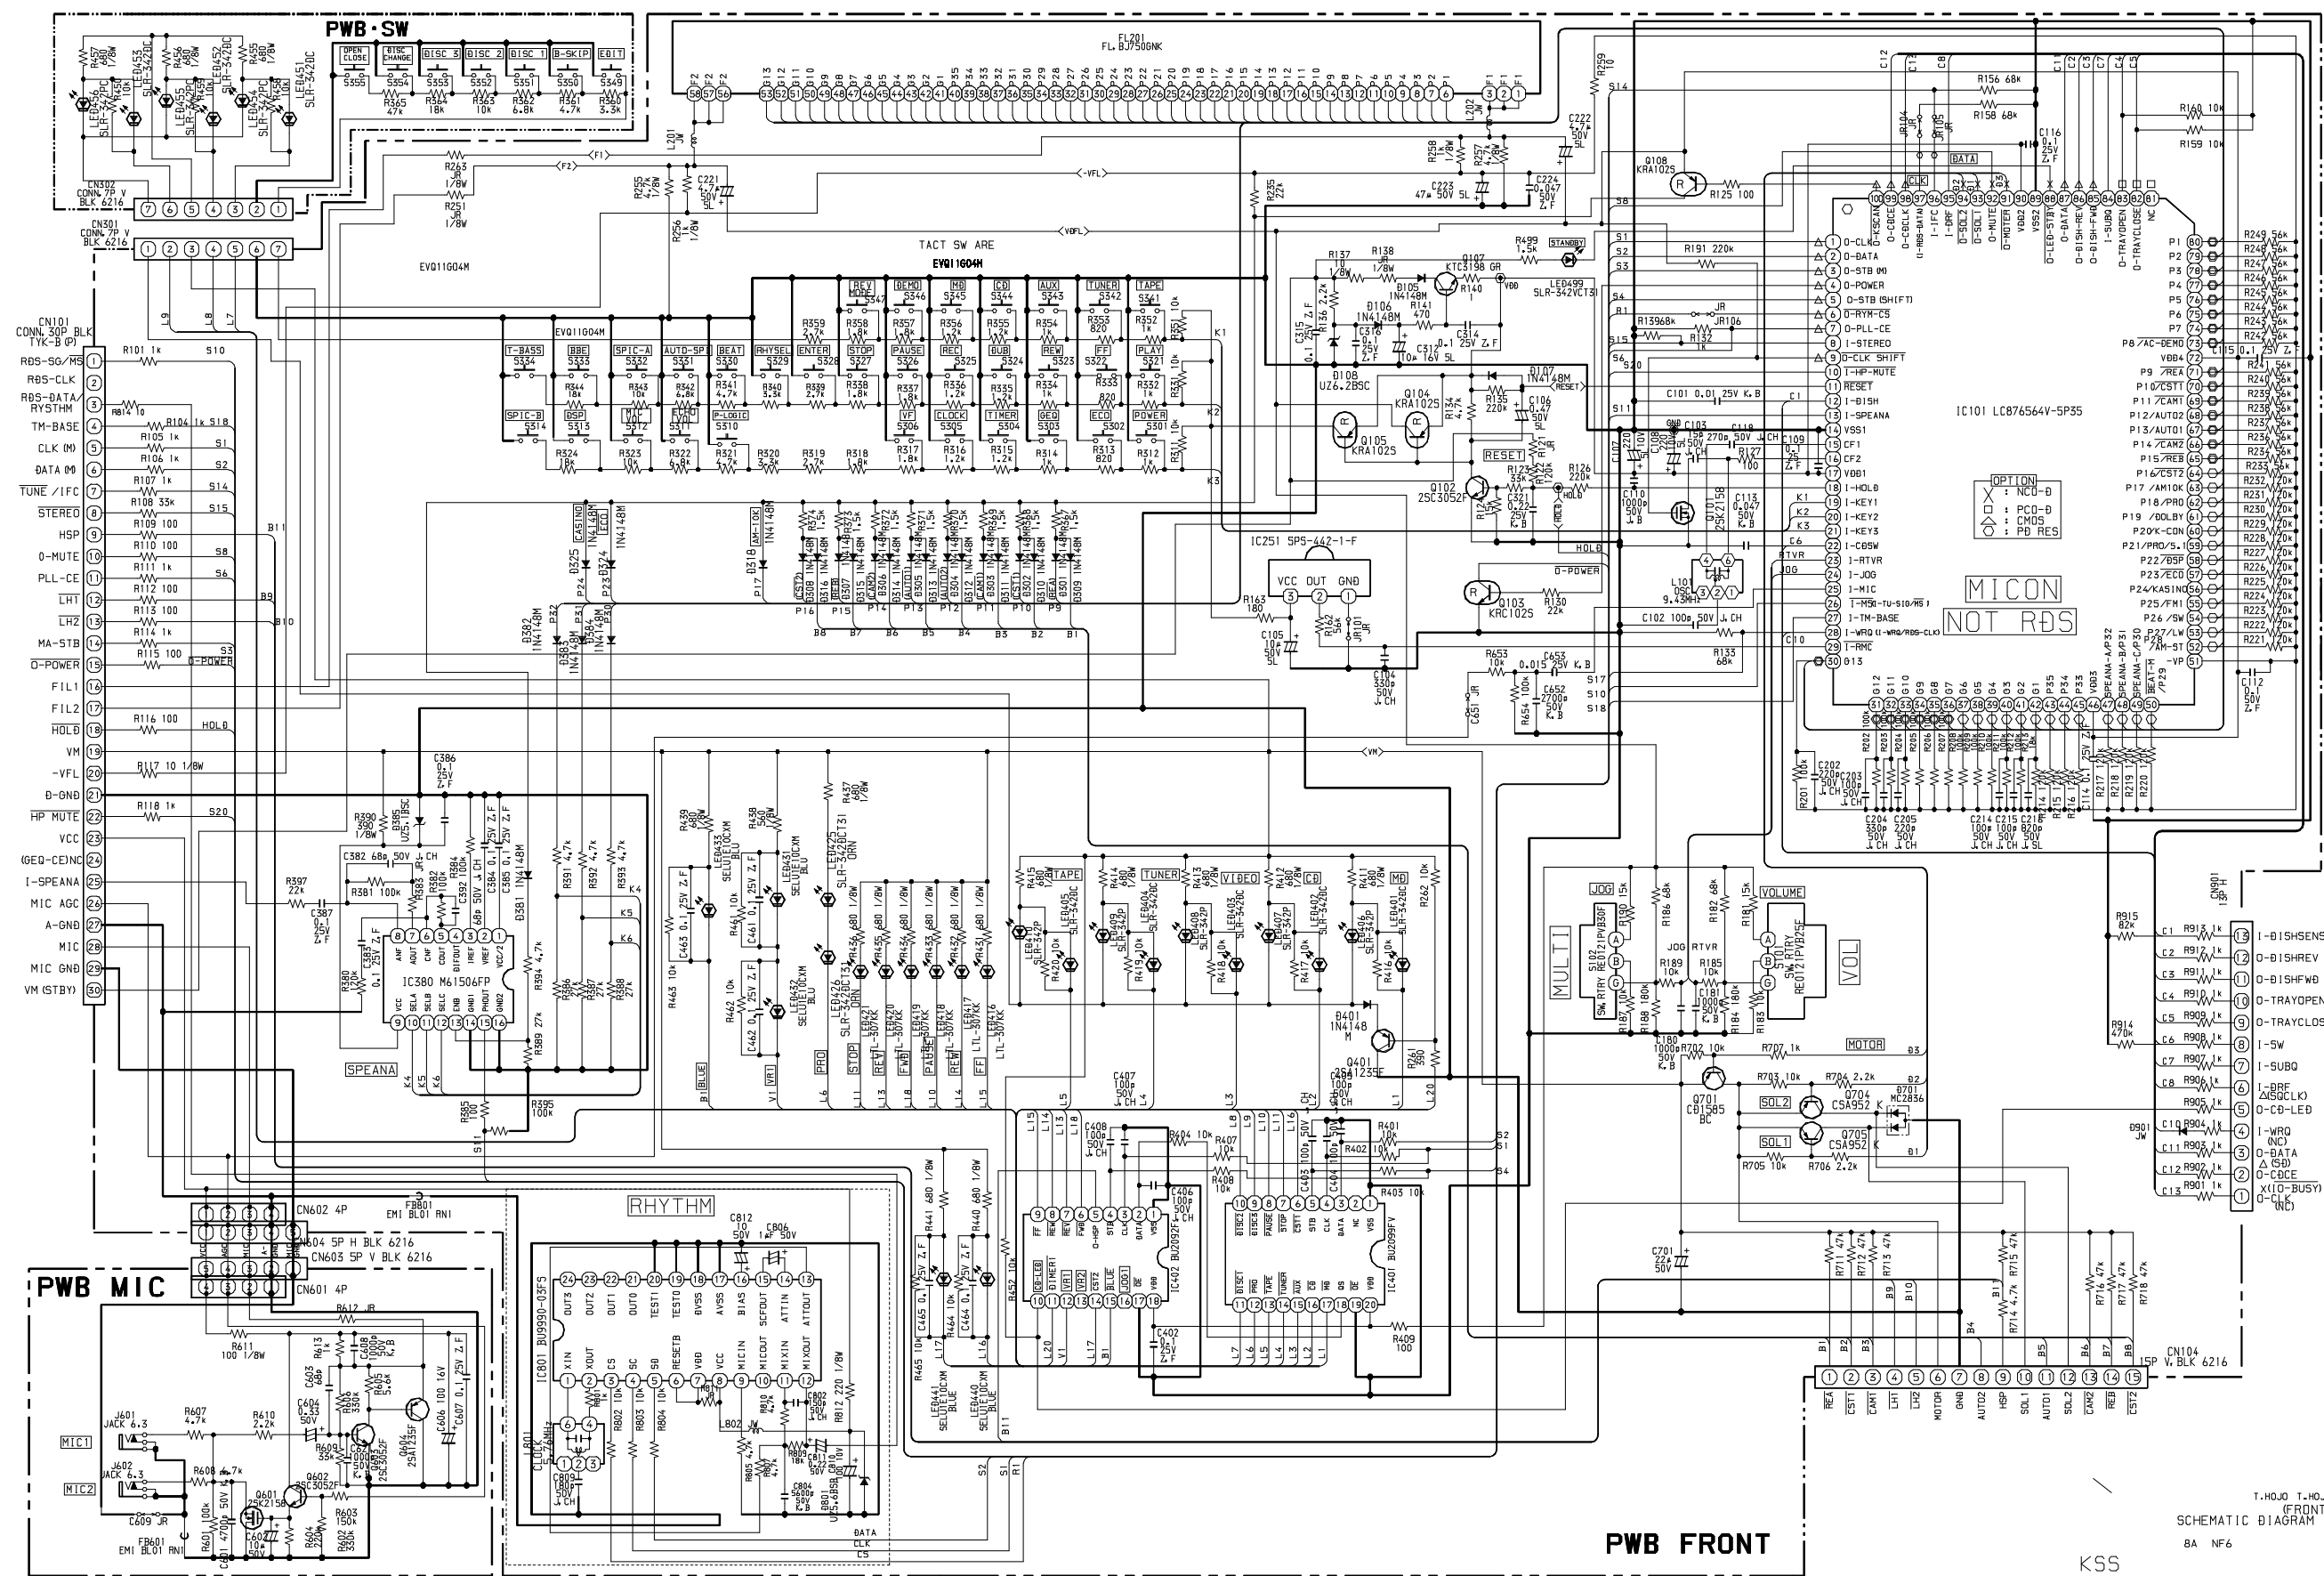


T-HOJO T-HOJO
(FRONT)
SCHEMATIC DIAGRAM
8A NF6

KSS
ANF-6 LH CX-NS280/B3 LHSN
8 JAN 2000


SCHEMATIC DIAGRAM – 5 (AMP SATELLITE : HR)

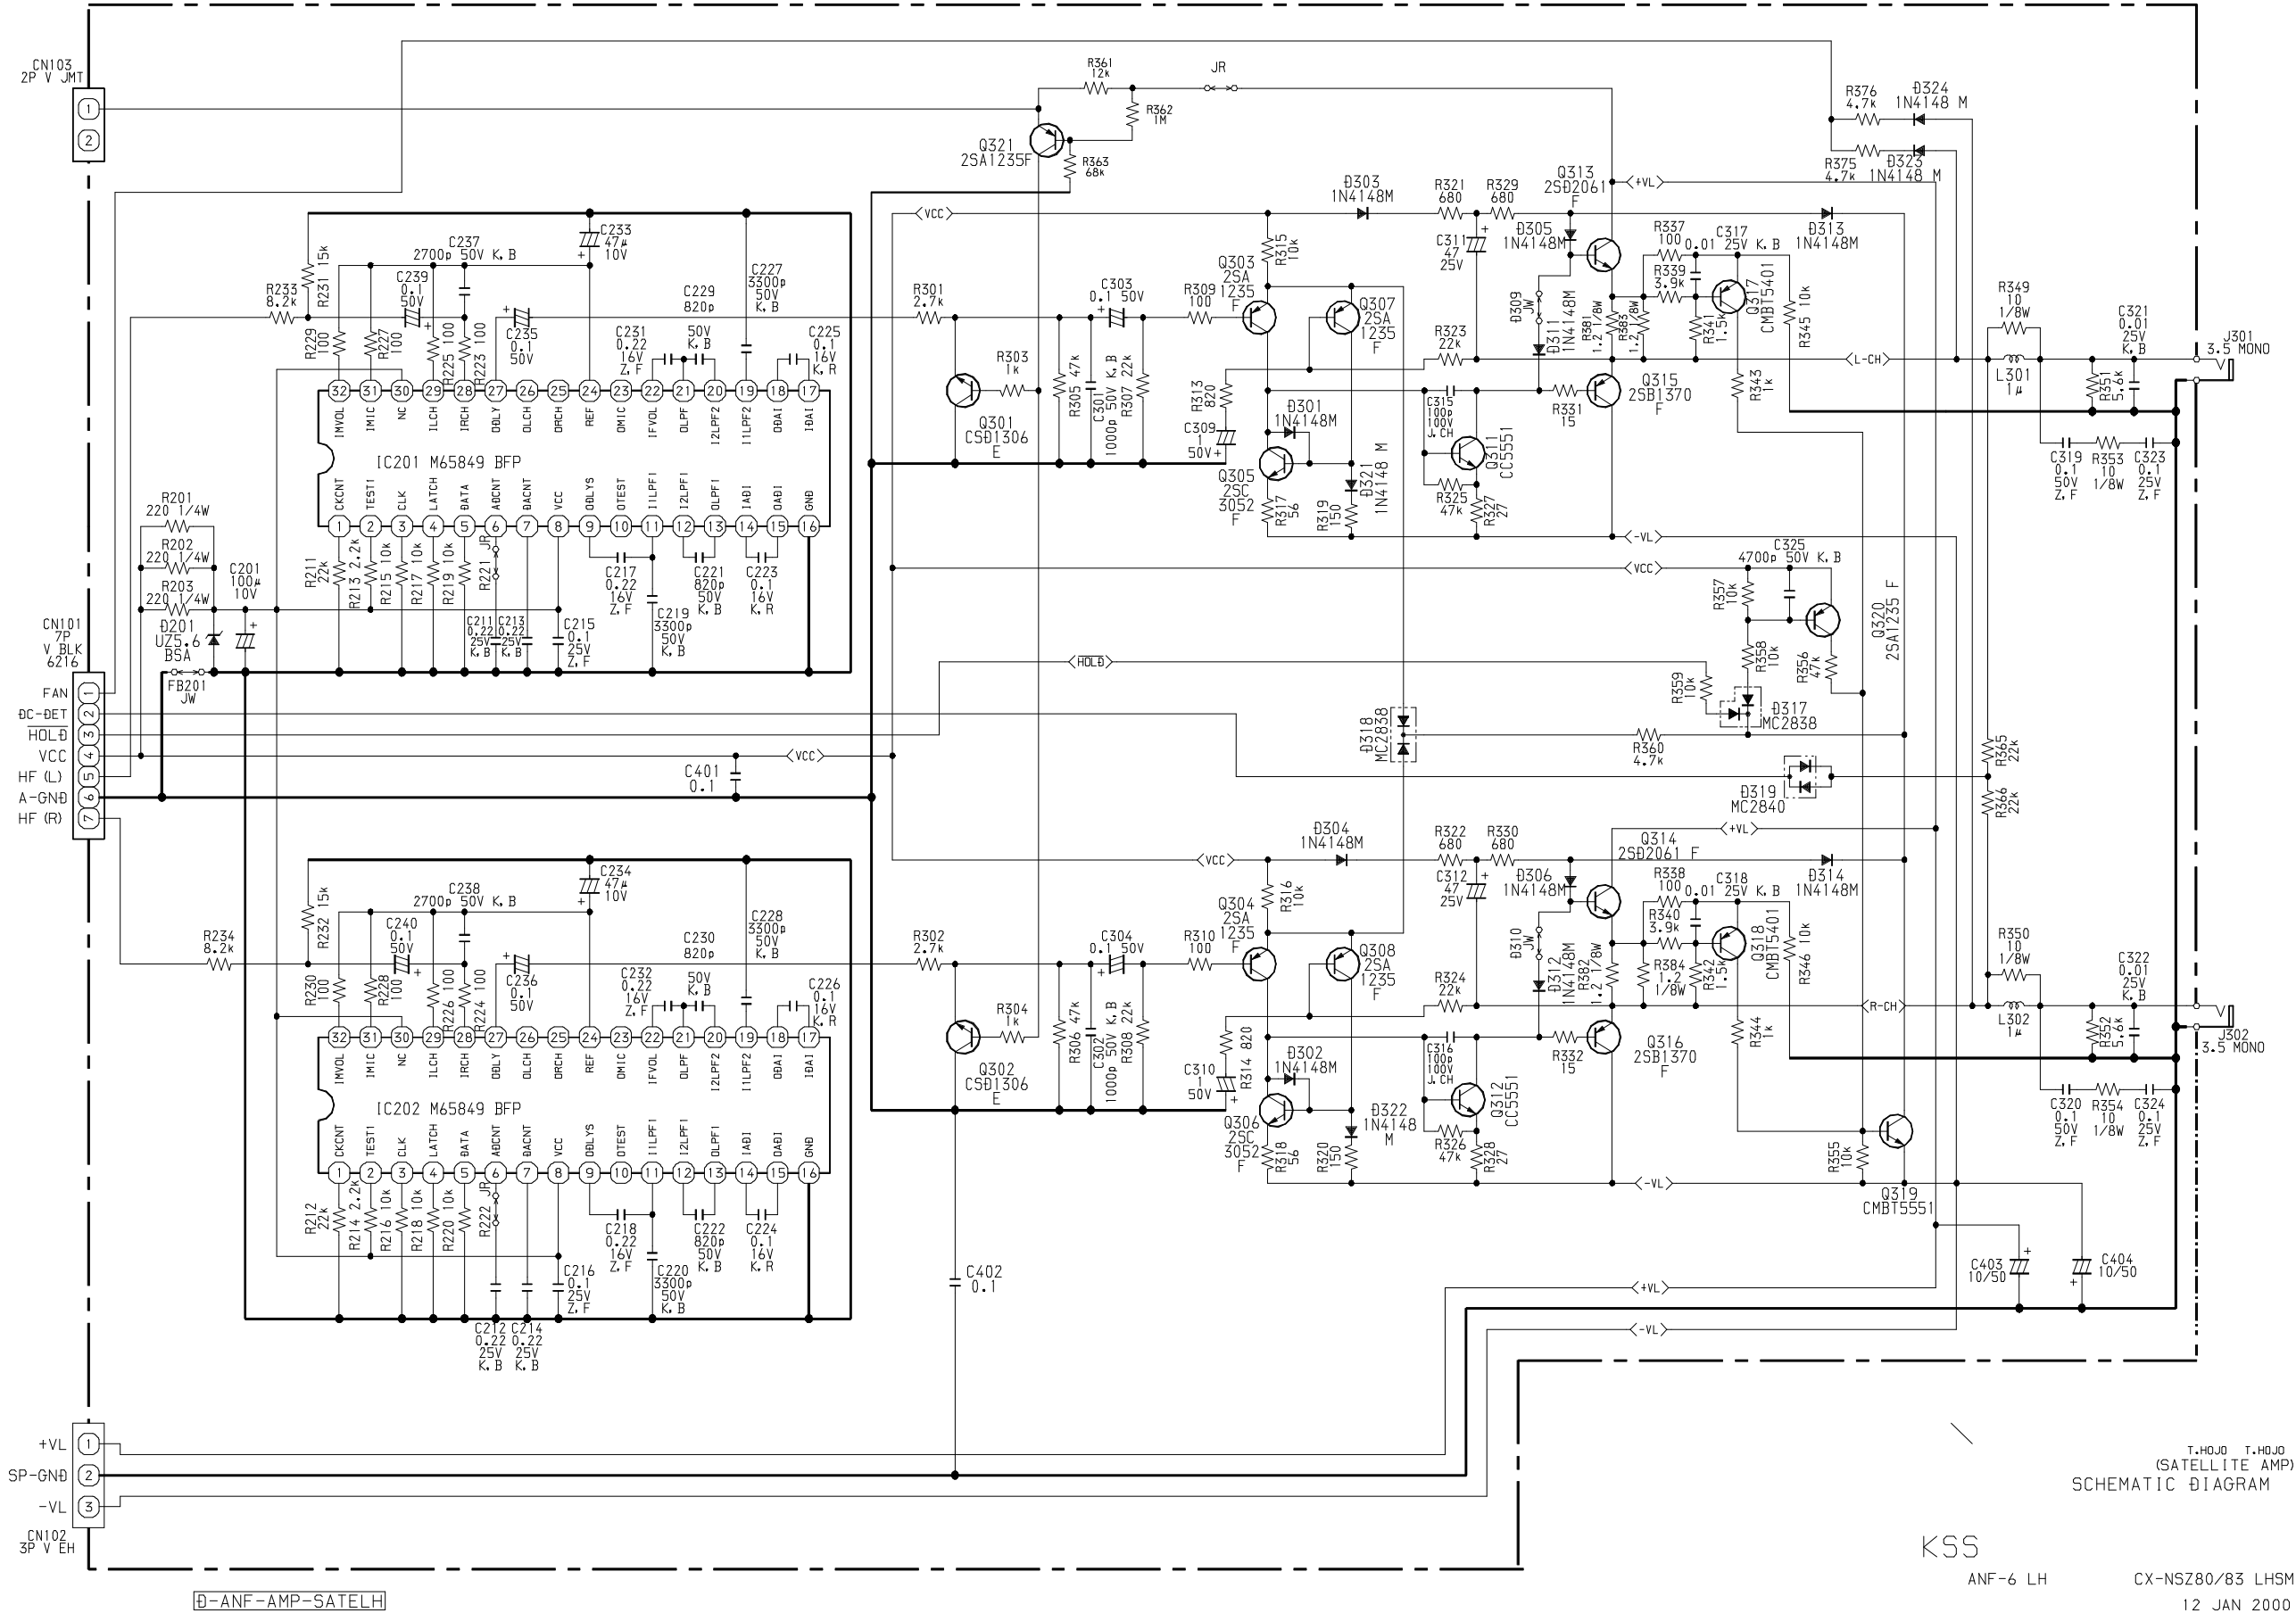


SCHEMATIC DIAGRAM – 6 (AMP 1F : HR)

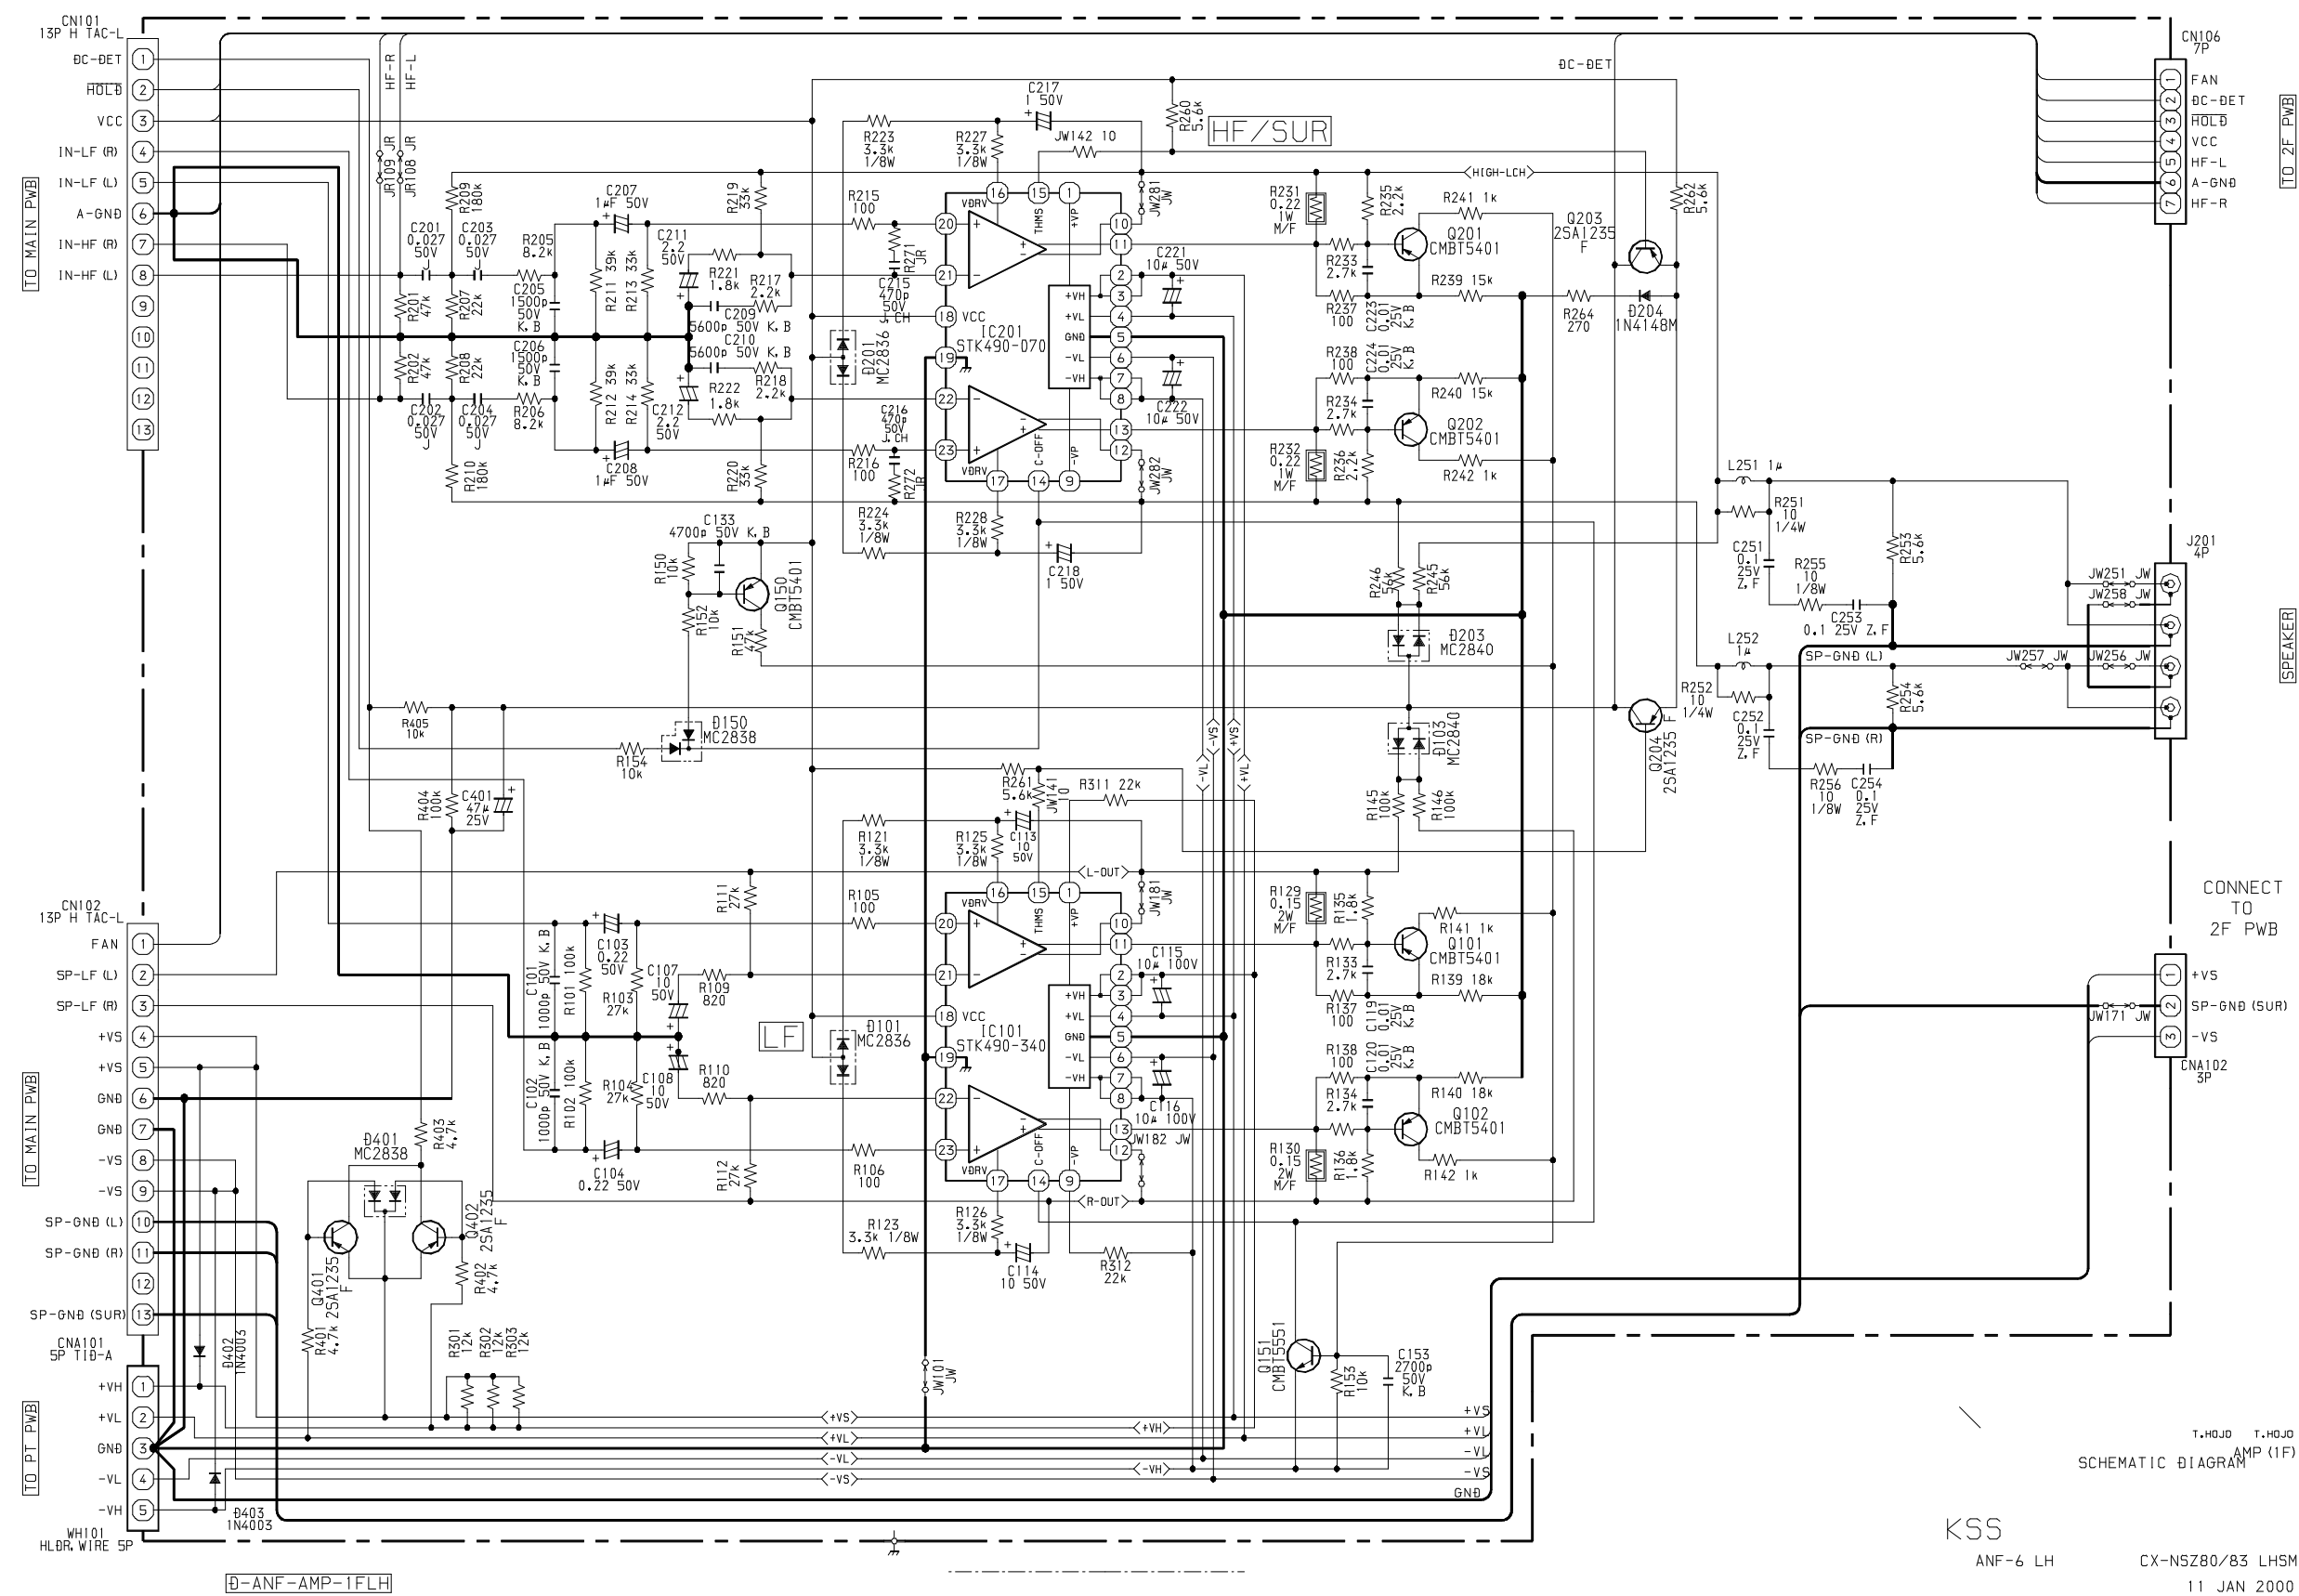

SCHEMATIC DIAGRAM – 7 (PT : HR)

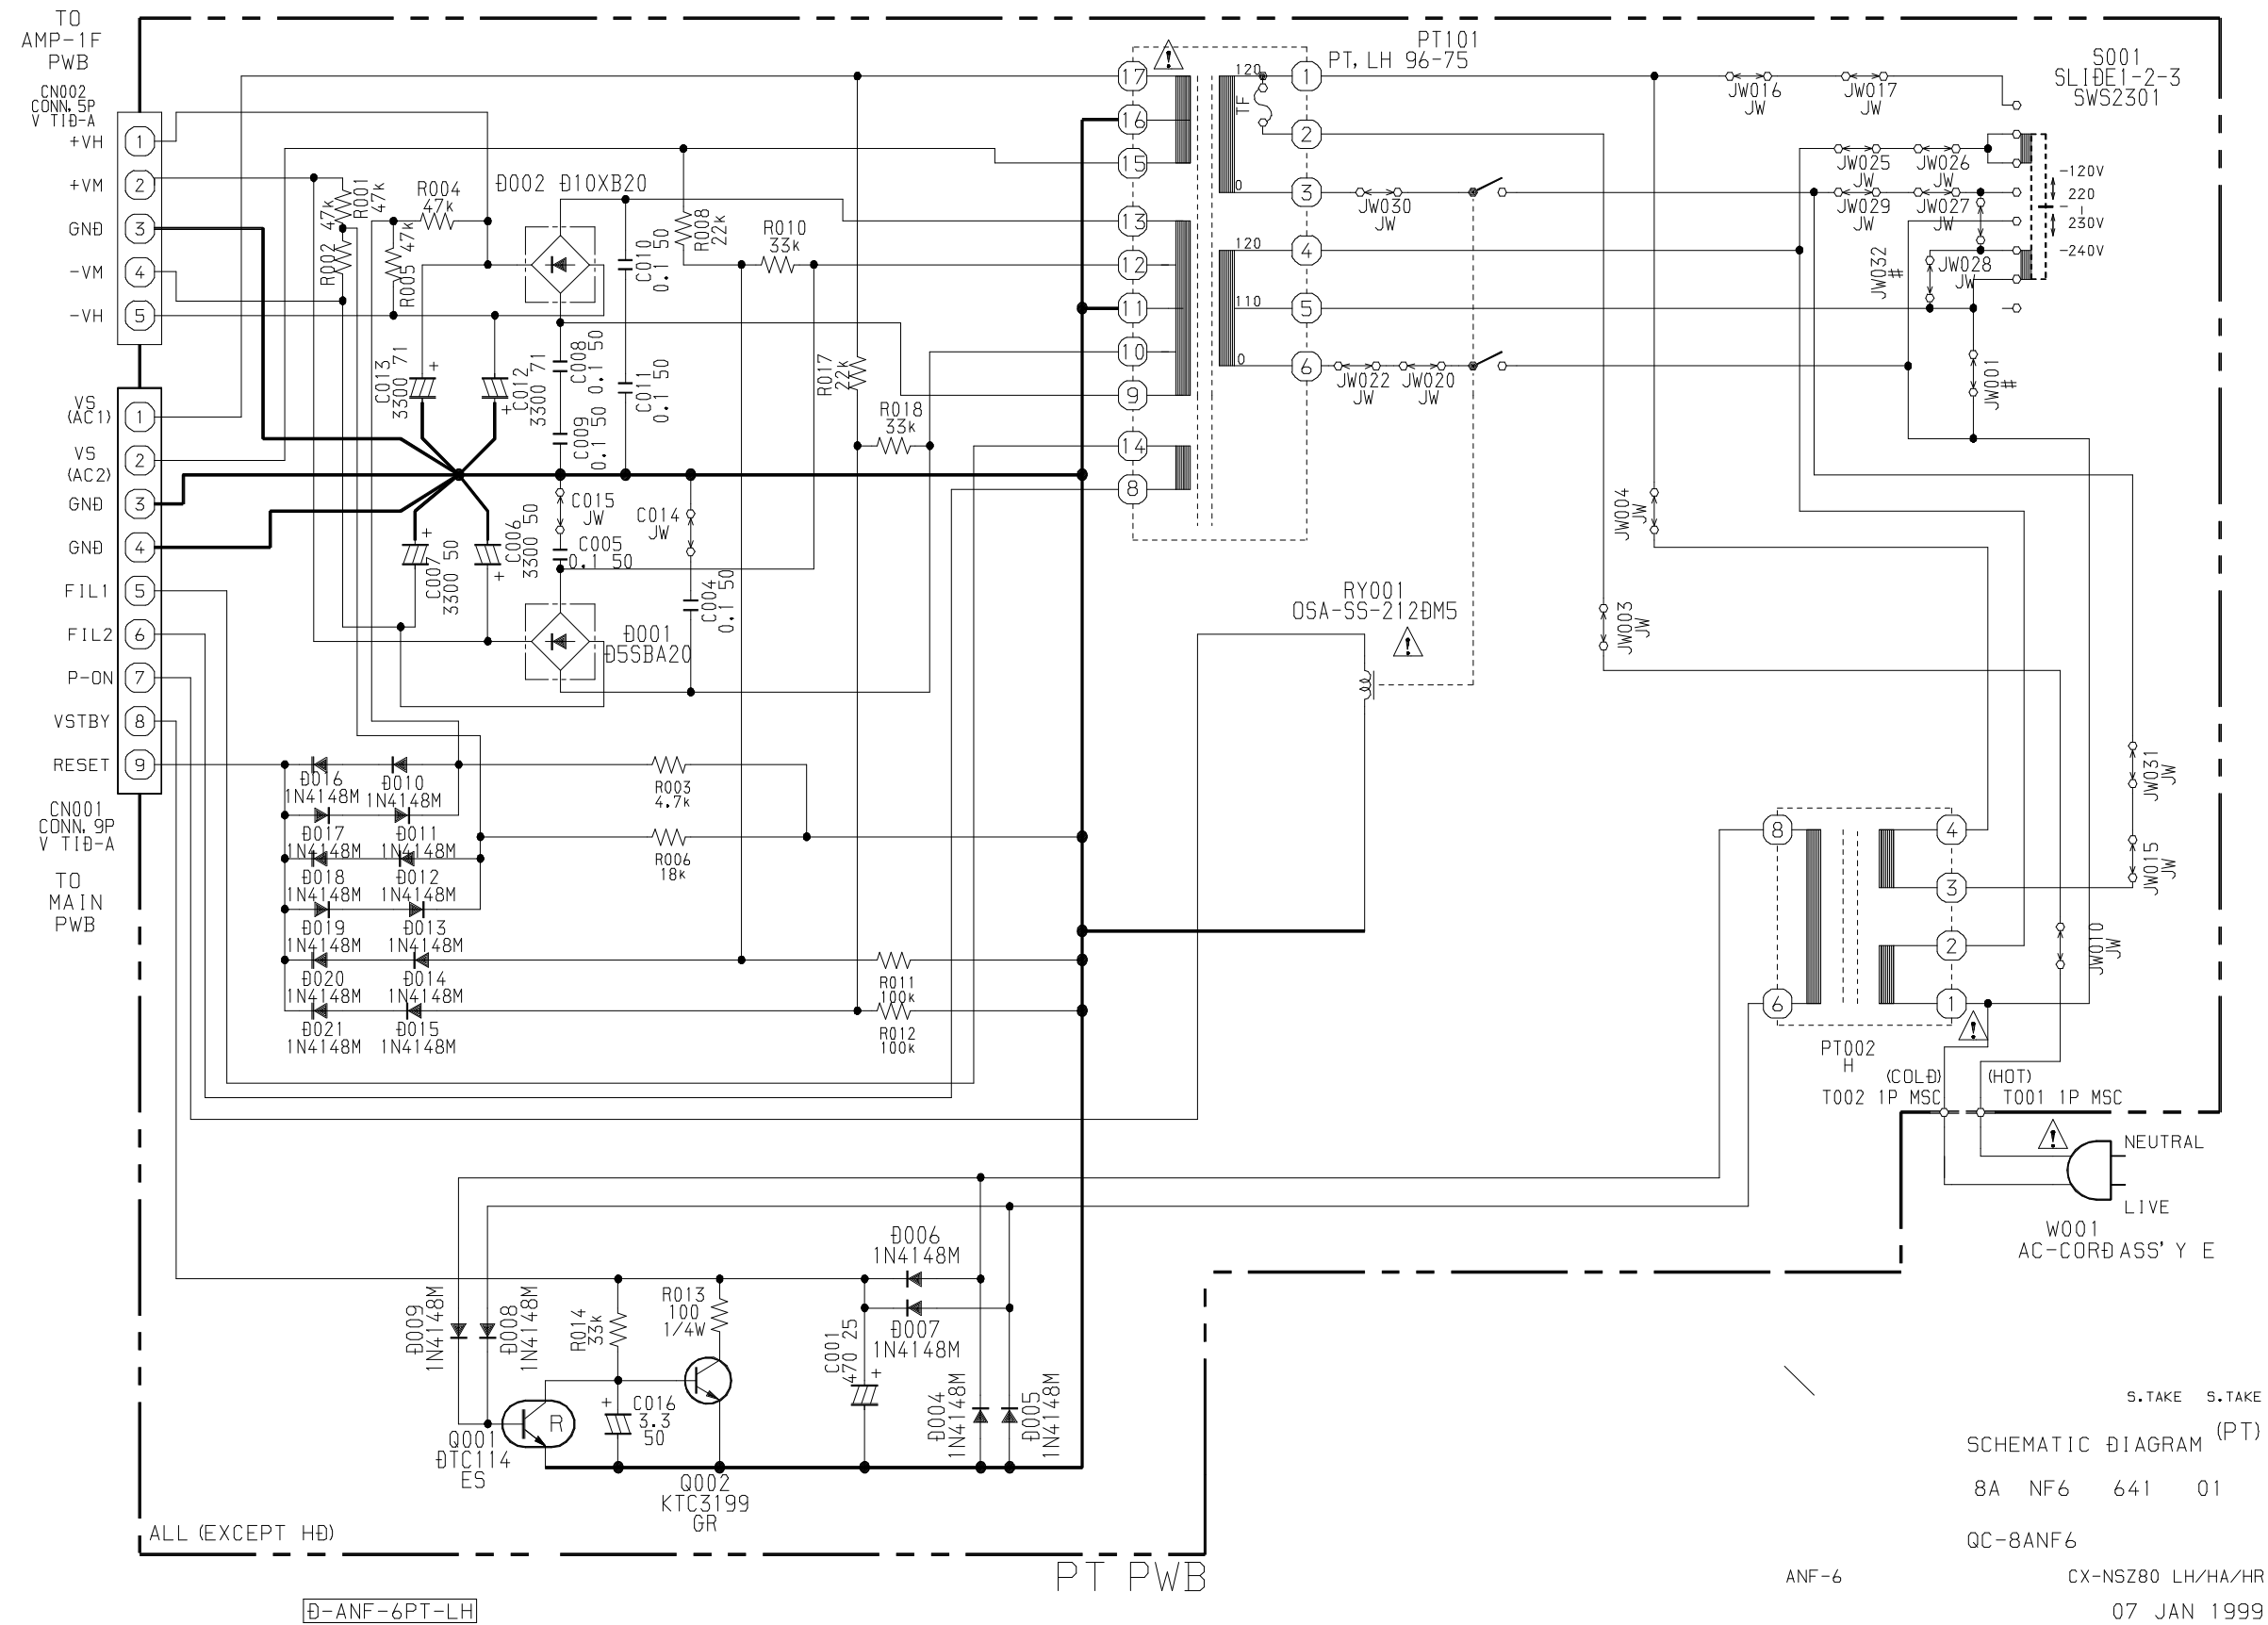

SCHEMATIC DIAGRAM – 8 (MAIN 1/3 : K, EZ)

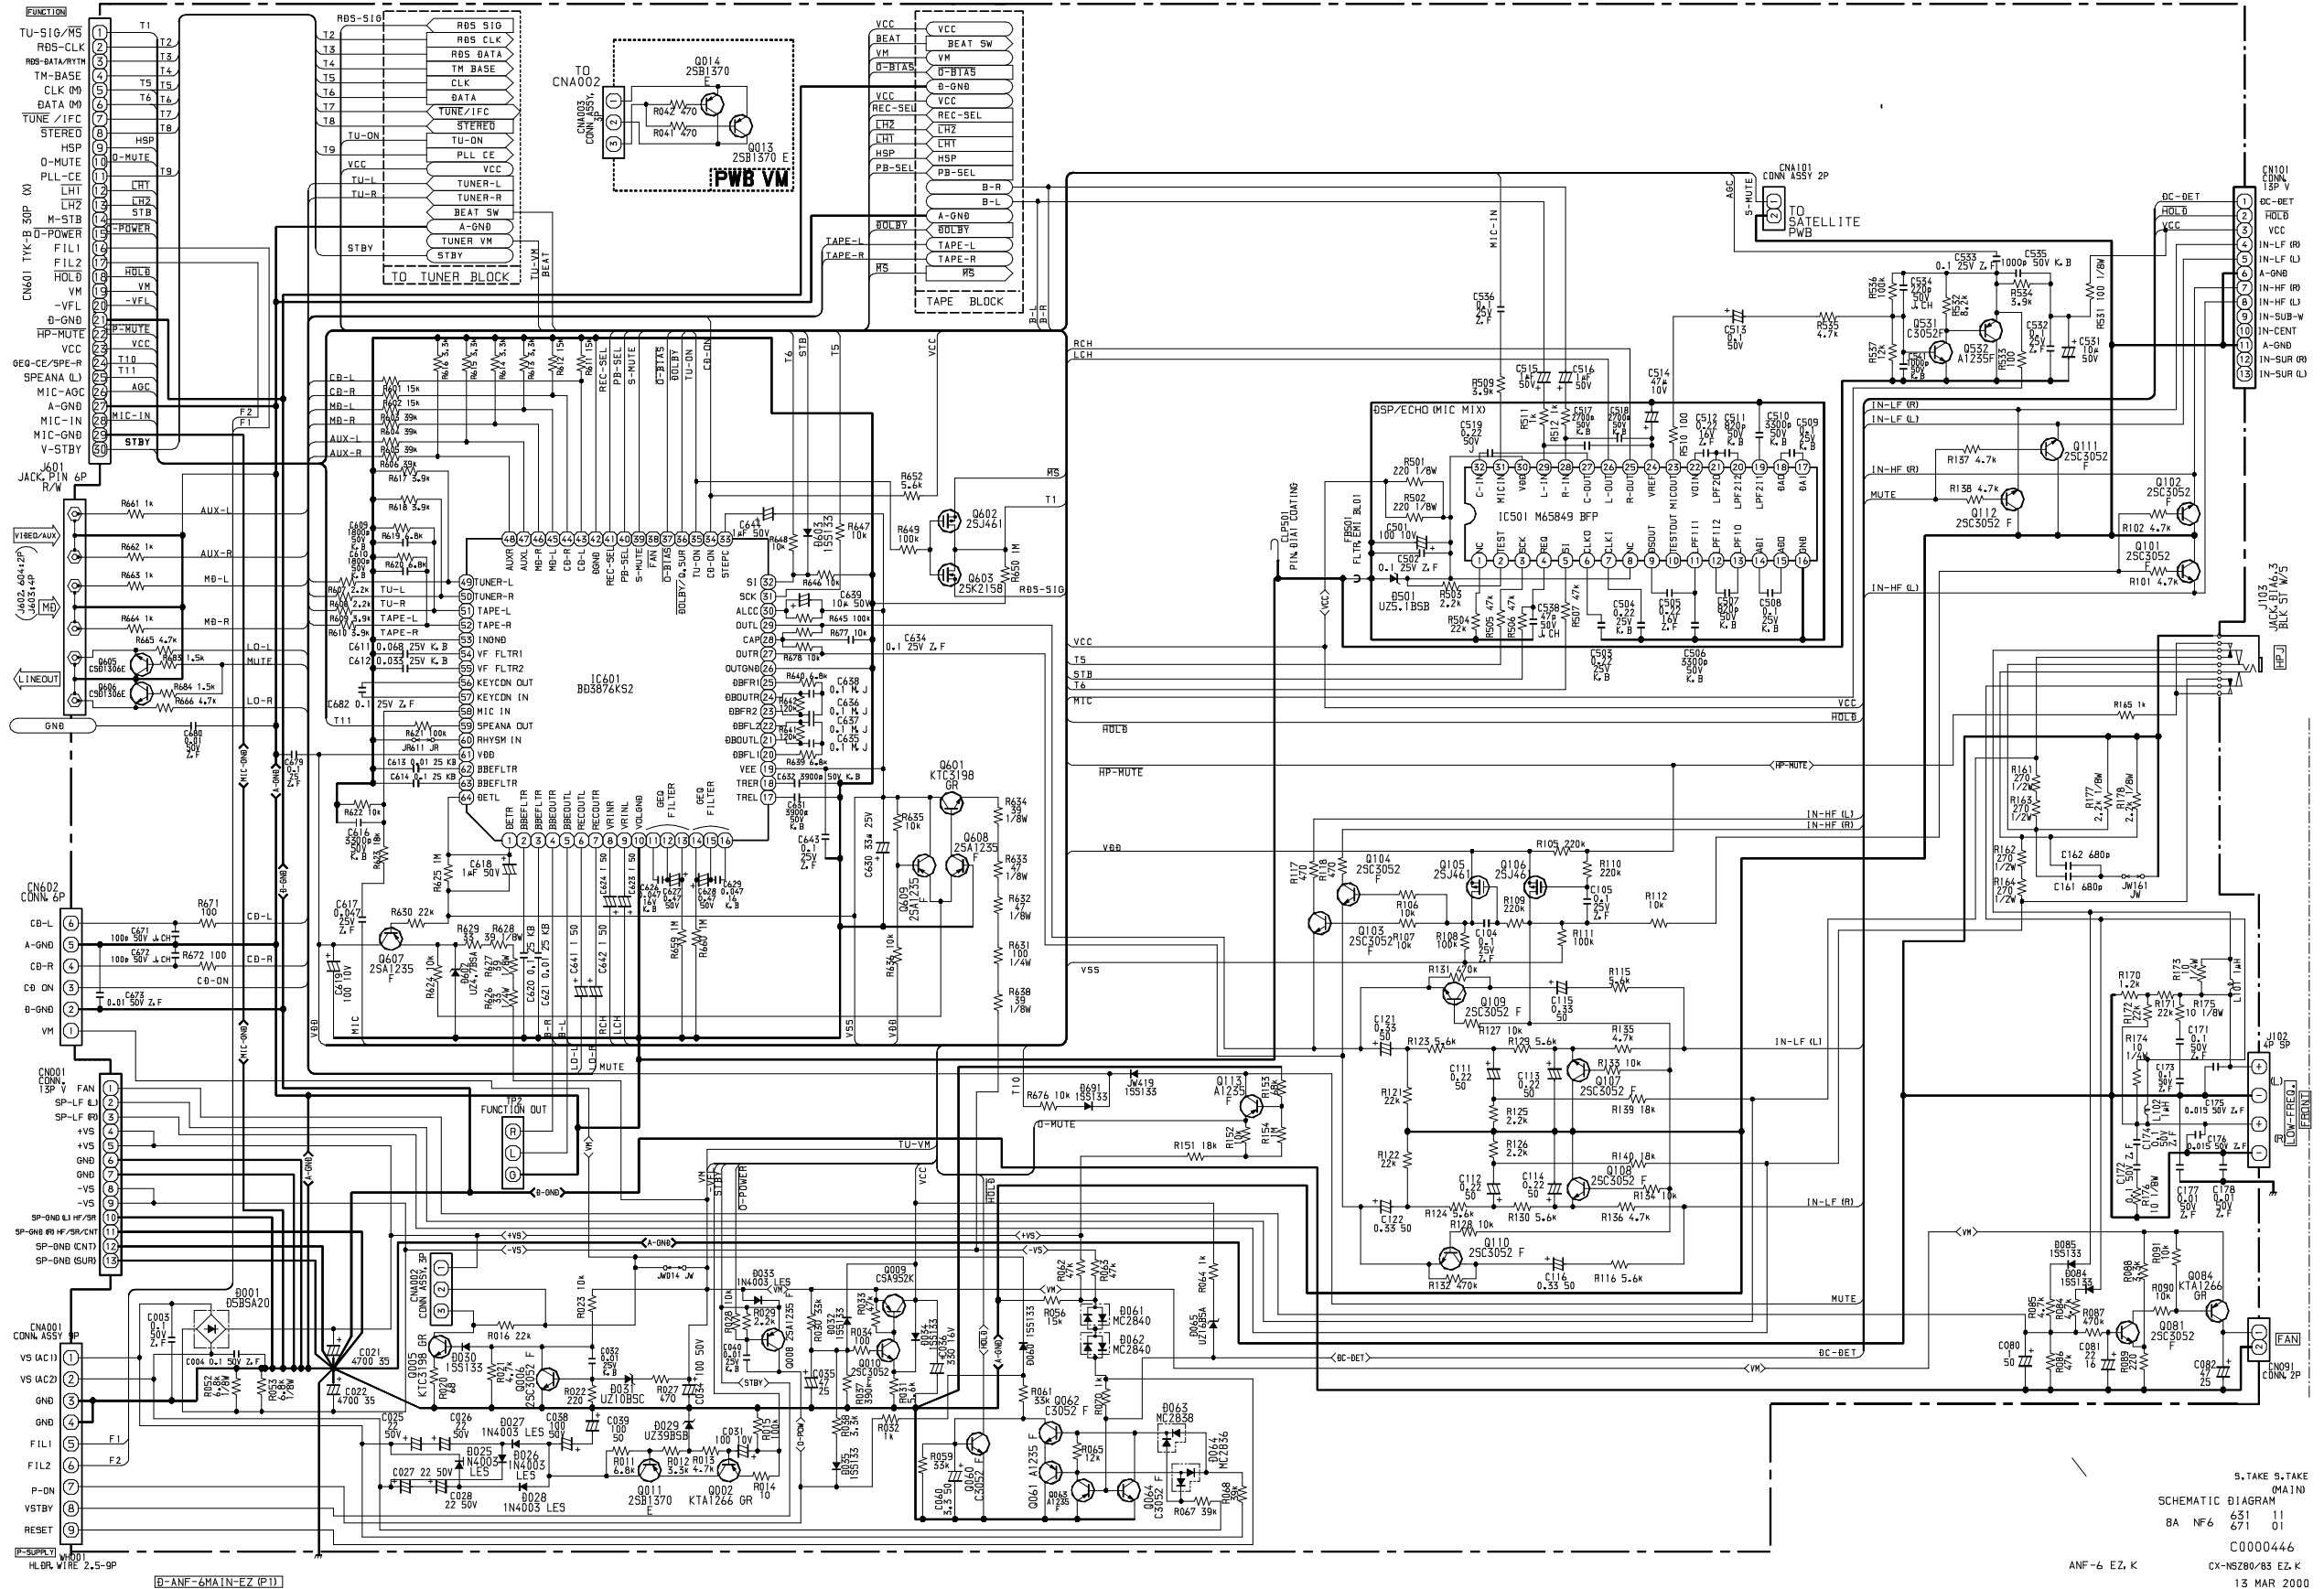

K



	USE BA7762AFS	USE HA1221
Q360	X	2SK215
R330	X	C-JR
R331	X	33K
JR336	X	C-JR

	EZ K MODEL	EXCEPT EZ K
Q356	2SC3052F	X
R362	4.7K	X
R365	10K	X

	EZ K MODEL	EXCEPT EZ
FB301	EMIBL01RN1	JW

S.TAKE S.TAKE
(CHECK)
SCHEMATIC DIAGRAM
8A NF6 631 11
671 01
C0000446
ANF-6 EZ, K CX-NSZ80/83 EZ, K
13 MAR 2000

SCHEMATIC DIAGRAM – 10 (MAIN 3/3 : TUNER SECTION : K, EZ)


IFT COIL

	PARTS NO./ PARTS CODE		
	U/LH, EZ, K, G, V	HE/HR/HC	B/HB
1ST	87-A91-551-01 FLTR, PCFJZH-450 L (TOK)	87-A91-552-01 FLTR, CFMT-450AL (TOK)	87-A91-553-01 FLTR, PCFMT-060L (TOK)
2ND			
3RD			

AM PACK

	PARTS NO./ PARTS CODE	
	U/LH, B/HB, V	EZ, K, G
1ST	8A-NF8-667-01 COIL, AM PACK4 (TOK)	8A-NF8-668-01 COIL, AM PACK (TOK)
2ND		
3RD		


*EXCEPT SW BAND MODEL (HE/HR/HC)

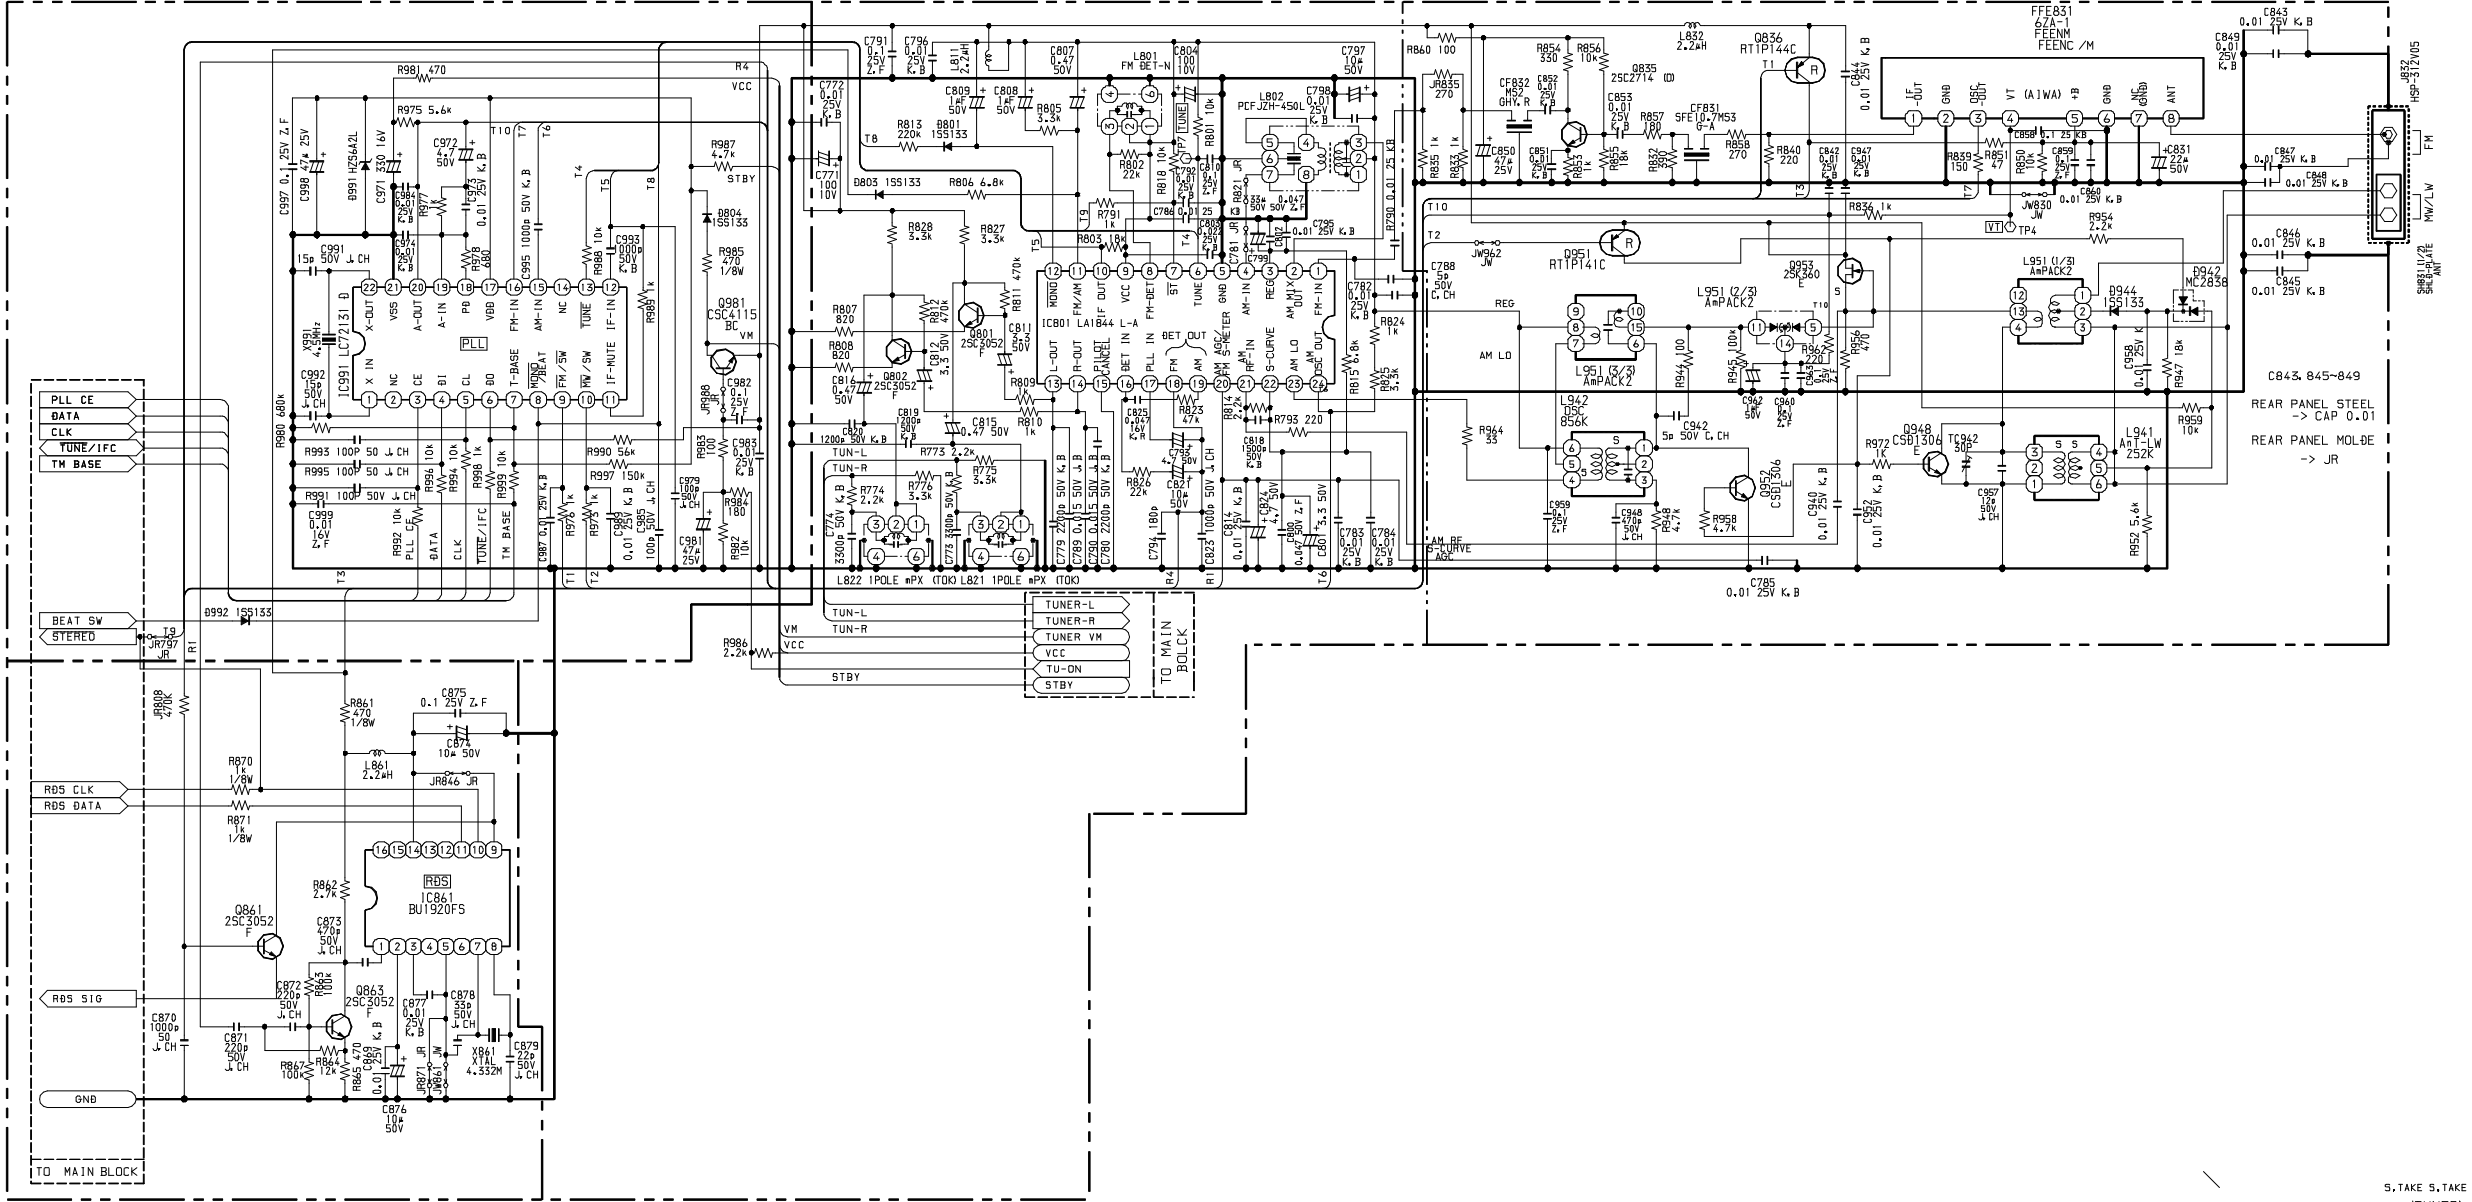


B-ANF-6MAIN-EZ (P7)

S.TAKE S.TAKE
(TUNER)
SCHEMATIC DIAGRAM
8A NF6 631 11
671 01
C0000446
ANF-6 CX-NS280/83 EZ K
13 MAR 2000


SCHEMATIC DIAGRAM – 11 (FRONT : K, EZ)

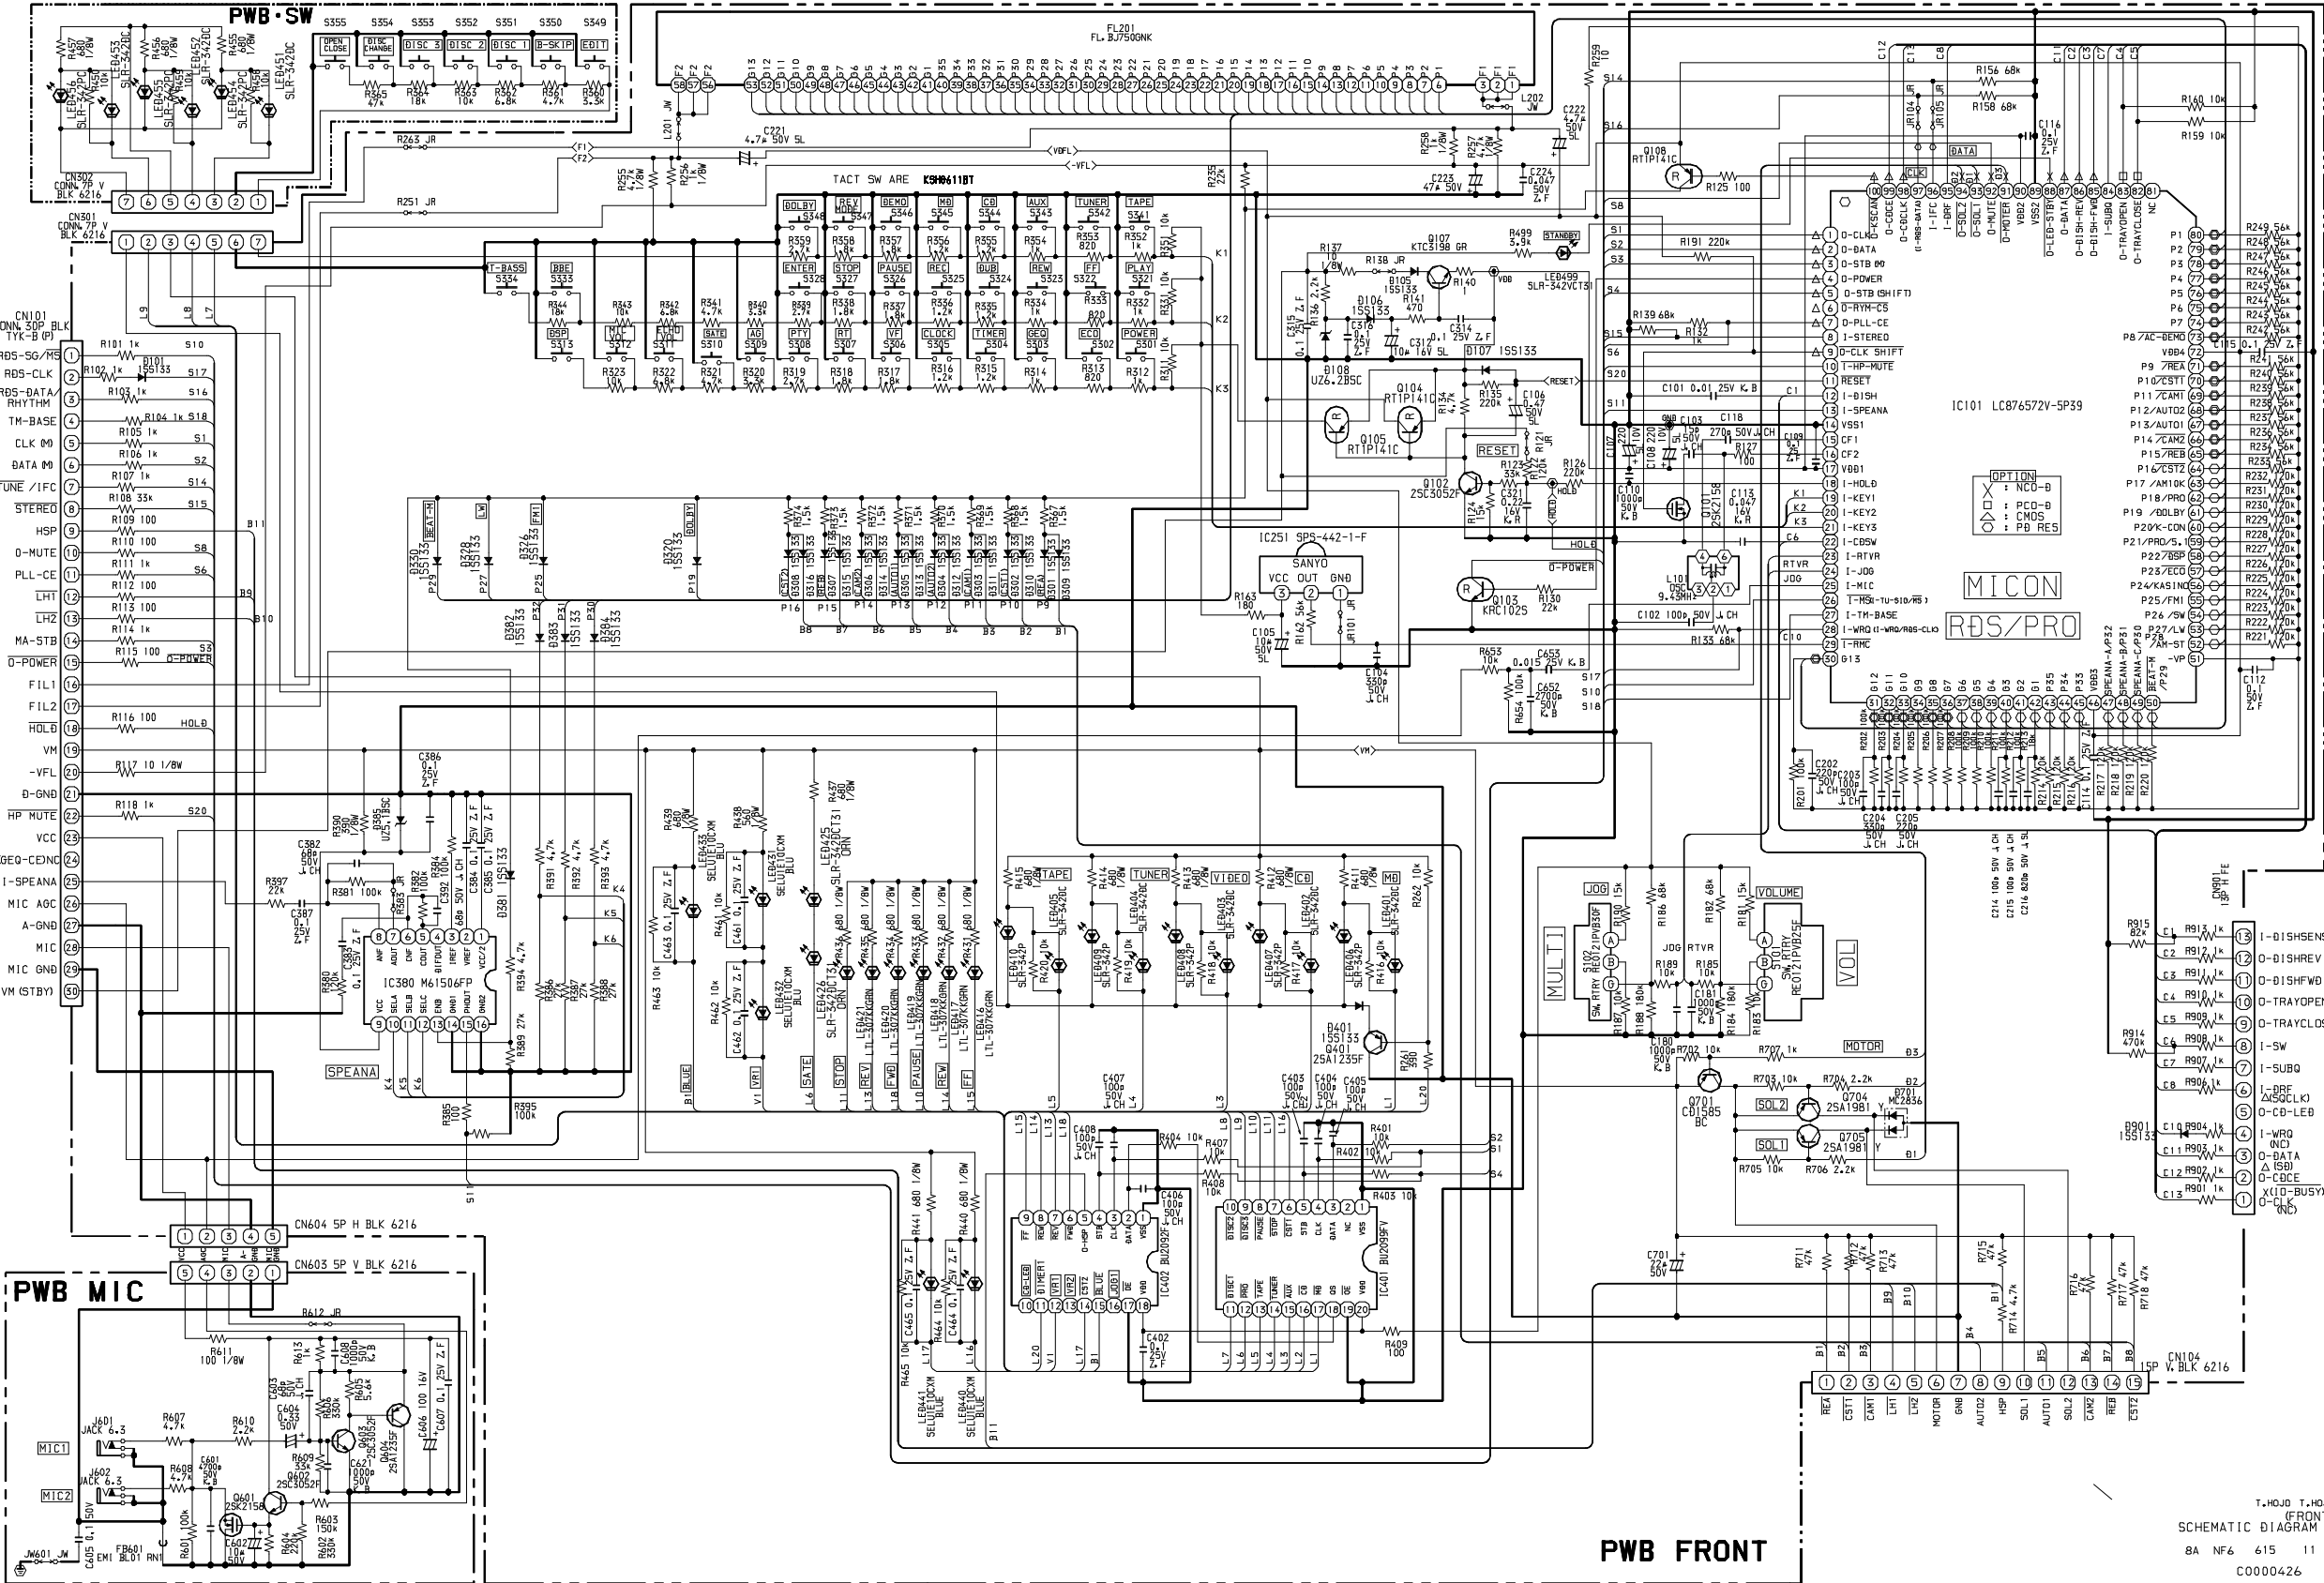


SCHEMATIC DIAGRAM – 12 (AMP SATELLITE : K, EZ)

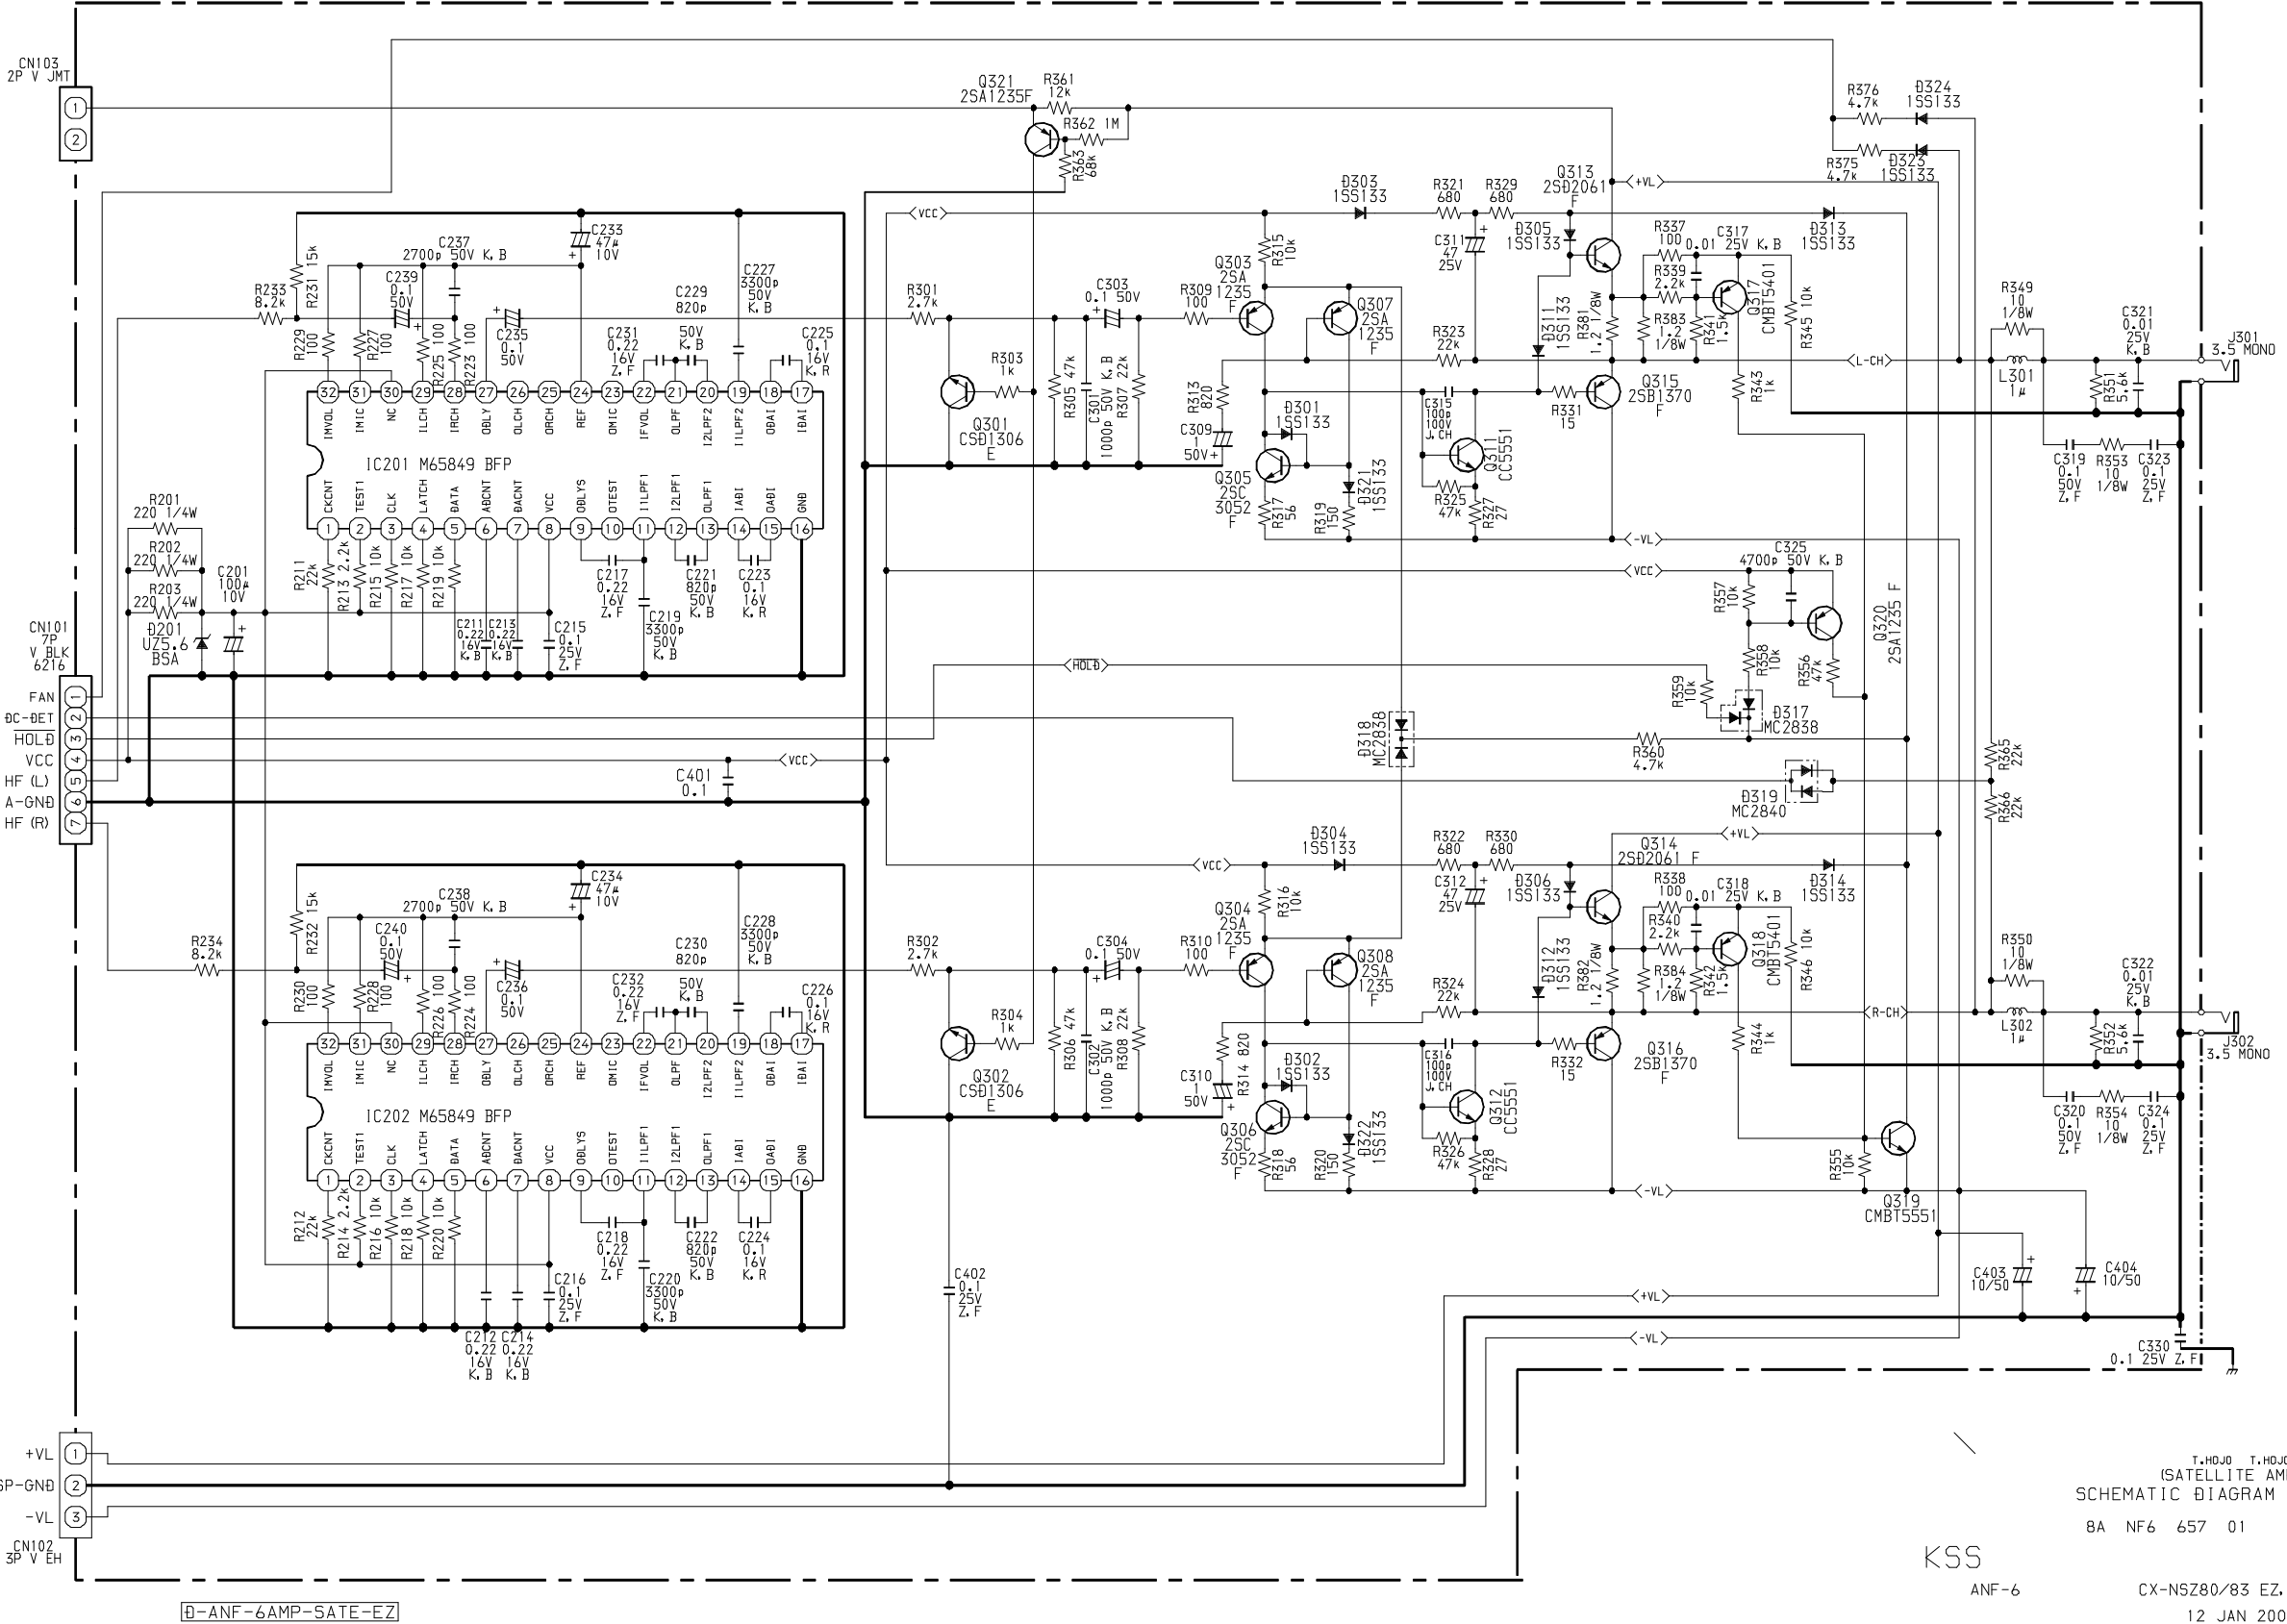

SCHEMATIC DIAGRAM – 13 (AMP 1F : K, EZ)

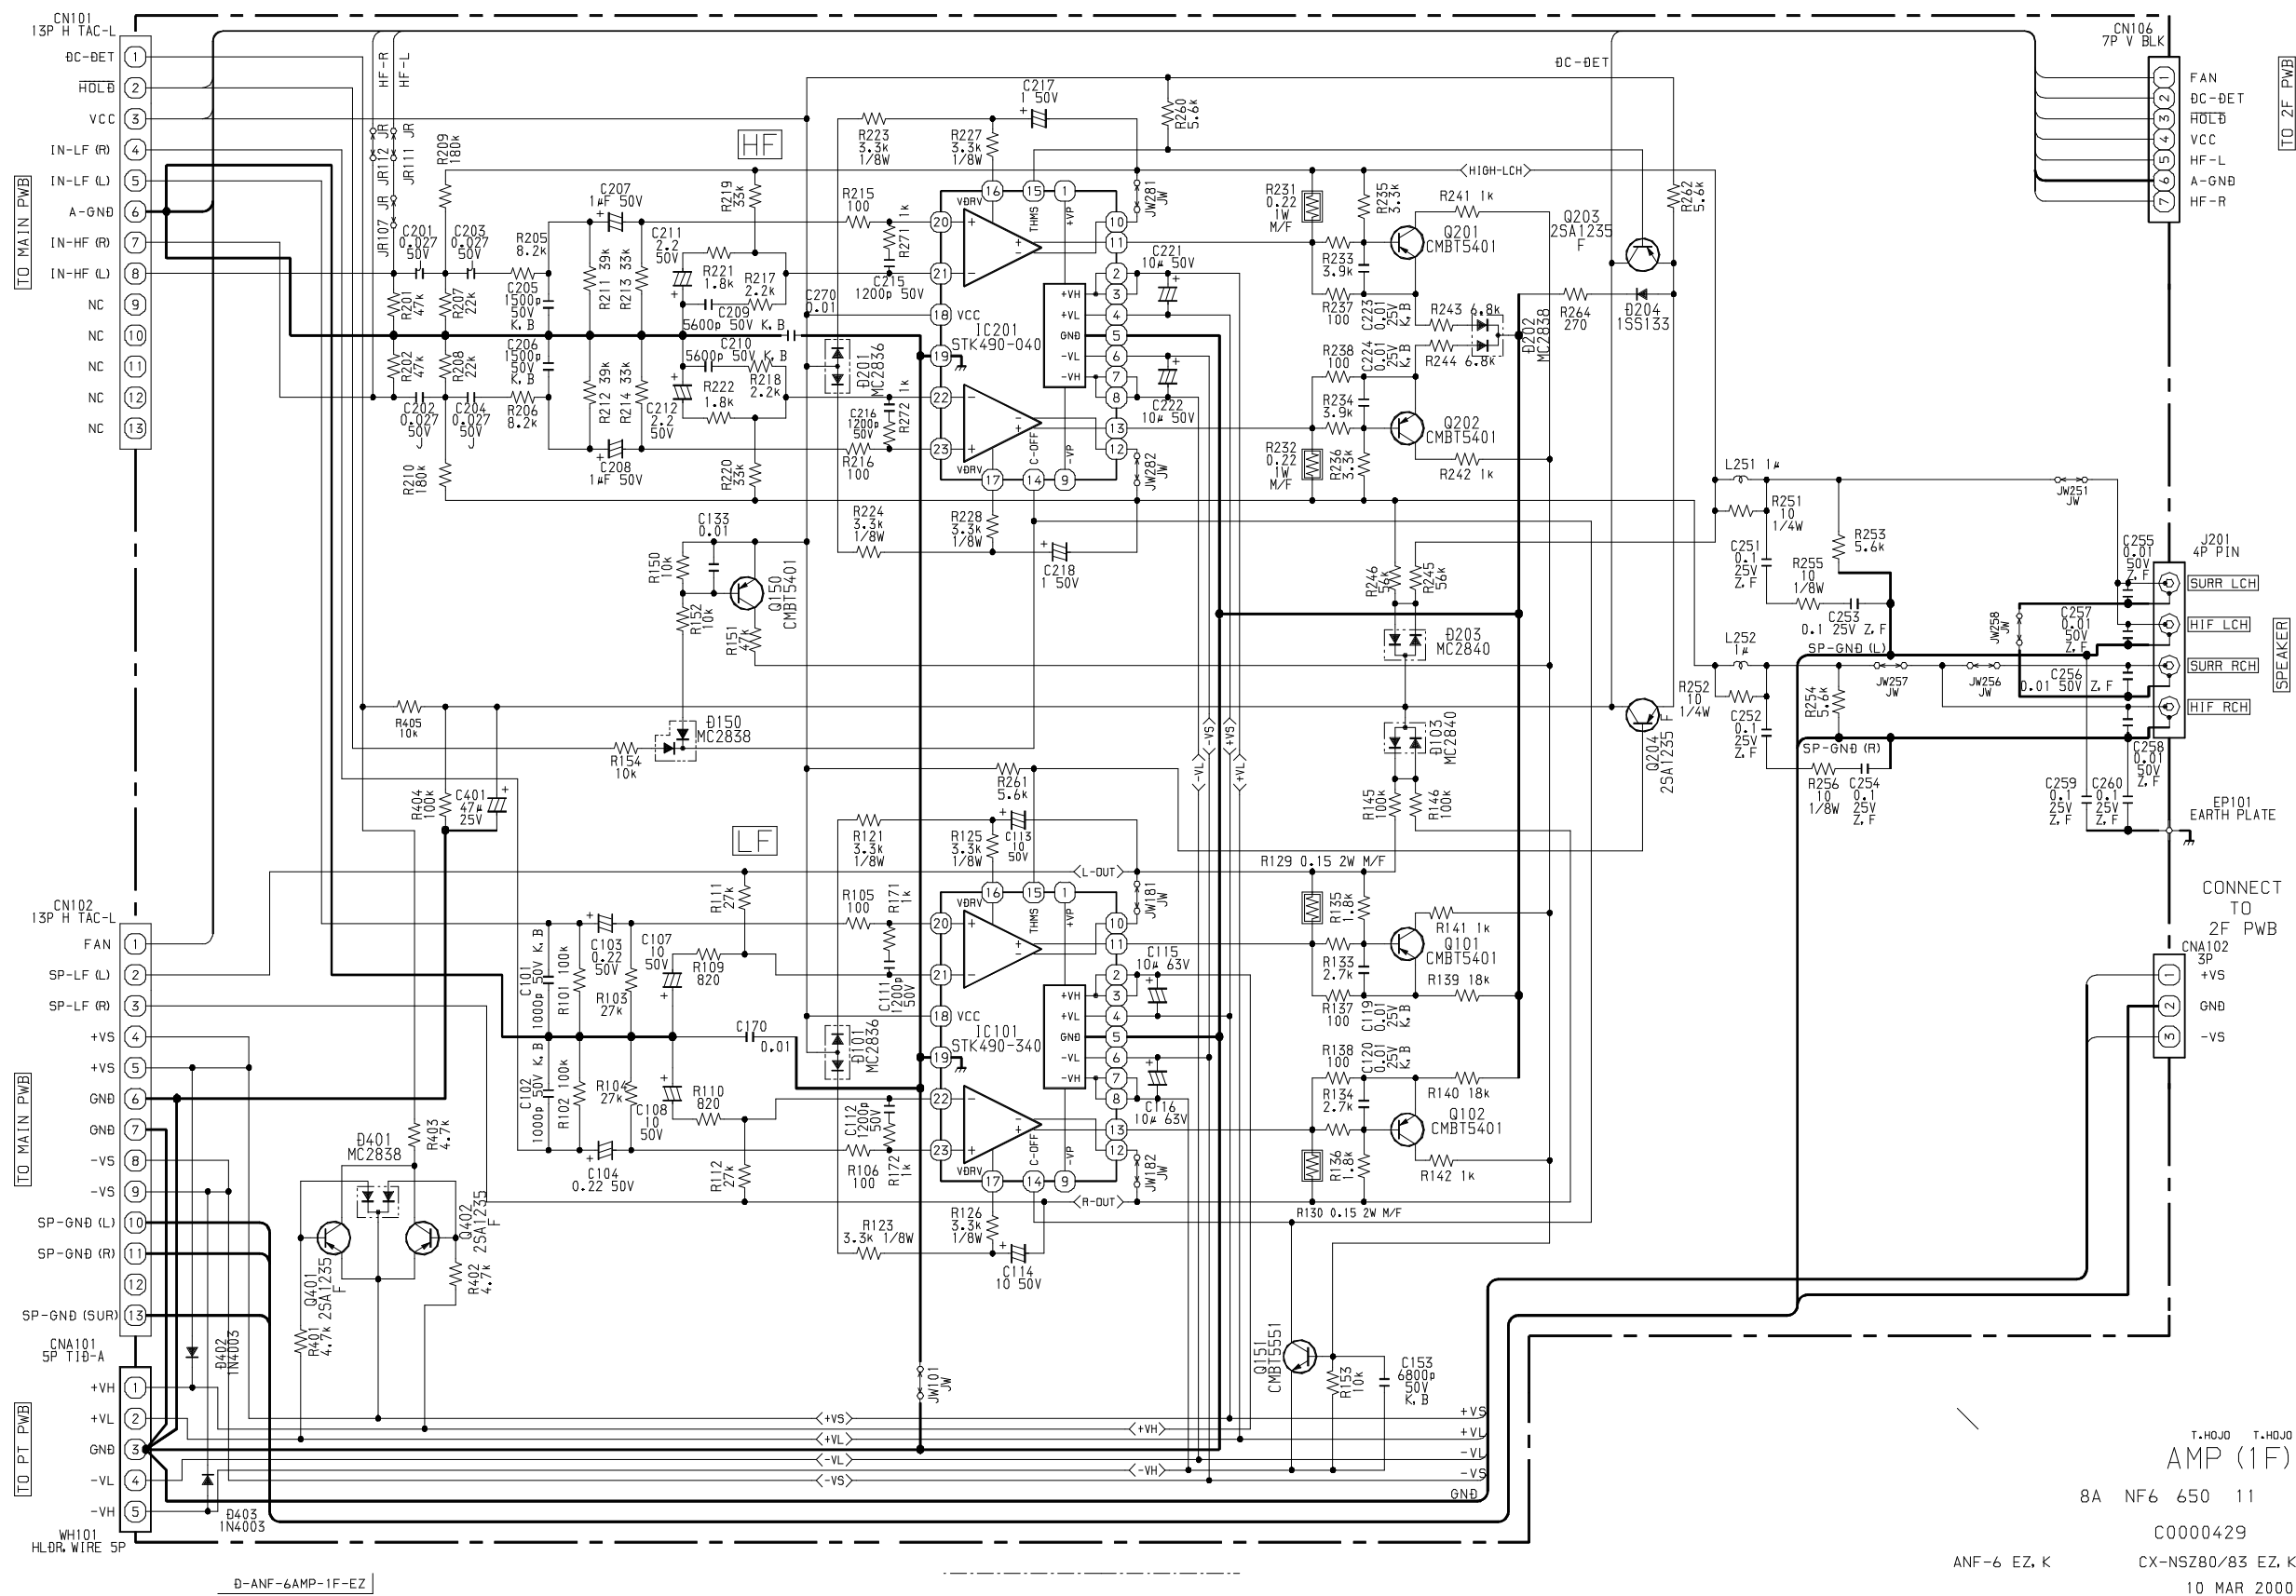

SCHEMATIC DIAGRAM – 14 (PT : K, EZ)

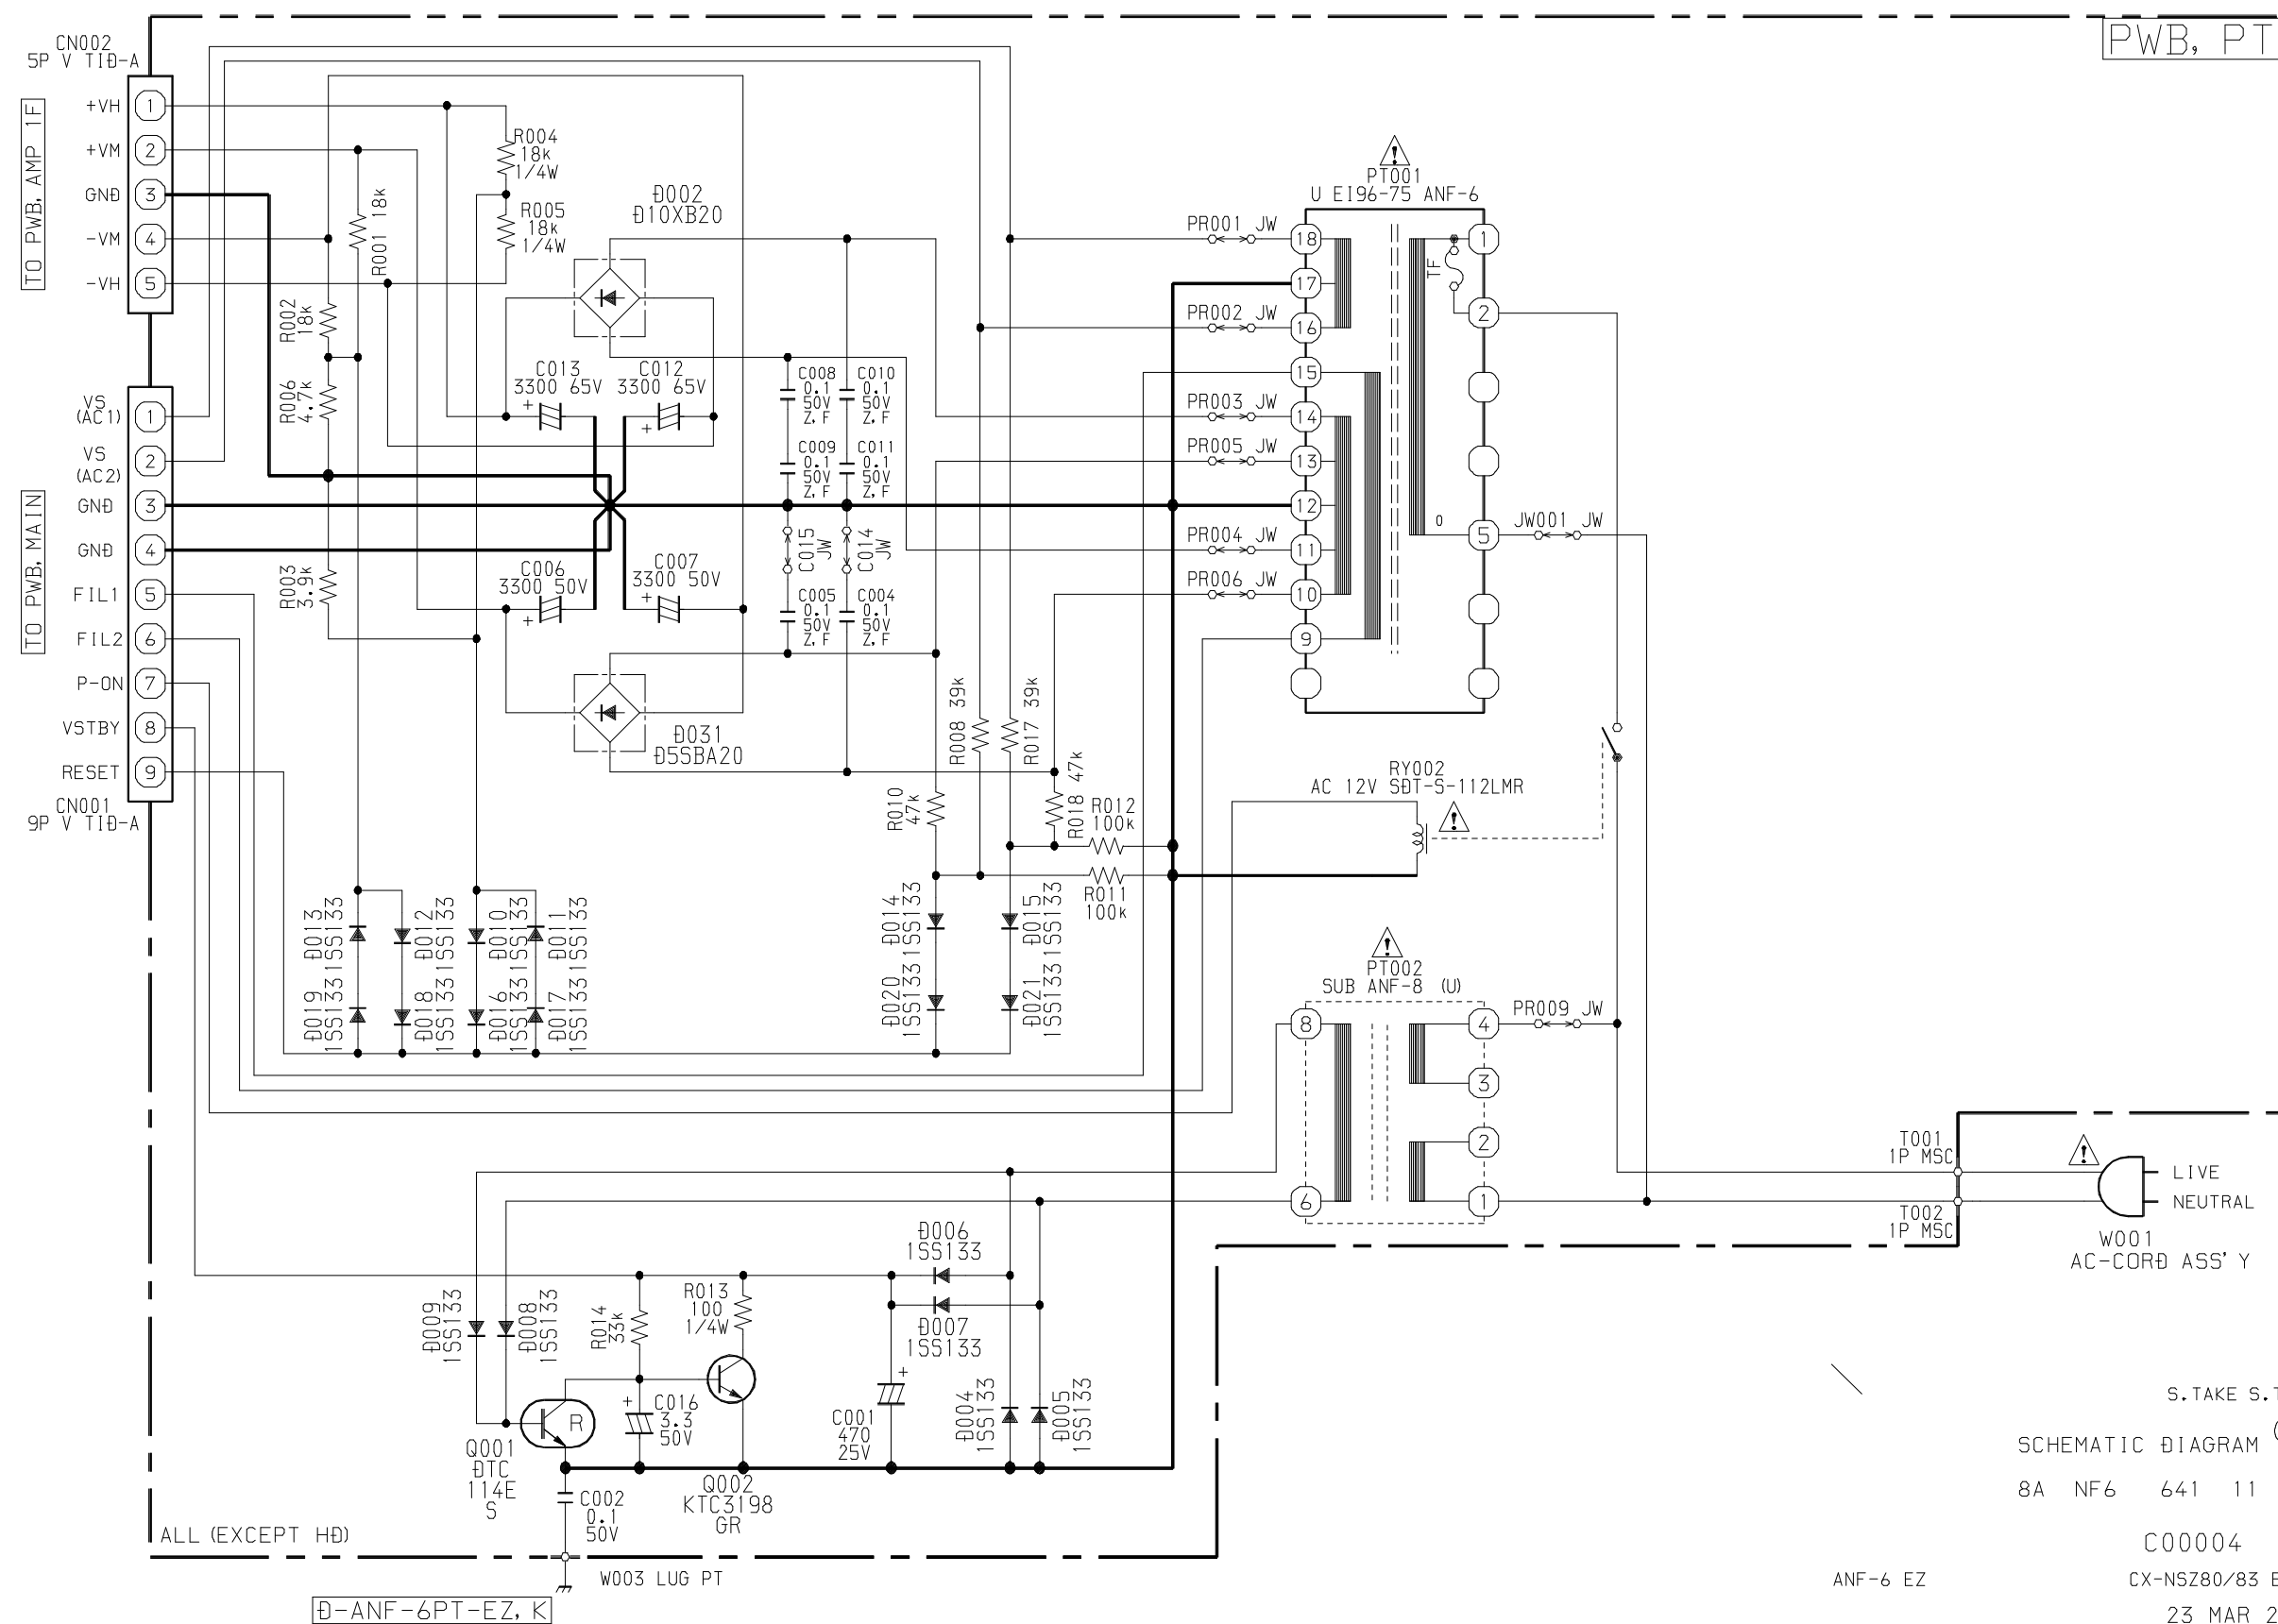

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111