


FILE NO.

SERVICE MANUAL Colour Television

**Model No. C14LT77M
C20LB87M**

(Argentina)

**Service Ref. No. C14LT77M-00
C20LB87M-00**

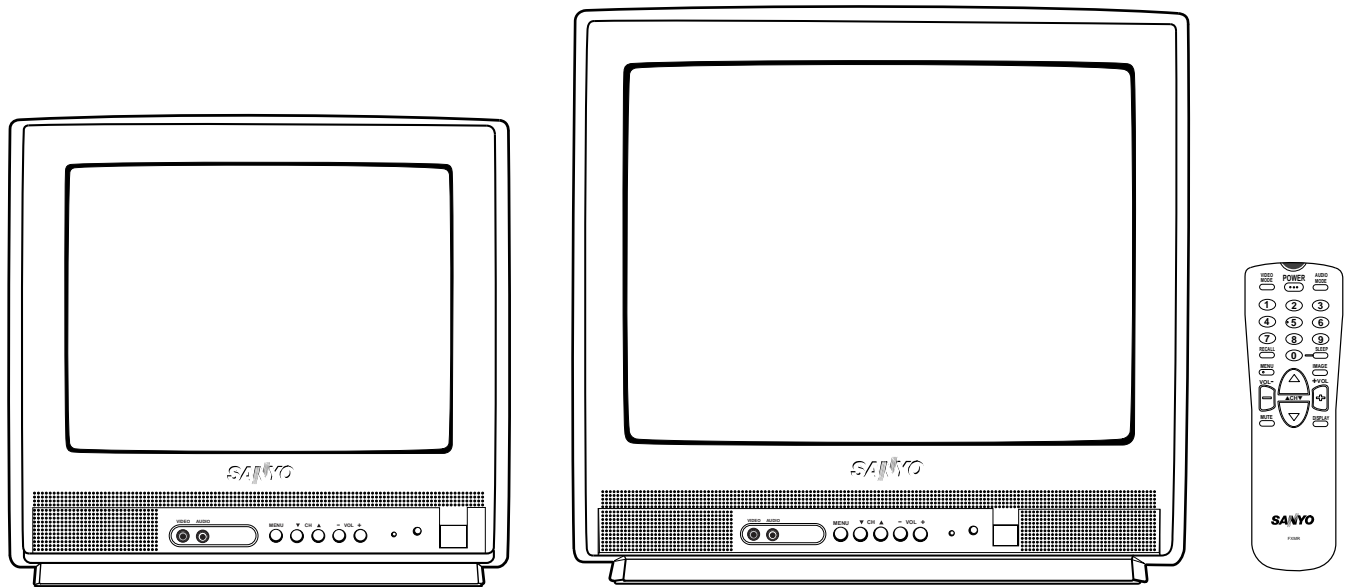

Specifications

Power SourceAC220V, 50Hz / 60Hz
 Receiving SystemPAL (M/M, N/N), NTSC (M/M)
 Channel Coverage
 Antenna mode VHF: CH02-CH13, UHF: CH14-CH69
 CATV mode VHF band: CH01-CH13, Mid band: CH14-CH22
 Super band: CH23-CH36, Hyper band: CH37-CH64
 Ultra band: CH65-CH94 and CH100-CH125
 Low mid band: CH95-CH99
 Video IF45.75MHz
 Aerial Input Impedance . .75Ω
 Ext. Terminals
 Video inputs: Phono jack X 2(1Vp - p, 75Ω)
 Audio inputs: Phono jack X 2 (436mVrms, more than 40KΩ)
 Headphone Jack: Mini jack X 1
 Sound Output (Music) . . .2.0W
 DimensionsModel C14LT77M: 380(W) X 356(H) X 383.5(D)mm
 Model C20LB87M: 496(W) X 464(H) X 472(D)mm
 WeightModel C14LT77M: approx. 9.4Kg
 Model C20LB87M: approx. 16.7 Kg

Specifications subject to change without notice.

**Product Code: 1 113 377 14 (C14LT77M)
1 113 378 14 (C20LB87M)**

Original Version

Chassis Series: LC1-B

Give complete "SERVICE REF. NO." for parts order or servicing. It is shown on the rating plate at the cabinet back of the unit.

This T.V. receiver will not work properly in foreign countries where the television transmission system and power source differ from the design specifications. Refer to the specification table.

Contents

Safety Notice

Chassis Block Diagram

IC Block Diagrams

Protection Circuit

Service Adjustments with replacing Memory IC (IC802)

Service Adjustments

Purity and Convergence Adjustment

Cabinet Parts List

Chassis Electrical Parts List

2

3-4

5-6

6

7-12

13

14

15-16

17-28

Safety Notice

SAFETY PRECAUTIONS




- 1: An isolation transformer should be connected in the power line between the receiver and the AC line when a service is performed on the primary of the converter transformer of the set.

2: Comply with all caution and safety-related notes provided on the cabinet back, inside the cabinet, on the chassis or the picture tube.
- 3: When replacing a chassis in the cabinet, always be certain that all the protective devices are installed properly, such as, control knobs, adjustment covers or shields, barriers, isolation resistor-capacitor networks etc.. Before returning any television to the customer, the service technician must be sure that it is completely safe to operate without danger of electrical shock.

X-RADIATION PRECAUTION


The primary source of X-RADIATION in television receiver is the picture tube. The picture tube is specially constructed to limit X-RADIATION emissions. For continued X-RADIATION protection, the replacement tube must be the same type as the original including suffix letter. Excessive high voltage may produce potentially hazardous X - RADIATION. To avoid such hazards, the high voltage must be maintained within specified limit. Refer to this service manual, high voltage adjustment for specific high voltage limit. If high voltage exceeds specified limits, take necessary corrective action. Carefully follow the instructions for + B1 volt power supply adjustment, and high voltage check to maintain the high voltage within the specified limits.

PRODUCT SAFETY NOTICE

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by mark  in the parts list and the schematic diagram designate components in which safety can be of special significance. It is particularly recommended that only parts designated on the parts list in this manual be used for component replacement designated by mark . No deviations from resistance wattage or voltage ratings may be made for replacement items designated by mark .


Chassis Block Diagrams

MAIN SIGNAL PROCESSING CIRCUIT

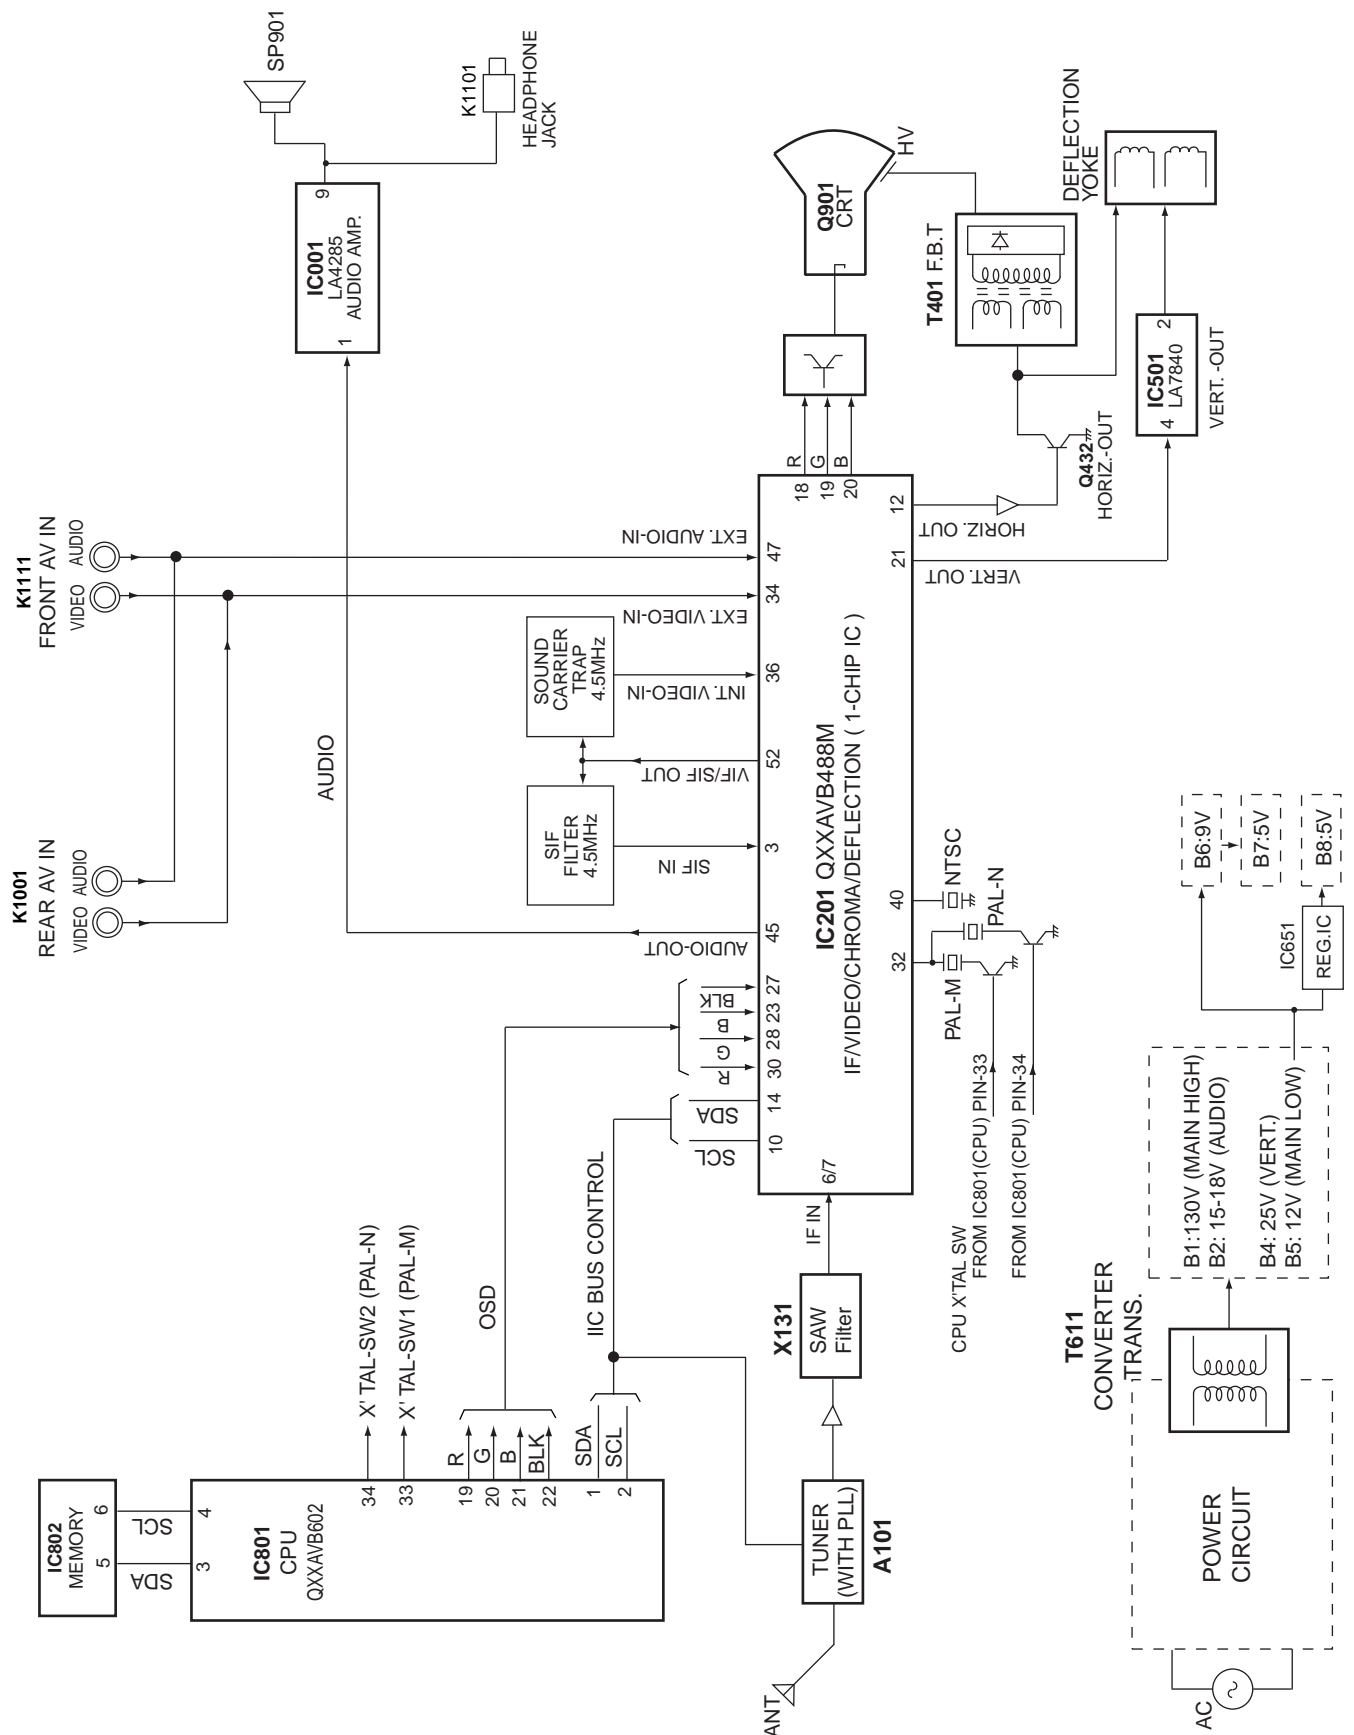


Chassis Block Diagrams

SYSTEM CONTROL

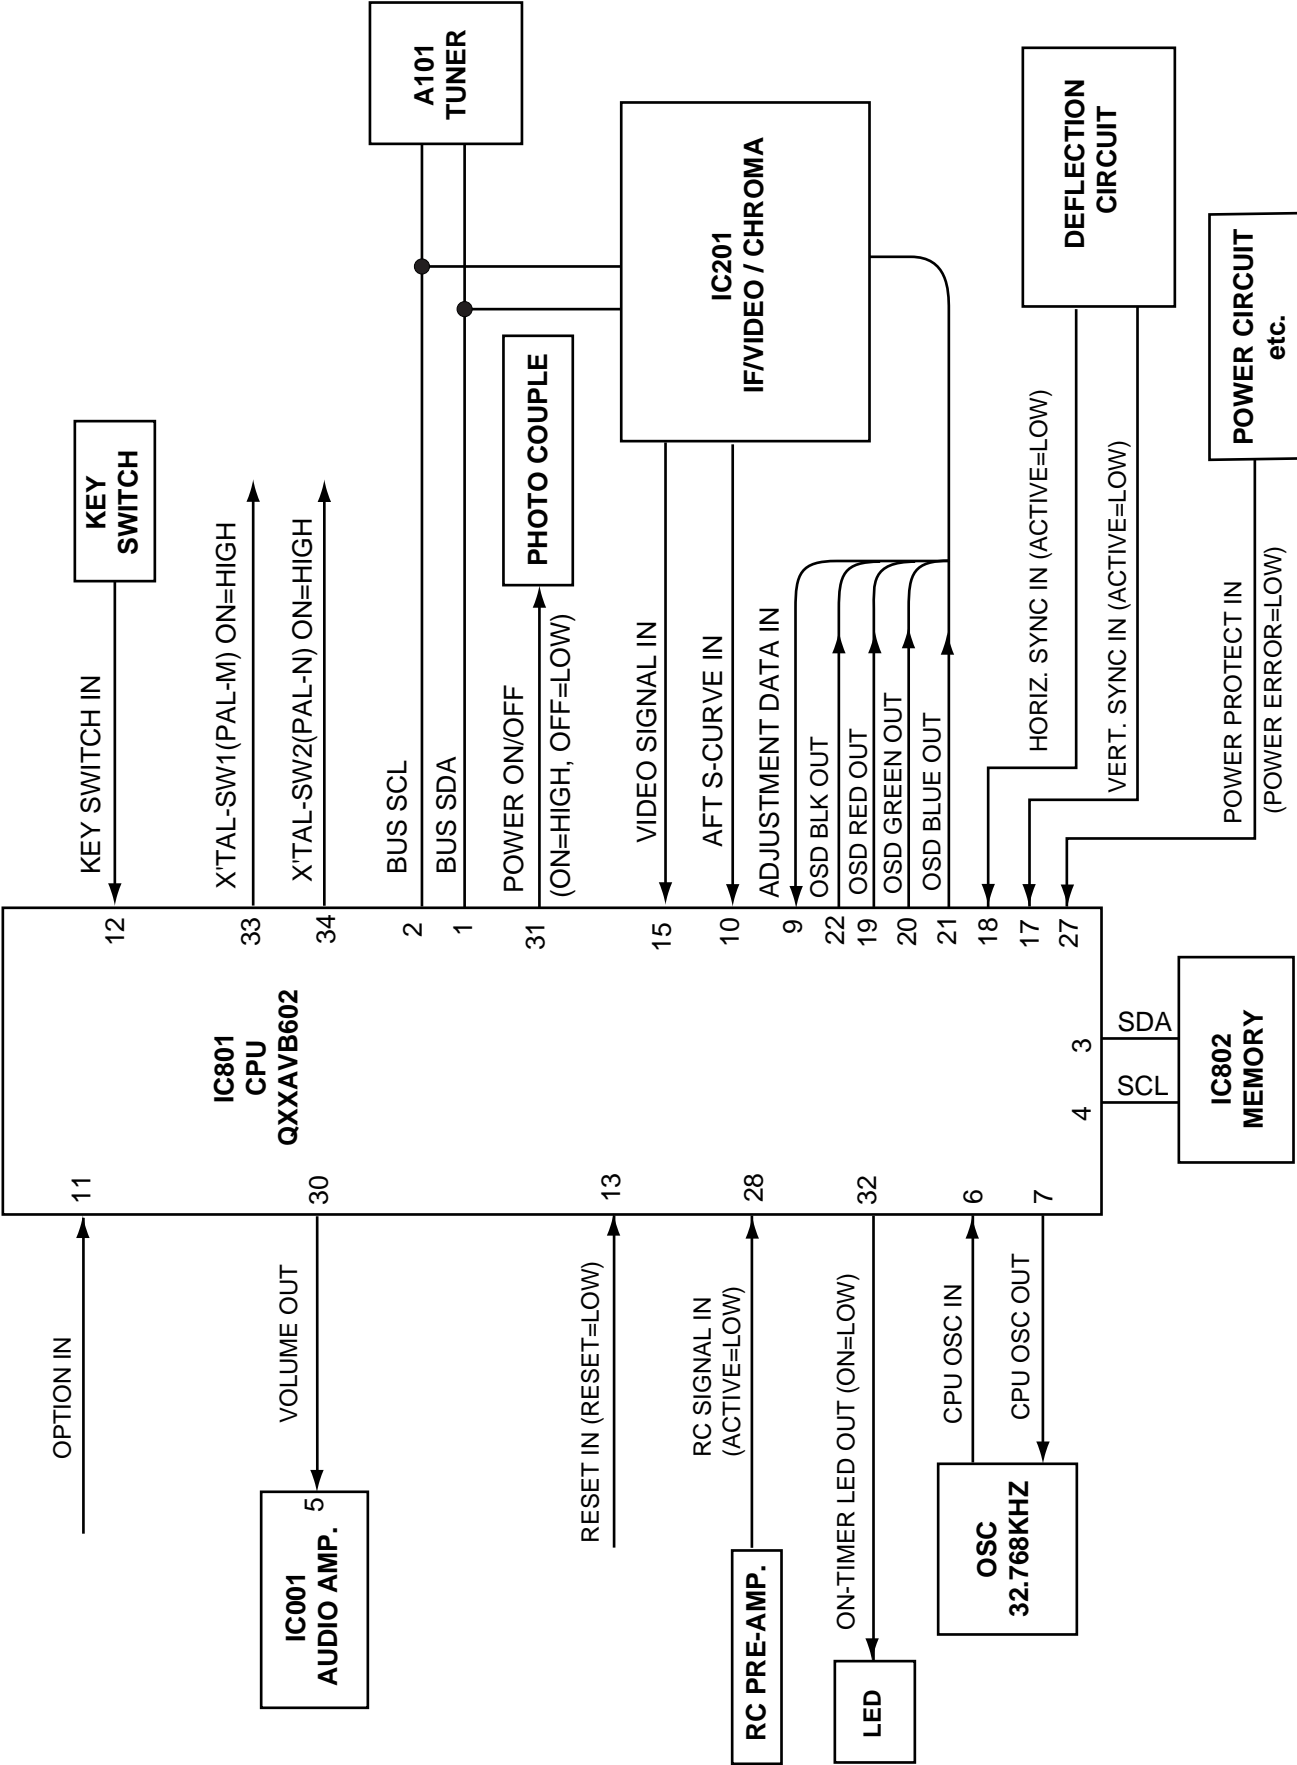


IC Block Diagrams

IC201 < IF/Video/Chroma/Def. > QXXAVB488

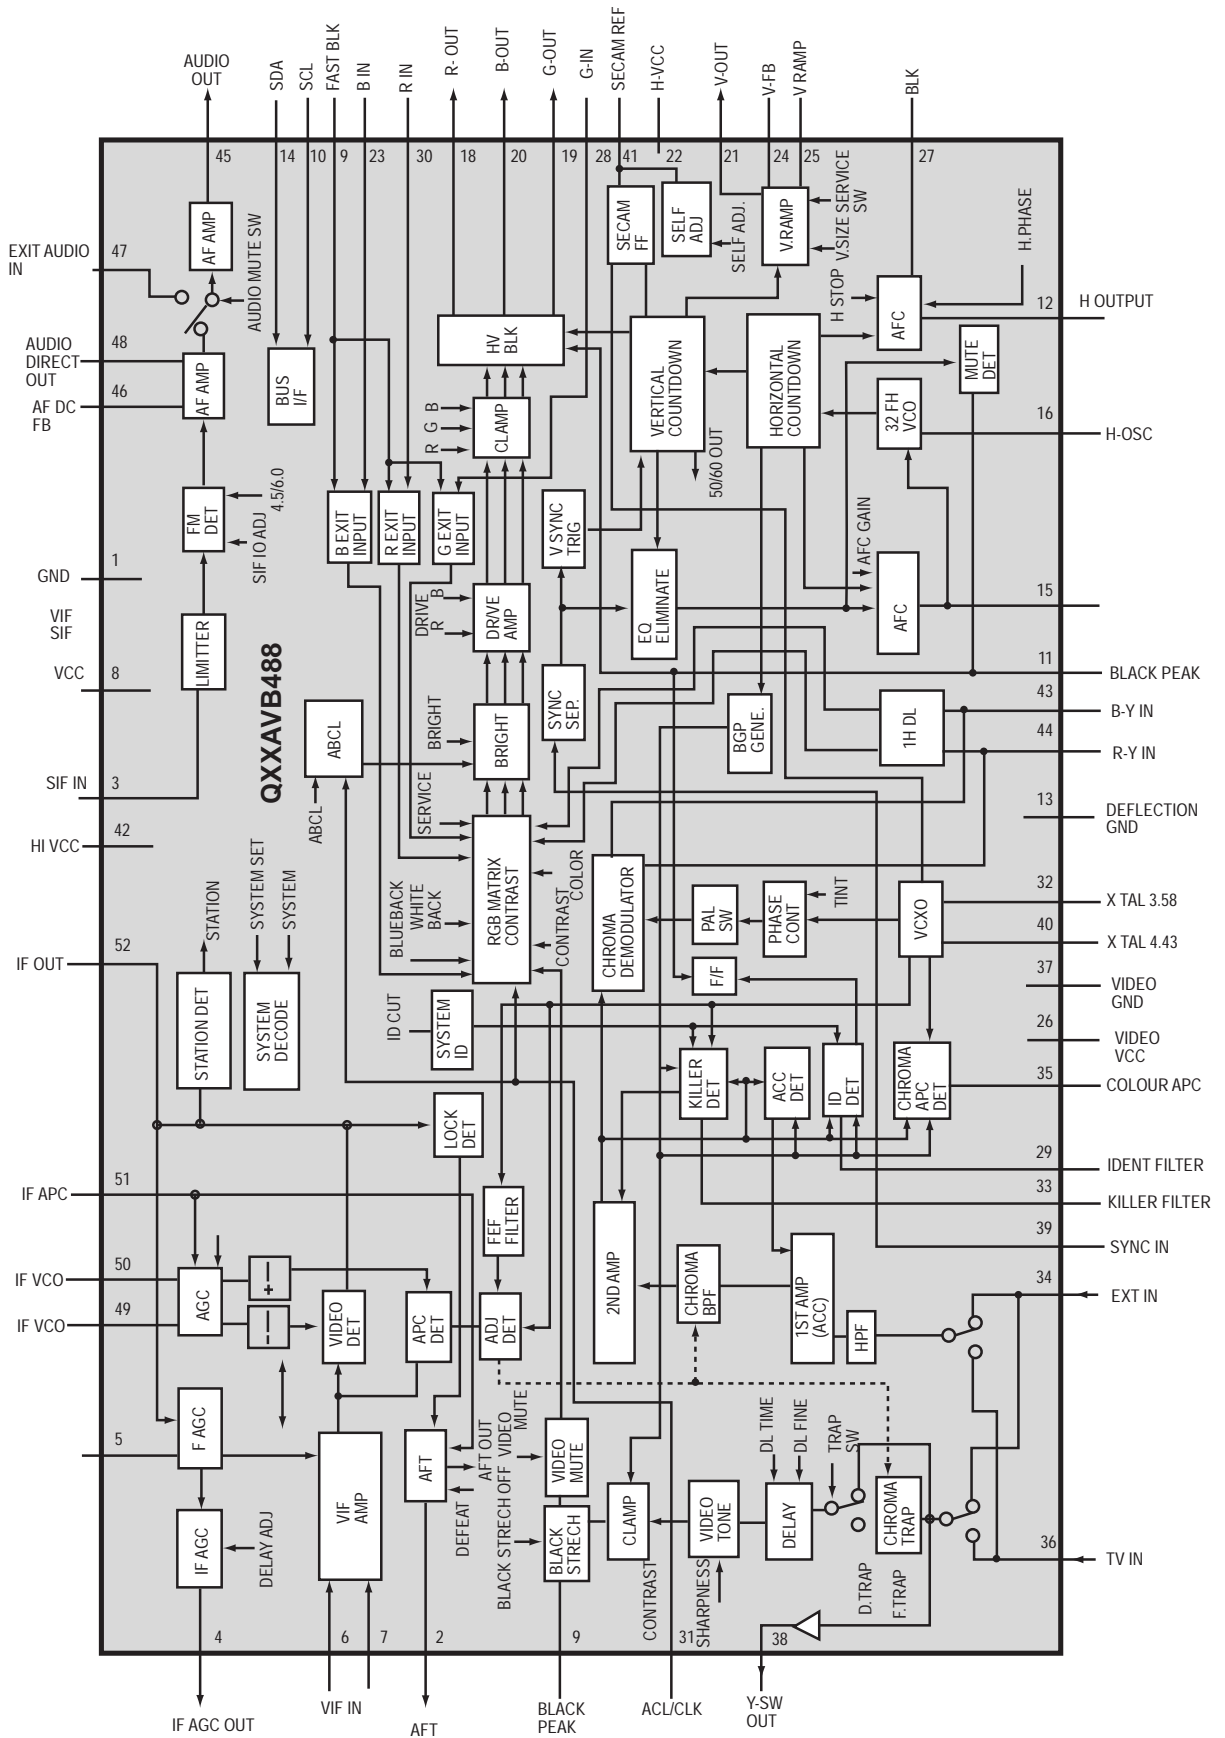


IC Block Diagrams

IC001 < Audio AMP. > LA4285

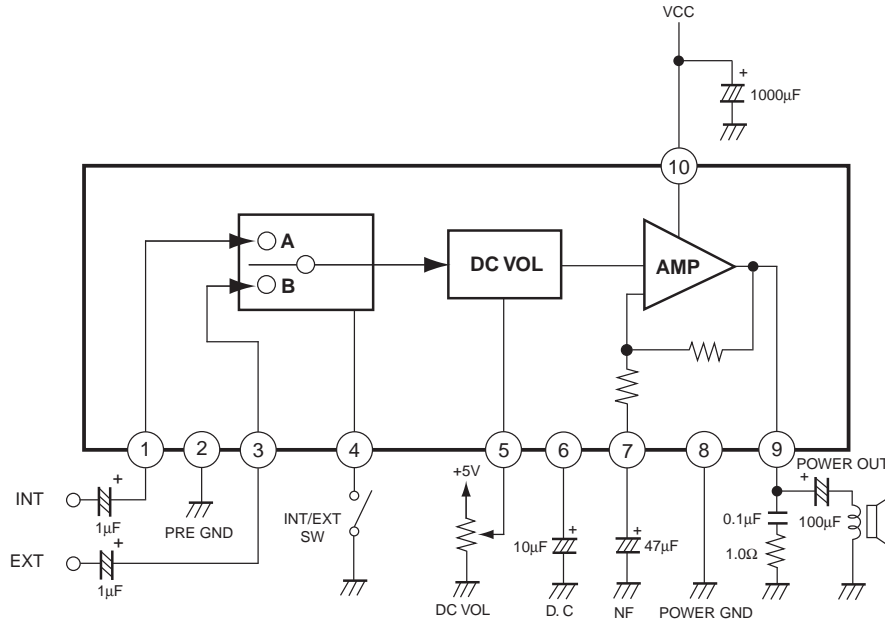

IC501 < Vertical Output > LA7840

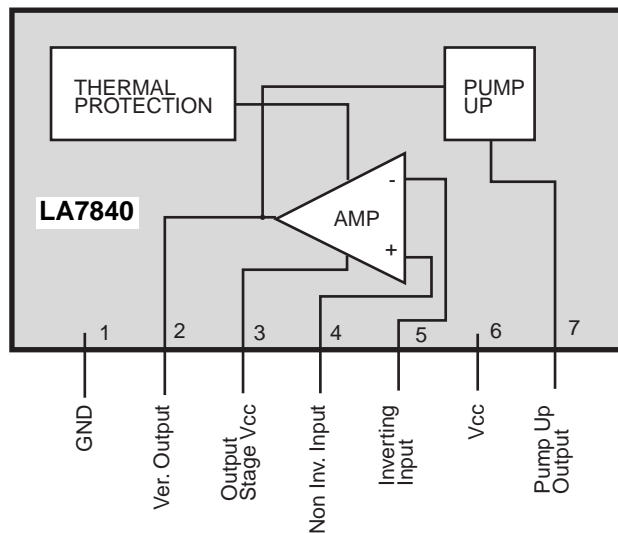

Protection Circuit

This TV set has a built-in power supply protection circuit.

It is provided to protect the TV set in case of a power supply circuit malfunctions. When something abnormality occurs during TV reception, the TV set goes to the stand-by mode.

When an abnormality occurs during TV reception, it causes pin 27 of the CPU to go continually Low (less than 0.75V) for about one second. The CPU detects that this has occurred and outputs the signal from pin 31 to switch off the power supply lines.

Releasing the protective circuit and restoring power supply


To release the protective circuit and restore power supply, turn the power to the TV set OFF and then ON again via either the main power switch or the ON-OFF button on the remote control. This will work only if the power supply trouble was temporary. If there is permanent trouble such as a damaged circuit, power cannot be restored and the circuit will have to be repaired.

Service Adjustments with Replacing Memory IC(IC802)

Note: The CPU (IC801) and memory IC (IC802) store the service adjustments data and controls data for each circuit. When the Memory IC(IC802) is replaced, some of the service adjustments should be readjusted to obtain the best performance. The necessary service adjustments are carried out by using the RC handset. Please set up the TV set with following steps [1] to [3].

[1] Initializing Procedure

1. Put a new memory IC.
2. Turn on the TV set
3. Press and hold the **MENU button** on the TV set, then press **0 button** on the remote control transmitter.

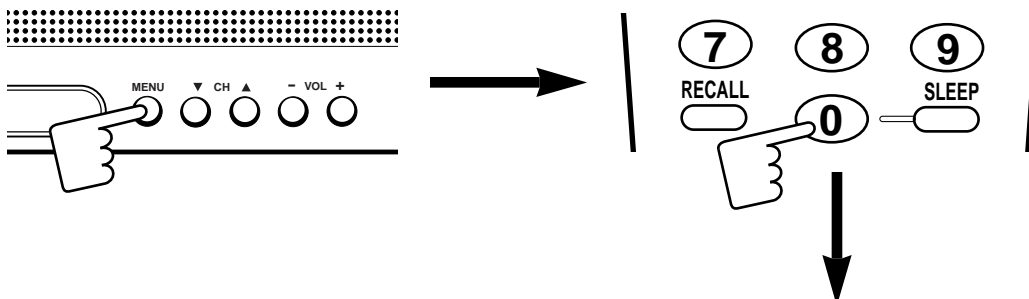

The following picture appears on the screen.



This completes the initialization of memory IC.

Following shows the initialized contents of memory data by this procedure.

- | | |
|--------------------------------------|---------------|
| 1. TV/AV mode | : TV mode |
| 2. Antenna or cable setting | : Antenna |
| 3. Colour system | : AUTO |
| 4. Channel Memory | : Clear |
| 5. Receiving Channel | : Ch02 |
| 6. Sound Volume | : 11/63 steps |
| 7. Color | : 30/63 steps |
| 8. Contrast | : 63/63 steps |
| 9. Brightness | : 32/63 steps |
| 10. Sharpness | : 31/63 steps |
| 11. Tint | : 31/63 steps |
| 12. Language | : Spanish |
| 13. Password | : Clear |
| 14. Channel Block | : Clear |
| 15. Sleep Timer | : Clear |
| 16. Picture Mode | : MANUAL |
| 17. Video status (Picture mode data) | |

Item	NORMAL	STRONG	SOFT	MANUAL
Colour	28	34	22	28
Contrast	63	63	63	63
Brightness	35	15	40	35
Sharpness	31	31	31	31

Service Adjustments with Replacing Memory IC(IC802)

[2] Service Adjustments-1

Following table shows the initial values which have been stored in the CPU ROM, and items for the service adjustments.

Service mode adjustments table in CPU ROM

No.	Item	Initial value	Range	Description
01	H-P	08	00~15	Horizontal centre adjustment
02	V-P	04	00~07	Vertical centre adjustment
03	V-S	64	00~127	Vertical size adjustment
04	OSD	20	01~63	OSD position adjustment
05	AGC	64	00~127	RF AGC adjustment
06	VCO	128	00~255	VCO (AFT) adjustment
07	SIF	00	00	SIF VCO adjustment
08	SELF	00	00~15	SELF-adjusting
09	DLT	02	00~03	DL-time adjustment
10	DL F	00	00, 01	DL-fine adjustment
11	B-ST	00	00, 01	Black stretch on/off setting
12	ABCL	01	00, 01	ABCL adjustment
13	AB-G	00	00, 01	ABCL gain adjustment
14	TRAP	03	00~03	Trap frequency adjustment
15	WBK	00	00, 01	White back setting
16	BBK	00	00, 01	Blue back setting
17	AFCG	02	00~02	AFC gain adjustment
18	RBI	00	00~255	Red bias adjustment
19	GBI	00	00~255	Green bias adjustment
20	BBI	00	00~255	Blue bias adjustment
21	RD	64	00~127	Red drive adjustment
22	BD	64	00~127	Blue drive adjustment
23	DRV	--	--	White balance adjustment
24	--	--	--	Y-cut setting
25	CCD	20	1~31	Caption H-Position Adjustment

Grey scale adjustment

Notes:

The initial value that the CPU writes down the CPU ROM data to the memory when replaced the memory IC. TV set may not operate correctly with this initial value. It is required to set up the fine adjustment for service adjustments described below.

Adjustments

Horizontal centre adjustment
Vertical centre adjustment
Vertical size adjustment
OSD position adjustment
RF AGC adjustment
AFT adjustment
Grey scale adjustment

Service Mode No. & Item


Item 01, H-P
Item 02, V-P
Item 03, V-S
Item 04, OSD
Item 05, AGC
Item 06, VCO
Item 18-24

Further adjustment please refer to pages 10 and 11.


Service Adjustments with Replacing Memory IC(IC802)

[Entering to Service Mode]



1. Press and hold the **MENU** button on the TV set and press the **2** button on the remote control handset. Following setting items appears on the screen.

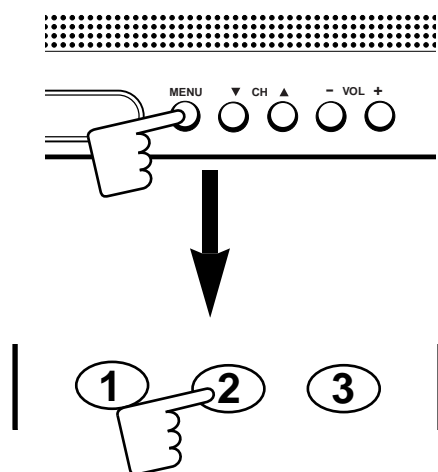

Display for [H-P] Horizontal centre adjustment

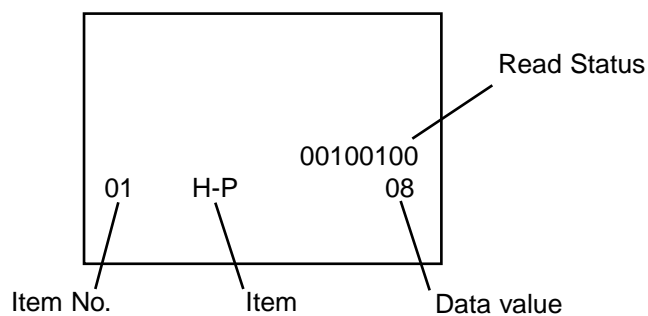


2. Select item by pressing the **CHANNEL DOWN** (Item No. UP) or **CHANNEL UP** (Item No. DOWN) button on the remote control handset.

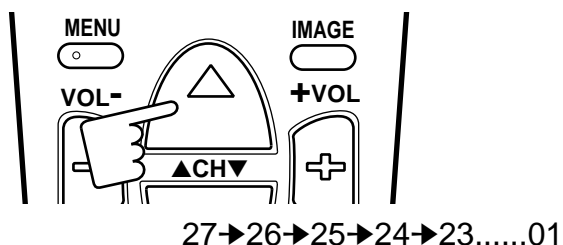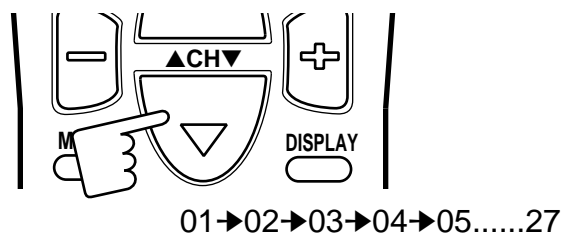


Example

Display for [DRV] White balance adjustment

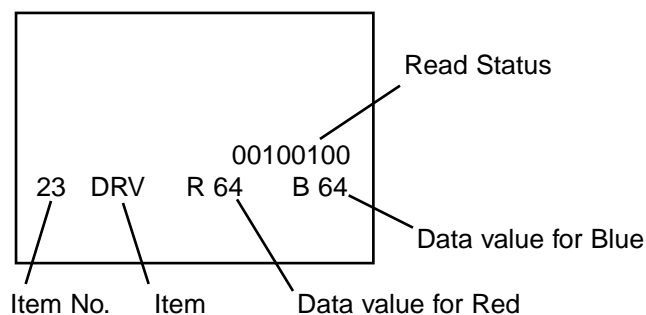

3. Adjust data value by pressing the **VOLUME +** or **VOLUME -** button on the remote control handset.

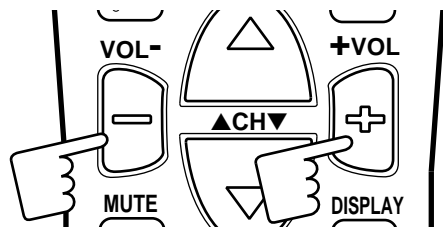


To return to normal TV mode, press the **MENU** button on the TV set or remote control handset.

Service Adjustments with Replacing Memory IC(IC802)


Item 01 [H-P] HORIZONTAL CENTRE

- (1) Receive the monochrome circular pattern.
- (2) Set the brightness and contrast to normal.
- (3) Select [H-P] in the service mode.
- (4) Change value to be optimum horizontal centre position.
- (5) Exit from the service mode.

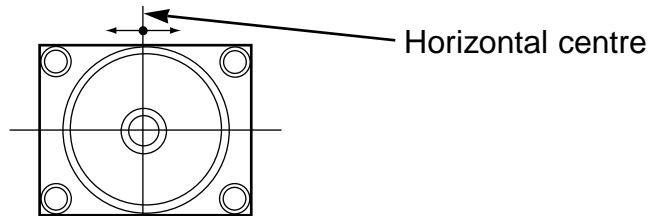


Item 02 [V-P] VERTICAL CENTRE

- (1) Receive the monochrome circular pattern.
- (2) Set the brightness and contrast to maximum.
- (3) Select [V-P] in the service mode.
- (4) Change value to be optimum vertical centre position.
- (5) Exit from the service mode.

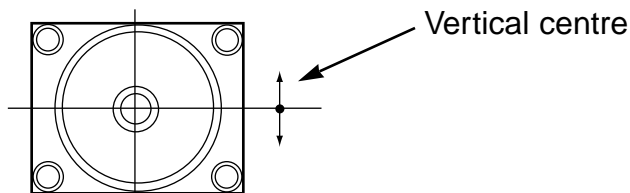

Item 03 [V-S] VERTICAL SIZE

- (1) Receive the monochrome circular pattern.
- (2) Set the brightness and contrast to maximum.
- (3) Select [V-S] in the service mode.
- (4) Change value to be optimum vertical size.
- (5) Exit from the service mode.

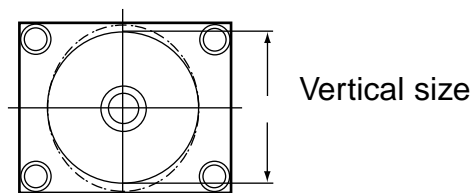

Item 04 [OSD] OSD POSITION


- (1) Receive the monochrome circular pattern.
- (2) Set the brightness and contrast to normal.
- (3) Select [OSD] in the service mode.
- (4) Change value to be proper OSD position.
- (5) Exit from the service mode.

Item 05 [AGC] AGC


NOTE: Do not attempt this adjustment with weak signal.

- (1) Tune the receiver to most clearest (or strongest) VHF station in your area. Set the brightness and contrast controls to maximum. Set the colour control to minimum.
- (2) Select [AGC] in the service mode.
- (3) Change value until the snow noise just disappears.
- (4) Exit from the service mode.

Item 06 [VCO] AFT

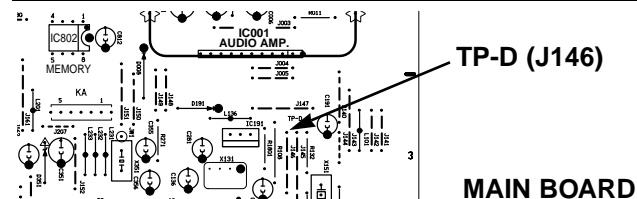


- (1) Connect DC meter to TP-D and the ground.
- (2) Tune the receiver to the clearest station.
- (3) Disconnect RF input. (Disconnect antenna plug from the antenna socket.)
- (4) Select same channel. (If you have selected channel 03 in step 2, press "0" button next "3" button on the remote control to select channel 03.)
- (5) Connect antenna plug to the antenna socket.
- (6) Select [VCO] in the service mode.
- (7) Change value until the voltage (on TP-D) to be $4.5 \pm 0.2V$ at OK point.

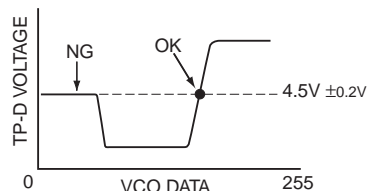

- (8) Exit from the service mode.

CAPTION H-POSITION ADJUSTMENT

- (1) Tune receiver to a CAPTION channel.
- (2) Check that CAPTION position is in the horizontal center of TV screen. If CAPTION center is too right or left, perform steps 3-6. (See Figure below.)
- (3) Select [CCD] in the service mode.
- (4) Adjust the data with + or - key for proper horizontal center.
- (5) Exit from the service mode.

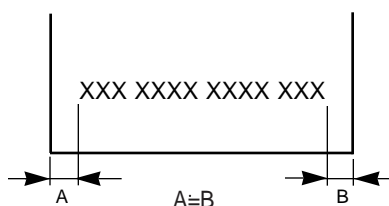



Caption H-Position Adjustment

Service Adjustments with Replacing Memory IC(IC802)

Items 18-24 GREY SCALE

- (1) Receive the monochrome circular pattern.
- (2) Set the brightness and colour to normal, contrast to maximum.
- (3) Enter to the service mode.
- (4) Set each value of Item-18 **RBI**, 19 **GBI**, 20 **BBI** mode to 00. Set each value of Item-21 **RD**, 22 **BD** mode to 64.
- (5) Select Item-24 mode to be one horizontal scanning line and turn the screen volume on the FBT to obtain just visible one coloured line.
- (6) Press the **1 (Red Bias +)**, **4 (Red Bias -)**, **2 (Green Bias +)**, **5 (Green Bias -)**, **3 (Blue Bias +)** or **6 (Blue Bias -)** button to adjust the brightness of each colour until a dim white line produced. Please see the control button allocations in this mode.
- (7) Select Item-23 **DRV** mode to enter the white balance adjusting mode.
- (8) Press the **7 (Red Drive +)**, **CHANNEL RECALL (Red Drive -)**, **8 (Blue Drive +)** or **0 (Blue Drive -)** button alternately to produce normal black and white picture.
- (9) Exit from the service mode.
- (10) Check for proper grey scale tracking at all brightness levels.

NOTE: If the grey scale adjustment is made after picture tube replacement, check the high voltage.

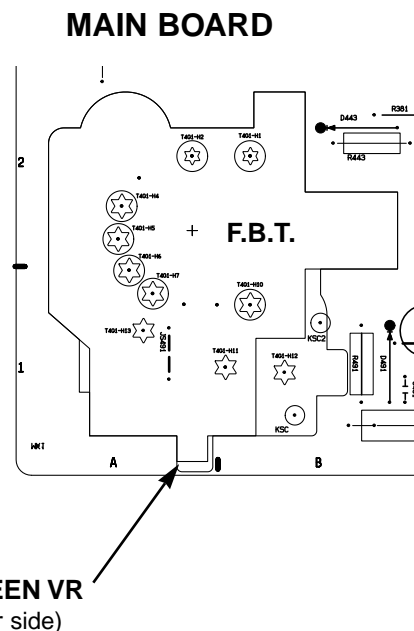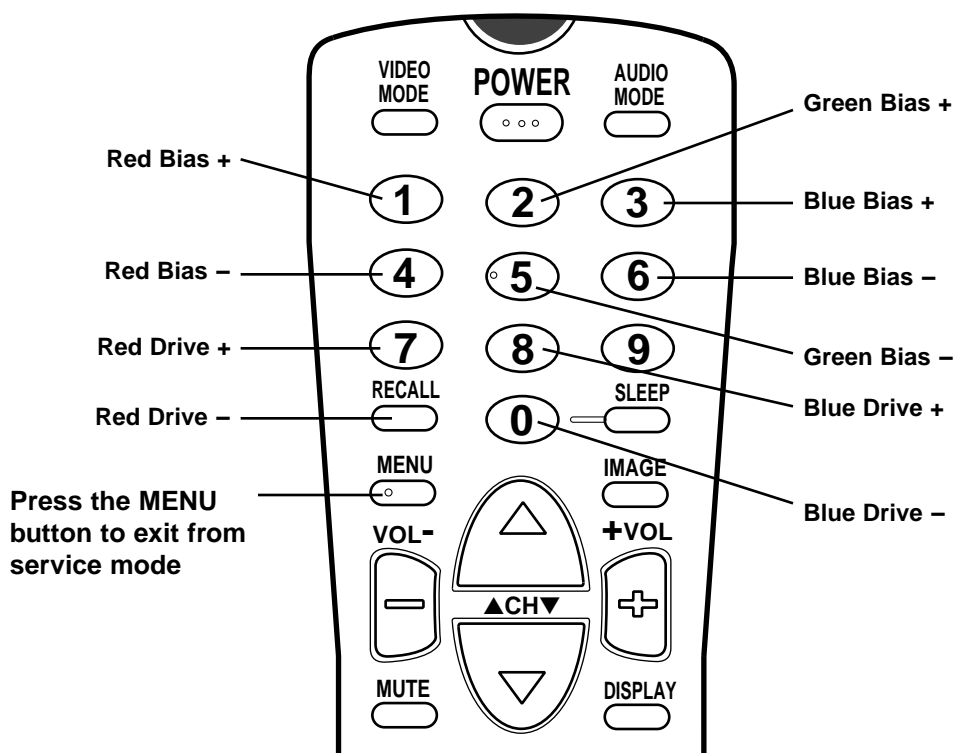


Service Adjustments with Replacing Memory IC(IC802)

[3] Service Adjustment-2


FINE TUNING

This adjustment is used to do a fine tuning of the channels with poor reception after they have been stored by the automatic tuning. This function is available for one channel only and the fine-tuned channel is memorized into IC802 (EEPROM).

1. Press and hold the **MENU** button on the TV set and press the **4** or **MENU** button on the remote control handset to enter to the service mode.

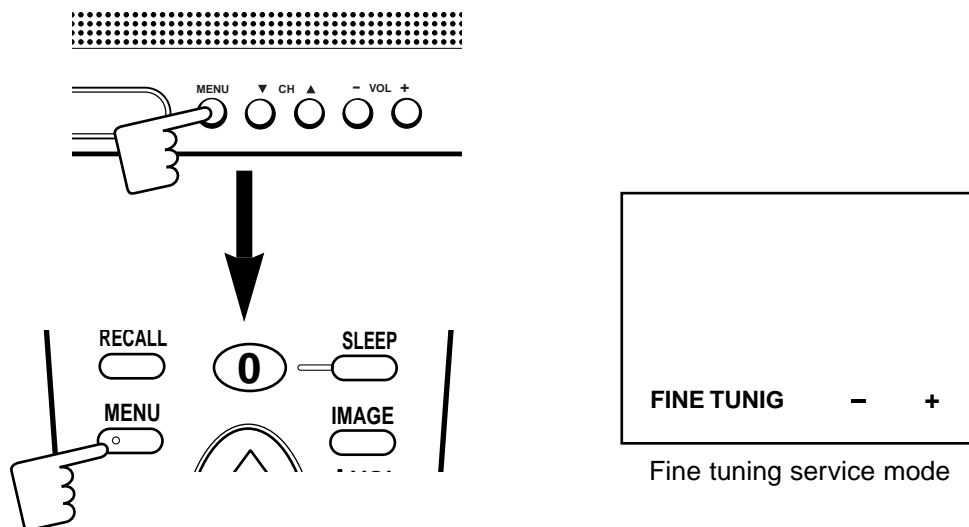

2. Press and hold the **VOLUME +** or **VOLUME -** button on the remote control handset or TV set to make fine tuning adjustment. Press and hold the **VOLUME +** button for higher frequency tuning, and press and hold the **VOLUME -** or lower frequency tuning.

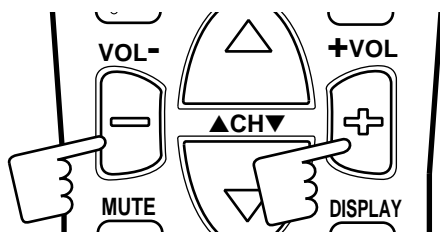

Fine tuning data value will be automatically stored in memory.

To return to normal TV mode, press the **MENU** button on the TV set or remote control handset. (Or will automatically return to normal TV mode after 5 seconds.)

Service Adjustments

Following adjustments are not required to readjust when replacing the memory IC.


FOCUS ADJUSTMENT

- (1) Receive the monochrome circular pattern.
- (2) Set the brightness to normal and contrast to maximum.
- (3) Adjust the focus control on the F.B.T. for the best focus on the screen centre.

HORIZ. WIDTH AND HIGH VOLTAGE CHECK

- (1) Receive the monochrome circular pattern.
- (2) Set the brightness and contrast to maximum.
- (3) If the picture is too wide, or narrow, cut or short the "AJ1" on the main unit. When AJ1 is shorted, the horizontal width increase. When AJ1 is cut, the horizontal width decrease.

Important note: When AJ1 is cut, in order to prevent a spark, leave the opening between cutting portions 5mm or more.



- (4) Connect a high voltage probe to anode lead of the picture tube.
- (5) The high voltage must be 14"=21KV \pm 1KV / 20"=25KV \pm 1KV and less than 14"=25KV \pm 1KV / 20"=27.5KV at 0 beam current (Brightness and contrast minimum setting).


Note: If the picture tube is replaced, check the high voltage. The horiz. width adjustment affects the high voltage. Therefore, re-check the high voltage.

+B POWER SUPPLY ADJUSTMENT

- (1) Connect DC meter to "TP-B" (R638) and the ground. Set the +B adjustment control (VR631) to mid-range.
- (2) Set the brightness to normal and contrast to maximum. Tune the receiver to an active channel and synchronized picture.
- (3) Adjust +B adjustment control (VR631) for 130 \pm 1,0 volt DC.

MAIN BOARD

+B POWER SUPPLY ADJUSTMENT

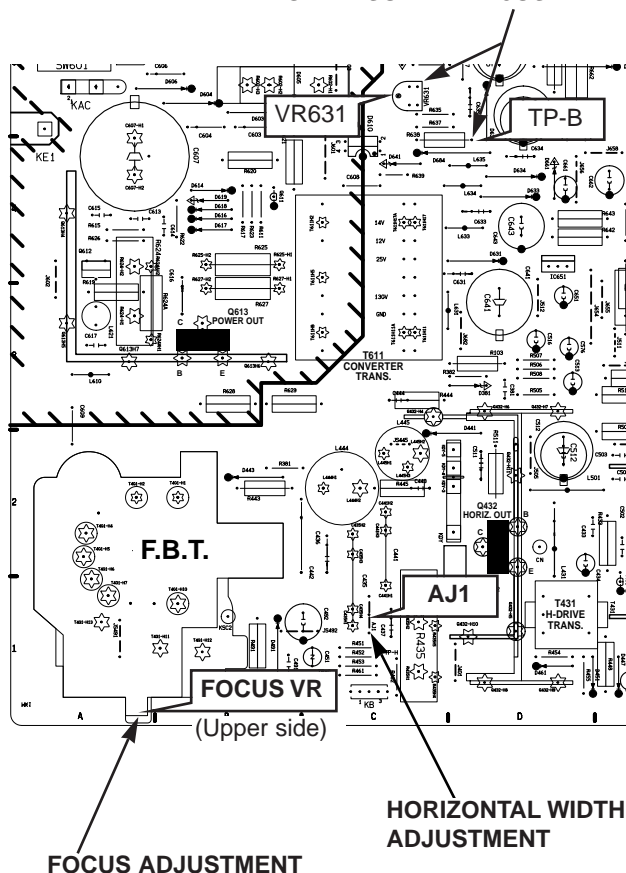

FOCUS ADJUSTMENT

HORIZONTAL WIDTH ADJUSTMENT

Purity and Convergence Adjustment

CAUTION: The Convergence and Purity adjustments have been made at the factory. Readjustment should be made only after picture tube or deflection yoke replacement, following the steps below:

PURITY ADJUSTMENT

1. Demagnetize the picture tube and receiver using an external degaussing coil. When replacing picture tube or deflection yoke, mount deflection yoke and purity-convergence magnets assembly properly, see figures 1 and 4.
2. Turn Red and Blue guns off and provide only Green raster. Rotate Screen control to fully counterclockwise. Rotate Red and Blue Bias controls fully counterclockwise. Slowly rotate Green Bias control clockwise to produce Green raster.
3. Loosen the screw holding the Deflection Yoke and remove the 3 Rubber Wedges, and slide the Deflection Yoke fully forward.
4. Rotate and spread the Tabs of the two Purity Magnets to centre the vertical green belt in the picture screen. The Purity Magnets are also adjusted to obtain vertical centring of the raster.
5. Slowly slide the Deflection Yoke backward until a uniform green screen is obtained.
6. Check the purity of the red and blue screens for uniformity, turn off other colours to check this (use bias controls). Readjust the yoke position if necessary until all screens are pure.
7. Adjust each Bias control and screen control to obtain white raster. Refer to Gray Scale Adjustment. If part of the picture screen is coloured, adjust the Deflection Yoke position forward or backward slightly.

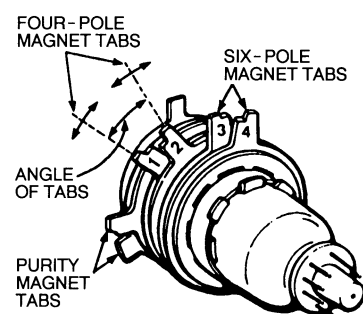


Figure- 1. PURITY AND CONVERGENCE MAGNETS

8. Tighten the mounting screw of the Deflection Yoke. Adjust Convergence next.

CENTRE CONVERGENCE ADJUSTMENT

1. Use a dot crosshatch pattern signal.
2. Turn Red and Blue guns on and turn off Green gun. Adjust the angle between the Tabs of the Four Pole Magnet 1 and 2, and superimpose the Red and Blue vertical lines in the centre area of the picture screen. Refer to figure 2.
3. Keeping the mutual angle of the Tabs of the Four Pole Magnet turn them together to superimpose the Blue and Red horizontal lines in the centre area of the picture screen. Refer to figure 2.
4. Turn Green gun on and adjust Six Pole Magnet 3 and 4 that the Green line superimposed on the Red/Blue lines. This is the same procedure used in steps 2 and 3. Refer to figure 3.

OUTER AREA CONVERGENCE ADJUSTMENT

Slightly loosen the screw holding the Deflection Yoke. Adjust the Deflection Yoke to converge the detail in the outer area (left side and right side) of the picture screen by orbital movement of the front of the Yoke, then secure the Deflection Yoke in appropriate position by putting the wedges as illustrated. Tighten screw holding the Deflection Yoke.

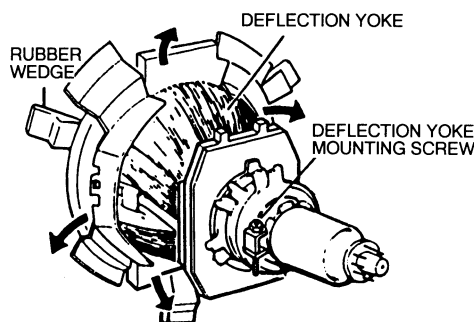


Figure- 4. ADJUSTMENT DEFLECTION YOKE

Adjust tabs angle to superimpose blue and red vertical line.

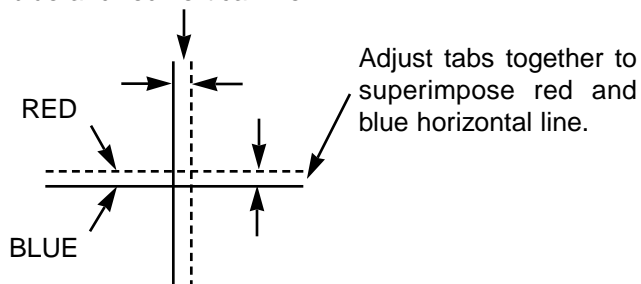


Figure- 2 BLUE AND RED LINE MOVEMENT

Adjust tabs angle to superimpose red/blue and green vertical line.


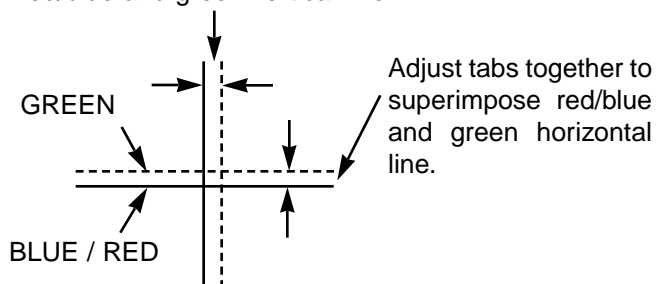


Figure- 3 BLUE/RED AND GREEN MOVEMENT

Note: Parts order must contain Service Ref. No., Part No., and descriptions.


Model C14LT77M

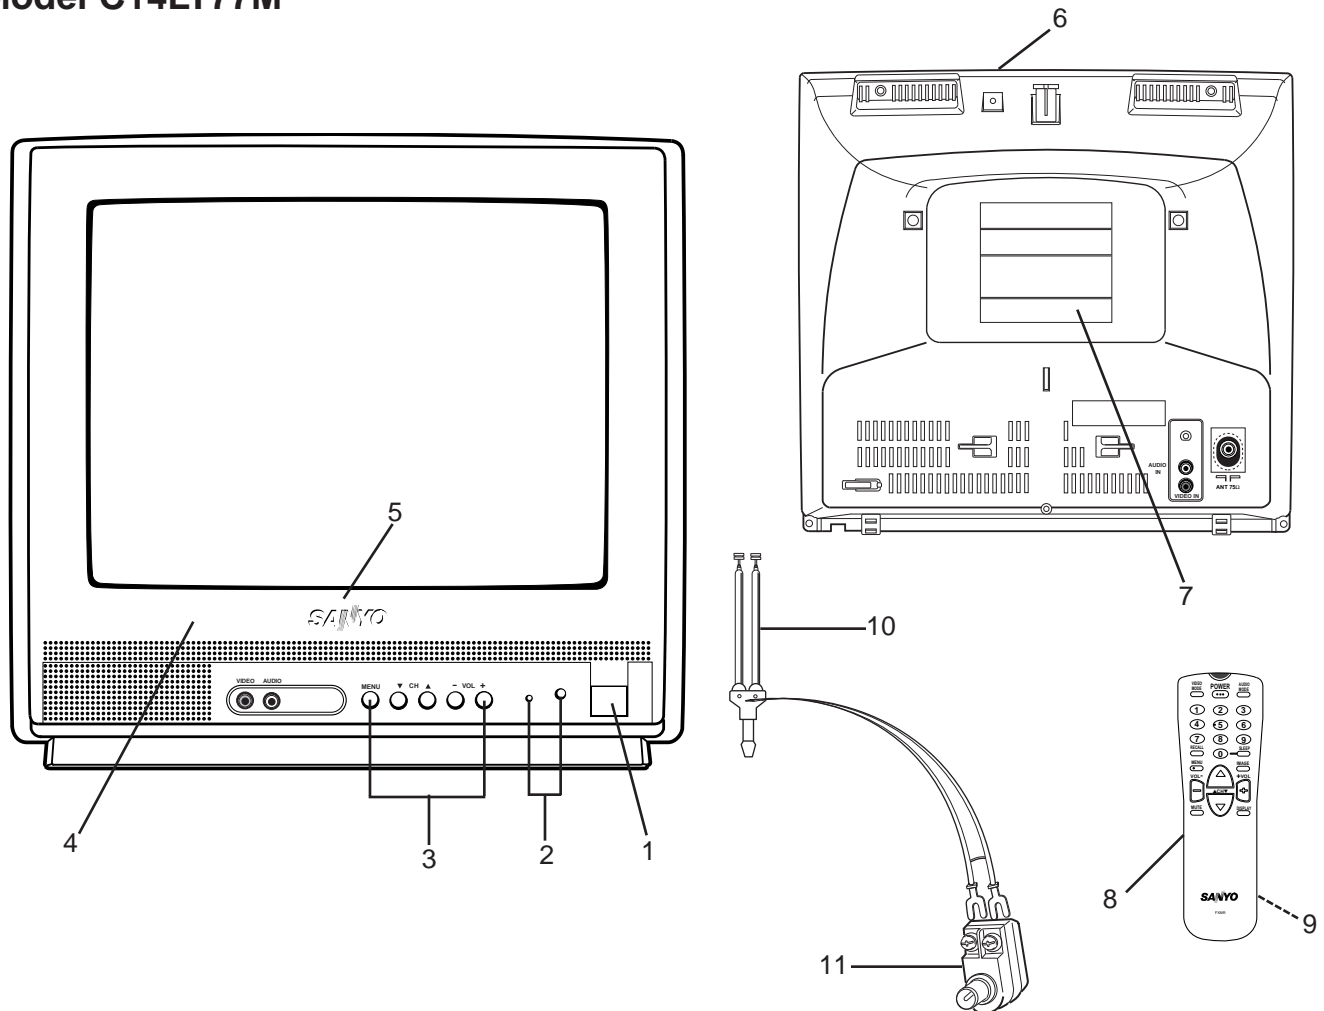

Key No.	Part No.	Description	Key No.	Part No.	Description
1	610 270 2477	BUTTON POWER	10	610 217 1006	ROD ANTENNA ASSY
	610 213 1437	COIL SPRING	or	645 012 0428	ROD ANTENNA ASSY
2	610 270 2453	DEC IND	11	645 004 3925	ANT MATCHING BOX
3	610 270 2484	BUTTON UNITED	or	645 005 0251	ANT MATCHING BOX
4	610 270 2361	CABINET FRONT			
5	645 030 7348	BADGE SANYO		610 291 4443	INSTRUCTIONS MANUAL
or	645 039 1866	BADGE SANYO			
6	610 270 2378	CABINET BACK			
7	610 291 7727	LABEL RATING			
8	645 029 2590	ASSY,REMOCON FXMR			
9	610 273 0173	RC-BATTERY LID			

Note: Parts order must contain Service Ref. No., Part No., and descriptions.

Model C20LB87M

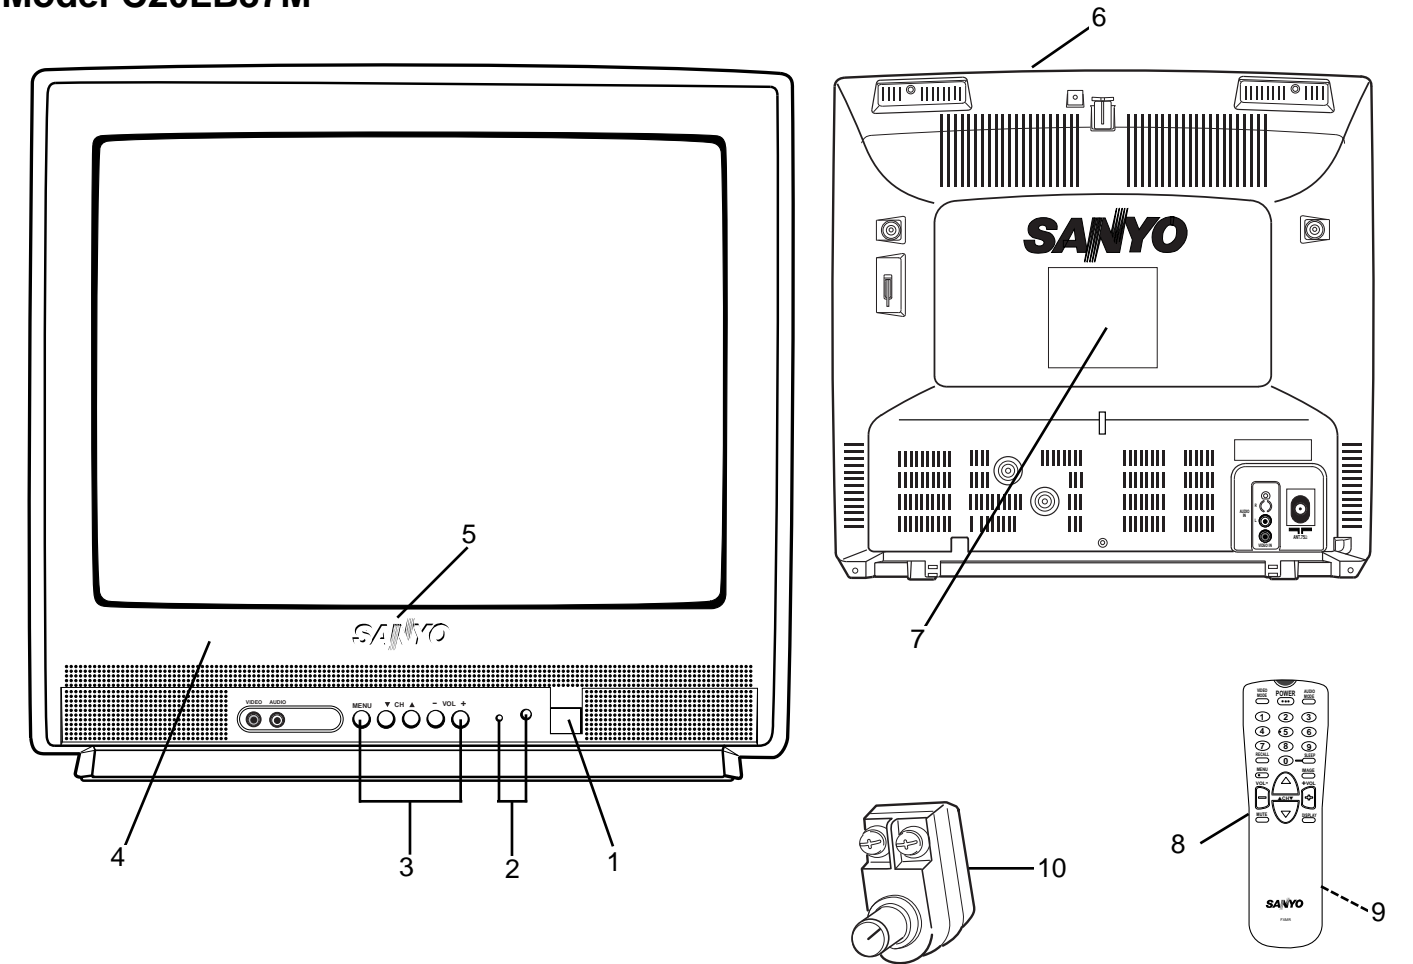

Key No.	Part No.	Description	Key No.	Part No.	Description
1	610 269 8923	BUTTON POWER			
	610 252 8725	SPRING			
or	610 270 5591	SPRING			
2	610 269 9166	DEC IND			
3	610 269 8930	BUTTON UNITED			
4	610 269 6578	CABINET FRONT			
5	645 040 1107	SANYO BADGE			
6	610 269 6585	CABINET BACK			
7	610 291 7734	LABEL RATING			
8	645 029 2590	ASSY,REMOCON FXMR			
9	610 273 0173	RC-BATTERY LID			
10	645 004 3925	ANT MATCHING BOX			
or	645 005 0251	ANT MATCHING BOX			
	610 291 4443	INSTRUCTIONS MANUAL			

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by a Δ mark in this parts list and the circuit diagram show components whose value have special significance to product safety. It is particularly recommended that only parts specified on the following parts list be used for components replacement pointed out by the mark.

Note: Parts order must contain Service Ref. No., Part No., and descriptions. The main PCB unit will be supplied without tuner and flyback transformer. They should be ordered separately.

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
NOTES: Read description in the Capacitor and Resistor as follows: CAPACITOR CERAMIC 100P K 50V <div style="margin-left: 100px;"> <div style="display: inline-block; width: 100px; border-left: 1px solid black; height: 100px; margin-right: 10px;"></div> <div> <p>Rated Voltage</p> <p>Tolerance Symbols: Less than 10pF A : Not specified B : $\pm 0.1\text{pF}$ C : $\pm 0.25\text{pF}$ D : $\pm 0.5\text{pF}$ F : $\pm 1\text{pF}$ G : $\pm 2\text{pF}$ R : $\pm 0.25\text{-}0\text{pF}$ S : $\pm 0\text{-}0.25\text{pF}$ E : $\pm 0\text{-}1\text{pF}$ More than 10pF A : Not specified B : $\pm 0.1\%$ C : $\pm 0.25\%$ D : $\pm 0.5\%$ F : $\pm 1\%$ G : $\pm 2\%$ H : $\pm 3\%$ J : $\pm 5\%$ K : $\pm 10\%$ L : $\pm 15\%$ M : $\pm 20\%$ N : $\pm 30\%$ P : $\pm 100\text{-}0\%$ Q : $\pm 30\text{-}10\%$ T : $\pm 50\text{-}10\%$ U : $\pm 75\text{-}10\%$ V : $\pm 20\text{-}10\%$ W : $\pm 100\text{-}10\%$ X : $\pm 40\text{-}20\%$ Y : $\pm 150\text{-}10\%$ Z : $\pm 80\text{-}20\%$</p> <p>Rated value: P=pico farad, U=micro farad</p> </div> </div> <p>Material:</p> <p>CERAMIC..... Ceramic MT-PAPER..... Metallized Paper POLYESTER..... Polyester MT-POLYEST..... Metallized Polyester POLYPRO..... Polypropylene MT-POLYPRO..... Metallized Polypropylene COMPO FILM..... Composite film MT-COMPO..... Metallized Composite STYRENE..... Styrene TA-SOLID..... Tantalum Solid AL-SOLID..... Aluminium Solid ELECT..... Electrolytic NP-ELECT..... Non-polarised Electrolytic OS-SOLID..... Aluminium Solid with Organic Semiconductive Electrolytic DL-ELECT..... Double Layered Electrolytic</p> RESISTOR CARBON 4.7K J A 1/4W <div style="margin-left: 100px;"> <div style="display: inline-block; width: 100px; border-left: 1px solid black; height: 100px; margin-right: 10px;"></div> <div> <p>Rated Wattage</p> <p>Performance Symbols: A: General B: Non flammable Z: Low noise Other: Temperature coefficient</p> <p>Tolerance Symbols: A: $\pm 0.05\%$ B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$ F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$ M: $\pm 20\%$ P: $\pm 5\text{-}15\%$</p> <p>Rated value, ohms: K: 1,000, M: 1,000,000</p> </div> </div> <p>Material:</p> <p>CARBON..... Carbon MT-FILM..... Metal Film OXIDE-MT..... Oxide Metal Film SOLID..... Composition MT-GLAZE..... Metal Glaze WIRE WOUND... Wire Wound CERAMIC RES.. Ceramic FUSIBLE RES.... Fusible</p>			OUT OF CIRCUIT BOARD PICTURE TUBE Δ Q901 414 010 4505 CRT A34EJL01X21 COIL Δ L901 645 004 8302 COIL,DEGAUSSING 645 045 4486 COIL,DEGAUSSING MISCELLANEOUS SP901 652 000 0650 SPEAKER, 8 Δ W901 645 037 2490 CORD,POWER-2.4MK-A5102 W902 610 024 2081 GROUNDING CONNECTOR 610 261 8648 ASSY,WIRE GND CONNECTOR F 610 293 3499 ASSY,PWB,CTV F5SS 1AA0B10E645B0 610 293 3475 ASSY,PWB,MAIN F5SS 1AA0B10E645BA TRANSISTOR Q111 405 015 9701 TR 2SC2814-F4-TB Q140 405 134 5905 TR 2SA1037AK-T146-R 405 147 2205 TR 2SA1037AK-S-T146 405 002 0308 TR 2SA1037K T146 R 405 002 0407 TR 2SA1037K T146 S 405 002 6706 TR 2SA1179-M6-TB 405 002 6904 TR 2SA1179-M7-TB 405 163 1503 TR 2SA1179N-M6-TB 405 163 2708 TR 2SA1179N-M7-TB Q141 405 134 5905 TR 2SA1037AK-T146-R 405 147 2205 TR 2SA1037AK-S-T146 405 002 0308 TR 2SA1037K T146 R 405 002 0407 TR 2SA1037K T146 S 405 002 6706 TR 2SA1179-M6-TB 405 002 6904 TR 2SA1179-M7-TB 405 163 1503 TR 2SA1179N-M6-TB 405 163 2708 TR 2SA1179N-M7-TB Q171 405 014 4509 TR 2SC2412K T146 R 405 014 4608 TR 2SC2412K T146 S 405 015 8704 TR 2SC2812-L6-TB 405 015 8902 TR 2SC2812-L7-TB 405 163 1602 TR 2SC2812N-L6-TB0 405 163 1701 TR 2SC2812N-L7-TB0 Q212 405 014 4509 TR 2SC2412K T146 R 405 014 4608 TR 2SC2412K T146 S 405 015 8704 TR 2SC2812-L6-TB 405 015 8902 TR 2SC2812-L7-TB 405 163 1602 TR 2SC2812N-L6-TB0 405 163 1701 TR 2SC2812N-L7-TB0 Q213 405 014 4509 TR 2SC2412K T146 R 405 014 4608 TR 2SC2412K T146 S 405 015 8704 TR 2SC2812-L6-TB 405 015 8902 TR 2SC2812-L7-TB 405 163 1602 TR 2SC2812N-L6-TB0 405 163 1701 TR 2SC2812N-L7-TB0		

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
Q261	405 134 5905	TR 2SA1037AK-T146-R		405 002 0308	TR 2SA1037K T146 R
	405 147 2205	TR 2SA1037AK-S-T146		405 002 0407	TR 2SA1037K T146 S
	405 002 0308	TR 2SA1037K T146 R		405 002 6706	TR 2SA1179-M6-TB
	405 002 0407	TR 2SA1037K T146 S		405 002 6904	TR 2SA1179-M7-TB
	405 002 6706	TR 2SA1179-M6-TB		405 163 1503	TR 2SA1179N-M6-TB
	405 002 6904	TR 2SA1179-M7-TB		405 163 2708	TR 2SA1179N-M7-TB
	405 163 1503	TR 2SA1179N-M6-TB	Q871	405 014 4509	TR 2SC2412K T146 R
	405 163 2708	TR 2SA1179N-M7-TB		405 014 4608	TR 2SC2412K T146 S
Q431	405 013 6801	TR 2SC2274-E		405 015 8704	TR 2SC2812-L6-TB
	405 013 7006	TR 2SC2274-F		405 015 8902	TR 2SC2812-L7-TB
Q432	405 157 1304	TR 2SD2634-YB		405 163 1602	TR 2SC2812N-L6-TB0
Q576	405 014 4509	TR 2SC2412K T146 R		405 163 1701	TR 2SC2812N-L7-TB0
	405 014 4608	TR 2SC2412K T146 S	Q881	405 014 4509	TR 2SC2412K T146 R
	405 015 8704	TR 2SC2812-L6-TB		405 014 4608	TR 2SC2412K T146 S
	405 015 8902	TR 2SC2812-L7-TB		405 015 8704	TR 2SC2812-L6-TB
	405 163 1602	TR 2SC2812N-L6-TB0		405 015 8902	TR 2SC2812-L7-TB
	405 163 1701	TR 2SC2812N-L7-TB0		405 163 1602	TR 2SC2812N-L6-TB0
Q611	406 000 6804	TR 2SA1015-GR(SAN)		405 163 1701	TR 2SC2812N-L7-TB0
	405 001 7407	TR 2SA1015-O(SAN)	Q886	405 014 4509	TR 2SC2412K T146 R
	405 001 7605	TR 2SA1015-Y(SAN)		405 014 4608	TR 2SC2412K T146 S
	405 004 3109	TR 2SA564A-Q(CU)		405 015 8704	TR 2SC2812-L6-TB
	405 004 3208	TR 2SA564A-R(CU)		405 015 8902	TR 2SC2812-L7-TB
	405 151 3304	TR 2SA608NF-NPA		405 163 1602	TR 2SC2812N-L6-TB0
	405 006 1707	TR 2SA933S-Q		405 163 1701	TR 2SC2812N-L7-TB0
	405 006 1806	TR 2SA933S-R	INTEGRATED CIRCUIT		
Q612	405 058 0208	TR 2SC3807-R-CTV-YA	IC001	409 365 3006	IC LA4285
Q613	405 022 8506	TR 2SD1710-CTV-YB	IC191	409 241 5407	IC BA178M05T
Q631	405 014 4509	TR 2SC2412K T146 R		409 172 1509	IC MC78M05CT
	405 014 4608	TR 2SC2412K T146 S		409 320 5700	IC UPC78M05AHF
	405 015 8704	TR 2SC2812-L6-TB	IC201	410 342 8907	IC QXXAVB488---M
	405 015 8902	TR 2SC2812-L7-TB	IC501	409 340 1805	IC LA7840
	405 163 1602	TR 2SC2812N-L6-TB0	IC651	409 241 5407	IC BA178M05T
	405 163 1701	TR 2SC2812N-L7-TB0		409 124 5302	IC L78M05T
Q661	405 059 9903	TR 2SD1913-R-RA		409 172 1509	IC MC78M05CT
	405 060 0005	TR 2SD1913-S-RA		409 320 5700	IC UPC78M05AHF
Q681	405 014 4509	TR 2SC2412K T146 R	IC801	410 360 3304	IC LC863428V-5P71-TLM
	405 014 4608	TR 2SC2412K T146 S	IC802	409 333 3700	IC 24LC02B/P
	405 015 8704	TR 2SC2812-L6-TB	CAPACITOR		
	405 015 8902	TR 2SC2812-L7-TB	C001	403 049 0008	ELECT 1U M 50V
	405 163 1602	TR 2SC2812N-L6-TB0	C002	403 157 6701	CERAMIC 560P K 50V
	405 163 1701	TR 2SC2812N-L7-TB0	C005	403 043 9106	ELECT 47U M 16V
Q683	405 089 0000	TR 2SA1707-S	C006	403 041 8804	ELECT 10U M 16V
	405 089 0109	TR 2SA1707-T	C007	403 045 9807	ELECT 2200U M 25V
	405 009 6907	TR 2SB985-S	C008	403 164 0204	CERAMIC 0.1U Z 25V
	405 009 7003	TR 2SB985-T	C009	403 281 5205	CERAMIC 0.22U Z 16V
Q684	405 014 4509	TR 2SC2412K T146 R	C010	403 045 1504	ELECT 1000U M 25V
	405 014 4608	TR 2SC2412K T146 S	C015	403 164 0204	CERAMIC 0.1U Z 25V
	405 015 8704	TR 2SC2812-L6-TB	C101	403 044 1703	ELECT 470U M 16V
	405 015 8902	TR 2SC2812-L7-TB	C102	403 038 8602	ELECT 33U M 6.3V
	405 163 1602	TR 2SC2812N-L6-TB0	C103	403 051 0607	ELECT 4.7U M 50V
	405 163 1701	TR 2SC2812N-L7-TB0	C106	403 051 0607	ELECT 4.7U M 50V
Q685	405 014 4509	TR 2SC2412K T146 R	C111	403 149 9208	CERAMIC 0.01U Z 50V
	405 014 4608	TR 2SC2412K T146 S	C112	403 149 9208	CERAMIC 0.01U Z 50V
	405 015 8704	TR 2SC2812-L6-TB	C113	403 149 9208	CERAMIC 0.01U Z 50V
	405 015 8902	TR 2SC2812-L7-TB	C132	403 149 9208	CERAMIC 0.01U Z 50V
	405 163 1602	TR 2SC2812N-L6-TB0	C136	403 043 3906	ELECT 33U M 16V
	405 163 1701	TR 2SC2812N-L7-TB0	C137	403 149 9208	CERAMIC 0.01U Z 50V
Q686	405 134 5905	TR 2SA1037AK-T146-R	C138	403 048 1907	ELECT 0.22U M 50V
	405 147 2205	TR 2SA1037AK-S-T146	C142	403 042 7707	ELECT 22U M 16V
	405 002 0308	TR 2SA1037K T146 R	C151	403 157 2901	CERAMIC 47P J 50V
	405 002 0407	TR 2SA1037K T146 S	C152	403 157 2901	CERAMIC 47P J 50V
	405 002 6706	TR 2SA1179-M6-TB	C171	403 048 1907	ELECT 0.22U M 50V
	405 002 6904	TR 2SA1179-M7-TB	C172	403 049 0008	ELECT 1U M 50V
	405 163 1503	TR 2SA1179N-M6-TB	C173	403 155 2200	CERAMIC 3300P K 50V
	405 163 2708	TR 2SA1179N-M7-TB	C177	403 048 4205	ELECT 0.33U M 50V
Q861	405 134 5905	TR 2SA1037AK-T146-R			
	405 147 2205	TR 2SA1037AK-S-T146			

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
C191	403 041 2109	ELECT 47U M 10V		403 275 8205	CERAMIC 680P K 2K
C201	403 043 9106	ELECT 47U M 16V	C617	403 059 6205	POLYESTER 0.022U K 50V
C202	403 149 9208	CERAMIC 0.01U Z 50V		403 312 0506	POLYESTER 0.022U K 50V
C206	403 218 3106	ELECT 1000U M 16V	C631	403 247 5003	CERAMIC 470P K 1K
C207	403 149 9208	CERAMIC 0.01U Z 50V		403 269 1809	CERAMIC 470P K 1K
C211	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	C633	403 247 5003	CERAMIC 470P K 1K
C212	401 150 6001	MT-GLAZE 0.000 ZA 1/10W		403 269 1809	CERAMIC 470P K 1K
C216	403 049 0008	ELECT 1U M 50V	C641	404 073 9005	ELECT 220U M 160V
C221	403 164 0204	CERAMIC 0.1U Z 25V	C643	403 053 6904	ELECT 330U M 35V
C222	403 164 0204	CERAMIC 0.1U Z 25V	C644	403 045 1504	ELECT 1000U M 25V
C223	403 164 0204	CERAMIC 0.1U Z 25V	C645	403 045 1504	ELECT 1000U M 25V
C241	403 155 9704	NP-ELECT 0.1U M 50V	C651	403 040 9406	ELECT 330U M 10V
C243	403 155 9704	NP-ELECT 0.1U M 50V	C661	403 043 0202	ELECT 220U M 16V
C246	403 049 0008	ELECT 1U M 50V	C662	403 043 6006	ELECT 330U M 16V
C247	403 215 2409	CERAMIC 0.015U K 50V	C685	403 049 0008	ELECT 1U M 50V
C248	403 149 9208	CERAMIC 0.01U Z 50V	C801	403 155 4204	CERAMIC 15P J 50V
C281	403 049 9803	ELECT 2.2U M 50V	C802	403 155 4204	CERAMIC 15P J 50V
C351	403 044 1703	ELECT 470U M 16V	C803	403 149 9208	CERAMIC 0.01U Z 50V
C354	403 215 2201	CERAMIC 0.01U K 50V	C804	403 224 7006	CERAMIC 0.047U Z 50V
C355	403 048 6308	ELECT 0.47U M 50V	C811	403 149 9208	CERAMIC 0.01U Z 50V
C356	403 048 6308	ELECT 0.47U M 50V	C812	403 041 8804	ELECT 10U M 16V
C357	403 215 2201	CERAMIC 0.01U K 50V	C832	403 149 9208	CERAMIC 0.01U Z 50V
C359	403 215 2201	CERAMIC 0.01U K 50V	C851	403 155 1609	CERAMIC 33P J 50V
C361	403 260 2003	MT-COMPO 1U J 50V	C853	403 155 1609	CERAMIC 33P J 50V
	403 270 2109	MT-COMPO 1U J 50V	C854	403 155 1609	CERAMIC 33P J 50V
C371	403 157 6800	CERAMIC 680P K 50V	C855	403 155 1609	CERAMIC 33P J 50V
C372	403 049 0008	ELECT 1U M 50V	C861	403 049 0008	ELECT 1U M 50V
C432	403 075 7101	CERAMIC 1000P K 500V	C878	403 060 8403	POLYESTER 0.033U K 50V
C433	403 076 3102	CERAMIC 3900P K 500V		403 312 1305	POLYESTER 0.033U K 50V
C434	403 054 0703	ELECT 47U M 35V	C891	403 113 3805	CERAMIC 1000P K 50V
C435	404 040 7904	MT-POLYPRO 6800P J 1.5K	C892	403 049 0008	ELECT 1U M 50V
	404 066 5700	MT-POLYPRO 6800P H 1.5K	C893	403 049 9803	ELECT 2.2U M 50V
C436	403 324 2505	CERAMIC 390P K 3K	C894	403 281 5007	CERAMIC 0.033U K 25V
	403 275 8403	CERAMIC 390P K 3K	C895	403 041 8804	ELECT 10U M 16V
C437	403 067 7805	MT-COMPO 0.47U J 50V	RESISTOR		
	403 256 0808	MT-COMPO 0.47U J 50V	R001	401 150 5905	MT-GLAZE 10K JA 1/10W
C441	403 083 1009	POLYPRO 0.47U J 200V	R002	401 150 5905	MT-GLAZE 10K JA 1/10W
C445	403 049 4204	ELECT 10U M 50V	R005	401 256 6905	MT-GLAZE 680 JA 1/10W
C451	404 056 5307	NP-ELECT 2.2U M 100V	R006	401 162 4002	MT-GLAZE 560 JA 1/10W
C501	403 054 1502	ELECT 470U M 35V	R009	401 150 6100	MT-GLAZE 2.2K JA 1/10W
C502	403 053 2104	ELECT 220U M 35V	R011	401 019 6203	CARBON 4.7 JA 1/4W
C503	403 023 9607	CERAMIC 39P J 50V	R1001	401 256 2709	MT-GLAZE 75 JA 1/10W
C504	403 149 9208	CERAMIC 0.01U Z 50V	R1006	401 150 6209	MT-GLAZE 1K JA 1/10W
C511	403 188 1201	MT-POLYEST 0.15U K 100V	R1007	401 150 5806	MT-GLAZE 100K JA 1/10W
	403 313 7603	MT-COMPO 0.15U J 100V	R103	401 061 8101	OXIDE-MT 39K JA 1W
C512	403 045 1504	ELECT 1000U M 25V	R106	401 255 6500	MT-GLAZE 100 JA 1/10W
C513	403 204 1802	ELECT 3.3U K 50V	R107	401 255 6500	MT-GLAZE 100 JA 1/10W
C576	403 041 8804	ELECT 10U M 16V	R108	401 026 1307	CARBON 27K JA 1/6W
C601	404 072 7705	MT-POLYEST 0.068U M 250V	R109	401 162 3005	MT-GLAZE 22K JA 1/10W
	404 079 6503	MT-POLYEST 0.068U M 250V	R1106	401 105 0504	MT-GLAZE 1K JA 1/16W
	404 073 7506	MT-POLYEST 0.068U M 275V	R111	401 150 6209	MT-GLAZE 1K JA 1/10W
C606	403 076 6707	CERAMIC 1000P K 1K	R112	401 162 4101	MT-GLAZE 5.6K JA 1/10W
	403 312 8205	CERAMIC 1000P K 1K	R113	401 255 6500	MT-GLAZE 100 JA 1/10W
C607	404 067 4009	ELECT 100U M 400V	R114	401 162 2909	MT-GLAZE 220 JA 1/10W
	404 035 6004	ELECT 100U T 400V	R116	401 256 7407	MT-GLAZE 39 JA 1/10W
△C608	404 073 5106	CERAMIC 470P K 250V	R132	401 025 2305	CARBON 150K JA 1/6W
	404 073 3300	CERAMIC 470P M 250V	R133	401 256 0200	MT-GLAZE 120K JA 1/10W
	404 071 4507	CERAMIC 470P K 400V	R134	401 256 5809	MT-GLAZE 270K JA 1/10W
△C609	404 073 5106	CERAMIC 470P K 250V	R140	401 162 3708	MT-GLAZE 4.7K JA 1/10W
	404 073 3300	CERAMIC 470P M 250V	R141	401 025 7409	CARBON 220 JA 1/6W
	404 071 4507	CERAMIC 470P K 400V	R142	401 162 2909	MT-GLAZE 220 JA 1/10W
C613	403 056 8103	POLYESTER 1000P K 50V	R144	401 256 7506	MT-GLAZE 390 JA 1/10W
C614	403 061 3407	POLYESTER 0.039U J 50V	R145	401 162 3609	MT-GLAZE 470 JA 1/10W
	403 312 1701	POLYESTER 0.039U J 50V	R146	401 150 6001	MT-GLAZE 0.000 ZA 1/10W
C615	403 214 5203	POLYESTER 0.012U J 50V	R147	401 150 6100	MT-GLAZE 2.2K JA 1/10W
	403 311 9203	POLYESTER 0.012U J 50V	R151	401 152 3206	MT-GLAZE 330 JA 1/10W
C616	403 247 6604	CERAMIC 680P K 2K			

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R170	401 150 5905	MT-GLAZE 10K JA 1/10W	R506	401 025 8208	CARBON 22K JA 1/6W
R171	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	R507	401 024 9701	CARBON 12K JA 1/6W
R172	401 150 5905	MT-GLAZE 10K JA 1/10W	R508	401 025 1605	CARBON 1.5K JA 1/6W
R173	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	R509	401 008 4401	CARBON 2.7 JA 1/2W
R174	401 255 9501	MT-GLAZE 220K JA 1/10W	R511	401 060 2704	OXIDE-MT 220 JA 1W
R1902	401 256 7209	MT-GLAZE 18K JA 1/10W	R514	401 007 4709	CARBON 1.2K JA 1/2W
R1903	401 256 7308	MT-GLAZE 6.8K JA 1/10W	R571	401 024 7004	CARBON 1K JA 1/6W
R1904	401 162 3708	MT-GLAZE 4.7K JA 1/10W	R576	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R1905	401 256 5908	MT-GLAZE 2.7K JA 1/10W	R577	401 256 0309	MT-GLAZE 820 JA 1/10W
R1906	401 025 7805	CARBON 2.2K JA 1/6W	R601	401 008 8607	CARBON 220K JA 1/2W
R1907	401 256 6202	MT-GLAZE 270 JA 1/10W	R602	402 060 8109	WIRE WOUND 3.9 KA 5W
R1908	401 150 5905	MT-GLAZE 10K JA 1/10W		402 072 4205	WIRE WOUND 3.9 KA 5W
R1911	401 162 3609	MT-GLAZE 470 JA 1/10W	R611	401 027 2600	CARBON 5.6K JA 1/6W
R1912	401 162 3609	MT-GLAZE 470 JA 1/10W	R615	401 025 8208	CARBON 22K JA 1/6W
R1913	401 162 3609	MT-GLAZE 470 JA 1/10W	R617	401 025 7805	CARBON 2.2K JA 1/6W
R212	401 256 5304	MT-GLAZE 56K JA 1/10W	R619	401 008 6702	CARBON 220 JA 1/2W
R213	401 256 5304	MT-GLAZE 56K JA 1/10W	R620	401 007 5805	CARBON 120K JA 1/2W
R214	401 256 3607	MT-GLAZE 15K JA 1/10W	R621	401 007 5805	CARBON 120K JA 1/2W
R215	401 256 3607	MT-GLAZE 15K JA 1/10W	R622	401 014 5201	CARBON 15K JA 1/4W
R216	401 256 6301	MT-GLAZE 47K JA 1/10W	R624A	401 069 1708	OXIDE-MT 68 JA 2W
R217	401 256 1702	MT-GLAZE 33K JA 1/10W	R625	401 068 6902	OXIDE-MT 56 JA 2W
R221	401 105 7305	MT-GLAZE 820 JA 1/16W	R626	401 017 1507	CARBON 2.7K GA 1/4W
R222	401 105 7305	MT-GLAZE 820 JA 1/16W	△R628	402 000 8305	SOLID 5.6M KA 1/2W
R223	401 105 7305	MT-GLAZE 820 JA 1/16W	△R629	402 000 8305	SOLID 5.6M KA 1/2W
R225	401 256 7605	MT-GLAZE 3.9K JA 1/10W	R635	401 012 8105	CARBON 100K JA 1/4W
R231	401 150 6100	MT-GLAZE 2.2K JA 1/10W	R636	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R232	401 150 6100	MT-GLAZE 2.2K JA 1/10W	R637	401 014 6109	CARBON 150K JA 1/4W
R233	401 150 6100	MT-GLAZE 2.2K JA 1/10W	R638	401 062 3006	OXIDE-MT 47K JA 1W
R246	401 162 3104	MT-GLAZE 3.3K JA 1/10W	R639	401 025 8208	CARBON 22K JA 1/6W
R248	401 256 7704	MT-GLAZE 3.9M JA 1/10W	R642	401 012 7009	CARBON 10K JA 1/4W
R261	401 162 3104	MT-GLAZE 3.3K JA 1/10W	R644	401 062 8803	OXIDE-MT 6.8 JA 1W
R262	401 025 7409	CARBON 220 JA 1/6W	R661	401 060 2704	OXIDE-MT 220 JA 1W
R263	401 025 7409	CARBON 220 JA 1/6W	R662	401 069 0404	OXIDE-MT 6.8 JA 2W
R271	401 024 6700	CARBON 100 JA 1/6W	R663	401 013 6407	CARBON 12K JA 1/4W
R272	401 255 6500	MT-GLAZE 100 JA 1/10W	R681	401 162 2800	MT-GLAZE 1.8K JA 1/10W
R281	401 162 3807	MT-GLAZE 470K JA 1/10W	R682	401 025 8703	CARBON 220K JA 1/6W
R351	401 063 1001	OXIDE-MT 680 JA 1W	R683	401 256 5106	MT-GLAZE 560K JA 1/10W
R356	401 162 3708	MT-GLAZE 4.7K JA 1/10W	R684	401 150 5905	MT-GLAZE 10K JA 1/10W
R357	401 256 5106	MT-GLAZE 560K JA 1/10W	R685	401 162 3005	MT-GLAZE 22K JA 1/10W
R361	401 150 6209	MT-GLAZE 1K JA 1/10W	R686	401 012 7009	CARBON 10K JA 1/4W
R364	401 162 3005	MT-GLAZE 22K JA 1/10W	R687	401 019 1901	CARBON 3.9K JA 1/4W
R372	401 162 4002	MT-GLAZE 560 JA 1/10W	R688	401 162 3005	MT-GLAZE 22K JA 1/10W
R373	401 256 5106	MT-GLAZE 560K JA 1/10W	R689	401 256 5106	MT-GLAZE 560K JA 1/10W
R380	401 162 3708	MT-GLAZE 4.7K JA 1/10W	R801	401 256 5809	MT-GLAZE 270K JA 1/10W
R381	401 012 7009	CARBON 10K JA 1/4W	R811	401 256 6301	MT-GLAZE 47K JA 1/10W
R382	401 021 3009	CARBON 5.6K JA 1/4W	R812	401 150 5905	MT-GLAZE 10K JA 1/10W
R383	401 025 7409	CARBON 220 JA 1/6W	R814	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R384	401 150 5905	MT-GLAZE 10K JA 1/10W	R816	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R385	401 024 7400	CARBON 10K JA 1/6W	R818	401 256 6905	MT-GLAZE 680 JA 1/10W
R430	401 150 6209	MT-GLAZE 1K JA 1/10W	R819	401 256 6905	MT-GLAZE 680 JA 1/10W
R432	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	R831	401 150 5905	MT-GLAZE 10K JA 1/10W
R433	401 007 1104	CARBON 1K JA 1/2W	R832	401 150 6001	MT-GLAZE 0.000 ZA 1/10W
R434	401 011 5501	CARBON 820 JA 1/2W	R834	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R435	402 068 6008	WIRE WOUND 12 KA 5W	R835	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R443	401 062 1200	OXIDE-MT 470 JA 1W	R836	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R445	401 008 8102	CARBON 22K JA 1/2W	R837	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R447	401 026 7002	CARBON 3.9K JA 1/6W	R838	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R448	401 010 3102	CARBON 470 JA 1/2W	R839	401 255 6500	MT-GLAZE 100 JA 1/10W
R451	401 015 4708	CARBON 180K JA 1/4W	R840	401 255 6500	MT-GLAZE 100 JA 1/10W
R453	401 024 7004	CARBON 1K JA 1/6W	R841	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R454	401 024 7400	CARBON 10K JA 1/6W	R842	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R455	401 012 8105	CARBON 100K JA 1/4W	R851	401 256 7605	MT-GLAZE 3.9K JA 1/10W
R461	401 025 0004	CARBON 120K JA 1/6W	R853	401 162 4101	MT-GLAZE 5.6K JA 1/10W
R462	401 026 9907	CARBON 4.7K JA 1/6W	R855	401 162 4101	MT-GLAZE 5.6K JA 1/10W
R481	401 061 0808	OXIDE-MT 3.9 JA 1W	R857	401 162 4101	MT-GLAZE 5.6K JA 1/10W
R501	401 018 2800	CARBON 330 JA 1/4W	R861	401 152 3206	MT-GLAZE 330 JA 1/10W
R505	401 025 7805	CARBON 2.2K JA 1/6W	R862	401 150 5905	MT-GLAZE 10K JA 1/10W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R863	401 150 5905	MT-GLAZE 10K JA 1/10W	D384	408 008 2406	DIODE 1N4148
R870	401 025 8208	CARBON 22K JA 1/6W		407 013 4306	DIODE 1S2076A
R871	401 150 5905	MT-GLAZE 10K JA 1/10W		407 013 6508	DIODE 1S2471
R878	401 162 4101	MT-GLAZE 5.6K JA 1/10W	D385	408 008 2406	DIODE 1N4148
R879	401 026 1307	CARBON 27K JA 1/6W		407 013 4306	DIODE 1S2076A
R881	401 150 5905	MT-GLAZE 10K JA 1/10W		407 013 6508	DIODE 1S2471
R883	401 256 1702	MT-GLAZE 33K JA 1/10W	D443	407 124 6404	DIODE ERA18-04
R886	401 162 3005	MT-GLAZE 22K JA 1/10W		407 007 6606	DIODE ES1
R891	401 162 2909	MT-GLAZE 220 JA 1/10W		407 124 5506	DIODE RMPG06G
R892	401 255 6005	MT-GLAZE 1M JA 1/10W	D445	408 008 2406	DIODE 1N4148
R893	401 255 6005	MT-GLAZE 1M JA 1/10W		407 013 4306	DIODE 1S2076A
R894	401 255 6500	MT-GLAZE 100 JA 1/10W		407 013 6508	DIODE 1S2471
R896	401 256 1702	MT-GLAZE 33K JA 1/10W	D446	407 099 5907	ZENER DIODE MTZJ8.2C
R897	401 027 8602	CARBON 8.2K JA 1/6W		407 057 8407	ZENER DIODE RD8.2EB3
R898	401 027 5205	CARBON 680 JA 1/6W	D447	408 008 2406	DIODE 1N4148
R899	401 024 7004	CARBON 1K JA 1/6W		407 013 4306	DIODE 1S2076A
VARIABLE RESISTOR				407 013 6508	DIODE 1S2471
VR631	645 006 5514	VR, SEMI, 2.2K N	D461	408 008 2406	DIODE 1N4148
	645 003 5579	VR, SEMI, 2.2K N		407 013 4306	DIODE 1S2076A
	645 023 5160	VR, SEMI, 2K N		407 013 6508	DIODE 1S2471
	610 239 7574	VR B-2K	D501	407 005 7308	DIODE EM01Z
TRANSFORMER				408 009 9008	DIODE BYD33D
△T401	652 000 0766	TRANS, FRYBACK	D521	407 005 7308	DIODE EM01Z
T431	610 000 1060	DRIVE TRANS		407 005 8602	DIODE ERA15-02
	652 000 0698	TRANS, DRIVE		408 009 9008	DIODE BYD33D
△T611	652 000 1633	TRANS, POWER, PULSE	D571	407 099 7901	ZENER DIODE MTZJ20B
COIL				407 055 1806	ZENER DIODE RD20EB2
L136	645 008 2894	INDUCTOR, 5.6U K	D572	408 008 2406	DIODE 1N4148
L140	645 001 4567	INDUCTOR, 10U K		407 013 4306	DIODE 1S2076A
L141	645 003 9751	INDUCTOR, 18U K		407 013 6508	DIODE 1S2471
L151	645 003 9713	INDUCTOR, 15U K	D603	407 006 6300	DIODE ERC05-10B
L171	645 032 8633	TRANS, OSC, 45.75MHZ		407 009 6901	DIODE RM11C
L201	645 008 0159	INDUCTOR, 47U K	D604	407 006 6300	DIODE ERC05-10B
L431	610 031 9998	PIPE CORE		407 009 6901	DIODE RM11C
L432	610 031 9998	PIPE CORE	D605	407 006 6300	DIODE ERC05-10B
L445	610 203 9078	COIL		407 009 6901	DIODE RM11C
	610 230 8839	COIL	D606	407 006 6300	DIODE ERC05-10B
L601	610 031 5938	LINE FILTER		407 009 6901	DIODE RM11C
	645 017 6159	LINE FILTER	△D610	407 104 2402	PHOTO COUPLE PC817C
DIODE				407 106 6101	PHOTO COUPLE PC817D
D002	408 008 2406	DIODE 1N4148	D614	408 008 2406	DIODE 1N4148
	407 012 4406	DIODE 1SS133		407 012 4406	DIODE 1SS133
	407 013 4306	DIODE 1S2076A		407 013 4306	DIODE 1S2076A
	407 013 7109	DIODE 1S2473		407 013 7109	DIODE 1S2473
D008	407 012 4406	DIODE 1SS133	D616	408 008 2406	DIODE 1N4148
D009	407 099 5808	ZENER DIODE MTZJ7.5A		407 012 4406	DIODE 1SS133
	407 057 6304	ZENER DIODE RD7.5EB1		407 013 4306	DIODE 1S2076A
D103	407 100 0204	ZENER DIODE MTZJ36A		407 013 7109	DIODE 1S2473
	407 056 2307	ZENER DIODE RD36EB1	D617	407 007 6606	DIODE ES1
D191	408 008 2406	DIODE 1N4148		407 007 6903	DIODE ES1Z
	407 013 4306	DIODE 1S2076A		408 009 9008	DIODE BYD33D
	407 013 6508	DIODE 1S2471	D631	407 007 7702	DIODE EU2A
D1910	407 116 6504	LED SLP-181B-51	D633	407 007 6606	DIODE ES1
D350	408 008 2406	DIODE 1N4148		407 007 6903	DIODE ES1Z
	407 013 4306	DIODE 1S2076A	D634	407 009 8905	DIODE RU3M
	407 013 6508	DIODE 1S2471	D635	407 007 7603	DIODE EU2
D351	407 099 6003	ZENER DIODE MTZJ9.1B		407 007 7801	DIODE EU2Z
	407 057 9701	ZENER DIODE RD9.1EB2	D641	407 099 5600	ZENER DIODE MTZJ6.8A
D381	407 063 8903	ZENER DIODE MTZJ5.6C		407 057 4003	ZENER DIODE RD6.8EB1
	407 057 0104	ZENER DIODE RD5.6EB3	D661	407 099 6102	ZENER DIODE MTZJ10B
D383	408 008 2406	DIODE 1N4148		407 054 0008	ZENER DIODE RD10EB2
	407 013 4306	DIODE 1S2076A	D683	408 008 2406	DIODE 1N4148
	407 013 6508	DIODE 1S2471		407 012 4406	DIODE 1SS133
				407 013 4306	DIODE 1S2076A
				407 013 7109	DIODE 1S2473
			D685	407 099 5600	ZENER DIODE MTZJ6.8A
				407 057 4003	ZENER DIODE RD6.8EB1

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description		
D861	407 099 4801	ZENER DIODE MTZJ4.3B	RESISTOR	R701	401 113 5409 MT-GLAZE 510 JA 1/16W		
	407 056 4707	ZENER DIODE RD4.3EB2		R703	401 105 5202 MT-GLAZE 470 JA 1/16W		
MISCELLANEOUS				R704	401 058 9807 OXIDE-MT 12K JA 1W		
△F601	423 024 8409	FUSE 250V 4A		R705	401 009 1508 CARBON 2.7K JA 1/2W		
F601-A1	645 000 5077	HOLDER,FUSE		R711	401 113 5409 MT-GLAZE 510 JA 1/16W		
F601-A2	645 000 5077	HOLDER,FUSE		R713	401 105 5202 MT-GLAZE 470 JA 1/16W		
A101	645 045 4455	TUNER,U/V		R714	401 058 9807 OXIDE-MT 12K JA 1W		
A1901	645 027 4213	UNIT,REMOCON RECEIVER		R715-M	401 009 1508 CARBON 2.7K JA 1/2W		
K1001	645 015 7462	JACK,RCA-2(3-1)		R721	401 113 5409 MT-GLAZE 510 JA 1/16W		
K1111	645 002 1145	TERMINAL,BOARD		R723	401 105 5202 MT-GLAZE 470 JA 1/16W		
PS601	408 015 1904	THERMISTOR PA3A5180B270		R724	401 058 9807 OXIDE-MT 12K JA 1W		
	408 042 1601	THERMISTOR PTH451A180M21		R725-M	401 009 1508 CARBON 2.7K JA 1/2W		
SW1901	645 027 7382	SWITCH,PUSH 1P-1TX1		R732	401 015 6504 CARBON 2.2 JA 1/4W		
SW1902	645 027 7382	SWITCH,PUSH 1P-1TX1		R751	401 150 6001 MT-GLAZE 0.000 ZA 1/10W		
SW1903	645 027 7382	SWITCH,PUSH 1P-1TX1		R752	401 150 5905 MT-GLAZE 10K JA 1/10W		
SW1904	645 027 7382	SWITCH,PUSH 1P-1TX1		R753	401 150 5905 MT-GLAZE 10K JA 1/10W		
SW1905	645 027 7382	SWITCH,PUSH 1P-1TX1		DIODE	D751	407 012 4406 DIODE 1SS133	
△SW601	645 017 0928	SWITCH,PUSH POWER 2P-2T			D752	407 012 4406 DIODE 1SS133	
	645 024 0607	SWITCH,PUSH POWER 2P-2T			D753	407 012 4406 DIODE 1SS133	
X131	421 006 3206	SAW F TSF5221P			D754	407 012 4406 DIODE 1SS133	
X141	610 015 3059	TRAP,CERAMIC 4.5MHZ			MISCELLANEOUS	△K701-M	645 009 8253 SOCKET,CRT 8P
	652 000 0230	TRAP,CERAMIC 4.5MHZ					645 025 6097 SOCKET,CRT 8P
X151	610 015 2946	CERAMIC FILTER 4.5MHZ					
	645 030 1049	CERAMIC FILTER 4.5MHZ					
	652 000 1466	CERAMIC FILTER 4.5MHZ					
X211	610 012 0655	CRYSTAL OSCILLATOR					
	652 000 1695	OSC,CRYSTAL 3.579545MHΩ					
X212	645 001 6172	OSC,CRYSTAL 3575.611KHZ					
X213	610 012 1294	CRYSTAL OSCILLATOR					
X351	645 030 1889	OSC,CERAMIC 503KHZ					
X801	645 004 1938	OSC,CRYSTAL 32.768KHZ					
	645 004 1945	OSC,CRYSTAL 32.768KHZ					
610 293 3482 ASSY.PWB,CRT F5SS 1AA0B10E645BB							
TRANSISTOR							
Q701	405 040 5600	TR 2SC2228-D					
	405 029 6901	TR 2SC2228-E					
	406 000 5104	TR 2SC2229-O(SAN-2)					
	406 000 5203	TR 2SC2229-Y(SAN-2)					
Q711	405 040 5600	TR 2SC2228-D					
	405 029 6901	TR 2SC2228-E					
	406 000 5104	TR 2SC2229-O(SAN-2)					
	406 000 5203	TR 2SC2229-Y(SAN-2)					
Q721	405 040 5600	TR 2SC2228-D					
	405 029 6901	TR 2SC2228-E					
	406 000 5104	TR 2SC2229-O(SAN-2)					
	406 000 5203	TR 2SC2229-Y(SAN-2)					
Q751	405 134 5905	TR 2SA1037AK-T146-R					
	405 147 2205	TR 2SA1037AK-S-T146					
	405 002 0308	TR 2SA1037K T146 R					
	405 002 0407	TR 2SA1037K T146 S					
	405 002 6706	TR 2SA1179-M6-TB					
	405 002 6904	TR 2SA1179-M7-TB					
	405 163 1503	TR 2SA1179N-M6-TB					
	405 163 2708	TR 2SA1179N-M7-TB					
CAPACITOR							
C701	403 157 6305	CERAMIC 270P K 50V					
C711	403 157 6305	CERAMIC 270P K 50V					
C721	403 157 6305	CERAMIC 270P K 50V					
C731	403 077 2708	CERAMIC 1000P P 2K					
	403 077 2807	CERAMIC 1000P Z 2K					
C751	403 044 1703	ELECT 470U M 16V					

Product safety should be considered when a component replacement is made in any area of a receiver. Components indicated by a Δ mark in this parts list and the circuit diagram show components whose value have special significance to product safety. It is particularly recommended that only parts specified on the following parts list be used for components replacement pointed out by the mark.

Note: Parts order must contain Service Ref. No., Part No., and descriptions. The main PCB unit will be supplied without tuner and flyback transformer. They should be ordered separately.

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
NOTES: Read description in the Capacitor and Resistor as follows:			OUT OF CIRCUIT BOARD		
CAPACITOR			PICTURE TUBE		
CERAMIC	100P	K 50V	Δ Q901	414 010 4604	CRT A48EJN05X101
		Rated Voltage	COIL		
		Tolerance Symbols:	Δ L901	645 004 5691	COIL,DEGAUSSING
		Less than 10pF		645 045 4479	COIL,DEGAUSSING
		A : Not specified		610 238 2105	DEGAUSSING COIL
		D : $\pm 0.5\text{pF}$			
		F : $\pm 1\text{PF}$			
		G : $\pm 2\text{pF}$			
		R : $\pm 0.25\text{-}0\text{pF}$			
		S : $\pm 0\text{-}0.25\text{pF}$			
		E : $\pm 0\text{-}1\text{pF}$			
		More than 10pF			
		A : Not specified			
		B : $\pm 0.1\%$			
		C : $\pm 0.25\%$			
		D : $\pm 0.5\%$			
		F : $\pm 1\%$			
		G : $\pm 2\%$			
		H : $\pm 3\%$			
		J : $\pm 5\%$			
		K : $\pm 10\%$			
		L : $\pm 15\%$			
		M : $\pm 20\%$			
		N : $\pm 30\%$			
		P : $\pm 100\text{-}0\%$			
		Q : $\pm 30\text{-}10\%$			
		T : $\pm 50\text{-}10\%$			
		U : $\pm 75\text{-}10\%$			
		V : $\pm 20\text{-}10\%$			
		W : $\pm 100\text{-}10\%$			
		X : $\pm 40\text{-}20\%$			
		Y : $\pm 150\text{-}10\%$			
		Z : $\pm 80\text{-}20\%$			
		Rated value: P=pico farad, U=micro farad			
Material:			MISCELLANEOUS		
CERAMIC..... Ceramic			SP901	652 000 0650	SPEAKER, 8
MT-PAPER..... Metallized Paper			Δ W901	645 037 2490	CORD, POWER-2. 4MK-A5102
POLYESTER..... Polyester			W902	610 210 5520	GROUNDING CONNECTOR
MT-POLYEST.....Metallized Polyester				610 261 8655	ASSY,WIRE GND CONNECTOR F
POLYPRO..... Polypropylene					
MT-POLYPRO.....Metallized Polypropylene					
COMPO FILM..... Composite film					
MT-COMPO.....Metallized Composite					
STYRENE..... Styrene					
TA-SOLID..... Tantalum Solid					
AL-SOLID..... Aluminium Solid					
ELECT..... Electrolytic					
NP-ELECT..... Non-polarised Electrolytic					
OS-SOLID..... Aluminium Solid with Organic Semiconductive Electrolytic					
DL-ELECT..... Double Layered Electrolytic					
RESISTOR					
CARBON	4.7K	J A 1/4W			
		Rated Wattage			
		Performance Symbols:			
		A: General B: Non flammable Z: Low noise			
		Other: Temperature coefficient			
		Tolerance Symbols:			
		A: $\pm 0.05\%$ B: $\pm 0.1\%$ C: $\pm 0.25\%$ D: $\pm 0.5\%$			
		F: $\pm 1\%$ G: $\pm 2\%$ J: $\pm 5\%$ K: $\pm 10\%$			
		M: $\pm 20\%$ P: $\pm 5\text{-}15\%$			
		Rated value, ohms:			
		K: 1,000, M: 1,000,000			
Material:					
CARBON..... Carbon					
MT-FILM..... Metal Film					
OXIDE-MT..... Oxide Metal Film					
SOLID..... Composition					
MT-GLAZE..... Metal Glaze					
WIRE WOUND... Wire Wound					
CERAMIC RES.. Ceramic					
FUSIBLE RES.... Fusible					

Q111	405 015 9701	TR 2SC2814-F4-TB
Q140	405 134 5905	TR 2SA1037AK-T146-R
	405 147 2205	TR 2SA1037AK-S-T146
	405 002 0308	TR 2SA1037K T146 R
	405 002 0407	TR 2SA1037K T146 S
	405 002 6706	TR 2SA1179-M6-TB
	405 002 6904	TR 2SA1179-M7-TB
	405 163 1503	TR 2SA1179N-M6-TB
	405 163 2708	TR 2SA1179N-M7-TB
Q141	405 134 5905	TR 2SA1037AK-T146-R
	405 147 2205	TR 2SA1037AK-S-T146
	405 002 0308	TR 2SA1037K T146 R
	405 002 0407	TR 2SA1037K T146 S
	405 002 6706	TR 2SA1179-M6-TB
	405 002 6904	TR 2SA1179-M7-TB
	405 163 1503	TR 2SA1179N-M6-TB
	405 163 2708	TR 2SA1179N-M7-TB
Q171	405 014 4509	TR 2SC2412K T146 R
	405 014 4608	TR 2SC2412K T146 S
	405 015 8704	TR 2SC2812-L6-TB
	405 015 8902	TR 2SC2812-L7-TB
	405 163 1602	TR 2SC2812N-L6-TB0
	405 163 1701	TR 2SC2812N-L7-TB0
Q212	405 014 4509	TR 2SC2412K T146 R
	405 014 4608	TR 2SC2412K T146 S
	405 015 8704	TR 2SC2812-L6-TB
	405 015 8902	TR 2SC2812-L7-TB
	405 163 1602	TR 2SC2812N-L6-TB0
	405 163 1701	TR 2SC2812N-L7-TB0
Q213	405 014 4509	TR 2SC2412K T146 R
	405 014 4608	TR 2SC2412K T146 S
	405 015 8704	TR 2SC2812-L6-TB
	405 015 8902	TR 2SC2812-L7-TB
	405 163 1602	TR 2SC2812N-L6-TB0


Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
Q261	405 163 1701	TR 2SC2812N-L7-TB0	Q871	405 147 2205	TR 2SA1037AK-S-T146
	405 134 5905	TR 2SA1037AK-T146-R		405 002 0308	TR 2SA1037K T146 R
	405 147 2205	TR 2SA1037AK-S-T146		405 002 0407	TR 2SA1037K T146 S
	405 002 0308	TR 2SA1037K T146 R		405 002 6706	TR 2SA1179-M6-TB
	405 002 0407	TR 2SA1037K T146 S		405 002 6904	TR 2SA1179-M7-TB
	405 002 6706	TR 2SA1179-M6-TB		405 163 1503	TR 2SA1179N-M6-TB
	405 002 6904	TR 2SA1179-M7-TB		405 163 2708	TR 2SA1179N-M7-TB
Q431	405 163 1503	TR 2SA1179N-M6-TB	Q881	405 014 4509	TR 2SC2412K T146 R
	405 163 2708	TR 2SA1179N-M7-TB		405 014 4608	TR 2SC2412K T146 S
	405 018 0507	TR 2SC3332-R	Q886	405 015 8704	TR 2SC2812-L6-TB
Q432	405 018 0606	TR 2SC3332-S		405 015 8902	TR 2SC2812-L7-TB
	405 157 1304	TR 2SD2634-YB		405 163 1602	TR 2SC2812N-L6-TB0
Q576	405 014 4509	TR 2SC2412K T146 R	Q881	405 163 1701	TR 2SC2812N-L7-TB0
	405 014 4608	TR 2SC2412K T146 S		405 014 4509	TR 2SC2412K T146 R
Q611	405 015 8704	TR 2SC2812-L6-TB	Q886	405 014 4608	TR 2SC2412K T146 S
	405 015 8902	TR 2SC2812-L7-TB		405 015 8704	TR 2SC2812-L6-TB
	405 163 1602	TR 2SC2812N-L6-TB0		405 015 8902	TR 2SC2812-L7-TB
	405 163 1701	TR 2SC2812N-L7-TB0		405 163 1602	TR 2SC2812N-L6-TB0
	406 000 6804	TR 2SA1015-GR(SAN)		405 163 1701	TR 2SC2812N-L7-TB0
	405 001 7407	TR 2SA1015-O(SAN)		405 014 4509	TR 2SC2412K T146 R
	405 001 7605	TR 2SA1015-Y(SAN)		405 014 4608	TR 2SC2412K T146 S
	405 004 3109	TR 2SA564A-Q(CU)		405 015 8704	TR 2SC2812-L6-TB
	405 004 3208	TR 2SA564A-R(CU)		405 015 8902	TR 2SC2812-L7-TB
	405 151 3304	TR 2SA608NF-NPA		405 163 1602	TR 2SC2812N-L6-TB0
Q612	405 006 1707	TR 2SA933S-Q	Q861	405 163 1701	TR 2SC2812N-L7-TB0
	405 006 1806	TR 2SA933S-R	INTEGRATED CIRCUIT		
Q613	405 058 0208	TR 2SC3807-R-CTV-YA	IC001	409 365 3006	IC LA4285
Q631	405 022 8506	TR 2SD1710-CTV-YB	IC191	409 241 5407	IC BA178M05T
	405 014 4509	TR 2SC2412K T146 R		409 172 1509	IC MC78M05CT
Q661	405 014 4608	TR 2SC2412K T146 S		409 320 5700	IC UPC78M05AHF
	405 015 8704	TR 2SC2812-L6-TB	IC201	410 342 8907	IC QXXAVB488---M
Q681	405 015 8902	TR 2SC2812-L7-TB	IC501	409 340 1805	IC LA7840
	405 163 1602	TR 2SC2812N-L6-TB0	IC651	409 241 5407	IC BA178M05T
Q683	405 163 1701	TR 2SC2812N-L7-TB0		409 124 5302	IC L78M05T
	405 089 0000	TR 2SA1707-S		409 172 1509	IC MC78M05CT
Q684	405 089 0109	TR 2SA1707-T		409 320 5700	IC UPC78M05AHF
	405 009 6907	TR 2SB985-S	IC801	410 360 3304	IC LC863428V-5P71-TLM
Q685	405 009 7003	TR 2SB985-T	IC802	409 333 3700	IC 24LC02B/P
	405 014 4509	TR 2SC2412K T146 R	CAPACITOR		
Q686	405 014 4608	TR 2SC2412K T146 S	C001	403 049 0008	ELECT 1U M 50V
	405 015 8704	TR 2SC2812-L6-TB	C002	403 157 6701	CERAMIC 560P K 50V
Q861	405 015 8902	TR 2SC2812-L7-TB	C005	403 043 9106	ELECT 47U M 16V
	405 163 1602	TR 2SC2812N-L6-TB0	C006	403 041 8804	ELECT 10U M 16V
Q861	405 163 1701	TR 2SC2812N-L7-TB0	C007	403 045 9807	ELECT 2200U M 25V
	405 014 4509	TR 2SC2412K T146 R	C008	403 164 0204	CERAMIC 0.1U Z 25V
Q861	405 014 4608	TR 2SC2412K T146 S	C009	403 281 5205	CERAMIC 0.22U Z 16V
	405 015 8704	TR 2SC2812-L6-TB	C010	403 045 1504	ELECT 1000U M 25V
Q861	405 015 8902	TR 2SC2812-L7-TB	C015	403 164 0204	CERAMIC 0.1U Z 25V
	405 163 1602	TR 2SC2812N-L6-TB0	C101	403 044 1703	ELECT 470U M 16V
Q861	405 163 1701	TR 2SC2812N-L7-TB0	C102	403 038 8602	ELECT 33U M 6.3V
	405 014 4509	TR 2SC2412K T146 R	C103	403 051 0607	ELECT 4.7U M 50V
Q861	405 014 4608	TR 2SC2412K T146 S	C106	403 051 0607	ELECT 4.7U M 50V
	405 015 8704	TR 2SC2812-L6-TB	C111	403 149 9208	CERAMIC 0.01U Z 50V
Q861	405 015 8902	TR 2SC2812-L7-TB	C112	403 149 9208	CERAMIC 0.01U Z 50V
	405 163 1602	TR 2SC2812N-L6-TB0	C113	403 149 9208	CERAMIC 0.01U Z 50V
Q861	405 163 1701	TR 2SC2812N-L7-TB0	C132	403 149 9208	CERAMIC 0.01U Z 50V
	405 134 5905	TR 2SA1037AK-T146-R	C136	403 043 3906	ELECT 33U M 16V
Q861	405 147 2205	TR 2SA1037AK-S-T146	C137	403 149 9208	CERAMIC 0.01U Z 50V
	405 002 0308	TR 2SA1037K T146 R	C138	403 048 1907	ELECT 0.22U M 50V
Q861	405 002 0407	TR 2SA1037K T146 S	C142	403 042 7707	ELECT 22U M 16V
	405 002 6706	TR 2SA1179-M6-TB	C151	403 157 2901	CERAMIC 47P J 50V
Q861	405 002 6904	TR 2SA1179-M7-TB	C152	403 157 2901	CERAMIC 47P J 50V
	405 163 1503	TR 2SA1179N-M6-TB	C171	403 048 1907	ELECT 0.22U M 50V
Q861	405 163 2708	TR 2SA1179N-M7-TB	C172	403 049 0008	ELECT 1U M 50V
	405 134 5905	TR 2SA1037AK-T146-R	C173	403 155 2200	CERAMIC 3300P K 50V


Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
C177	403 048 4205	ELECT 0.33U M 50V		403 311 9609	POLYESTER 0.015U J 50V
C191	403 041 2109	ELECT 47U M 10V	C616	403 247 0008	CERAMIC 1500P K 2K
C201	403 043 9106	ELECT 47U M 16V		403 263 6602	CERAMIC 1500P K 2K
C202	403 149 9208	CERAMIC 0.01U Z 50V	C617	403 059 6205	POLYESTER 0.022U K 50V
C206	403 218 3106	ELECT 1000U M 16V		403 312 0506	POLYESTER 0.022U K 50V
C207	403 149 9208	CERAMIC 0.01U Z 50V	C631	403 247 5003	CERAMIC 470P K 1K
C211	401 150 6001	MT-GLAZE 0.000 ZA 1/10W		403 269 1809	CERAMIC 470P K 1K
C212	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	C633	403 247 5003	CERAMIC 470P K 1K
C216	403 049 0008	ELECT 1U M 50V		403 269 1809	CERAMIC 470P K 1K
C221	403 164 0204	CERAMIC 0.1U Z 25V	C641	404 073 9005	ELECT 220U M 160V
C222	403 164 0204	CERAMIC 0.1U Z 25V	C643	403 054 1502	ELECT 470U M 35V
C223	403 164 0204	CERAMIC 0.1U Z 25V	C644	403 045 1504	ELECT 1000U M 25V
C241	403 155 9704	NP-ELECT 0.1U M 50V	C645	403 045 1504	ELECT 1000U M 25V
C243	403 155 9704	NP-ELECT 0.1U M 50V	C651	403 040 9406	ELECT 330U M 10V
C246	403 049 0008	ELECT 1U M 50V	C661	403 043 0202	ELECT 220U M 16V
C247	403 215 2409	CERAMIC 0.015U K 50V	C662	403 043 6006	ELECT 330U M 16V
C248	403 149 9208	CERAMIC 0.01U Z 50V	C685	403 049 0008	ELECT 1U M 50V
C281	403 049 9803	ELECT 2.2U M 50V	C801	403 155 4204	CERAMIC 15P J 50V
C351	403 044 1703	ELECT 470U M 16V	C802	403 155 4204	CERAMIC 15P J 50V
C354	403 215 2201	CERAMIC 0.01U K 50V	C803	403 149 9208	CERAMIC 0.01U Z 50V
C355	403 048 6308	ELECT 0.47U M 50V	C804	403 224 7006	CERAMIC 0.047U Z 50V
C356	403 048 6308	ELECT 0.47U M 50V	C811	403 149 9208	CERAMIC 0.01U Z 50V
C357	403 215 2201	CERAMIC 0.01U K 50V	C812	403 041 8804	ELECT 10U M 16V
C359	403 215 2201	CERAMIC 0.01U K 50V	C832	403 149 9208	CERAMIC 0.01U Z 50V
C361	403 260 2003	MT-COMPO 1U J 50V	C851	403 155 1609	CERAMIC 33P J 50V
	403 270 2109	MT-COMPO 1U J 50V	C853	403 155 1609	CERAMIC 33P J 50V
C371	403 157 6800	CERAMIC 680P K 50V	C854	403 155 1609	CERAMIC 33P J 50V
C372	403 049 0008	ELECT 1U M 50V	C855	403 155 1609	CERAMIC 33P J 50V
C383	403 281 5007	CERAMIC 0.033U K 25V	C861	403 049 0008	ELECT 1U M 50V
C432	403 075 7101	CERAMIC 1000P K 500V	C878	403 060 8403	POLYESTER 0.033U K 50V
C433	403 076 3102	CERAMIC 3900P K 500V		403 312 1305	POLYESTER 0.033U K 50V
C434	403 054 0703	ELECT 47U M 35V	C891	403 113 3805	CERAMIC 1000P K 50V
C435	404 077 5508	MT-POLYPRO 9600P H 1.5K	C892	403 049 0008	ELECT 1U M 50V
C436	403 324 2604	CERAMIC 470P K 3K	C893	403 049 9803	ELECT 2.2U M 50V
	403 264 4300	CERAMIC 470P K 3K	C894	403 281 5007	CERAMIC 0.033U K 25V
C437	403 067 7805	MT-COMPO 0.47U J 50V	C895	403 041 8804	ELECT 10U M 16V
	403 256 0808	MT-COMPO 0.47U J 50V			
C441	403 083 1009	POLYPRO 0.47U J 200V	RESISTOR		
C445	403 049 4204	ELECT 10U M 50V	R001	401 150 5905	MT-GLAZE 10K JA 1/10W
C451	404 056 5307	NP-ELECT 2.2U M 100V	R002	401 150 5905	MT-GLAZE 10K JA 1/10W
C491	403 076 5304	CERAMIC 680P K 500V	R005	401 256 6905	MT-GLAZE 680 JA 1/10W
C492	403 115 0802	ELECT 22U M 100V	R006	401 162 4002	MT-GLAZE 560 JA 1/10W
C501	403 054 1502	ELECT 470U M 35V	R009	401 150 6100	MT-GLAZE 2.2K JA 1/10W
C502	403 053 2104	ELECT 220U M 35V	R011	401 019 6203	CARBON 4.7 JA 1/4W
C503	403 023 9607	CERAMIC 39P J 50V	R1001	401 256 2709	MT-GLAZE 75 JA 1/10W
C504	403 149 9208	CERAMIC 0.01U Z 50V	R1006	401 150 6209	MT-GLAZE 1K JA 1/10W
C511	403 188 1201	MT-POLYEST 0.15U K 100V	R1007	401 150 5806	MT-GLAZE 100K JA 1/10W
	403 313 7603	MT-COMPO 0.15U J 100V	R103	401 061 8101	OXIDE-MT 39K JA 1W
C512	403 045 1504	ELECT 1000U M 25V	R106	401 255 6500	MT-GLAZE 100 JA 1/10W
C513	403 049 4204	ELECT 10U M 50V	R107	401 255 6500	MT-GLAZE 100 JA 1/10W
C576	403 041 8804	ELECT 10U M 16V	R108	401 026 1307	CARBON 27K JA 1/6W
C601	404 072 7705	MT-POLYEST 0.068U M 250V	R109	401 162 3005	MT-GLAZE 22K JA 1/10W
	404 079 6503	MT-POLYEST 0.068U M 250V	R1106	401 105 0504	MT-GLAZE 1K JA 1/16W
	404 073 7506	MT-POLYEST 0.068U M 275V	R111	401 150 6209	MT-GLAZE 1K JA 1/10W
C606	403 076 6707	CERAMIC 1000P K 1K	R112	401 162 4101	MT-GLAZE 5.6K JA 1/10W
	403 312 8205	CERAMIC 1000P K 1K	R113	401 255 6500	MT-GLAZE 100 JA 1/10W
C607	404 067 4009	ELECT 100U M 400V	R114	401 162 2909	MT-GLAZE 220 JA 1/10W
	404 035 6004	ELECT 100U T 400V	R116	401 256 7407	MT-GLAZE 39 JA 1/10W
△C608	404 073 5106	CERAMIC 470P K 250V	R132	401 025 2305	CARBON 150K JA 1/6W
	404 073 3300	CERAMIC 470P M 250V	R133	401 256 0200	MT-GLAZE 120K JA 1/10W
	404 071 4507	CERAMIC 470P K 400V	R134	401 256 5809	MT-GLAZE 270K JA 1/10W
△C609	404 073 5106	CERAMIC 470P K 250V	R140	401 162 3708	MT-GLAZE 4.7K JA 1/10W
	404 073 3300	CERAMIC 470P M 250V	R141	401 025 7409	CARBON 220 JA 1/6W
	404 071 4507	CERAMIC 470P K 400V	R142	401 162 2909	MT-GLAZE 220 JA 1/10W
C613	403 056 8103	POLYESTER 1000P K 50V	R144	401 256 7506	MT-GLAZE 390 JA 1/10W
C614	403 067 5603	MT-COMPO 0.1U J 50V	R145	401 162 3609	MT-GLAZE 470 JA 1/10W
C615	403 058 2604	POLYESTER 0.015U J 50V	R146	401 150 6001	MT-GLAZE 0.000 ZA 1/10W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R147	401 150 6100	MT-GLAZE 2.2K JA 1/10W	R462	401 026 9907	CARBON 4.7K JA 1/6W
R151	401 152 3206	MT-GLAZE 330 JA 1/10W	R481	401 061 0808	OXIDE-MT 3.9 JA 1W
R170	401 150 5905	MT-GLAZE 10K JA 1/10W	R491	401 008 3800	CARBON 2.2 JB 1/2W
R171	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	R501	401 018 2800	CARBON 330 JA 1/4W
R172	401 150 5905	MT-GLAZE 10K JA 1/10W	R505	401 025 7805	CARBON 2.2K JA 1/6W
R173	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	R506	401 026 4605	CARBON 33K JA 1/6W
R174	401 255 9501	MT-GLAZE 220K JA 1/10W	R507	401 025 1902	CARBON 15K JA 1/6W
R1902	401 256 7209	MT-GLAZE 18K JA 1/10W	R508	401 027 8305	CARBON 820 JA 1/6W
R1903	401 256 7308	MT-GLAZE 6.8K JA 1/10W	R509	401 006 8807	CARBON 1.8 JA 1/2W
R1904	401 162 3708	MT-GLAZE 4.7K JA 1/10W	R511	401 059 6706	OXIDE-MT 180 JA 1W
R1905	401 256 5908	MT-GLAZE 2.7K JA 1/10W	R514	401 007 1104	CARBON 1K JA 1/2W
R1906	401 025 7805	CARBON 2.2K JA 1/6W	R571	401 024 7004	CARBON 1K JA 1/6W
R1907	401 256 6202	MT-GLAZE 270 JA 1/10W	R576	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R1908	401 150 5905	MT-GLAZE 10K JA 1/10W	R577	401 256 0309	MT-GLAZE 820 JA 1/10W
R1911	401 162 3609	MT-GLAZE 470 JA 1/10W	R601	401 008 8607	CARBON 220K JA 1/2W
R1912	401 162 3609	MT-GLAZE 470 JA 1/10W	R602	402 060 8109	WIRE WOUND 3.9 KA 5W
R1913	401 162 3609	MT-GLAZE 470 JA 1/10W		402 072 4205	WIRE WOUND 3.9 KA 5W
R212	401 256 5304	MT-GLAZE 56K JA 1/10W	R611	401 027 2600	CARBON 5.6K JA 1/6W
R213	401 256 5304	MT-GLAZE 56K JA 1/10W	R615	401 025 8208	CARBON 22K JA 1/6W
R214	401 256 3607	MT-GLAZE 15K JA 1/10W	R617	401 026 5800	CARBON 3.6K JA 1/6W
R215	401 256 3607	MT-GLAZE 15K JA 1/10W	R619	401 008 6009	CARBON 22 JA 1/2W
R216	401 256 6301	MT-GLAZE 47K JA 1/10W	R620	401 007 5805	CARBON 120K JA 1/2W
R217	401 256 1702	MT-GLAZE 33K JA 1/10W	R621	401 007 5805	CARBON 120K JA 1/2W
R221	401 105 0504	MT-GLAZE 1K JA 1/16W	R622	401 014 5201	CARBON 15K JA 1/4W
R222	401 105 0504	MT-GLAZE 1K JA 1/16W	R623	401 024 7400	CARBON 10K JA 1/6W
R223	401 105 0504	MT-GLAZE 1K JA 1/16W	R624A	401 069 1708	OXIDE-MT 68 JA 2W
R225	401 256 7605	MT-GLAZE 3.9K JA 1/10W	R625	401 067 4206	OXIDE-MT 33 JA 2W
R231	401 150 6100	MT-GLAZE 2.2K JA 1/10W	R626	401 018 3401	CARBON 3.3K GA 1/4W
R232	401 150 6100	MT-GLAZE 2.2K JA 1/10W	R627	401 067 4206	OXIDE-MT 33 JA 2W
R233	401 150 6100	MT-GLAZE 2.2K JA 1/10W	△R628	402 000 8305	SOLID 5.6M KA 1/2W
R246	401 162 3104	MT-GLAZE 3.3K JA 1/10W	△R629	402 000 8305	SOLID 5.6M KA 1/2W
R248	401 256 7704	MT-GLAZE 3.9M JA 1/10W	R635	401 012 8105	CARBON 100K JA 1/4W
R261	401 162 3104	MT-GLAZE 3.3K JA 1/10W	R636	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R262	401 025 7409	CARBON 220 JA 1/6W	R637	401 014 6109	CARBON 150K JA 1/4W
R263	401 025 7409	CARBON 220 JA 1/6W	R638	401 062 3006	OXIDE-MT 47K JA 1W
R271	401 024 6700	CARBON 100 JA 1/6W	R639	401 025 8208	CARBON 22K JA 1/6W
R272	401 255 6500	MT-GLAZE 100 JA 1/10W	R642	401 012 7009	CARBON 10K JA 1/4W
R281	401 162 3807	MT-GLAZE 470K JA 1/10W	R644	401 058 1108	OXIDE-MT 10 JA 1W
R351	401 063 1001	OXIDE-MT 680 JA 1W	R661	401 060 2704	OXIDE-MT 220 JA 1W
R356	401 162 3708	MT-GLAZE 4.7K JA 1/10W	R662	401 069 0404	OXIDE-MT 6.8 JA 2W
R357	401 256 5106	MT-GLAZE 560K JA 1/10W	R663	401 013 6407	CARBON 12K JA 1/4W
R361	401 150 6209	MT-GLAZE 1K JA 1/10W	R681	401 162 2800	MT-GLAZE 1.8K JA 1/10W
R364	401 162 3005	MT-GLAZE 22K JA 1/10W	R682	401 025 8208	CARBON 22K JA 1/6W
R372	401 162 4002	MT-GLAZE 560 JA 1/10W	R683	401 256 5106	MT-GLAZE 560K JA 1/10W
R373	401 256 5106	MT-GLAZE 560K JA 1/10W	R684	401 150 5905	MT-GLAZE 10K JA 1/10W
R380	401 162 3708	MT-GLAZE 4.7K JA 1/10W	R685	401 162 3005	MT-GLAZE 22K JA 1/10W
R381	401 012 7009	CARBON 10K JA 1/4W	R686	401 012 7009	CARBON 10K JA 1/4W
R382	401 021 3009	CARBON 5.6K JA 1/4W	R687	401 019 1901	CARBON 3.9K JA 1/4W
R383	401 025 7409	CARBON 220 JA 1/6W	R688	401 162 3005	MT-GLAZE 22K JA 1/10W
R384	401 150 5905	MT-GLAZE 10K JA 1/10W	R689	401 256 5106	MT-GLAZE 560K JA 1/10W
R385	401 024 7400	CARBON 10K JA 1/6W	R801	401 256 5809	MT-GLAZE 270K JA 1/10W
R430	401 150 6209	MT-GLAZE 1K JA 1/10W	R811	401 256 6301	MT-GLAZE 47K JA 1/10W
R432	401 150 6001	MT-GLAZE 0.000 ZA 1/10W	R812	401 150 5905	MT-GLAZE 10K JA 1/10W
R433	401 007 1104	CARBON 1K JA 1/2W	R814	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R434	401 008 0908	CARBON 180 JA 1/2W	R816	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R435	402 069 8704	WIRE WOUND 8.2 KA 7W	R818	401 256 6905	MT-GLAZE 680 JA 1/10W
	402 076 0609	WIRE WOUND 8.2 KA 7W	R819	401 256 6905	MT-GLAZE 680 JA 1/10W
R443	401 062 1200	OXIDE-MT 470 JA 1W	R831	401 150 5905	MT-GLAZE 10K JA 1/10W
R444	401 058 3706	OXIDE-MT 1K JA 1W	R832	401 150 6001	MT-GLAZE 0.000 ZA 1/10W
R445	401 058 3706	OXIDE-MT 1K JA 1W	R834	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R447	401 026 7002	CARBON 3.9K JA 1/6W	R835	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R448	401 010 3102	CARBON 470 JA 1/2W	R836	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R451	401 013 7305	CARBON 120K JA 1/4W	R837	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R453	401 024 7004	CARBON 1K JA 1/6W	R838	401 162 3708	MT-GLAZE 4.7K JA 1/10W
R454	401 024 7400	CARBON 10K JA 1/6W	R839	401 255 6500	MT-GLAZE 100 JA 1/10W
R455	401 012 8105	CARBON 100K JA 1/4W	R840	401 255 6500	MT-GLAZE 100 JA 1/10W
R461	401 025 4903	CARBON 180K JA 1/6W	R841	401 162 3708	MT-GLAZE 4.7K JA 1/10W

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
R842	401 162 3708	MT-GLAZE 4.7K JA 1/10W		407 013 6508	DIODE 1S2471
R851	401 256 7605	MT-GLAZE 3.9K JA 1/10W	D351	407 099 6003	ZENER DIODE MTZJ9.1B
R853	401 162 4101	MT-GLAZE 5.6K JA 1/10W		407 057 9701	ZENER DIODE RD9.1EB2
R855	401 162 4101	MT-GLAZE 5.6K JA 1/10W	D381	407 063 8903	ZENER DIODE MTZJ5.6C
R857	401 162 4101	MT-GLAZE 5.6K JA 1/10W		407 057 0104	ZENER DIODE RD5.6EB3
R861	401 152 3206	MT-GLAZE 330 JA 1/10W	D383	408 008 2406	DIODE 1N4148
R862	401 150 5905	MT-GLAZE 10K JA 1/10W		407 013 4306	DIODE 1S2076A
R863	401 150 5905	MT-GLAZE 10K JA 1/10W		407 013 6508	DIODE 1S2471
R870	401 025 8208	CARBON 22K JA 1/6W	D384	408 008 2406	DIODE 1N4148
R871	401 150 5905	MT-GLAZE 10K JA 1/10W		407 013 4306	DIODE 1S2076A
R878	401 162 4101	MT-GLAZE 5.6K JA 1/10W		407 013 6508	DIODE 1S2471
R879	401 026 1307	CARBON 27K JA 1/6W	D385	408 008 2406	DIODE 1N4148
R881	401 150 5905	MT-GLAZE 10K JA 1/10W		407 013 4306	DIODE 1S2076A
R883	401 256 1702	MT-GLAZE 33K JA 1/10W		407 013 6508	DIODE 1S2471
R886	401 162 3005	MT-GLAZE 22K JA 1/10W	D443	407 124 6404	DIODE ERA18-04
R891	401 162 2909	MT-GLAZE 220 JA 1/10W		407 007 6606	DIODE ES1
R892	401 255 6005	MT-GLAZE 1M JA 1/10W		407 124 5506	DIODE RMPG06G
R893	401 255 6005	MT-GLAZE 1M JA 1/10W	D445	408 008 2406	DIODE 1N4148
R894	401 255 6500	MT-GLAZE 100 JA 1/10W		407 013 4306	DIODE 1S2076A
R896	401 256 1702	MT-GLAZE 33K JA 1/10W		407 013 6508	DIODE 1S2471
R897	401 027 8602	CARBON 8.2K JA 1/6W	D446	407 099 5907	ZENER DIODE MTZJ8.2C
R898	401 027 5205	CARBON 680 JA 1/6W		407 057 8407	ZENER DIODE RD8.2EB3
R899	401 024 7004	CARBON 1K JA 1/6W	D447	408 008 2406	DIODE 1N4148
VARIABLE RESISTOR				407 013 4306	DIODE 1S2076A
VR631	645 006 5514	VR,SEMI,2.2K N		407 013 6508	DIODE 1S2471
	645 003 5579	VR,SEMI,2.2K N	D461	408 008 2406	DIODE 1N4148
	645 023 5160	VR,SEMI,2K N		407 013 4306	DIODE 1S2076A
	610 239 7574	VR B-2K		407 013 6508	DIODE 1S2471
TRANSFORMER			D491	407 124 6404	DIODE ERA18-04
△T401	652 000 0711	TRANS,FRYBACK		407 007 6606	DIODE ES1
T431	610 000 1060	DRIVE TRANS		407 124 5506	DIODE RMPG06G
	652 000 0698	TRANS,DRIVE	D501	407 005 7308	DIODE EM01Z
△T611	652 000 1640	TRANS,POWER,PULSE		408 009 9008	DIODE BYD33D
COIL			D521	407 005 7308	DIODE EM01Z
L136	645 008 2894	INDUCTOR,5.6U K		407 005 8602	DIODE ERA15-02
L140	645 001 4567	INDUCTOR,10U K		408 009 9008	DIODE BYD33D
L141	645 003 9751	INDUCTOR,18U K	D571	407 099 7901	ZENER DIODE MTZJ20B
L151	645 003 9713	INDUCTOR,15U K		407 055 1806	ZENER DIODE RD20EB2
L171	645 032 8633	TRANS,OSC,45.75MHZ	D572	408 008 2406	DIODE 1N4148
L201	645 008 0159	INDUCTOR,47U K		407 013 4306	DIODE 1S2076A
L431	610 031 9998	PIPE CORE		407 013 6508	DIODE 1S2471
L432	610 031 9998	PIPE CORE	D603	407 006 6300	DIODE ERC05-10B
L444	645 036 7458	COIL,LINEARITY		407 009 6901	DIODE RM11C
L445	610 000 0278	COIL	D604	407 006 6300	DIODE ERC05-10B
	610 205 1117	COIL		407 009 6901	DIODE RM11C
L601	610 031 5938	LINE FILTER	D605	407 006 6300	DIODE ERC05-10B
	645 017 6159	LINE FILTER		407 009 6901	DIODE RM11C
DIODE			D606	407 006 6300	DIODE ERC05-10B
D002	408 008 2406	DIODE 1N4148		407 009 6901	DIODE RM11C
	407 012 4406	DIODE 1SS133	△D610	407 104 2402	PHOTO COUPLE PC817C
	407 013 4306	DIODE 1S2076A		407 106 6101	PHOTO COUPLE PC817D
	407 013 7109	DIODE 1S2473	D614	408 008 2406	DIODE 1N4148
D008	407 012 4406	DIODE 1SS133		407 012 4406	DIODE 1SS133
D009	407 099 5808	ZENER DIODE MTZJ7.5A		407 013 4306	DIODE 1S2076A
	407 057 6304	ZENER DIODE RD7.5EB1		407 013 7109	DIODE 1S2473
D103	407 100 0204	ZENER DIODE MTZJ36A	D616	408 008 2406	DIODE 1N4148
	407 056 2307	ZENER DIODE RD36EB1		407 012 4406	DIODE 1SS133
D191	408 008 2406	DIODE 1N4148		407 013 4306	DIODE 1S2076A
	407 013 4306	DIODE 1S2076A	D617	407 007 6606	DIODE ES1
	407 013 6508	DIODE 1S2471		407 007 6903	DIODE ES1Z
D1910	407 116 6504	LED SLP-181B-51		408 009 9008	DIODE BYD33D
D350	408 008 2406	DIODE 1N4148	D618	408 008 2406	DIODE 1N4148
	407 013 4306	DIODE 1S2076A		407 012 4406	DIODE 1SS133
				407 013 4306	DIODE 1S2076A
				407 013 7109	DIODE 1S2473
			D619	407 063 9405	ZENER DIODE MTZJ8.2A

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
	407 057 8209	ZENER DIODE RD8.2EB1		405 041 6705	TR 2SC2621-E-RA
D631	407 007 7702	DIODE EU2A		405 066 9903	TR 2SC2688(1)-K
D633	407 007 7603	DIODE EU2		405 067 0008	TR 2SC2688(1)-L
	407 007 7801	DIODE EU2Z		405 067 0107	TR 2SC2688(1)-M
D634	407 009 8905	DIODE RU3M		406 000 3605	TR 2SC3620(LB-SAN-1)
D635	407 009 8905	DIODE RU3M		405 134 5905	TR 2SA1037AK-T146-R
D641	407 099 5600	ZENER DIODE MTZJ6.8A		405 147 2205	TR 2SA1037AK-S-T146
	407 057 4003	ZENER DIODE RD6.8EB1		405 002 0308	TR 2SA1037K T146 R
D661	407 099 6102	ZENER DIODE MTZJ10B		405 002 0407	TR 2SA1037K T146 S
	407 054 0008	ZENER DIODE RD10EB2		405 002 6706	TR 2SA1179-M6-TB
D683	408 008 2406	DIODE 1N4148		405 002 6904	TR 2SA1179-M7-TB
	407 012 4406	DIODE 1SS133		405 163 1503	TR 2SA1179N-M6-TB
	407 013 4306	DIODE 1S2076A		405 163 2708	TR 2SA1179N-M7-TB
	407 013 7109	DIODE 1S2473			
D685	407 099 5600	ZENER DIODE MTZJ6.8A			
	407 057 4003	ZENER DIODE RD6.8EB1			
D861	407 099 4801	ZENER DIODE MTZJ4.3B			
	407 056 4707	ZENER DIODE RD4.3EB2			
MISCELLANEOUS			CAPACITOR		
△F601	423 024 8409	FUSE 250V 4A	C701	403 157 6404	CERAMIC 330P K 50V
F601-A1	645 000 5077	HOLDER,FUSE	C710	403 056 0008	ELECT 4.7U M 250V
F601-A2	645 000 5077	HOLDER,FUSE	C711	403 157 6404	CERAMIC 330P K 50V
A101	645 045 4455	TUNER,U/V	C721	403 157 6404	CERAMIC 330P K 50V
A1901	645 027 4213	UNIT,REMOCON RECEIVER	C731	403 077 2708	CERAMIC 1000P P 2K
K1001	645 015 7462	JACK,RCA-2(3-1)		403 077 2807	CERAMIC 1000P Z 2K
K1111	645 002 1145	TERMINAL, BOARD	C751	403 044 1703	ELECT 470U M 16V
PS601	408 015 1904	THERMISTOR PA3A5180B270			
	408 042 1601	THERMISTOR PTH451A180M21			
SW1901	645 027 7382	SWITCH,PUSH 1P-1TX1	RESISTOR		
SW1902	645 027 7382	SWITCH,PUSH 1P-1TX1	R701	401 105 4502	MT-GLAZE 390 JA 1/16W
SW1903	645 027 7382	SWITCH,PUSH 1P-1TX1	R703	401 105 5202	MT-GLAZE 470 JA 1/16W
SW1904	645 027 7382	SWITCH,PUSH 1P-1TX1	R704	401 065 4604	OXIDE-MT 12K JA 2W
SW1905	645 027 7382	SWITCH,PUSH 1P-1TX1	R705	401 009 1508	CARBON 2.7K JA 1/2W
△SW601	645 017 0928	SWITCH,PUSH POWER 2P-2T	R711	401 105 4502	MT-GLAZE 390 JA 1/16W
	645 024 0607	SWITCH,PUSH POWER 2P-2T	R713	401 105 5202	MT-GLAZE 470 JA 1/16W
X131	421 006 3206	SAW F TSF5221P	R714	401 065 4604	OXIDE-MT 12K JA 2W
X141	610 015 3059	TRAP,CERAMIC 4.5MHZ	R715	401 009 1508	CARBON 2.7K JA 1/2W
	652 000 0230	TRAP,CERAMIC 4.5MHZ	R721	401 105 4502	MT-GLAZE 390 JA 1/16W
X151	610 015 2946	CERAMIC FILTER 4.5MHZ	R723	401 105 5202	MT-GLAZE 470 JA 1/16W
	645 030 1049	CERAMIC FILTER 4.5MHZ	R724	401 065 4604	OXIDE-MT 12K JA 2W
	652 000 1466	CERAMIC FILTER 4.5MHZ	R725	401 009 1508	CARBON 2.7K JA 1/2W
X211	610 012 0655	CRYSTAL OSCILLATOR	R732	401 015 6504	CARBON 2.2 JA 1/4W
	652 000 1695	OSC,CRYSTAL 3.579545MHZ	R751	401 150 6001	MT-GLAZE 0.000 ZA 1/10W
X212	645 001 6172	OSC,CRYSTAL 3575.611KHZ	R752	401 150 5905	MT-GLAZE 10K JA 1/10W
X213	610 012 1294	CRYSTAL OSCILLATOR	R753	401 150 5905	MT-GLAZE 10K JA 1/10W
X351	645 030 1889	OSC,CERAMIC 503KHZ			
X801	645 004 1938	OSC,CRYSTAL 32.768KHZ	DIODE		
	645 004 1945	OSC,CRYSTAL 32.768KHZ	D751	407 012 4406	DIODE 1SS133
			D752	407 012 4406	DIODE 1SS133
			D753	407 012 4406	DIODE 1SS133
			D754	407 012 4406	DIODE 1SS133
610 293 3512 ASSY.PWB,CRT F5TS 1AA0B10E646HB			MISCELLANEOUS		
TRANSISTOR			△K701	645 026 2005	SOCKET,CRT 8P
Q701	405 041 6507	TR 2SC2621-D-RA			
	405 041 6705	TR 2SC2621-E-RA			
	405 066 9903	TR 2SC2688(1)-K			
	405 067 0008	TR 2SC2688(1)-L			
	405 067 0107	TR 2SC2688(1)-M			
	406 000 3605	TR 2SC3620(LB-SAN-1)			
Q711	405 041 6507	TR 2SC2621-D-RA			
	405 041 6705	TR 2SC2621-E-RA			
	405 066 9903	TR 2SC2688(1)-K			
	405 067 0008	TR 2SC2688(1)-L			
	405 067 0107	TR 2SC2688(1)-M			
	406 000 3605	TR 2SC3620(LB-SAN-1)			
Q721	405 041 6507	TR 2SC2621-D-RA			

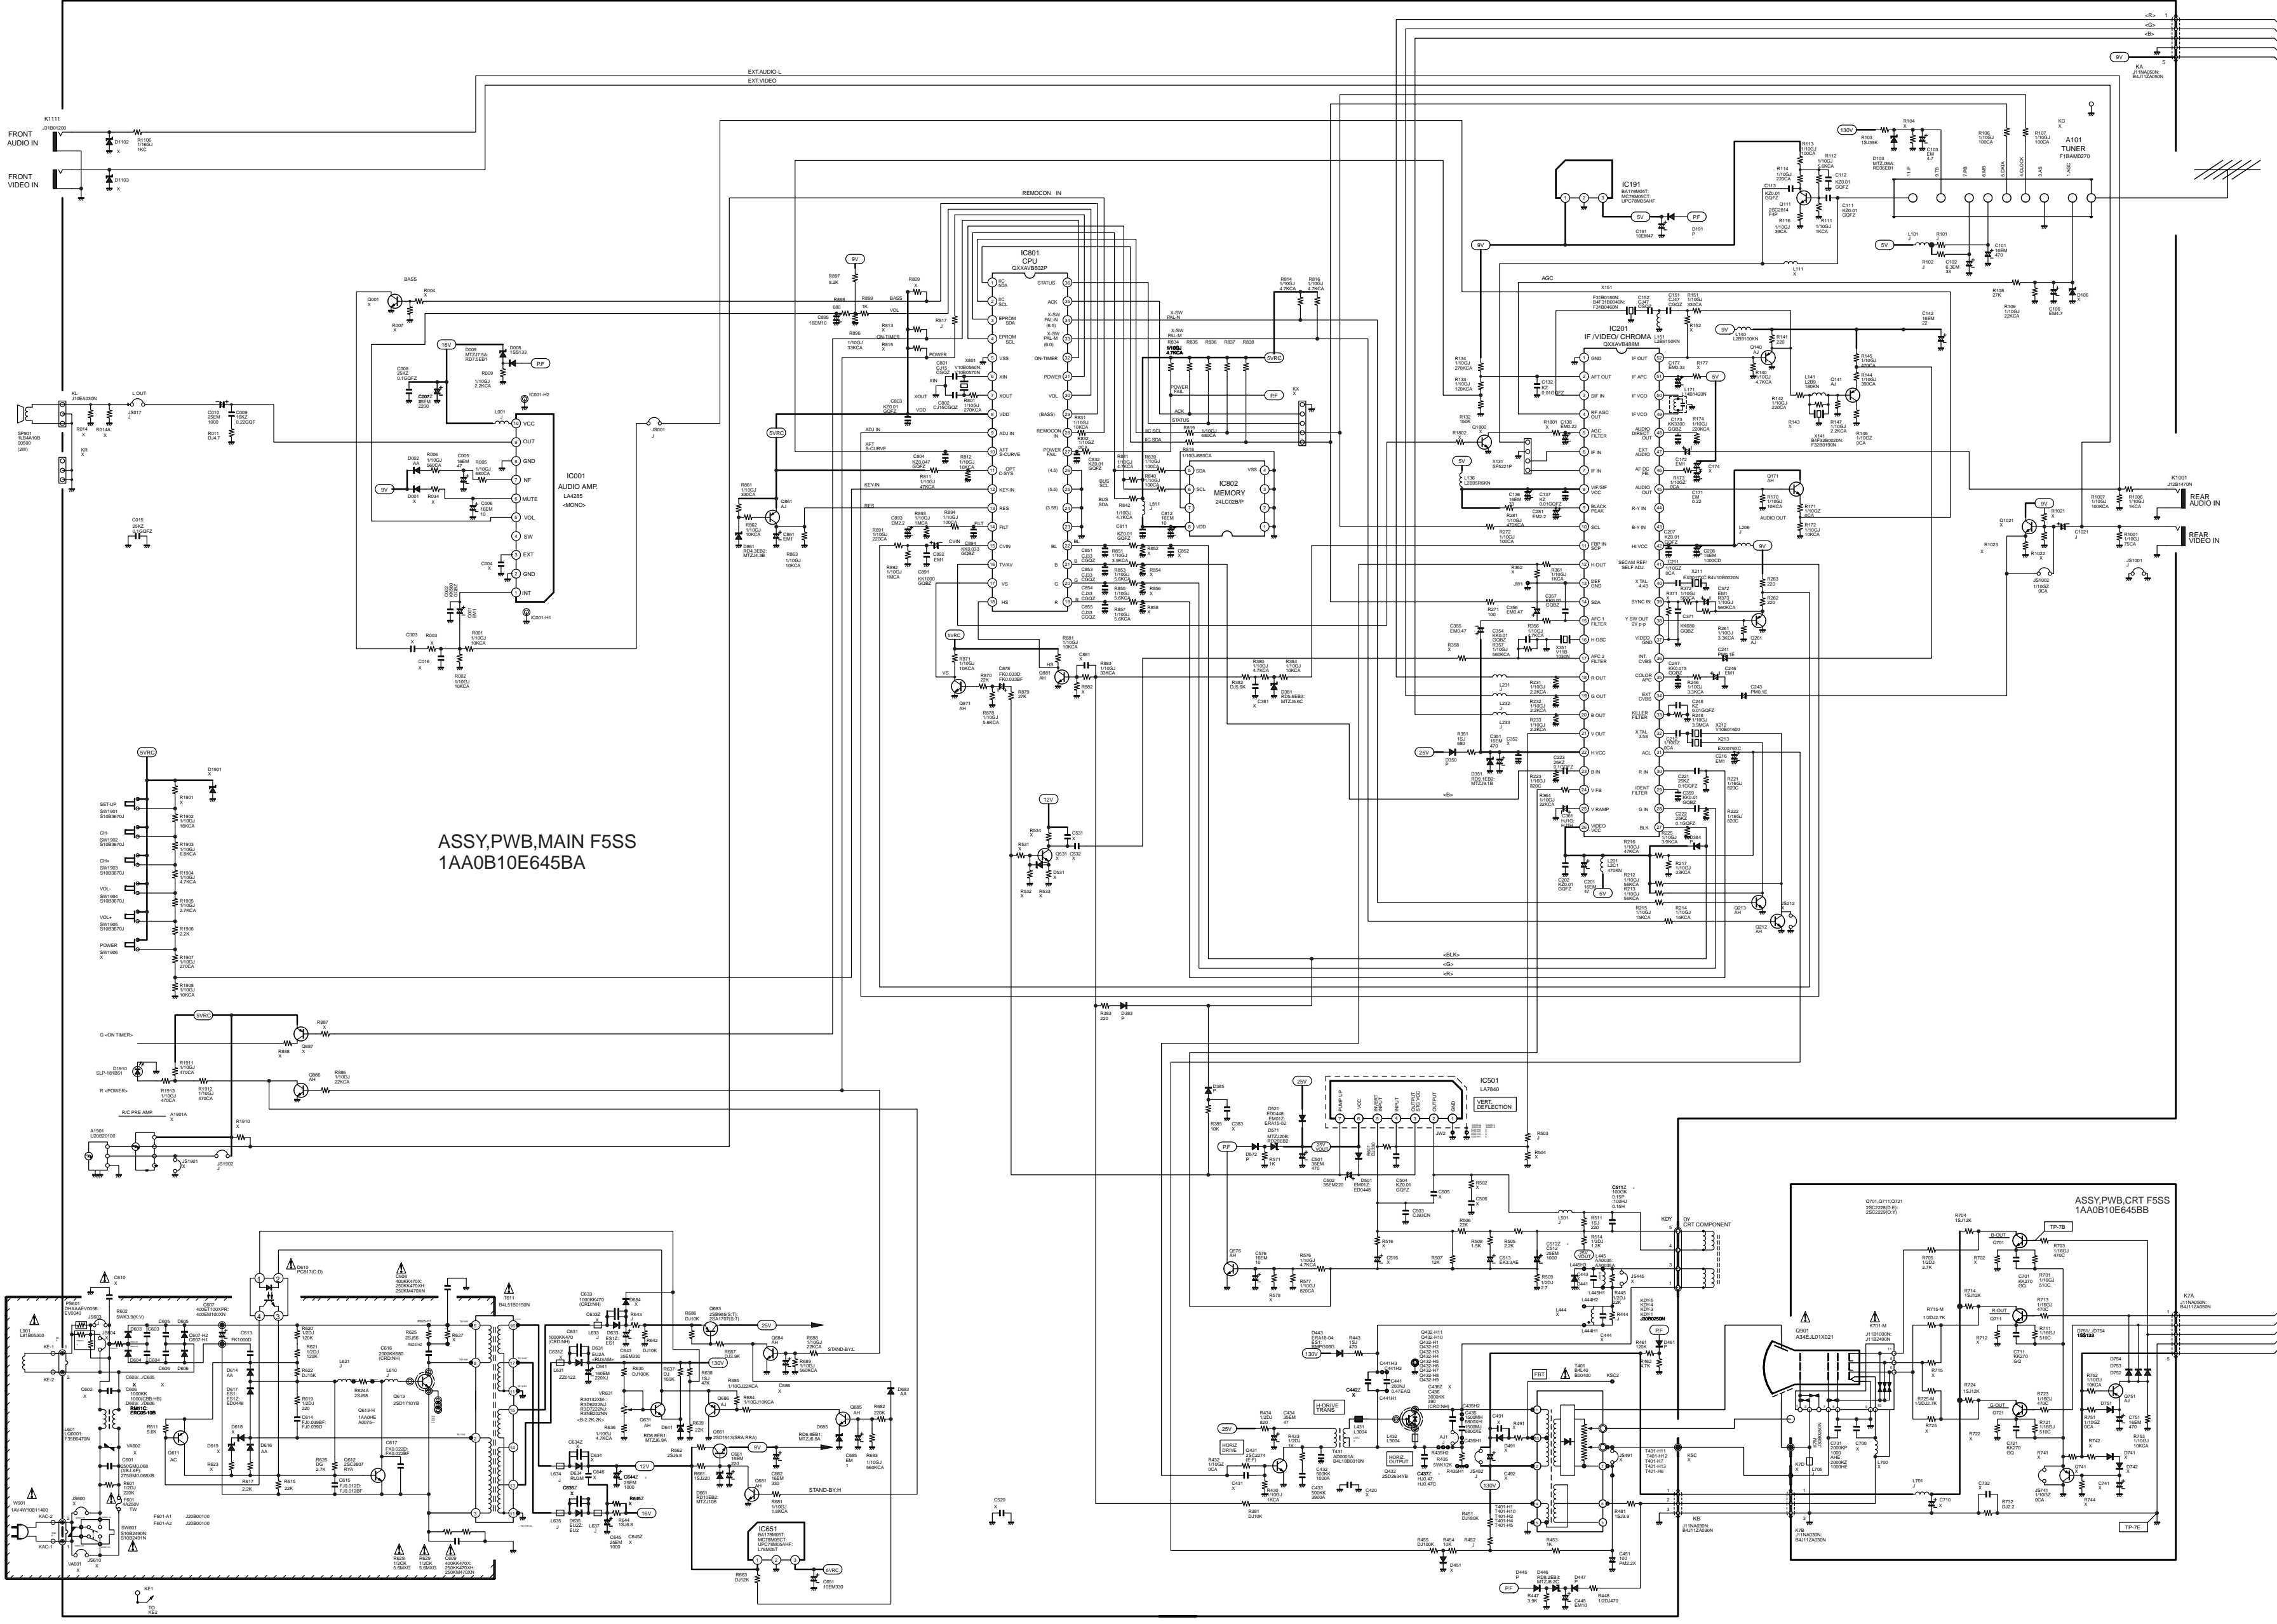


THE SERVICE PRECAUTION:
The area enclosed by this line() is directly connected with AC mains voltage.
When servicing the area, connect an isolating transformer between TV receiver and AC line to eliminate hazard of electric shock.

COLOUR TELEVISION

SANYO LC1-B CHASSIS SERIES

SERVICE REF. NO. C14LT77M-00

PRODUCT SAFETY NOTICE:
Product safety should be considered when a component replacement is made in any area of a receiver.
Components indicated by a mark  in this circuit diagram show components whose values have special significance to product safety. It is particularly recommended that only parts specified on the part service manual be used for components replacement pointed out by the mark.

- CIRCUIT DIAGRAM NOTICE:**
1. All resistance value are in ohms, K=1,000, M=1,000,000.
 2. All resistance rated wattages are 1/6W unless otherwise noted.
 3. Excepting electrolytic capacitors, all capacitance values of less than 1 μ are expressed in μ F and more than 1 are pF.
 4. All capacitance rated voltages are 50V unless otherwise noted.
 5. All inductance values are in μ H.
 6. Voltage readings take with a "VTVM" are from point indicated chassis ground. Voltage readings taken by using PAL colour bar signal are with all controls at normal position. Some voltage may vary with signal strength.
 7. Waveform were taken with PAL colour bar and controls adjusted for normal picture. Waveforms were taken by using a wide band oscilloscope and a low capacity probe.
 8. This circuit diagram covers a basic or representative chassis only. There may be some components or partial circuit differences between the actual chassis and the circuit diagram.
 9. Parts specified with "X" are not installed in this model.
 10. Parts specified with "J" are just jumper wires.

11. Expression of capacitance and resistance in circuit diagram.
- Capacitance (Example)**
1000 C M 2000 D
- J= $\pm 5\%$
 - K= $\pm 10\%$
 - M= $\pm 20\%$
 - Characteristic Capacitance value (220pF)
 - Allowable error ($\pm 20\%$)
 - Kind (Ceramic)
 - Rated voltage (1,000V)
- Resistance (Example)**
1/2 N 1.2
- Resistance value (1.2 Ω)
 - Allowable error ($\pm 5\%$)
 - Kind (M.carbon)
 - Rated wattage (1/2W)
- Material and Construction:**
T, A, U, D: Electrolytic
C, K, B: Ceramic
F: Mylar film
M, N: Polypropylene
Z: Metallized paper
D: Carbon
N: Metallized carbon
S: Oxided metallized
W: Wire winding
C: Solid

TRANSISTOR, DIODE AND INTEGRATED CIRCUIT TERMINAL GUIDE

C: COLLECTOR
B: BASE
E: EMITTER

A: ANODE
K: KATHODE

CHIP COMPONENTS
TRANSISTOR
DIODE
RESISTOR

PARTICULAR PARTS SYMBOL
FUSIBLE RESISTOR
NON POLE ELECTRIC CAPACITOR
POSISTER

12. List of replaceable transistors and diodes.

(PNP TR)					
	2SA608	2SA644A	2SA1015	2SA933	2SA933S
Z	E.F	Q.R	O.Y.G	Q.R	Q.R
Y	E.F	Q.R	O.Y.G	Q.R	
W	F	R	Y.G		
V	E.F	Q.R	O.Y.G	Q.R	Y.G
U	F	R	Y.G	R	G

(DIODE)					
	DIODE				
M	1SS176, 1SS133, GMA01				
P	1S1553, 1S2076A, 1S2471, 1N4148				
R	1S1555, 1S2473, 1S2076, DS442, 1N4148				

(NPN TR)					
	2SC536	2SC945A	2SC1815	2SC1740	2SC1740S
A	E.F.G	P.Q.R	O.Y.G	Q.R.S	Q.R.S
B	E.F.G	P.Q.R	O.Y.G	Q.R.S	
D	F.G	P.Q	Y.G	Q.R.S	
F	F.G	P	G	R.S	
H	F.G	P.Q	Y.G	Q.R.S	Y.G
I	E.F.G	P.Q.R	O.Y.G	Q.R.S	Y.G
G	F.G	P	G	R.S	G


(On the Main Board)

IC191 Pin-1: 9.2V 2: GND 3: 5.0V	IC651 Pin-1: 12.9V 2: GND 3: 5.0V
------------------------------------------------------	-------------------------------------------------------


IC001 (AUDIO AMP.)								
Pin-1: 6.3V	2: GND	3: 6.3V	4: 0.7V	5: 3.0V	6: 5.5V	7: 5.5V	8: GND	9: 5.5V
10: 12.3V								


[C801 (CPU)]											
Pin-1: 4.7V	2: 4.6V	3: 5.0V	4: 5.0V	5: GND	6: 1.8V	7: 2.5V	8: 5.0V	9: 1.4V			
10: 2.5V	11: 0.9V	12: 0V	13: 4.9V	14: 3.3V	15: 2.6V	16: 0V	17: 4.8V	18: 4.1V			
19: 0V	20: 0V	21: 0V	22: 0V	23: GND	24: GND	25: GND	26: GND	27: 4.5V			
28: 5.0V	29: 0V	30: 2.4V	31: 4.9V	32: 5.0V	33: 0V	34: 4.9V	35: 5.0V	36: 5.0V			

Q140 B 5.7V C 0V E 6.3V	Q141 B 5.9V C 0V E 6.5V	Q171 B 3.5V C 9.3V E 2.9V	Q212 B 0V C 4.7V E 0V	Q213 B 0.6V C 9.3V E 0V	Q261 B 1.6V C 0V E 2.3V	Q431 B 0.3V C 10.5V E 0V	Q432 B 2.5V C 131.7V E 2.5V	Q576 B 0V C 4.5V E 0V	Q611 B 18.5V C -0.9V E 17.6V	Q612 B 0V C -0.8V E -0.9V	Q613 B 0V C 329V E +0.8V	Q631 B 3.5V C 18.0V E 3.3V
Q661 B 9.9V C 11.3V E 9.3V	Q681 B 0V C 9.9V E 0V	Q683 B 23.9V C 24.5V E 24.6V	Q684 B 0.7V C 0V E 0V	Q685 B 0V C 36.1V E 1.0V	Q686 B 36.2V C 0V E 36.2V	Q861 B 4.4V C 4.9V E 5.0V	Q871 B 0V C 4.8V E 0V	Q881 B -5.9V C 4.1V E 0V	Q886 B 0.7V C 0V E 0V			

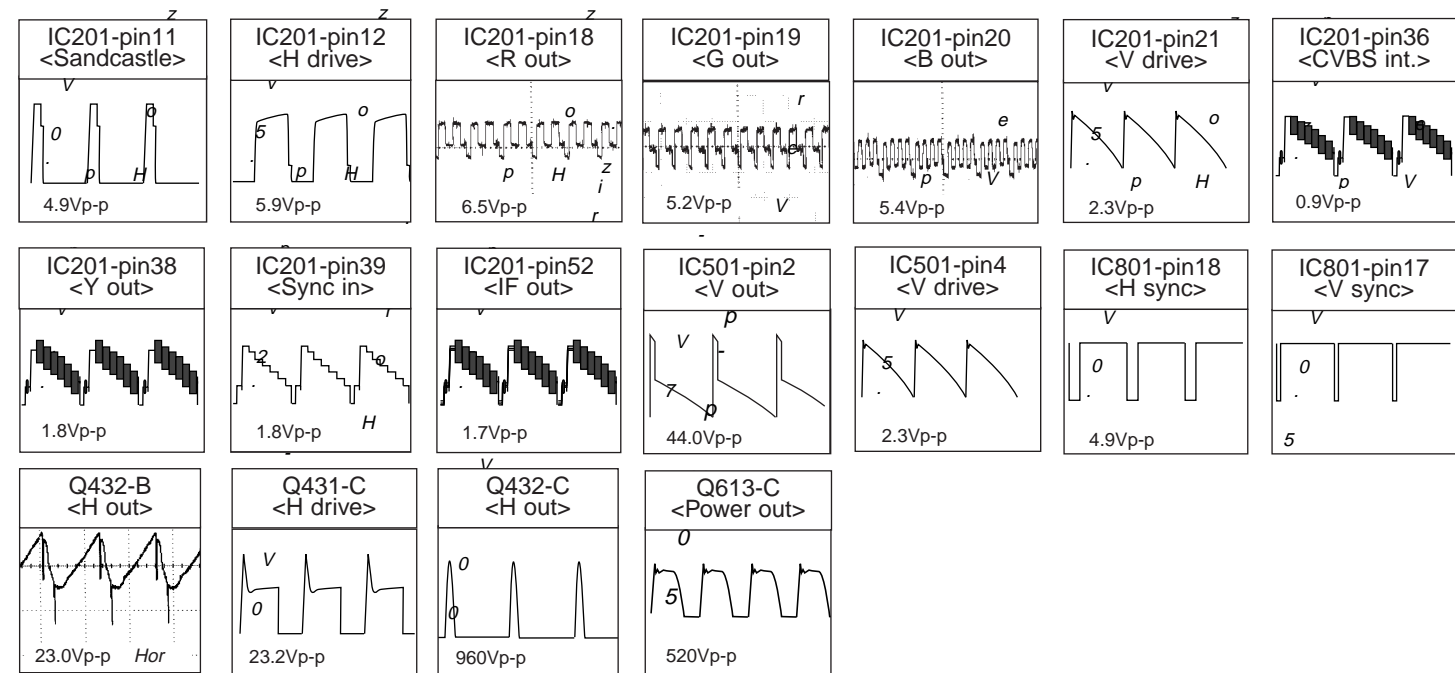

Q701	Q711	Q721	Q751
B 2.4V	B 2.5V	B 2.3V	B 9.3V
C 86.2V	C 84.0V	C 88.9V	C 0V
E 1.9V	E 2.0V	E 1.8V	E 9.1V

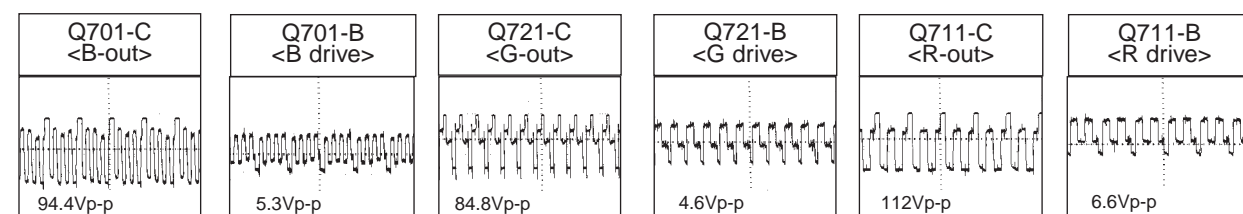

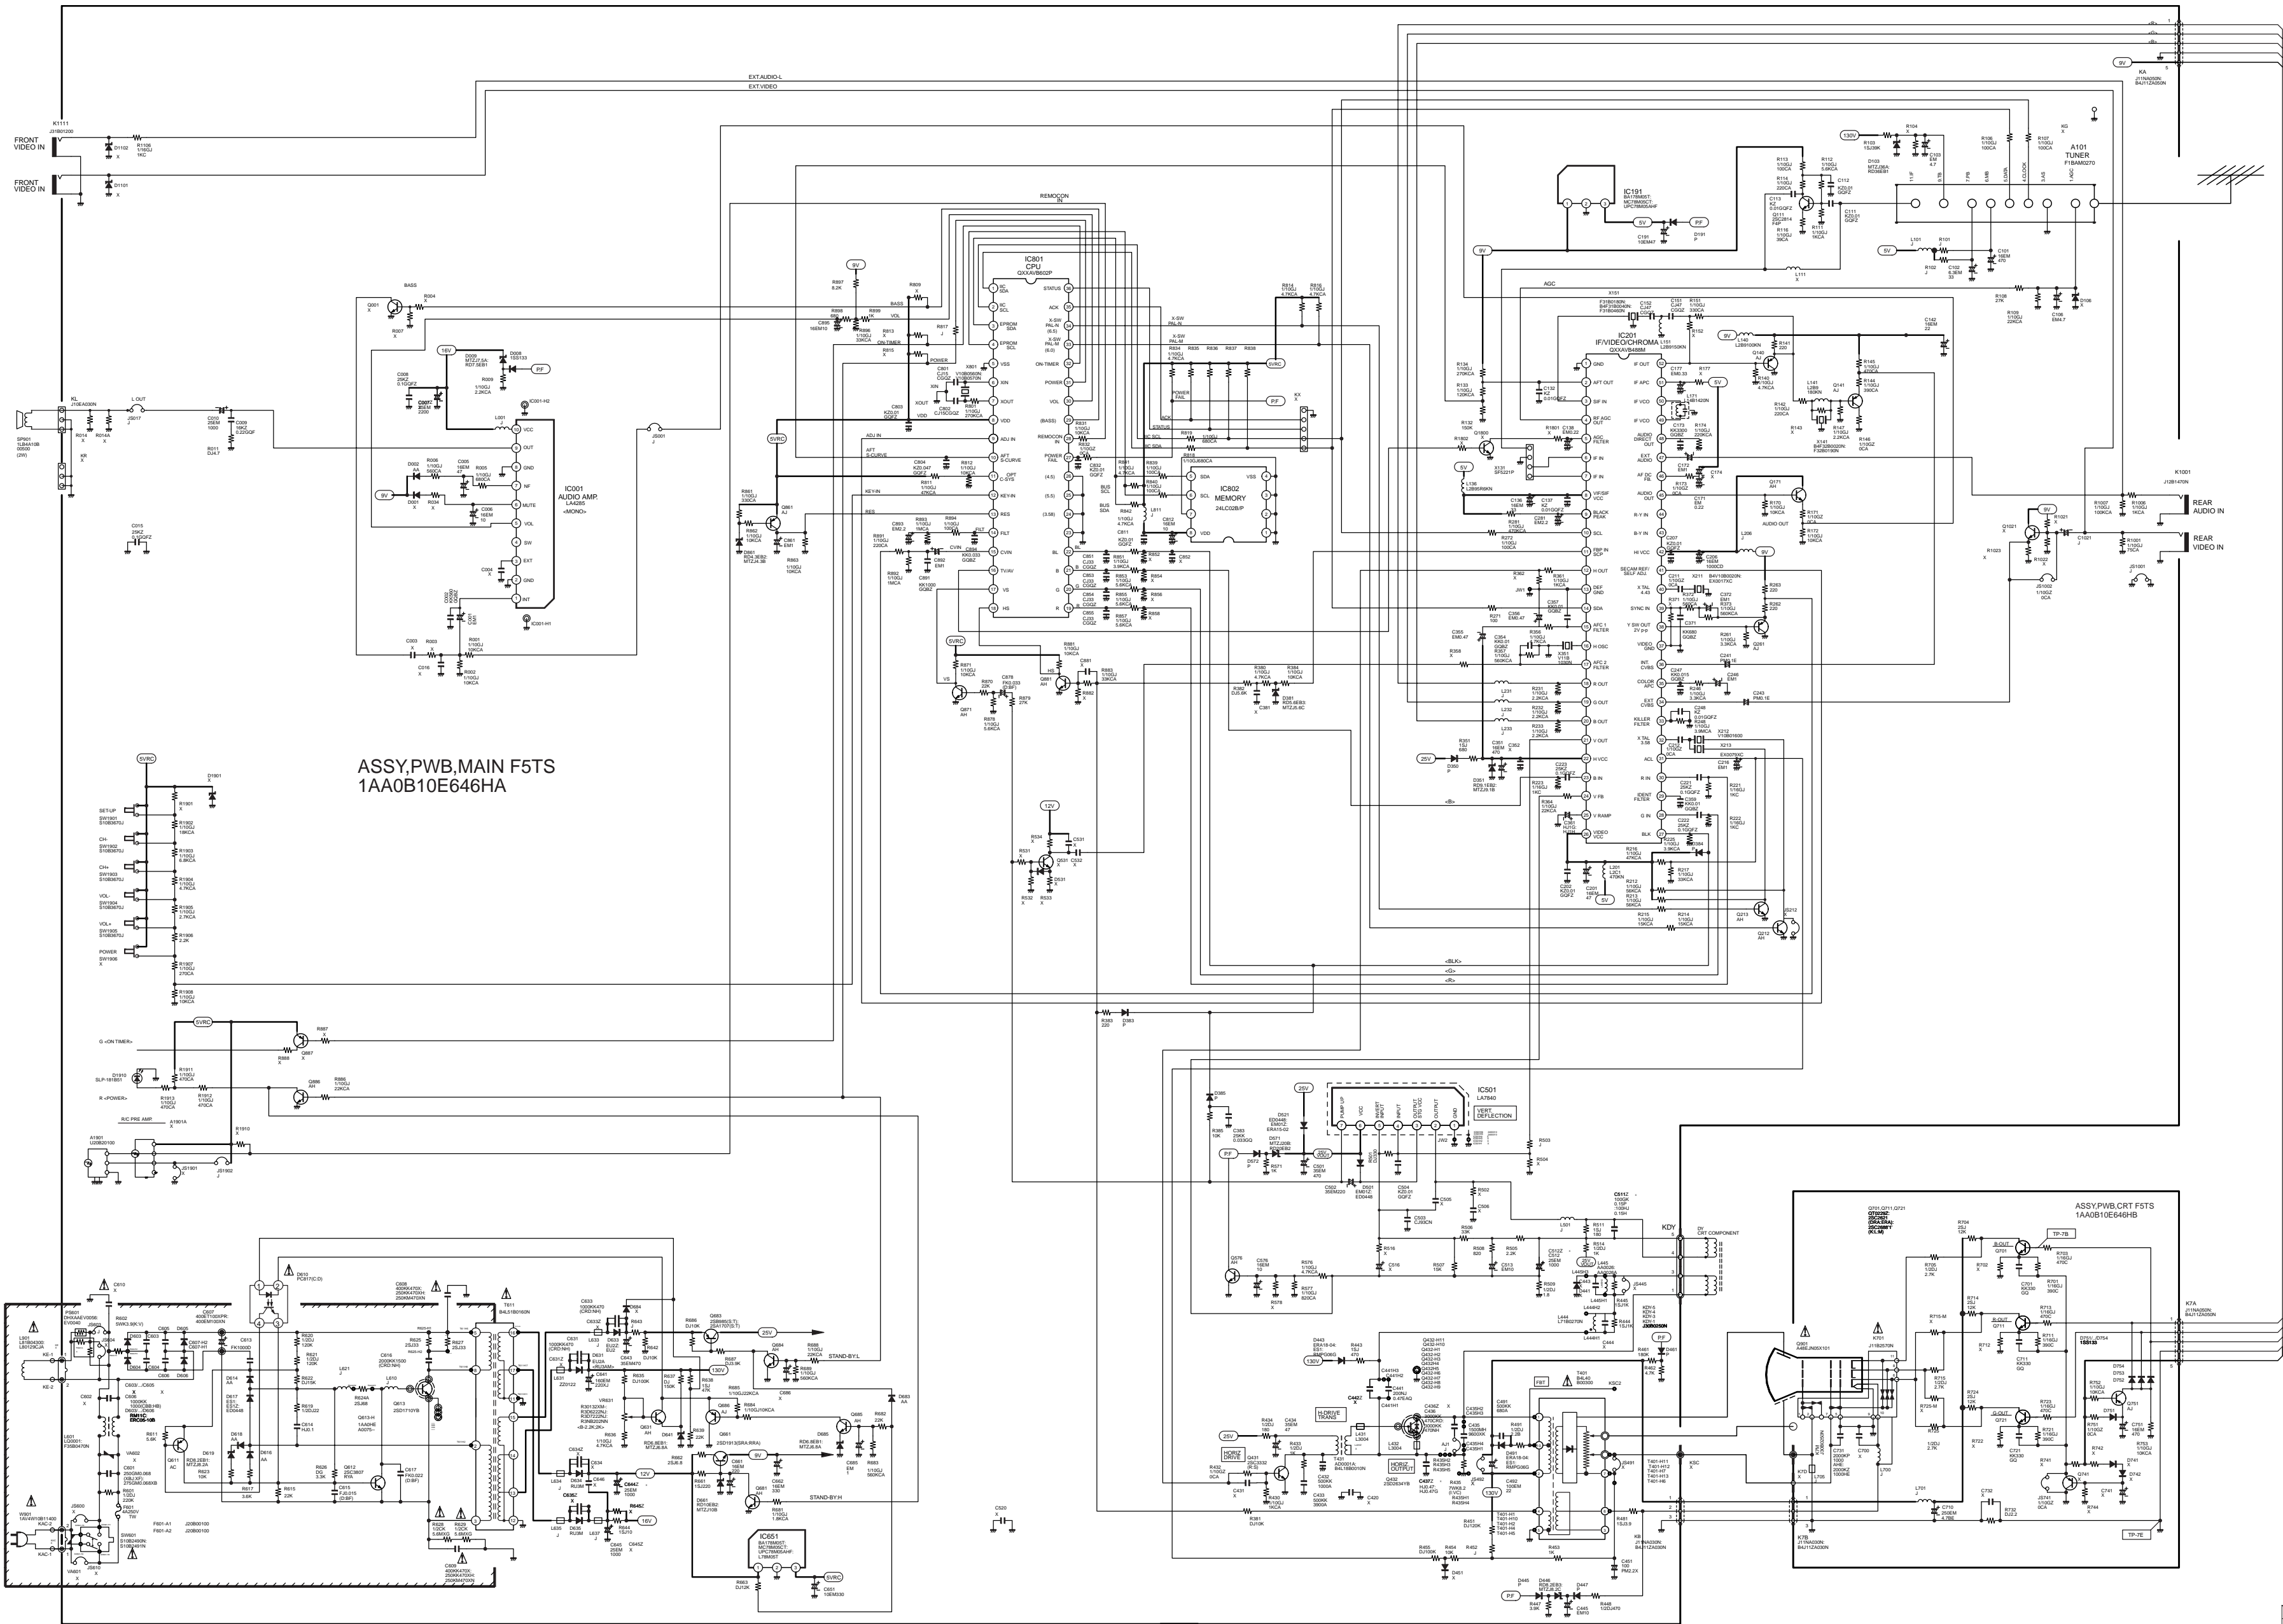

ASSY,PWB,MAIN F5TS
1AA0B10E646HA

THE SERVICE PRECAUTION:
The area enclosed by this line () is directly connected with AC mains voltage. When servicing the area, connect an isolating transformer between TV receiver and AC line to eliminate hazard of electric shock.

COLOUR TELEVISION

SANYO LC1-B CHASSIS SERIES

SERVICE REF. NO. C20LB87M-00

PRODUCT SAFETY NOTICE:
Product safety should be considered when a component replacement is made in any area of a receiver.
Components indicated by a mark in this circuit diagram show components whose values have special significance to product safety. It is particularly recommended that only parts specified on the part service manual be used for components replacement pointed out by the mark.

- CIRCUIT DIAGRAM NOTICE:**
1. All resistance value are in ohms, K=1,000, M=1,000,000.
 2. All resistance rated wattages are 1/6W unless otherwise noted.
 3. Excepting electrolytic capacitors, all capacitance values of less than 1 are expressed in μ F and more than 1 are pF.
 4. All capacitance rated voltages are 50V unless otherwise noted.
 5. All inductance values are in μ H.
 6. Voltage readings take with a "VTVM" are from point indicated chassis ground. Voltage readings taken by using PAL colour bar signal are with all controls at normal position. Some voltage may vary with signal strength.
 7. Waveform were taken with PAL colour bar and controls adjusted for normal picture. Waveforms were taken by using a wide band oscilloscope and a low capacity probe.
 8. This circuit diagram covers a basic or representative chassis only. There may be some components or partial circuit differences between the actual chassis and the circuit diagram.
 9. Parts specified with "X" are not installed in this model.
 10. Parts specified with "J" are just jumper wires.

11. Expression of capacitance and resistance in circuit diagram.

Capacitance (Example)
1000 C M 2000 D

Resistance (Example)
1/2 N 1.2

Legend:

- J= $\pm 5\%$
- K= $\pm 10\%$
- M= $\pm 20\%$
- T, A, U, D: Electrolytic
- C, K, B: Ceramic
- F: Mylar film
- M, N: Polypropylene
- Z: Metalized paper
- D: Carbon
- N: Metalized carbon
- S: Oxid metalized
- W: Wire winding
- C: Solid

TRANSISTOR, DIODE AND INTEGRATED CIRCUIT TERMINAL GUIDE

C: COLLECTOR
B: BASE
E: EMITTER

A: ANODE
K: KATHODE

CHIP COMPONENTS
TRANSISTOR
DIODE
RESISTOR

PARTICULAR PARTS SYMBOL
FUSIBLE RESISTOR
NON POLE ELECTRIC CAPACITOR
POSISTER

12. List of replaceable transistors and diodes.

(PNP TR)

	2SA608	2SA644	2SA1015	2SA933	2SA933S	KS4733C
Z	E.F	Q.R	O.Y.G	Q.R	Q.R	
Y	E.F	Q.R	O.Y.G	Q.R		
W	F	R	Y.G	R		
V	E.F	Q.R	O.Y.G	Q.R		Y.G
U	F	R	Y.G	R		G

(DIODE)

	DIODE
M	1S5176, 1S5133, GMA01
P	1S1553, 1S2076A, 1S2471, 1N4148
R	1S1555, 1S2473, 1S2076, DS442, 1N4148

(NPN TR)

	2SC536	2SC945A	2SC1815	2SC1740	2SC1740S	KSC945C
A	E.F.G	P.Q.R	O.Y.G	Q.R.S	Q.R.S	
B	E.F.G	P.Q.R	O.Y.G	Q.R.S		
D	F.G	P.Q	Y.G	Q.R.S		
F	F.G	P	G	R.S		
H	F.G	P.Q	Y.G	Q.R.S		Y.G
I	E.F.G	P.Q.R	O.Y.G	Q.R.S		Y.G
G	F.G	P	G	R.S		G

Waveforms & Voltages

(On the Main Board)

IC201 (IF/VIDEO/CHROMA) ::									
Pin-1: GND	2: 4.5V	3: 0.4V	4: 5.3V	5: 1.0V	6: 1.5V	7: 1.5V	8: 4.9V	9: 0V	
10: 4.6V	11: 0.6V	12: 2.4V	13: 0V	14: 4.7V	15: 5.4V	16: 5.1V	17: 4.4V	18: 2.5V	
19: 2.3V	20: 2.4V	21: 4.1V	22: 8.6V	23: 2.5V	24: 2.6V	25: 5.2V	26: 4.8V	27: 1.0V	
28: 2.6V	29: 3.4V	30: 2.5V	31: 2.7V	32: 3.1V	33: 3.7V	34: 1.6V	35: 3.0V	36: 1.9V	
37: 0V	38: 1.6V	39: 2.7V	40: 3.1V	41: 1.4V	42: 9.2V	43: 1.7V	44: 1.7V	45: 3.5V	
46: 2.8V	47: 2.3V	48: 2.3V	49: 4.0V	50: 4.1V	51: 3.1V	52: 5.6V			

IC191		
Pin-1: 9.2V	2: GND	3: 5.0V

IC651		
Pin-1: 12.9V	2: GND	3: 5.0V


IC501 (VERT. OUT)						
Pin-1: GND	2: 14.8V	3: 24.8V	4: 4.4V	5: 4.4V	6: 24.4V	7: 2.4V

IC001 (AUDIO AMP.)								
Pin-1: 6.3V	2: GND	3: 6.3V	4: 0.7V	5: 3.1V	6: 5.6V	7: 5.5V	8: GND	9: 5.7V
10: 12.5V								

IC802 (MEMORY)							
Pin-1 GND	2: GND	3: GND	4: GND	5: 5.0V	6: 5.0V	7: GND	8: 5.0V


IC801 (CPU)									
Pin-1: 4.7V	2: 4.6V	3: 5.0V	4: 5.0V	5: GND	6: 1.8V	7: 2.5V	8: 5.0V	9: 1.4V	
10: 2.5V	11: 0.9V	12: 0V	13: 4.9V	14: 3.3V	15: 2.6V	16: 0V	17: 4.8V	18: 4.1V	
19: 0V	20: 0V	21: 0V	22: 0V	23: GND	24: GND	25: GND	26: GND	27: 4.5V	
28: 5.0V	29: 0V	30: 2.4V	31: 4.9V	32: 5.0V	33: 0V	34: 4.9V	35: 5.0V	36: 5.0V	

Q140 B 5.7V C 0V E 6.3V	Q141 B 5.9V C 0V E 6.5V	Q171 B 3.5V C 9.3V E 2.9V	Q212 B 0V C 4.7V E 0V	Q213 B 0.6V C 0V E 0V	Q261 B 1.6V C 0V E 2.3V	Q431 B 0.3V C 10.5V E 0V	Q432 B 2.5V C 131.7V E 2.5V	Q576 B 0V C 4.5V E 0V	Q611 B 15.3V C 0.2V E 14.9V	Q612 B 0V C -0.3V E -0.2V	Q613 B 0V C 324V E 0.3V	Q631 B 3.5V C 18.0V E 3.3V
Q661 B 9.9V C 11.3V E 9.3V	Q681 B 0V C 9.9V E 0V	Q683 B 23.9V C 24.5V E 24.6V	Q684 B 0.7V C 0V E 0V	Q685 B 0V C 36.1V E 1.0V	Q686 B 36.2V C 0V E 36.2V	Q861 B 4.4V C 4.9V E 5.0V	Q871 B 0V C 4.1V E 0V	Q881 B -5.9V C 4.1V E 0V	Q886 B 0.7V C 0V E 0V			

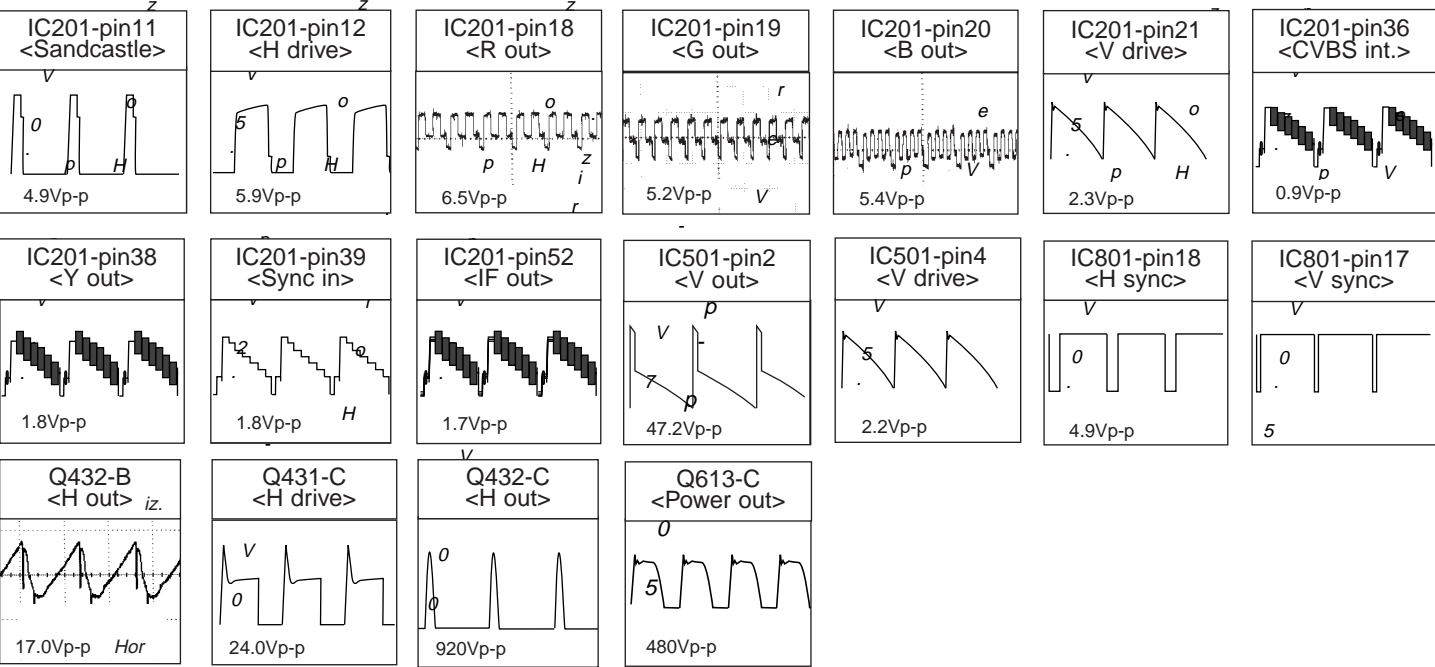


(On the CRT Board)

Q701		Q711		Q721		Q751	
B 2.1V	B 2.1V	B 2.0V	B 9.2V	B 2.0V	B 9.2V	B 2.0V	B 9.2V
C 139.4V	C 139V	C 142.5V	C 0V	C 142.5V	C 0V	C 142.5V	C 0V
E 1.7V	E 1.7V	E 1.6V	E 9.1V	E 1.6V	E 9.1V	E 1.6V	E 9.1V

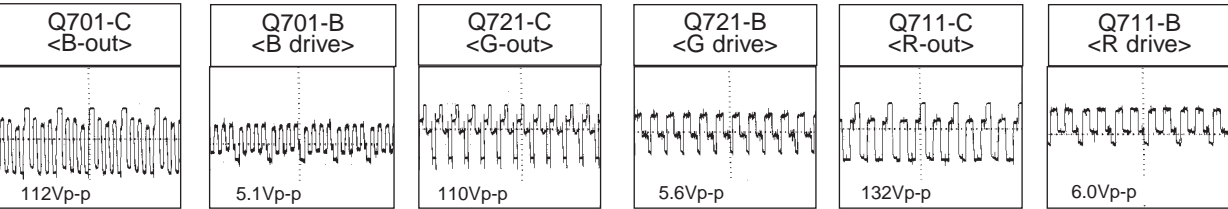

CRT BOARD (Component Location)

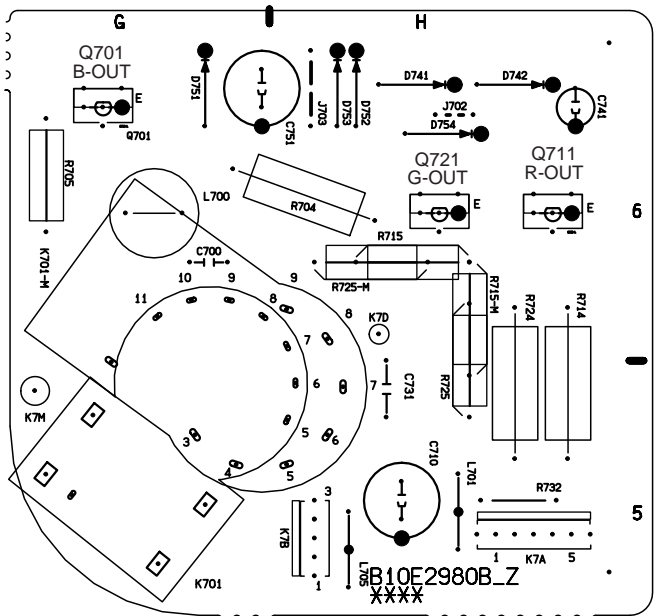

MAIN BOARD (Component Location)

