



Z-L720
Z-L820

U
LH

SERVICE MANUAL

COMPACT DISC STEREO SYSTEM

BASIC TAPE MECHANISM: ZZM-3 PR1NM
BASIC CD MECHANISM: 6ZG-1 ZZRNIM

- Replace this Service manual with "Revision Publishing" when it is issued.

aiwa
S/M Code No. 09-011-440-1T1

SIMPLE

DATA

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	ACCESSORY		87-006-268-010	1C	ANT, LOOP AM	USM	CX-ZL720
O	ACCESSORY		87-006-268-010	1C	ANT, LOOP AM	LHSM	CX-ZL820
O	ACCESSORY		87-043-115-010	1A	FEEDER-ANT, FM	USM	CX-ZL720
O	ACCESSORY		87-043-115-010	1A	FEEDER-ANT, FM	LHSM	CX-ZL820
!	O ACCESSORY		87-099-789-010	1B	PLUG, CONVERSION IR44	LHSM	CX-ZL820
O	ACCESSORY		8Z-NF9-702-010	1H	RC UNIT, ZAS02	USM	CX-ZL720
O	ACCESSORY		8Z-NF9-702-010	1H	RC UNIT, ZAS02	LHSM	CX-ZL820
!	O APPEARANCE		87-B00-002-010	0E	BADGE, AIWA 30 ABS SIL	USM	CX-ZL720
!	O APPEARANCE		87-B00-002-010	0E	BADGE, AIWA 30 ABS SIL	LHSM	CX-ZL820
O	APPEARANCE		8B-MA3-025-010	--	BOX, CASS L A3	USM	CX-ZL720
O	APPEARANCE		8B-MA3-025-010	--	BOX, CASS L A3	LHSM	CX-ZL820
O	APPEARANCE		8B-MA3-026-010	--	BOX, CASS R A3	USM	CX-ZL720
O	APPEARANCE		8B-MA3-026-010	--	BOX, CASS R A3	LHSM	CX-ZL820
O	APPEARANCE		8B-MA3-047-010	--	PANEL, SIDE L (U)	USM	CX-ZL720
O	APPEARANCE		8B-MA3-047-010	--	PANEL, SIDE L (U)	LHSM	CX-ZL820
O	APPEARANCE		8B-MA3-048-010	--	PANEL, SIDE R (U)	USM	CX-ZL720
O	APPEARANCE		8B-MA3-048-010	--	PANEL, SIDE R (U)	LHSM	CX-ZL820
O	APPEARANCE	*	8B-MA3-001-010	--	CABI, FR U A3	USM	CX-ZL720
O	APPEARANCE	*	8B-MA3-001-010	--	CABI, FR U A3	LHSM	CX-ZL820
O	APPEARANCE	*	8B-MA3-010-010	--	CABI, REAR U A3	USM	CX-ZL720
O	APPEARANCE	*	8B-MA3-011-010	--	CABI, REAR LH A3	LHSM	CX-ZL820
O	APPEARANCE	*	8B-MA3-021-010	--	CABI, TOP U	USM	CX-ZL720
O	APPEARANCE	*	8B-MA3-021-010	--	CABI, TOP U	LHSM	CX-ZL820
X	CD		M8-6ZG-189-030	--	6ZG-1 ZZRNM	USM	CX-ZL720
X	CD		M8-6ZG-189-030	--	6ZG-1 ZZRNM	LHSM	CX-ZL820
O	CNTL	C 0651	87-012-274-080	0E	C-CAP, U 1000P-50 K B	USM	CX-ZL720
O	CNTL	C 0651	87-012-274-080	0E	C-CAP, U 1000P-50 K B	LHSM	CX-ZL820
O	CNTL	C 0652	87-012-274-080	0E	C-CAP, U 1000P-50 K B	USM	CX-ZL720
O	CNTL	C 0652	87-012-274-080	0E	C-CAP, U 1000P-50 K B	LHSM	CX-ZL820
O	CNTL	LED0682	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	USM	CX-ZL720
O	CNTL	LED0682	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	LHSM	CX-ZL820
O	CNTL	LED0683	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	USM	CX-ZL720
O	CNTL	LED0683	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	LHSM	CX-ZL820
O	CNTL	LED0684	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	USM	CX-ZL720
O	CNTL	LED0684	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	LHSM	CX-ZL820
O	CNTL	LED0685	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	USM	CX-ZL720
O	CNTL	LED0685	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	LHSM	CX-ZL820
O	CNTL	LED0698	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	USM	CX-ZL720
O	CNTL	LED0698	87-A41-056-040	0E	LED, HLMF-D405 ORANGE	LHSM	CX-ZL820
X	CNTL	R 0402	88-108-561-080	0E	C-RES, U 560-1/16W J	USM	CX-ZL720
X	CNTL	R 0402	88-108-561-080	0E	C-RES, U 560-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0403	88-108-561-080	0E	C-RES, U 560-1/16W J	USM	CX-ZL720
X	CNTL	R 0403	88-108-561-080	0E	C-RES, U 560-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0404	88-108-681-080	0E	C-RES, U 680-1/16W J	USM	CX-ZL720
X	CNTL	R 0404	88-108-681-080	0E	C-RES, U 680-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0651	88-108-102-080	0E	C-RES, U 1K-1/16W J	USM	CX-ZL720
X	CNTL	R 0651	88-108-102-080	0E	C-RES, U 1K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0652	88-108-183-080	0E	C-RES, U 18K-1/16W J	USM	CX-ZL720
X	CNTL	R 0652	88-108-183-080	0E	C-RES, U 18K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0653	88-108-473-080	0E	C-RES, U 47K-1/16W J	USM	CX-ZL720
X	CNTL	R 0653	88-108-473-080	0E	C-RES, U 47K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0654	88-108-152-080	0E	C-RES, U 1.5K-1/16W J	USM	CX-ZL720
X	CNTL	R 0654	88-108-152-080	0E	C-RES, U 1.5K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0655	88-108-682-080	0E	C-RES, U 6.8K-1/16W J	USM	CX-ZL720
X	CNTL	R 0655	88-108-682-080	0E	C-RES, U 6.8K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0670	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0670	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0680	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0680	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0682	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0682	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0683	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0683	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0684	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0684	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0685	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0685	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0686	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0686	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0687	88-118-122-080	0E	C-RES, S 1.2K-1/10W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	CNTL	R 0687	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0688	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0688	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0689	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	CNTL	R 0689	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	CNTL	R 0805	88-121-681-080	0E	RES,680-1/8W J	USM	CX-ZL720
X	CNTL	R 0805	88-121-681-080	0E	RES,680-1/8W J	LHSM	CX-ZL820
X	CNTL	R 0806	88-108-821-080	0E	C-RES,U 820-1/16W J	USM	CX-ZL720
X	CNTL	R 0806	88-108-821-080	0E	C-RES,U 820-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0807	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	CNTL	R 0807	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0808	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	CNTL	R 0808	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0809	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	USM	CX-ZL720
X	CNTL	R 0809	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0821	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	CNTL	R 0821	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0822	88-108-561-080	0E	C-RES,U 560-1/16W J	USM	CX-ZL720
X	CNTL	R 0822	88-108-561-080	0E	C-RES,U 560-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0823	88-108-561-080	0E	C-RES,U 560-1/16W J	USM	CX-ZL720
X	CNTL	R 0823	88-108-561-080	0E	C-RES,U 560-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0824	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	CNTL	R 0824	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0825	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	CNTL	R 0825	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0826	88-108-821-080	0E	C-RES,U 820-1/16W J	USM	CX-ZL720
X	CNTL	R 0826	88-108-821-080	0E	C-RES,U 820-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0827	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	CNTL	R 0827	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0828	88-121-122-080	0E	RES,1.2K-1/8W J	USM	CX-ZL720
X	CNTL	R 0828	88-121-122-080	0E	RES,1.2K-1/8W J	LHSM	CX-ZL820
X	CNTL	R 0829	88-121-152-080	0E	RES,1.5K-1/8W J	USM	CX-ZL720
X	CNTL	R 0829	88-121-152-080	0E	RES,1.5K-1/8W J	LHSM	CX-ZL820
X	CNTL	R 0830	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	USM	CX-ZL720
X	CNTL	R 0830	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0831	88-121-222-080	0E	RES,2.2K-1/8W J	USM	CX-ZL720
X	CNTL	R 0831	88-121-222-080	0E	RES,2.2K-1/8W J	LHSM	CX-ZL820
X	CNTL	R 0842	88-108-561-080	0E	C-RES,U 560-1/16W J	USM	CX-ZL720
X	CNTL	R 0842	88-108-561-080	0E	C-RES,U 560-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0843	88-108-561-080	0E	C-RES,U 560-1/16W J	USM	CX-ZL720
X	CNTL	R 0843	88-108-561-080	0E	C-RES,U 560-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0844	88-121-681-080	0E	RES,680-1/8W J	USM	CX-ZL720
X	CNTL	R 0844	88-121-681-080	0E	RES,680-1/8W J	LHSM	CX-ZL820
X	CNTL	R 0845	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	CNTL	R 0845	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0846	88-108-821-080	0E	C-RES,U 820-1/16W J	USM	CX-ZL720
X	CNTL	R 0846	88-108-821-080	0E	C-RES,U 820-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0847	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	CNTL	R 0847	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	CNTL	R 0848	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	CNTL	R 0848	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0849	88-121-152-080	0E	RES,1.5K-1/8W J	USM	CX-ZL720
X	CNTL	R 0849	88-121-152-080	0E	RES,1.5K-1/8W J	LHSM	CX-ZL820
X	CNTL	R 0850	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	USM	CX-ZL720
X	CNTL	R 0850	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	LHSM	CX-ZL820
X	CNTL	R 0851	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	CNTL	R 0851	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
O	CNTL	S 0401	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0401	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0402	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0402	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0405	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0405	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0651	87-A91-542-010	1A	SW,RTRY EC12E12504	USM	CX-ZL720
O	CNTL	S 0651	87-A91-542-010	1A	SW,RTRY EC12E12504	LHSM	CX-ZL820
O	CNTL	S 0805	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0805	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0806	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0806	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0807	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	CNTL	S 0807	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0808	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0808	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0809	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0809	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0821	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0821	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0822	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0822	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0823	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0823	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0825	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0825	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0826	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0826	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0827	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0827	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0828	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0828	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0829	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0829	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0830	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0830	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0831	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0831	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0842	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0842	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0843	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0843	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0844	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0844	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0845	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0845	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0846	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0846	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0849	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0849	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
O	CNTL	S 0851	87-A90-095-080	0E	SW, TACT EVQ11G04M	USM	CX-ZL720
O	CNTL	S 0851	87-A90-095-080	0E	SW, TACT EVQ11G04M	LHSM	CX-ZL820
! S	ELECTRICAL		87-035-194-010	1A	FUSE, 6.3A 250V T 218	LHSM	CX-ZL820
! S	ELECTRICAL		87-035-493-010	0E	FUSE, 8A 125V T 237	USM	CX-ZL720
! X	ELECTRICAL		87-069-033-010	0E	CABLE, TIE	USM	CX-ZL720
! X	ELECTRICAL		87-069-033-010	0E	CABLE, TIE	LHSM	CX-ZL820
! O	ELECTRICAL		87-085-185-010	0E	BUSHING, AC CORD(E) CM-22B	LHSM	CX-ZL820
! O	ELECTRICAL		87-A80-148-010	1B	AC CORD ASSY, E BLK	LHSM	CX-ZL820
! O	ELECTRICAL		87-A80-149-010	1B	AC CORD ASSY, U BLK	USM	CX-ZL720
! O	ELECTRICAL		87-A91-422-010	1D	BUSHING, AC CORD(U)	USM	CX-ZL720
O	ELECTRICAL		87-A91-736-010	1F	FAN, DSB0812M-S382 -300MM	USM	CX-ZL720
O	ELECTRICAL		87-A91-736-010	1F	FAN, DSB0812M-S382 -300MM	LHSM	CX-ZL820
X	ELECTRICAL		88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	ELECTRICAL		88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
O	ELECTRICAL		88-906-321-110	0E	FF-CABLE, 6P 1.25 320MM	USM	CX-ZL720
O	ELECTRICAL		88-906-321-110	0E	FF-CABLE, 6P 1.25 320MM	LHSM	CX-ZL820
O	ELECTRICAL		88-908-151-110	0E	FF-CABLE, 8P 1.25-150MM	USM	CX-ZL720
O	ELECTRICAL		88-908-151-110	0E	FF-CABLE, 8P 1.25-150MM	LHSM	CX-ZL820
O	ELECTRICAL		88-910-231-210	0E	FF-CABLE, 10P 1.25 230MM	USM	CX-ZL720
O	ELECTRICAL		88-910-231-210	0E	FF-CABLE, 10P 1.25 230MM	LHSM	CX-ZL820
O	ELECTRICAL		88-911-151-110	1A	FF-CABLE, 11P 1.25 150MM	USM	CX-ZL720
O	ELECTRICAL		88-911-151-110	1A	FF-CABLE, 11P 1.25 150MM	LHSM	CX-ZL820
X	ELECTRICAL		89-750-124-410	0E	WIRE ASSY, 120 LUG	USM	CX-ZL720
X	ELECTRICAL		89-750-124-410	0E	WIRE ASSY, 120 LUG	LHSM	CX-ZL820
X	ELECTRICAL		8A-MA3-215-010	0E	HT-SINK, IC	USM	CX-ZL720
X	ELECTRICAL		8A-MA3-215-010	0E	HT-SINK, IC	LHSM	CX-ZL820
O	ELECTRICAL	PT 0001	8B-MA3-661-010	--	PT, BMA-3 U	USM	CX-ZL720
O	ELECTRICAL	PT 0001	8B-MA3-663-010	--	PT, BMA-3 LH	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0098	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	FRONT JUMPER	JR 0098	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0099	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	FRONT JUMPER	JR 0099	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0100	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	FRONT JUMPER	JR 0100	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0101	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0101	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0102	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0102	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0105	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0105	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0107	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0107	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0108	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0108	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0112	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0112	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0113	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0113	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0121	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0121	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0131	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0131	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0132	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0132	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0802	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0802	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FRONT JUMPER	JR 0803	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FRONT JUMPER	JR 0803	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	FUNC/E.VR	C 0605	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	USM	CX-ZL720
O	FUNC/E.VR	C 0605	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	LHSM	CX-ZL820
O	FUNC/E.VR	C 0606	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	USM	CX-ZL720
O	FUNC/E.VR	C 0606	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	LHSM	CX-ZL820
O	FUNC/E.VR	C 0609	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	USM	CX-ZL720
O	FUNC/E.VR	C 0609	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	LHSM	CX-ZL820
O	FUNC/E.VR	C 0610	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	USM	CX-ZL720
O	FUNC/E.VR	C 0610	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	LHSM	CX-ZL820
O	FUNC/E.VR	C 0611	87-A12-084-080	0E	CAP,E 0.22-50 SMG	USM	CX-ZL720
O	FUNC/E.VR	C 0611	87-A12-084-080	0E	CAP,E 0.22-50 SMG	LHSM	CX-ZL820
O	FUNC/E.VR	C 0612	87-A12-084-080	0E	CAP,E 0.22-50 SMG	USM	CX-ZL720
O	FUNC/E.VR	C 0612	87-A12-084-080	0E	CAP,E 0.22-50 SMG	LHSM	CX-ZL820
O	FUNC/E.VR	C 0613	87-A12-084-080	0E	CAP,E 0.22-50 SMG	USM	CX-ZL720
O	FUNC/E.VR	C 0613	87-A12-084-080	0E	CAP,E 0.22-50 SMG	LHSM	CX-ZL820
O	FUNC/E.VR	C 0614	87-A12-084-080	0E	CAP,E 0.22-50 SMG	USM	CX-ZL720
O	FUNC/E.VR	C 0614	87-A12-084-080	0E	CAP,E 0.22-50 SMG	LHSM	CX-ZL820
O	FUNC/E.VR	C 0615	87-012-172-080	0E	C-CAP,U 10P-50 D CH	USM	CX-ZL720
O	FUNC/E.VR	C 0615	87-012-172-080	0E	C-CAP,U 10P-50 D CH	LHSM	CX-ZL820
O	FUNC/E.VR	C 0616	87-010-221-080	0E	CAP,E 470-10 M SME	USM	CX-ZL720
O	FUNC/E.VR	C 0616	87-010-221-080	0E	CAP,E 470-10 M SME	LHSM	CX-ZL820
O	FUNC/E.VR	C 0617	87-010-221-080	0E	CAP,E 470-10 M SME	USM	CX-ZL720
O	FUNC/E.VR	C 0617	87-010-221-080	0E	CAP,E 470-10 M SME	LHSM	CX-ZL820
O	FUNC/E.VR	C 0618	87-A12-091-080	0E	CAP,E 10-50 SMG	USM	CX-ZL720
O	FUNC/E.VR	C 0618	87-A12-091-080	0E	CAP,E 10-50 SMG	LHSM	CX-ZL820
O	FUNC/E.VR	C 0620	87-010-263-080	0E	CAP,E 100-10 M 11L SME	USM	CX-ZL720
O	FUNC/E.VR	C 0620	87-010-263-080	0E	CAP,E 100-10 M 11L SME	LHSM	CX-ZL820
O	FUNC/E.VR	C 0623	87-010-402-080	0E	CAP,E 2.2-50 M 11L SME	USM	CX-ZL720
O	FUNC/E.VR	C 0623	87-010-402-080	0E	CAP,E 2.2-50 M 11L SME	LHSM	CX-ZL820
O	FUNC/E.VR	C 0624	87-010-402-080	0E	CAP,E 2.2-50 M 11L SME	USM	CX-ZL720
O	FUNC/E.VR	C 0624	87-010-402-080	0E	CAP,E 2.2-50 M 11L SME	LHSM	CX-ZL820
O	FUNC/E.VR	C 0630	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	FUNC/E.VR	C 0630	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
X	FUNC/E.VR	C 0633	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	C 0633	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	C 0634	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	C 0634	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
O	FUNC/E.VR	C 0669	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	FUNC/E.VR	C 0669	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	FUNC/E.VR	C 0670	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	FUNC/E.VR	C 0670	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	FUNC/E.VR	C 0671	87-010-805-080	0E	C-CAP,S 1-16 Z F	USM	CX-ZL720
O	FUNC/E.VR	C 0671	87-010-805-080	0E	C-CAP,S 1-16 Z F	LHSM	CX-ZL820
O	FUNC/E.VR	C 0672	87-010-805-080	0E	C-CAP,S 1-16 Z F	USM	CX-ZL720
O	FUNC/E.VR	C 0672	87-010-805-080	0E	C-CAP,S 1-16 Z F	LHSM	CX-ZL820
O	FUNC/E.VR	C 0673	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	FUNC/E.VR	C 0673	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	FUNC/E.VR	C 0677	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	FUNC/E.VR	C 0677	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
X	FUNC/E.VR	C 0678	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FUNC/E.VR	C 0678	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	FUNC/E.VR	C 0681	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	FUNC/E.VR	C 0681	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	FUNC/E.VR	C 0682	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	FUNC/E.VR	C 0682	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
! O	FUNC/E.VR	CN 0601	87-099-719-010	1B	CONN,30P H BLK TYK-B(X)	USM	CX-ZL720
! O	FUNC/E.VR	CN 0601	87-099-719-010	1B	CONN,30P H BLK TYK-B(X)	LHSM	CX-ZL820
! O	FUNC/E.VR	CN 0602	87-A60-131-010	0E	CONN,6P V FE	USM	CX-ZL720
! O	FUNC/E.VR	CN 0602	87-A60-131-010	0E	CONN,6P V FE	LHSM	CX-ZL820
S	FUNC/E.VR	D 0601	87-A40-539-080	0E	ZENER,MTZJ2.4A	USM	CX-ZL720
S	FUNC/E.VR	D 0601	87-A40-539-080	0E	ZENER,MTZJ2.4A	LHSM	CX-ZL820
S	FUNC/E.VR	D 0602	87-A40-539-080	0E	ZENER,MTZJ2.4A	USM	CX-ZL720
S	FUNC/E.VR	D 0602	87-A40-539-080	0E	ZENER,MTZJ2.4A	LHSM	CX-ZL820
X	FUNC/E.VR	FB 0602	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	FUNC/E.VR	FB 0602	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
S	FUNC/E.VR	IC 0601	87-A21-443-040	1C	C-IC,M62495AFP	USM	CX-ZL720
S	FUNC/E.VR	IC 0601	87-A21-443-040	1C	C-IC,M62495AFP	LHSM	CX-ZL820
O	FUNC/E.VR	J 0603	87-A60-926-010	1A	JACK,PIN 4P R/W TC58-118	USM	CX-ZL720
O	FUNC/E.VR	J 0603	87-A60-926-010	1A	JACK,PIN 4P R/W TC58-118	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0601	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FUNC/E.VR	JR 0601	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0602	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FUNC/E.VR	JR 0602	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0606	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	FUNC/E.VR	JR 0606	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0607	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FUNC/E.VR	JR 0607	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0612	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	FUNC/E.VR	JR 0612	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0613	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	FUNC/E.VR	JR 0613	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0614	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	FUNC/E.VR	JR 0614	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0615	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	FUNC/E.VR	JR 0615	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	FUNC/E.VR	JR 0616	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FUNC/E.VR	JR 0616	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
S	FUNC/E.VR	Q 0601	87-A30-087-080	0E	C-FET,2SK2158	USM	CX-ZL720
S	FUNC/E.VR	Q 0601	87-A30-087-080	0E	C-FET,2SK2158	LHSM	CX-ZL820
S	FUNC/E.VR	Q 0602	87-A30-087-080	0E	C-FET,2SK2158	USM	CX-ZL720
S	FUNC/E.VR	Q 0602	87-A30-087-080	0E	C-FET,2SK2158	LHSM	CX-ZL820
S	FUNC/E.VR	Q 0605	87-A30-090-080	0E	FET,2SK2541	USM	CX-ZL720
S	FUNC/E.VR	Q 0605	87-A30-090-080	0E	FET,2SK2541	LHSM	CX-ZL820
S	FUNC/E.VR	Q 0606	87-A30-090-080	0E	FET,2SK2541	USM	CX-ZL720
S	FUNC/E.VR	Q 0606	87-A30-090-080	0E	FET,2SK2541	LHSM	CX-ZL820
S	FUNC/E.VR	Q 0607	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	FUNC/E.VR	Q 0607	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
X	FUNC/E.VR	R 0077	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0077	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0601	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0601	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0602	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0602	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0603	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0603	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0604	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0604	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0607	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0607	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0608	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0608	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0609	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0609	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0610	88-121-332-080	0E	RES,3.3K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0610	88-121-332-080	0E	RES,3.3K-1/8W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0611	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	FUNC/E.VR	R 0611	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0612	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0612	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0613	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0613	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0614	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0614	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0615	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0615	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0616	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0616	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0618	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0618	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0619	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0619	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0620	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0620	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0621	88-108-105-080	0E	C-RES,U 1M-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0621	88-108-105-080	0E	C-RES,U 1M-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0622	88-108-105-080	0E	C-RES,U 1M-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0622	88-108-105-080	0E	C-RES,U 1M-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0625	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0625	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0626	88-121-103-080	0E	RES,10K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0626	88-121-103-080	0E	RES,10K-1/8W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0627	88-108-123-080	0E	C-RES,U 12K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0627	88-108-123-080	0E	C-RES,U 12K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0628	88-121-332-080	0E	RES,3.3K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0628	88-121-332-080	0E	RES,3.3K-1/8W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0631	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0631	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0632	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0632	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0633	88-108-563-080	0E	C-RES,U 56K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0633	88-108-563-080	0E	C-RES,U 56K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0634	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0634	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0635	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0635	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0637	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0637	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0638	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0638	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0639	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0639	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0640	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0640	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0641	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0641	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0642	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0642	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0643	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0643	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0644	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0644	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0649	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0649	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0650	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0650	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0653	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FUNC/E.VR	R 0653	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FUNC/E.VR	R 0654	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	FUNC/E.VR	R 0654	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	FUNC/E.VR	R 0661	88-108-123-080	0E	C-RES,U 12K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0661	88-108-123-080	0E	C-RES,U 12K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0662	88-108-123-080	0E	C-RES,U 12K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0662	88-108-123-080	0E	C-RES,U 12K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0663	88-108-123-080	0E	C-RES,U 12K-1/16W J	USM	CX-ZL720
X	FUNC/E.VR	R 0663	88-108-123-080	0E	C-RES,U 12K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0664	88-108-123-080	0E	C-RES,U 12K-1/16W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	FUNC/E.VR	R 0664	88-108-123-080	0E	C-RES,U 12K-1/16W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0671	88-121-183-080	0E	RES,18K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0671	88-121-183-080	0E	RES,18K-1/8W J	LHSM	CX-ZL820
X	FUNC/E.VR	R 0672	88-121-183-080	0E	RES,18K-1/8W J	USM	CX-ZL720
X	FUNC/E.VR	R 0672	88-121-183-080	0E	RES,18K-1/8W J	LHSM	CX-ZL820
! O	KEY-CD	CN 0701	87-A60-156-010	0E	CONN,8P H FE	USM	CX-ZL720
! O	KEY-CD	CN 0701	87-A60-156-010	0E	CONN,8P H FE	LHSM	CX-ZL820
O	KEY-CD	LED0771	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	USM	CX-ZL720
O	KEY-CD	LED0771	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	LHSM	CX-ZL820
O	KEY-CD	LED0772	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	USM	CX-ZL720
O	KEY-CD	LED0772	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	LHSM	CX-ZL820
O	KEY-CD	LED0773	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	USM	CX-ZL720
O	KEY-CD	LED0773	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	LHSM	CX-ZL820
O	KEY-CD	LED0774	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	USM	CX-ZL720
O	KEY-CD	LED0774	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	LHSM	CX-ZL820
O	KEY-CD	LED0775	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	USM	CX-ZL720
O	KEY-CD	LED0775	87-A41-055-040	0E	LED,HLMF-K405 ORANGE	LHSM	CX-ZL820
X	KEY-CD	R 0751	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	USM	CX-ZL720
X	KEY-CD	R 0751	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	LHSM	CX-ZL820
X	KEY-CD	R 0752	88-108-392-080	0E	C-RES,U 3.9K-1/16W J	USM	CX-ZL720
X	KEY-CD	R 0752	88-108-392-080	0E	C-RES,U 3.9K-1/16W J	LHSM	CX-ZL820
X	KEY-CD	R 0753	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	KEY-CD	R 0753	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	KEY-CD	R 0754	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	USM	CX-ZL720
X	KEY-CD	R 0754	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	LHSM	CX-ZL820
X	KEY-CD	R 0755	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	KEY-CD	R 0755	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	KEY-CD	R 0756	88-108-153-080	0E	C-RES,U 15K-1/16W J	USM	CX-ZL720
X	KEY-CD	R 0756	88-108-153-080	0E	C-RES,U 15K-1/16W J	LHSM	CX-ZL820
X	KEY-CD	R 0757	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	KEY-CD	R 0757	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	KEY-CD	R 0771	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0771	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0772	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0772	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0773	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0773	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0774	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0774	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0775	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0775	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0776	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0776	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0777	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0777	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0778	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0778	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0779	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0779	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	KEY-CD	R 0780	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	KEY-CD	R 0780	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
O	KEY-CD	S 0751	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	KEY-CD	S 0751	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	KEY-CD	S 0752	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	KEY-CD	S 0752	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	KEY-CD	S 0753	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	KEY-CD	S 0753	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	KEY-CD	S 0754	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	KEY-CD	S 0754	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	KEY-CD	S 0755	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	KEY-CD	S 0755	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	KEY-CD	S 0756	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	KEY-CD	S 0756	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	KEY-CD	S 0757	87-A90-095-080	0E	SW,TACT EVQ11G04M	USM	CX-ZL720
O	KEY-CD	S 0757	87-A90-095-080	0E	SW,TACT EVQ11G04M	LHSM	CX-ZL820
O	KNOB	8B-MA3-061-010	--	KEY,OPEN	USM	CX-ZL720	
O	KNOB	8B-MA3-061-010	--	KEY,OPEN	LHSM	CX-ZL820	
X	KNOB	8B-MA3-063-010	--	KEY,DIRECT A3	USM	CX-ZL720	
X	KNOB	8B-MA3-063-010	--	KEY,DIRECT A3	LHSM	CX-ZL820	
O	KNOB	8B-MA3-064-010	--	KEY,T-BASS A3	USM	CX-ZL720	

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	KNOB		8B-MA3-064-010	--	KEY, T-BASS A3	LHSM	CX-ZL820
O	KNOB		8B-MA3-065-010	--	KEY, ENTER	USM	CX-ZL720
O	KNOB		8B-MA3-065-010	--	KEY, ENTER	LHSM	CX-ZL820
O	KNOB		8B-MA3-066-010	--	KEY, GEQ	USM	CX-ZL720
O	KNOB		8B-MA3-066-010	--	KEY, GEQ	LHSM	CX-ZL820
X	KNOB		8B-MA3-070-010	--	KEY, OPE	USM	CX-ZL720
X	KNOB		8B-MA3-070-010	--	KEY, OPE	LHSM	CX-ZL820
X	KNOB		8B-MA3-071-010	--	KEY, FUNC A3	USM	CX-ZL720
X	KNOB		8B-MA3-071-010	--	KEY, FUNC A3	LHSM	CX-ZL820
X	KNOB		8B-MA3-072-010	--	KEY, CD	USM	CX-ZL720
X	KNOB		8B-MA3-072-010	--	KEY, CD	LHSM	CX-ZL820
X	KNOB		8B-MA3-080-010	--	KNOB, RTRY VOL	USM	CX-ZL720
X	KNOB		8B-MA3-080-010	--	KNOB, RTRY VOL	LHSM	CX-ZL820
O	KNOB		8B-MA3-081-010	--	KNOB, RTRY JOG	USM	CX-ZL720
O	KNOB		8B-MA3-081-010	--	KNOB, RTRY JOG	LHSM	CX-ZL820
X	KNOB		8B-MA3-082-010	--	CAP, VOL	USM	CX-ZL720
X	KNOB		8B-MA3-082-010	--	CAP, VOL	LHSM	CX-ZL820
O	KNOB		8B-MA3-083-010	--	KNOB, SL MIC	USM	CX-ZL720
O	KNOB		8B-MA3-083-010	--	KNOB, SL MIC	LHSM	CX-ZL820
O	KNOB		8B-MA3-084-010	--	RING, OPE	USM	CX-ZL720
O	KNOB		8B-MA3-084-010	--	RING, OPE	LHSM	CX-ZL820
X	KNOB		8B-MA3-085-010	--	RING, CD	USM	CX-ZL720
X	KNOB		8B-MA3-085-010	--	RING, CD	LHSM	CX-ZL820
O	KNOB		8B-MA3-086-010	--	RING, VOL	USM	CX-ZL720
O	KNOB		8B-MA3-086-010	--	RING, VOL	LHSM	CX-ZL820
O	KNOB		8B-MA3-088-010	--	RING, IND	USM	CX-ZL720
O	KNOB		8B-MA3-088-010	--	RING, IND	LHSM	CX-ZL820
X	KNOB		8B-MA3-090-010	--	REFLECTOR, DIRECT	USM	CX-ZL720
X	KNOB		8B-MA3-090-010	--	REFLECTOR, DIRECT	LHSM	CX-ZL820
X	KNOB		8B-MA3-091-010	--	REFLECTOR, POWER	USM	CX-ZL720
X	KNOB		8B-MA3-091-010	--	REFLECTOR, POWER	LHSM	CX-ZL820
X	KNOB		8B-MA3-092-010	--	REFLECTOR, PLAY	USM	CX-ZL720
X	KNOB		8B-MA3-092-010	--	REFLECTOR, PLAY	LHSM	CX-ZL820
X	KNOB		8B-MA3-093-010	--	REFLECTOR, FF	USM	CX-ZL720
X	KNOB		8B-MA3-093-010	--	REFLECTOR, FF	LHSM	CX-ZL820
X	KNOB		8B-MA3-094-010	--	REFLECTOR, FUNC	USM	CX-ZL720
X	KNOB		8B-MA3-094-010	--	REFLECTOR, FUNC	LHSM	CX-ZL820
X	KNOB		8B-MA3-095-010	--	REFLECTOR, CD	USM	CX-ZL720
X	KNOB		8B-MA3-095-010	--	REFLECTOR, CD	LHSM	CX-ZL820
O	KNOB		8B-MA3-100-010	--	KEY ASSY, DIRECT	USM	CX-ZL720
O	KNOB		8B-MA3-100-010	--	KEY ASSY, DIRECT	LHSM	CX-ZL820
O	KNOB		8B-MA3-102-010	--	KEY ASSY, OPE	USM	CX-ZL720
O	KNOB		8B-MA3-102-010	--	KEY ASSY, OPE	LHSM	CX-ZL820
O	KNOB		8B-MA3-103-010	--	KEY ASSY, FUNC	USM	CX-ZL720
O	KNOB		8B-MA3-103-010	--	KEY ASSY, FUNC	LHSM	CX-ZL820
O	KNOB		8B-MA3-104-010	--	KEY ASSY, CD	USM	CX-ZL720
O	KNOB		8B-MA3-104-010	--	KEY ASSY, CD	LHSM	CX-ZL820
O	KNOB		8B-MA3-105-010	--	KNOB ASSY, RTRY VOL	USM	CX-ZL720
O	KNOB		8B-MA3-105-010	--	KNOB ASSY, RTRY VOL	LHSM	CX-ZL820
O	KNOB		8B-MA5-087-010	--	RENG, JOG R	USM	CX-ZL720
O	KNOB		8B-MA5-087-010	--	RENG, JOG R	LHSM	CX-ZL820
X	MECHANICAL		8B-MA3-201-010	--	CHAS, MAIN A3	USM	CX-ZL720
X	MECHANICAL		8B-MA3-201-010	--	CHAS, MAIN A3	LHSM	CX-ZL820
O	MIC	C 0602	87-A10-706-080	0E	C-CAP, U 0.33-16 Z F	USM	CX-ZL720
O	MIC	C 0602	87-A10-706-080	0E	C-CAP, U 0.33-16 Z F	LHSM	CX-ZL820
O	MIC	C 0603	87-012-337-080	0E	C-CAP, U 56P-50 J CH GRM	USM	CX-ZL720
O	MIC	C 0603	87-012-337-080	0E	C-CAP, U 56P-50 J CH GRM	LHSM	CX-ZL820
O	MIC	C 0604	87-012-274-080	0E	C-CAP, U 1000P-50 K B	USM	CX-ZL720
O	MIC	C 0604	87-012-274-080	0E	C-CAP, U 1000P-50 K B	LHSM	CX-ZL820
O	MIC	C 0606	87-010-759-080	0E	C-CAP, U 0.1-25 Z F	USM	CX-ZL720
O	MIC	C 0606	87-010-759-080	0E	C-CAP, U 0.1-25 Z F	LHSM	CX-ZL820
O	MIC	C 0607	87-010-060-040	0E	CAP, E 100-16 M 7L SRA	USM	CX-ZL720
O	MIC	C 0607	87-010-060-040	0E	CAP, E 100-16 M 7L SRA	LHSM	CX-ZL820
O	MIC	C 0611	87-012-282-080	0E	C-CAP, U 4700P-50 K B	USM	CX-ZL720
O	MIC	C 0611	87-012-282-080	0E	C-CAP, U 4700P-50 K B	LHSM	CX-ZL820
O	MIC	C 0612	87-015-699-040	0E	CAP, E 10-50 M 7L SRA	USM	CX-ZL720
O	MIC	C 0612	87-015-699-040	0E	CAP, E 10-50 M 7L SRA	LHSM	CX-ZL820
O	MIC	C 0614	87-A10-047-080	0E	C-CAP, U 1-10 Z F	USM	CX-ZL720
O	MIC	C 0614	87-A10-047-080	0E	C-CAP, U 1-10 Z F	LHSM	CX-ZL820
O	MIC	C 0621	87-010-759-080	0E	C-CAP, U 0.1-25 Z F	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	MIC	C 0621	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	MIC	C 0622	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	MIC	C 0622	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	MIC	C 0623	87-012-274-080	0E	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	MIC	C 0623	87-012-274-080	0E	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	MIC	C 0624	87-012-337-080	0E	C-CAP,U 56P-50 J CH GRM	USM	CX-ZL720
O	MIC	C 0624	87-012-337-080	0E	C-CAP,U 56P-50 J CH GRM	LHSM	CX-ZL820
O	MIC	CNA0601	8B-MA3-655-010	--	CONN ASSY, 3P 80MM	USM	CX-ZL720
O	MIC	CNA0601	8B-MA3-655-010	--	CONN ASSY, 3P 80MM	LHSM	CX-ZL820
!	O MIC	J 0601	87-099-659-010	1A	JACK, 6.3 0	USM	CX-ZL720
!	O MIC	J 0601	87-099-659-010	1A	JACK, 6.3 0	LHSM	CX-ZL820
!	O MIC	J 0602	87-099-659-010	1A	JACK, 6.3 0	USM	CX-ZL720
!	O MIC	J 0602	87-099-659-010	1A	JACK, 6.3 0	LHSM	CX-ZL820
S	MIC	Q 0601	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	MIC	Q 0601	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	MIC	Q 0602	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	MIC	Q 0602	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
S	MIC	Q 0611	87-A30-087-080	0E	C-FET, 2SK2158	USM	CX-ZL720
S	MIC	Q 0611	87-A30-087-080	0E	C-FET, 2SK2158	LHSM	CX-ZL820
S	MIC	Q 0612	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	MIC	Q 0612	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	MIC	Q 0621	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	MIC	Q 0621	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	MIC	Q 0622	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	MIC	Q 0622	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
X	MIC	R 0601	88-108-472-080	0E	C-RES, U 4.7K-1/16W J	USM	CX-ZL720
X	MIC	R 0601	88-108-472-080	0E	C-RES, U 4.7K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0602	88-108-472-080	0E	C-RES, U 4.7K-1/16W J	USM	CX-ZL720
X	MIC	R 0602	88-108-472-080	0E	C-RES, U 4.7K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0603	88-108-222-080	0E	C-RES, U 2.2K-1/16W J	USM	CX-ZL720
X	MIC	R 0603	88-108-222-080	0E	C-RES, U 2.2K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0604	88-108-333-080	0E	C-RES, U 33K-1/16W J	USM	CX-ZL720
X	MIC	R 0604	88-108-333-080	0E	C-RES, U 33K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0605	88-108-562-080	0E	C-RES, U 5.6K-1/16W J	USM	CX-ZL720
X	MIC	R 0605	88-108-562-080	0E	C-RES, U 5.6K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0606	88-108-334-080	0E	C-RES, U 330K-1/16W J	USM	CX-ZL720
X	MIC	R 0606	88-108-334-080	0E	C-RES, U 330K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0607	88-108-102-080	0E	C-RES, U 1K-1/16W J	USM	CX-ZL720
X	MIC	R 0607	88-108-102-080	0E	C-RES, U 1K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0608	88-108-101-080	0E	C-RES, U 100-1/16W J	USM	CX-ZL720
X	MIC	R 0608	88-108-101-080	0E	C-RES, U 100-1/16W J	LHSM	CX-ZL820
X	MIC	R 0609	88-121-101-080	0E	RES, 100-1/8W J	USM	CX-ZL720
X	MIC	R 0609	88-121-101-080	0E	RES, 100-1/8W J	LHSM	CX-ZL820
X	MIC	R 0611	88-108-104-080	0E	C-RES, U 100K-1/16W J	USM	CX-ZL720
X	MIC	R 0611	88-108-104-080	0E	C-RES, U 100K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0612	88-108-224-080	0E	C-RES, U 220K-1/16W J	USM	CX-ZL720
X	MIC	R 0612	88-108-224-080	0E	C-RES, U 220K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0613	88-108-334-080	0E	C-RES, U 330K-1/16W J	USM	CX-ZL720
X	MIC	R 0613	88-108-334-080	0E	C-RES, U 330K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0614	88-108-224-080	0E	C-RES, U 220K-1/16W J	USM	CX-ZL720
X	MIC	R 0614	88-108-224-080	0E	C-RES, U 220K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0621	88-108-273-080	0E	C-RES, U 27K-1/16W J	USM	CX-ZL720
X	MIC	R 0621	88-108-273-080	0E	C-RES, U 27K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0622	88-108-333-080	0E	C-RES, U 33K-1/16W J	USM	CX-ZL720
X	MIC	R 0622	88-108-333-080	0E	C-RES, U 33K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0623	88-108-564-080	0E	C-RES, U 560K-1/16W J	USM	CX-ZL720
X	MIC	R 0623	88-108-564-080	0E	C-RES, U 560K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0624	88-108-102-080	0E	C-RES, U 1K-1/16W J	USM	CX-ZL720
X	MIC	R 0624	88-108-102-080	0E	C-RES, U 1K-1/16W J	LHSM	CX-ZL820
X	MIC	R 0625	88-108-562-080	0E	C-RES, U 5.6K-1/16W J	USM	CX-ZL720
X	MIC	R 0625	88-108-562-080	0E	C-RES, U 5.6K-1/16W J	LHSM	CX-ZL820
O	MIC	VR 0621	8Z-MA3-603-010	1C	VR, SL 10KB RS15111-20	USM	CX-ZL720
O	MIC	VR 0621	8Z-MA3-603-010	1C	VR, SL 10KB RS15111-20	LHSM	CX-ZL820
O	MICON		88-MA1-205-010	0E	GUIDE, FL	USM	CX-ZL720
O	MICON		88-MA1-205-010	0E	GUIDE, FL	LHSM	CX-ZL820
X	MICON		8B-MA5-601-110	1E	PWB, COMBI FR	USM	CX-ZL720
X	MICON		8B-MA5-601-110	1E	PWB, COMBI FR	LHSM	CX-ZL820
X	MICON		8B-MA5-602-110	--	PWB, MICON	USM	CX-ZL720
X	MICON		8B-MA5-602-110	--	PWB, MICON	LHSM	CX-ZL820
X	MICON		8B-MA5-603-110	--	PWB, CNTL	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON		8B-MA5-603-110	--	PWB,CNTL	LHSM	CX-ZL820
X	MICON		8B-MA5-604-110	--	PWB,KEY CD	USM	CX-ZL720
X	MICON		8B-MA5-604-110	--	PWB,KEY CD	LHSM	CX-ZL820
O	MICON	C 0100	87-A10-047-080	OE	C-CAP,U 1-10 Z F	USM	CX-ZL720
O	MICON	C 0100	87-A10-047-080	OE	C-CAP,U 1-10 Z F	LHSM	CX-ZL820
O	MICON	C 0106	87-010-248-040	OE	CAP,E 220-10 M 11L SME	USM	CX-ZL720
O	MICON	C 0106	87-010-248-040	OE	CAP,E 220-10 M 11L SME	LHSM	CX-ZL820
O	MICON	C 0107	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	MICON	C 0107	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	MICON	C 0108	87-012-278-080	OE	C-CAP,U 2200P-50 K B	USM	CX-ZL720
O	MICON	C 0108	87-012-278-080	OE	C-CAP,U 2200P-50 K B	LHSM	CX-ZL820
O	MICON	C 0110	87-010-248-040	OE	CAP,E 220-10 M 11L SME	USM	CX-ZL720
O	MICON	C 0110	87-010-248-040	OE	CAP,E 220-10 M 11L SME	LHSM	CX-ZL820
O	MICON	C 0111	87-A10-260-080	OE	C-CAP,U 0.1-16 K B	USM	CX-ZL720
O	MICON	C 0111	87-A10-260-080	OE	C-CAP,U 0.1-16 K B	LHSM	CX-ZL820
O	MICON	C 0112	87-010-493-040	OE	CAP,E 0.47-50 M 5L SRE	USM	CX-ZL720
O	MICON	C 0112	87-010-493-040	OE	CAP,E 0.47-50 M 5L SRE	LHSM	CX-ZL820
O	MICON	C 0113	87-012-274-080	OE	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	MICON	C 0113	87-012-274-080	OE	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	MICON	C 0116	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	MICON	C 0116	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	MICON	C 0117	87-010-872-080	OE	C-CAP,U 470P-50 SL	USM	CX-ZL720
O	MICON	C 0117	87-010-872-080	OE	C-CAP,U 470P-50 SL	LHSM	CX-ZL820
O	MICON	C 0122	87-012-369-080	OE	C-CAP,S 0.047-50 Z F	USM	CX-ZL720
O	MICON	C 0122	87-012-369-080	OE	C-CAP,S 0.047-50 Z F	LHSM	CX-ZL820
O	MICON	C 0123	87-010-408-040	OE	CAP,E 47-50 M 11L SME	USM	CX-ZL720
O	MICON	C 0123	87-010-408-040	OE	CAP,E 47-50 M 11L SME	LHSM	CX-ZL820
O	MICON	C 0124	87-010-421-040	OE	CAP,E 4.7-50 M 5L SRE	USM	CX-ZL720
O	MICON	C 0124	87-010-421-040	OE	CAP,E 4.7-50 M 5L SRE	LHSM	CX-ZL820
O	MICON	C 0125	87-010-421-040	OE	CAP,E 4.7-50 M 5L SRE	USM	CX-ZL720
O	MICON	C 0125	87-010-421-040	OE	CAP,E 4.7-50 M 5L SRE	LHSM	CX-ZL820
O	MICON	C 0132	87-012-199-080	OE	C-CAP,U 220P-50 J CH	USM	CX-ZL720
O	MICON	C 0132	87-012-199-080	OE	C-CAP,U 220P-50 J CH	LHSM	CX-ZL820
O	MICON	C 0133	87-012-184-080	OE	C-CAP,U 33P-50 J CH	USM	CX-ZL720
O	MICON	C 0133	87-012-184-080	OE	C-CAP,U 33P-50 J CH	LHSM	CX-ZL820
O	MICON	C 0135	87-018-209-080	OE	CAP,TC U 0.1-50 Z F UP050	USM	CX-ZL720
O	MICON	C 0135	87-018-209-080	OE	CAP,TC U 0.1-50 Z F UP050	LHSM	CX-ZL820
O	MICON	C 0137	87-012-178-080	OE	C-CAP,U 18P-50 J CH	USM	CX-ZL720
O	MICON	C 0137	87-012-178-080	OE	C-CAP,U 18P-50 J CH	LHSM	CX-ZL820
O	MICON	C 0138	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	MICON	C 0138	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	MICON	C 0251	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	MICON	C 0251	87-010-759-080	OE	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	MICON	C 0252	87-012-199-080	OE	C-CAP,U 220P-50 J CH	USM	CX-ZL720
O	MICON	C 0252	87-012-199-080	OE	C-CAP,U 220P-50 J CH	LHSM	CX-ZL820
O	MICON	C 0253	87-012-195-080	OE	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	MICON	C 0253	87-012-195-080	OE	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	MICON	C 0411	87-012-157-080	OE	C-CAP,S 330P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0411	87-012-157-080	OE	C-CAP,S 330P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0412	87-010-405-040	OE	CAP,E 10-50 M 11L SME	USM	CX-ZL720
O	MICON	C 0412	87-010-405-040	OE	CAP,E 10-50 M 11L SME	LHSM	CX-ZL820
O	MICON	C 0421	87-012-274-080	OE	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	MICON	C 0421	87-012-274-080	OE	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	MICON	C 0422	87-012-274-080	OE	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	MICON	C 0422	87-012-274-080	OE	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	MICON	C 0940	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0940	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0941	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0941	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0942	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0942	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0943	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0943	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0944	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0944	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0945	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0945	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0946	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0946	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0947	87-012-145-080	OE	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	MICON	C 0947	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0948	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0948	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0949	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0949	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0950	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0950	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0951	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0951	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
O	MICON	C 0952	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	USM	CX-ZL720
O	MICON	C 0952	87-012-145-080	0E	C-CAP,S 270P-50 J CH GRM	LHSM	CX-ZL820
!	O MICON	CN 0101	87-099-720-010	1B	CONN,30P BLK TYK-B(P)	USM	CX-ZL720
!	O MICON	CN 0101	87-099-720-010	1B	CONN,30P BLK TYK-B(P)	LHSM	CX-ZL820
!	O MICON	CN 0104	87-A60-136-010	0E	CONN,11P V FE	USM	CX-ZL720
!	O MICON	CN 0104	87-A60-136-010	0E	CONN,11P V FE	LHSM	CX-ZL820
!	O MICON	CN 0301	87-A60-133-010	0E	CONN,8P V FE	USM	CX-ZL720
!	O MICON	CN 0301	87-A60-133-010	0E	CONN,8P V FE	LHSM	CX-ZL820
!	O MICON	CN 1000	87-A60-135-010	0E	CONN,10P V FE	USM	CX-ZL720
!	O MICON	CN 1000	87-A60-135-010	0E	CONN,10P V FE	LHSM	CX-ZL820
S	MICON	D 0101	87-A40-234-080	0E	ZENER,MTZJ5.6A	USM	CX-ZL720
S	MICON	D 0101	87-A40-234-080	0E	ZENER,MTZJ5.6A	LHSM	CX-ZL820
S	MICON	D 0102	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	MICON	D 0102	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	MICON	D 0103	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0103	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0104	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0104	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0132	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0132	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0134	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0134	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0135	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0135	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0137	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0137	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0138	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0138	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
X	MICON	D 0139	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	MICON	D 0139	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
X	MICON	D 0140	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	MICON	D 0140	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
S	MICON	D 0351	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	MICON	D 0351	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820
S	MICON	D 0371	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0371	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0372	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0372	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0375	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0375	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0376	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0376	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0377	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0377	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0378	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0378	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0379	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0379	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0380	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0380	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0381	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0381	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0382	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0382	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0383	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0383	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0384	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0384	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0385	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0385	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0386	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	MICON	D 0386	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0447	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	MICON	D 0447	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0450	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	MICON	D 0451	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
O	MICON	FL 0101	8B-MA3-671-010	--	FL,BJ824GNK	USM	CX-ZL720
O	MICON	FL 0101	8B-MA3-671-010	--	FL,BJ824GNK	LHSM	CX-ZL820
S	MICON	IC 0101	8B-MA3-651-010	--	C-IC,LC876580	USM	CX-ZL720
S	MICON	IC 0101	8B-MA3-651-010	--	C-IC,LC876580	LHSM	CX-ZL820
S	MICON	IC 0412	87-A21-831-010	1B	IC,SPS-442-1-F1	USM	CX-ZL720
S	MICON	IC 0412	87-A21-831-010	1B	IC,SPS-442-1-F1	LHSM	CX-ZL820
S	MICON	IC 0662	87-070-289-040	1B	C-IC,BU2092F	USM	CX-ZL720
S	MICON	IC 0662	87-070-289-040	1B	C-IC,BU2092F	LHSM	CX-ZL820
X	MICON	JR 0135	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	MICON	JR 0135	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	MICON	JR 0136	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	MICON	JR 0136	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	MICON	JR 0137	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	MICON	JR 0137	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	MICON	JR 1131	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	MICON	JR 1131	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	MICON	L 0101	87-A50-333-010	0E	COIL,OSC 9.43MHZ	USM	CX-ZL720
O	MICON	L 0101	87-A50-333-010	0E	COIL,OSC 9.43MHZ	LHSM	CX-ZL820
O	MICON	LED0131	87-A40-317-080	0E	LED,SLR-342VCT31 RED	USM	CX-ZL720
O	MICON	LED0131	87-A40-317-080	0E	LED,SLR-342VCT31 RED	LHSM	CX-ZL820
O	MICON	LED0202	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	USM	CX-ZL720
O	MICON	LED0202	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	LHSM	CX-ZL820
O	MICON	LED0205	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	USM	CX-ZL720
O	MICON	LED0205	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	LHSM	CX-ZL820
O	MICON	LED0207	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	USM	CX-ZL720
O	MICON	LED0207	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	LHSM	CX-ZL820
O	MICON	LED0210	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	USM	CX-ZL720
O	MICON	LED0210	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	LHSM	CX-ZL820
O	MICON	LED0212	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	USM	CX-ZL720
O	MICON	LED0212	87-A41-056-040	0E	LED,HLMF-D405 ORANGE	LHSM	CX-ZL820
S	MICON	Q 0101	87-026-610-080	0E	TR,KTC3198GR	USM	CX-ZL720
S	MICON	Q 0101	87-026-610-080	0E	TR,KTC3198GR	LHSM	CX-ZL820
S	MICON	Q 0102	87-A30-447-040	1F	C-TR,DTA114EKA	USM	CX-ZL720
S	MICON	Q 0102	87-A30-447-040	1F	C-TR,DTA114EKA	LHSM	CX-ZL820
S	MICON	Q 0104	87-026-610-080	0E	TR,KTC3198GR	USM	CX-ZL720
S	MICON	Q 0104	87-026-610-080	0E	TR,KTC3198GR	LHSM	CX-ZL820
S	MICON	Q 0105	87-026-609-080	0E	TR,KTA1266GR	USM	CX-ZL720
S	MICON	Q 0105	87-026-609-080	0E	TR,KTA1266GR	LHSM	CX-ZL820
S	MICON	Q 0111	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	MICON	Q 0111	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	MICON	Q 0130	87-A30-427-040	0E	C-TR,DTC114EKA	USM	CX-ZL720
S	MICON	Q 0130	87-A30-427-040	0E	C-TR,DTC114EKA	LHSM	CX-ZL820
S	MICON	Q 0131	87-A30-087-080	0E	C-FET,2SK2158	USM	CX-ZL720
S	MICON	Q 0131	87-A30-087-080	0E	C-FET,2SK2158	LHSM	CX-ZL820
S	MICON	Q 0132	87-A30-087-080	0E	C-FET,2SK2158	USM	CX-ZL720
S	MICON	Q 0132	87-A30-087-080	0E	C-FET,2SK2158	LHSM	CX-ZL820
S	MICON	Q 0133	87-A30-427-040	0E	C-TR,DTC114EKA	USM	CX-ZL720
S	MICON	Q 0133	87-A30-427-040	0E	C-TR,DTC114EKA	LHSM	CX-ZL820
S	MICON	Q 0134	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	MICON	Q 0134	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	MICON	Q 0351	87-A30-582-080	0E	TR,CDA1585BC	USM	CX-ZL720
S	MICON	Q 0351	87-A30-582-080	0E	TR,CDA1585BC	LHSM	CX-ZL820
S	MICON	Q 0352	87-A30-495-080	0E	TR,2SA1981Y	USM	CX-ZL720
S	MICON	Q 0352	87-A30-495-080	0E	TR,2SA1981Y	LHSM	CX-ZL820
S	MICON	Q 0353	87-A30-495-080	0E	TR,2SA1981Y	USM	CX-ZL720
S	MICON	Q 0353	87-A30-495-080	0E	TR,2SA1981Y	LHSM	CX-ZL820
S	MICON	Q 0441	87-A30-142-040	0E	C-TR,DTA123EKA	USM	CX-ZL720
S	MICON	Q 0441	87-A30-142-040	0E	C-TR,DTA123EKA	LHSM	CX-ZL820
X	MICON	R 0074	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0074	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0075	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	MICON	R 0075	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0076	88-121-101-080	0E	RES,100-1/8W J	USM	CX-ZL720
X	MICON	R 0076	88-121-101-080	0E	RES,100-1/8W J	LHSM	CX-ZL820
X	MICON	R 0077	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0077	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0078	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	MICON	R 0078	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	MICON	R 0079	88-121-101-080	0E	RES,100-1/8W J	USM	CX-ZL720
X	MICON	R 0079	88-121-101-080	0E	RES,100-1/8W J	LHSM	CX-ZL820
X	MICON	R 0080	88-121-101-080	0E	RES,100-1/8W J	USM	CX-ZL720
X	MICON	R 0080	88-121-101-080	0E	RES,100-1/8W J	LHSM	CX-ZL820
X	MICON	R 0081	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	MICON	R 0081	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0083	88-121-101-080	0E	RES,100-1/8W J	USM	CX-ZL720
X	MICON	R 0083	88-121-101-080	0E	RES,100-1/8W J	LHSM	CX-ZL820
X	MICON	R 0084	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	MICON	R 0084	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	MICON	R 0085	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	MICON	R 0085	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	MICON	R 0087	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	MICON	R 0087	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0088	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	MICON	R 0088	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0090	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0090	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0101	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	MICON	R 0101	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0104	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0104	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0105	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	MICON	R 0105	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0106	88-108-471-080	0E	C-RES,U 470-1/16W J	USM	CX-ZL720
X	MICON	R 0106	88-108-471-080	0E	C-RES,U 470-1/16W J	LHSM	CX-ZL820
X	MICON	R 0111	88-108-124-080	0E	C-RES,U 120K-1/16W J	USM	CX-ZL720
X	MICON	R 0111	88-108-124-080	0E	C-RES,U 120K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0112	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	MICON	R 0112	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0113	88-108-153-080	0E	C-RES,U 15K-1/16W J	USM	CX-ZL720
X	MICON	R 0113	88-108-153-080	0E	C-RES,U 15K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0114	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	MICON	R 0114	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0115	88-108-224-080	0E	C-RES,U 220K-1/16W J	USM	CX-ZL720
X	MICON	R 0115	88-108-224-080	0E	C-RES,U 220K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0116	88-121-224-080	0E	RES,220K-1/8W J	USM	CX-ZL720
X	MICON	R 0116	88-121-224-080	0E	RES,220K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0121	88-108-100-080	0E	C-RES,U 10-1/16W J	USM	CX-ZL720
X	MICON	R 0121	88-108-100-080	0E	C-RES,U 10-1/16W J	LHSM	CX-ZL820
X	MICON	R 0122	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	MICON	R 0122	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	MICON	R 0123	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	MICON	R 0123	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0124	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	MICON	R 0124	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	MICON	R 0125	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	MICON	R 0125	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0126	88-108-100-080	0E	C-RES,U 10-1/16W J	USM	CX-ZL720
X	MICON	R 0126	88-108-100-080	0E	C-RES,U 10-1/16W J	LHSM	CX-ZL820
X	MICON	R 0131	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0131	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0133	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0133	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0135	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	MICON	R 0135	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0136	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	MICON	R 0136	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0137	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	MICON	R 0137	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	MICON	R 0138	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	MICON	R 0138	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0139	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0139	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0140	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	MICON	R 0140	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0141	88-108-224-080	0E	C-RES,U 220K-1/16W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.


Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0141	88-108-224-080	0E	C-RES,U 220K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0156	88-108-124-080	0E	C-RES,U 120K-1/16W J	USM	CX-ZL720
X	MICON	R 0156	88-108-124-080	0E	C-RES,U 120K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0157	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	MICON	R 0157	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0158	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	MICON	R 0158	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0176	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0176	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0197	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	MICON	R 0197	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0201	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0201	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0202	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0202	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0205	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0205	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0206	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0206	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0209	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0209	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0210	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0210	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0213	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0213	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0214	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0214	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0217	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0217	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0218	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	USM	CX-ZL720
X	MICON	R 0218	88-118-122-080	0E	C-RES,S 1.2K-1/10W J	LHSM	CX-ZL820
X	MICON	R 0251	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	MICON	R 0251	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0252	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	MICON	R 0252	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0253	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	MICON	R 0253	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0254	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	MICON	R 0254	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0255	88-121-103-080	0E	RES,10K-1/8W J	USM	CX-ZL720
X	MICON	R 0255	88-121-103-080	0E	RES,10K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0256	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	MICON	R 0256	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
X	MICON	R 0256	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	MICON	R 0256	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	MICON	R 0351	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0351	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0352	88-121-561-080	0E	RES,560-1/8W J	USM	CX-ZL720
X	MICON	R 0352	88-121-561-080	0E	RES,560-1/8W J	LHSM	CX-ZL820
X	MICON	R 0353	88-108-109-080	0E	C-RES,U 1-1/16W J	USM	CX-ZL720
X	MICON	R 0353	88-108-109-080	0E	C-RES,U 1-1/16W J	LHSM	CX-ZL820
X	MICON	R 0354	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0354	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0355	88-121-222-080	0E	RES,2.2K-1/8W J	USM	CX-ZL720
X	MICON	R 0355	88-121-222-080	0E	RES,2.2K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0356	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0356	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0357	88-121-222-080	0E	RES,2.2K-1/8W J	USM	CX-ZL720
X	MICON	R 0357	88-121-222-080	0E	RES,2.2K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0361	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0361	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0363	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0363	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0366	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0366	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0367	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0367	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0368	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0368	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0371	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after-sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0371	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0373	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0373	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0374	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0374	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0375	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0375	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0376	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0376	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0377	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0377	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0378	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0378	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0379	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0379	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0401	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0401	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0405	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0405	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0411	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	MICON	R 0411	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	MICON	R 0412	88-108-563-080	0E	C-RES,U 56K-1/16W J	USM	CX-ZL720
X	MICON	R 0412	88-108-563-080	0E	C-RES,U 56K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0421	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	USM	CX-ZL720
X	MICON	R 0421	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0422	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	USM	CX-ZL720
X	MICON	R 0422	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0423	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0423	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0424	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	MICON	R 0424	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0425	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 0425	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0441	88-121-223-080	0E	RES,22K-1/8W J	USM	CX-ZL720
X	MICON	R 0441	88-121-223-080	0E	RES,22K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0442	88-121-101-080	0E	RES,100-1/8W J	USM	CX-ZL720
X	MICON	R 0442	88-121-101-080	0E	RES,100-1/8W J	LHSM	CX-ZL820
X	MICON	R 0901	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	MICON	R 0901	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0902	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	MICON	R 0902	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0903	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0903	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0904	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0904	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0905	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0905	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0906	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0906	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0907	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0907	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0908	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0908	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0909	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0909	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0910	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0910	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0911	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0911	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0912	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0912	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0913	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	MICON	R 0913	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0914	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	MICON	R 0914	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0915	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	MICON	R 0915	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0916	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	MICON	R 0916	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0917	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0917	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0918	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	MICON	R 0918	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0919	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	MICON	R 0919	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0920	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	MICON	R 0920	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0921	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0921	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0922	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0922	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0923	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0923	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0924	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0924	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0925	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0925	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0926	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0926	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0927	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0927	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0928	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0928	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0929	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0929	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0930	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0930	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0931	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0931	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0932	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0932	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0933	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0933	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0934	88-121-473-080	0E	RES,47K-1/8W J	USM	CX-ZL720
X	MICON	R 0934	88-121-473-080	0E	RES,47K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0935	88-121-473-080	0E	RES,47K-1/8W J	USM	CX-ZL720
X	MICON	R 0935	88-121-473-080	0E	RES,47K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0936	88-121-473-080	0E	RES,47K-1/8W J	USM	CX-ZL720
X	MICON	R 0936	88-121-473-080	0E	RES,47K-1/8W J	LHSM	CX-ZL820
X	MICON	R 0937	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0937	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0938	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0938	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0939	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0939	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0940	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0940	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0941	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0941	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0942	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0942	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0943	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0943	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0944	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0944	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0945	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0945	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0946	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0946	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0947	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0947	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0948	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0948	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0949	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0949	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0950	88-108-123-080	0E	C-RES,U 12K-1/16W J	USM	CX-ZL720
X	MICON	R 0950	88-108-123-080	0E	C-RES,U 12K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0951	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	MICON	R 0951	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0952	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	MICON	R 0952	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	MICON	R 0953	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	MICON	R 0953	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	MICON	R 1000	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 1000	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 1001	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 1001	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 1002	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	MICON	R 1002	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	MICON	R 1003	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	USM	CX-ZL720
X	MICON	R 1003	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	LHSM	CX-ZL820
X	MICON	R 1004	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	MICON	R 1004	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	MICON	R 1005	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	USM	CX-ZL720
X	MICON	R 1005	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	LHSM	CX-ZL820
X	MICON	R 1006	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 1006	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 1007	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	MICON	R 1007	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	MICON	R 1008	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	MICON	R 1008	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	MICON	R 1009	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	MICON	R 1009	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	MICON	R 1010	88-108-563-080	0E	C-RES,U 56K-1/16W J	USM	CX-ZL720
X	MICON	R 1010	88-108-563-080	0E	C-RES,U 56K-1/16W J	LHSM	CX-ZL820
O	MICON	S 0421	87-A92-071-010	--	SW, RTRY EC12E24508-30MM	USM	CX-ZL720
O	MICON	S 0421	87-A92-071-010	--	SW, RTRY EC12E24508-30MM	LHSM	CX-ZL820
! O	OTHERS		82-NF5-229-010	0E	PLATE, LOCK (*)	USM	CX-ZL720
! O	OTHERS		82-NF5-229-010	0E	PLATE, LOCK (*)	LHSM	CX-ZL820
O	OTHERS		86-NF9-224-010	0E	SPR-C, LOCK	USM	CX-ZL720
O	OTHERS		86-NF9-224-010	0E	SPR-C, LOCK	LHSM	CX-ZL820
X	OTHERS		87-063-173-010	0E	CLOTH, N9295B BLK 30-10-0.35	USM	CX-ZL720
X	OTHERS		87-063-173-010	0E	CLOTH, N9295B BLK 30-10-0.35	LHSM	CX-ZL820
O	OTHERS		87-064-185-010	0E	HLDR, WIRE PVC 0.5	USM	CX-ZL720
O	OTHERS		87-064-185-010	0E	HLDR, WIRE PVC 0.5	LHSM	CX-ZL820
X	OTHERS		87-B40-142-010	0E	SH, 12-8.5-2 W/ADH FOOT EEA	USM	CX-ZL720
X	OTHERS		87-B40-142-010	0E	SH, 12-8.5-2 W/ADH FOOT EEA	LHSM	CX-ZL820
O	OTHERS		87-MA3-062-010	0E	FOOT, H17	USM	CX-ZL720
O	OTHERS		87-MA3-062-010	0E	FOOT, H17	LHSM	CX-ZL820
! O	OTHERS		87-NF4-216-010	0E	HLDR, LOCK 1	USM	CX-ZL720
! O	OTHERS		87-NF4-216-010	0E	HLDR, LOCK 1	LHSM	CX-ZL820
! O	OTHERS		87-NF4-217-110	0E	HLDR, LOCK 2	USM	CX-ZL720
! O	OTHERS		87-NF4-217-110	0E	HLDR, LOCK 2	LHSM	CX-ZL820
! O	OTHERS		87-NF4-221-010	0E	HLDR, CABLE	USM	CX-ZL720
! O	OTHERS		87-NF4-221-010	0E	HLDR, CABLE	LHSM	CX-ZL820
! O	OTHERS		87-NF8-220-010	0E	DMPR, 150	USM	CX-ZL720
! O	OTHERS		87-NF8-220-010	0E	DMPR, 150	LHSM	CX-ZL820
O	OTHERS		88-MA1-208-210	1A	JOINT, CABI	USM	CX-ZL720
O	OTHERS		88-MA1-208-210	1A	JOINT, CABI	LHSM	CX-ZL820
X	OTHERS		8A-MA3-208-110	1B	PLATE, PT	USM	CX-ZL720
X	OTHERS		8A-MA3-208-110	1B	PLATE, PT	LHSM	CX-ZL820
O	OTHERS		8A-MA5-207-010	0E	SPR-T, EJECT 1	USM	CX-ZL720
O	OTHERS		8A-MA5-207-010	0E	SPR-T, EJECT 1	LHSM	CX-ZL820
O	OTHERS		8A-MA5-208-010	0E	SPR-T, EJECT 2	USM	CX-ZL720
O	OTHERS		8A-MA5-208-010	0E	SPR-T, EJECT 2	LHSM	CX-ZL820
O	OTHERS		8B-MA3-202-010	--	HLDR, HT-SINK	USM	CX-ZL720
O	OTHERS		8B-MA3-202-010	--	HLDR, HT-SINK	LHSM	CX-ZL820
! O	OTHERS	*	8A-DB8-209-010	0E	HLDR, PWB PT	USM	CX-ZL720
! O	OTHERS	*	8A-DB8-209-010	0E	HLDR, PWB PT	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-203-010	--	HT-SINK, MAIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-203-010	--	HT-SINK, MAIN A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK, FIN A3	USM	CX-ZL720

! = SAFETY PARTS
C = Components marked

However, please note that not all components will be available as spare parts for after-sales service.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	USM	CX-ZL720
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-204-010	--	HT-SINK,FIN A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-206-010	--	GUIDE,LED DIRECT	USM	CX-ZL720
O	OTHERS	*	8B-MA3-205-010	--	GUIDE,LED DIRECT	LHSM	CX-ZL820
O	OTHERS	*	8B-MA3-206-010	--	GUIDE,LED OPE	USM	CX-ZL720
O	OTHERS	*	8B-MA3-206-010	--	GUIDE,LED OPE	LHSM	CX-ZL820
O	OTHERS	*	8B-MA3-207-010	--	HLD R,TR A3	USM	CX-ZL720
O	OTHERS	*	8B-MA3-207-010	--	HLD R,TR A3	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-208-010	--	HT-SINK ASSY,A	USM	CX-ZL720
X	OTHERS	*	8B-MA3-208-010	--	HT-SINK ASSY,A	LHSM	CX-ZL820
X	OTHERS	*	8B-MA3-210-010	--	SH,TR VM	USM	CX-ZL720
X	OTHERS	*	8B-MA3-210-010	--	SH,TR VM	LHSM	CX-ZL820
X	P-AMP(FRONT/LF)		87-A90-267-010	OE	HLD R,WIRE(U)2.5 -4P	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0101	87-012-279-080	OE	C-CAP,U 2700P-50 K B GRM	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0101	87-012-279-080	OE	C-CAP,U 2700P-50 K B GRM	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0102	87-012-279-080	OE	C-CAP,U 2700P-50 K B GRM	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0102	87-012-279-080	OE	C-CAP,U 2700P-50 K B GRM	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0103	87-A12-090-080	OE	CAP,E 4.7-50 SMG	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0103	87-A12-090-080	OE	CAP,E 4.7-50 SMG	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0104	87-A12-090-080	OE	CAP,E 4.7-50 SMG	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0104	87-A12-090-080	OE	CAP,E 4.7-50 SMG	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0107	87-A12-091-080	OE	CAP,E 10-50 SMG	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0107	87-A12-091-080	OE	CAP,E 10-50 SMG	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0108	87-A12-091-080	OE	CAP,E 10-50 SMG	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0108	87-A12-091-080	OE	CAP,E 10-50 SMG	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0109	87-012-199-080	OE	C-CAP,U 220P-50 J CH	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0109	87-012-199-080	OE	C-CAP,U 220P-50 J CH	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0110	87-012-199-080	OE	C-CAP,U 220P-50 J CH	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0110	87-012-199-080	OE	C-CAP,U 220P-50 J CH	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0111	87-010-392-080	OE	CAP,E 33-35 M 11L SME	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0111	87-010-392-080	OE	CAP,E 33-35 M 11L SME	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0112	87-010-392-080	OE	CAP,E 33-35 M 11L SME	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0112	87-010-392-080	OE	CAP,E 33-35 M 11L SME	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0113	87-A10-596-080	OE	C-CAP,S 100P-100 J CH	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0113	87-A10-596-080	OE	C-CAP,S 100P-100 J CH	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0114	87-A10-596-080	OE	C-CAP,S 100P-100 J CH	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0114	87-A10-596-080	OE	C-CAP,S 100P-100 J CH	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0115	87-012-167-080	OE	C-CAP,U 5P-50 C CH	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0115	87-012-167-080	OE	C-CAP,U 5P-50 C CH	LHSM	CX-ZL820
O	P-AMP(FRONT/LF)	C 0116	87-012-167-080	OE	C-CAP,U 5P-50 C CH	USM	CX-ZL720
O	P-AMP(FRONT/LF)	C 0116	87-012-167-08				

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after-sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	P-AMP (FRONT/LF)	C 0124	87-010-986-080	0E	C-CAP,S 820P-50 J CH	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0124	87-010-986-080	0E	C-CAP,S 820P-50 J CH	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0133	87-012-282-080	0E	C-CAP,U 4700P-50 K B	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0133	87-012-282-080	0E	C-CAP,U 4700P-50 K B	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0140	87-012-278-080	0E	C-CAP,U 2200P-50 K B	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0140	87-012-278-080	0E	C-CAP,U 2200P-50 K B	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0186	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0186	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0187	87-A10-119-080	0E	CAP,E 10-100 REA	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0187	87-A10-119-080	0E	CAP,E 10-100 REA	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0188	87-A10-119-080	0E	CAP,E 10-100 REA	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0188	87-A10-119-080	0E	CAP,E 10-100 REA	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0225	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0225	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0226	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0226	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0227	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0227	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0228	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0228	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0229	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0229	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0230	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0230	87-012-287-080	0E	C-CAP,U 0.015-25 Z F	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0231	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0231	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0232	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0232	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	C 0241	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	P-AMP (FRONT/LF)	C 0241	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
! O	P-AMP (FRONT/LF)	CN 0201	87-A61-108-010	0E	CONN,5P V TID-A	USM	CX-ZL720
! O	P-AMP (FRONT/LF)	CN 0202	87-099-043-010	0E	CONN,2P V WHT EH	USM	CX-ZL720
O	P-AMP (FRONT/LF)	CNA0201	8B-MA3-656-010	--	CONN ASSY,5P TID-A(400)BMA3	USM	CX-ZL720
O	P-AMP (FRONT/LF)	CNA0202	8A-NHP-643-010	0E	CONN ASSY,2P (FAN)ANHP-390	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0101	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0101	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0103	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0103	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0104	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0104	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0105	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0105	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0106	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0106	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0107	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0107	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0108	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0108	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0115	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0115	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0117	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0117	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0118	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0118	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0150	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0150	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0160	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0160	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0185	87-A40-646-010	1B	DIODE,FMB-G16L	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0185	87-A40-646-010	1B	DIODE,FMB-G16L	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0186	87-A40-646-010	1B	DIODE,FMB-G16L	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0186	87-A40-646-010	1B	DIODE,FMB-G16L	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0187	87-A40-002-080	0E	ZENER,MTZJ5.1C	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0187	87-A40-002-080	0E	ZENER,MTZJ5.1C	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0188	87-A40-749-080	0E	ZENER,UZ5.6BSB	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0188	87-A40-749-080	0E	ZENER,UZ5.6BSB	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0189	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0189	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0190	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0190	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	P-AMP (FRONT/LF)	D 0191	87-A40-764-080	0E	ZENER, UZ10BSC	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0191	87-A40-764-080	0E	ZENER, UZ10BSC	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0192	87-020-465-080	0E	DIODE, 1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0192	87-020-465-080	0E	DIODE, 1SS133	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	D 0193	87-020-465-080	0E	DIODE, 1SS133	USM	CX-ZL720
S	P-AMP (FRONT/LF)	D 0193	87-020-465-080	0E	DIODE, 1SS133	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	J 0201	87-A61-480-010	0E	JACK, DIA6.3 BLK ST W/SW MSC16A	USM	CX-ZL720
O	P-AMP (FRONT/LF)	J 0201	87-A61-480-010	0E	JACK, DIA6.3 BLK ST W/SW MSC16A	LHSM	CX-ZL820
!	O P-AMP (FRONT/LF)	J 0203	87-A60-238-010	1A	TERMINAL, SP 4P (MSC)	USM	CX-ZL720
!	O P-AMP (FRONT/LF)	J 0203	87-A60-238-010	1A	TERMINAL, SP 4P (MSC)	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	JR 0101	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	P-AMP (FRONT/LF)	JR 0101	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	JR 0102	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	P-AMP (FRONT/LF)	JR 0102	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	JR 0107	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	P-AMP (FRONT/LF)	JR 0107	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	JR 0109	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	P-AMP (FRONT/LF)	JR 0109	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	JR 0110	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	P-AMP (FRONT/LF)	JR 0110	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	JR 0113	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	P-AMP (FRONT/LF)	JR 0113	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	JR 0114	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	P-AMP (FRONT/LF)	JR 0114	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	JR 0123	87-A10-596-080	0E	C-CAP, S 100P-100 J CH	USM	CX-ZL720
O	P-AMP (FRONT/LF)	JR 0123	87-A10-596-080	0E	C-CAP, S 100P-100 J CH	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	JR 0124	87-A10-596-080	0E	C-CAP, S 100P-100 J CH	USM	CX-ZL720
O	P-AMP (FRONT/LF)	JR 0124	87-A10-596-080	0E	C-CAP, S 100P-100 J CH	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	L 0201	87-A50-610-010	0E	COIL, 1UH K (MDEC)	USM	CX-ZL720
O	P-AMP (FRONT/LF)	L 0201	87-A50-610-010	0E	COIL, 1UH K (MDEC)	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	L 0202	87-A50-610-010	0E	COIL, 1UH K (MDEC)	USM	CX-ZL720
O	P-AMP (FRONT/LF)	L 0202	87-A50-610-010	0E	COIL, 1UH K (MDEC)	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0101	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0101	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0102	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0102	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0103	87-A30-107-070	0E	C-TR, CMBT5401	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0103	87-A30-107-070	0E	C-TR, CMBT5401	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0104	87-A30-107-070	0E	C-TR, CMBT5401	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0104	87-A30-107-070	0E	C-TR, CMBT5401	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0105	87-A30-107-070	0E	C-TR, CMBT5401	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0105	87-A30-107-070	0E	C-TR, CMBT5401	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0106	87-A30-107-070	0E	C-TR, CMBT5401	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0106	87-A30-107-070	0E	C-TR, CMBT5401	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0107	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0107	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0108	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0108	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0109	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0109	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0110	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0110	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0111	87-A30-190-080	0E	TR, CC5551	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0111	87-A30-190-080	0E	TR, CC5551	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0112	87-A30-190-080	0E	TR, CC5551	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0112	87-A30-190-080	0E	TR, CC5551	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0113	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0113	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0114	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0114	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0115	87-A30-106-040	0E	C-TR, CMBT5551	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0115	87-A30-106-040	0E	C-TR, CMBT5551	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0116	87-A30-106-040	0E	C-TR, CMBT5551	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0116	87-A30-106-040	0E	C-TR, CMBT5551	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0121	87-A30-190-080	0E	TR, CC5551	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0121	87-A30-190-080	0E	TR, CC5551	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0122	87-A30-190-080	0E	TR, CC5551	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0122	87-A30-190-080	0E	TR, CC5551	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0123	87-A30-107-070	0E	C-TR, CMBT5401	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0123	87-A30-107-070	0E	C-TR, CMBT5401	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	P-AMP (FRONT/LF)	Q 0124	87-A30-107-070	0E	C-TR, CMBT5401	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0124	87-A30-107-070	0E	C-TR, CMBT5401	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0126	87-A30-107-070	0E	C-TR, CMBT5401	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0126	87-A30-107-070	0E	C-TR, CMBT5401	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0127	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0127	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0128	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0128	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0130	87-A30-106-040	0E	C-TR, CMBT5551	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0130	87-A30-106-040	0E	C-TR, CMBT5551	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0131	87-A30-205-010	1D	TR, 2SB1588	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0131	87-A30-205-010	1D	TR, 2SB1588	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0132	87-A30-205-010	1D	TR, 2SB1588	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0132	87-A30-205-010	1D	TR, 2SB1588	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0133	87-A30-204-010	1D	TR, 2SD2439	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0133	87-A30-204-010	1D	TR, 2SD2439	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0134	87-A30-204-010	1D	TR, 2SD2439	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0134	87-A30-204-010	1D	TR, 2SD2439	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0183	87-A30-162-010	1B	FET, 2SK2937	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0183	87-A30-162-010	1B	FET, 2SK2937	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0184	87-A30-162-010	1B	FET, 2SK2937	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0184	87-A30-162-010	1B	FET, 2SK2937	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0185	87-A30-076-080	0E	C-TR, 2SC3052F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0185	87-A30-076-080	0E	C-TR, 2SC3052F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0186	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0186	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0187	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0187	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
S	P-AMP (FRONT/LF)	Q 0235	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	P-AMP (FRONT/LF)	Q 0235	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0101	88-108-392-080	0E	C-RES, U 3.9K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0101	88-108-392-080	0E	C-RES, U 3.9K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0102	88-108-392-080	0E	C-RES, U 3.9K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0102	88-108-392-080	0E	C-RES, U 3.9K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0103	88-108-153-080	0E	C-RES, U 15K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0103	88-108-153-080	0E	C-RES, U 15K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0104	88-108-153-080	0E	C-RES, U 15K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0104	88-108-153-080	0E	C-RES, U 15K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0105	88-108-473-080	0E	C-RES, U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0105	88-108-473-080	0E	C-RES, U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0106	88-108-473-080	0E	C-RES, U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0106	88-108-473-080	0E	C-RES, U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0107	88-108-101-080	0E	C-RES, U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0107	88-108-101-080	0E	C-RES, U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0108	88-108-101-080	0E	C-RES, U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0108	88-108-101-080	0E	C-RES, U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0111	88-108-821-080	0E	C-RES, U 820-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0111	88-108-821-080	0E	C-RES, U 820-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0112	88-108-821-080	0E	C-RES, U 820-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0112	88-108-821-080	0E	C-RES, U 820-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0113	88-108-473-080	0E	C-RES, U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0113	88-108-473-080	0E	C-RES, U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0114	88-108-473-080	0E	C-RES, U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0114	88-108-473-080	0E	C-RES, U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0117	88-108-103-080	0E	C-RES, U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0117	88-108-103-080	0E	C-RES, U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0118	88-108-103-080	0E	C-RES, U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0118	88-108-103-080	0E	C-RES, U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0119	88-108-101-080	0E	C-RES, U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0119	88-108-101-080	0E	C-RES, U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0120	88-108-101-080	0E	C-RES, U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0120	88-108-101-080	0E	C-RES, U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0121	88-108-101-080	0E	C-RES, U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0121	88-108-101-080	0E	C-RES, U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0122	88-108-101-080	0E	C-RES, U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0122	88-108-101-080	0E	C-RES, U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0123	88-128-332-080	0E	C-RES, 3.3K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0123	88-128-332-080	0E	C-RES, 3.3K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0124	88-128-332-080	0E	C-RES, 3.3K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0124	88-128-332-080	0E	C-RES, 3.3K-1/8W J	LHSM	CX-ZL820

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	P-AMP (FRONT/LF)	R 0125	88-128-332-080	0E	C-RES, 3.3K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0125	88-128-332-080	0E	C-RES, 3.3K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0126	88-128-332-080	0E	C-RES, 3.3K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0126	88-128-332-080	0E	C-RES, 3.3K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0127	88-108-390-080	0E	C-RES,U 39-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0127	88-108-390-080	0E	C-RES,U 39-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0128	88-108-390-080	0E	C-RES,U 39-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0128	88-108-390-080	0E	C-RES,U 39-1/16W J	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0129	87-A00-418-010	0E	RES,M/F 0.15-3W J	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0129	87-A00-418-010	0E	RES,M/F 0.15-3W J	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0130	87-A00-418-010	0E	RES,M/F 0.15-3W J	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0130	87-A00-418-010	0E	RES,M/F 0.15-3W J	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0131	87-A00-418-010	0E	RES,M/F 0.15-3W J	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0131	87-A00-418-010	0E	RES,M/F 0.15-3W J	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0132	87-A00-418-010	0E	RES,M/F 0.15-3W J	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0132	87-A00-418-010	0E	RES,M/F 0.15-3W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0133	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0133	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0134	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0134	88-108-182-080	0E	C-RES,U 1.8K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0135	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0135	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0136	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0136	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0137	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0137	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0138	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0138	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0141	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0141	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0142	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0142	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0151	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0151	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0152	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0152	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0153	88-108-390-080	0E	C-RES,U 39-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0153	88-108-390-080	0E	C-RES,U 39-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0154	88-108-390-080	0E	C-RES,U 39-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0154	88-108-390-080	0E	C-RES,U 39-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0155	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0155	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0156	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0156	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0157	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0157	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0159	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0159	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0160	88-121-103-080	0E	RES,10K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0160	88-121-103-080	0E	RES,10K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0161	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0161	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0162	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0162	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0163	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0163	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0164	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0164	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0165	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0165	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0166	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0166	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0167	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0167	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0168	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0168	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0169	88-108-271-080	0E	C-RES,U 270-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0169	88-108-271-080	0E	C-RES,U 270-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0170	88-108-271-080	0E	C-RES,U 270-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0170	88-108-271-080	0E	C-RES,U 270-1/16W J	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	P-AMP (FRONT/LF)	R 0171	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0171	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0172	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0172	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0173	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0173	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0174	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0174	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0175	88-108-331-080	0E	C-RES,U 330-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0175	88-108-331-080	0E	C-RES,U 330-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0176	88-108-331-080	0E	C-RES,U 330-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0176	88-108-331-080	0E	C-RES,U 330-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0177	88-128-332-080	0E	C-RES, 3.3K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0177	88-128-332-080	0E	C-RES, 3.3K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0178	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0178	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0179	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0179	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0180	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0180	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0181	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0181	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0182	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0182	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0184	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0184	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0185	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0185	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0186	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0186	88-118-102-080	0E	C-RES,S 1K-1/10W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0187	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0187	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0188	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0188	88-118-222-080	0E	C-RES,S 2.2K-1/10W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0189	88-128-222-080	0E	C-RES, 2.2K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0189	88-128-222-080	0E	C-RES, 2.2K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0190	88-128-222-080	0E	C-RES, 2.2K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0190	88-128-222-080	0E	C-RES, 2.2K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0192	88-128-332-080	0E	C-RES, 3.3K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0192	88-128-332-080	0E	C-RES, 3.3K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0193	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0193	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0194	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0194	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0195	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0195	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0196	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0196	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0197	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0197	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0198	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0198	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0199	88-108-225-080	0E	C-RES,U 2.2M-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0199	88-108-225-080	0E	C-RES,U 2.2M-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0213	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0213	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0217	88-108-683-080	0E	C-RES,U 68K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0217	88-108-683-080	0E	C-RES,U 68K-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0218	88-108-105-080	0E	C-RES,U 1M-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0218	88-108-105-080	0E	C-RES,U 1M-1/16W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0219	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0219	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0243	87-A00-443-050	0E	RES,390-1/2W J RP	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0243	87-A00-443-050	0E	RES,390-1/2W J RP	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0244	87-A00-443-050	0E	RES,390-1/2W J RP	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0244	87-A00-443-050	0E	RES,390-1/2W J RP	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0245	87-A00-443-050	0E	RES,390-1/2W J RP	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0245	87-A00-443-050	0E	RES,390-1/2W J RP	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	R 0246	87-A00-443-050	0E	RES,390-1/2W J RP	USM	CX-ZL720
O	P-AMP (FRONT/LF)	R 0246	87-A00-443-050	0E	RES,390-1/2W J RP	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	P-AMP (FRONT/LF)	R 0247	88-130-100-080	0E	RES,10-1/4W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0247	88-130-100-080	0E	RES,10-1/4W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0248	88-130-100-080	0E	RES,10-1/4W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0248	88-130-100-080	0E	RES,10-1/4W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0249	88-128-100-080	0E	C-RES, 10-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0249	88-128-100-080	0E	C-RES, 10-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0250	88-121-100-080	0E	RES,10-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0250	88-121-100-080	0E	RES,10-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0265	88-128-222-080	0E	C-RES, 2.2K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0265	88-128-222-080	0E	C-RES, 2.2K-1/8W J	LHSM	CX-ZL820
X	P-AMP (FRONT/LF)	R 0266	88-128-222-080	0E	C-RES, 2.2K-1/8W J	USM	CX-ZL720
X	P-AMP (FRONT/LF)	R 0266	88-128-222-080	0E	C-RES, 2.2K-1/8W J	LHSM	CX-ZL820
!	O P-AMP (FRONT/LF)	RY 0201	87-A91-339-010	1B	RELAY,AC DC12V G5PA-2	USM	CX-ZL720
O	P-AMP (FRONT/LF)	TH 0101	87-A91-042-080	0E	C-THMS,100K 55001	USM	CX-ZL720
O	P-AMP (FRONT/LF)	TH 0101	87-A91-042-080	0E	C-THMS,100K 55001	LHSM	CX-ZL820
O	P-AMP (FRONT/LF)	TH 0102	87-A91-042-080	0E	C-THMS,100K 55001	USM	CX-ZL720
O	P-AMP (FRONT/LF)	TH 0102	87-A91-042-080	0E	C-THMS,100K 55001	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN		8B-NF9-670-010	1E	PWB,COMB MAIN -M'SIA	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN		8B-NF9-670-010	1E	PWB,COMB MAIN -M'SIA	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN		8B-NF9-671-010	--	PWB,MAIN-M'SIA	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN		8B-NF9-671-010	--	PWB,MAIN-M'SIA	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN		8B-NF9-672-010	--	PWB,PT-M'SIA	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN		8B-NF9-672-010	--	PWB,PT-M'SIA	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN		8B-NF9-673-010	--	PWB,FAN-M'SIA	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN		8B-NF9-673-010	--	PWB,FAN-M'SIA	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0003	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0003	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0004	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0004	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0005	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0005	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0006	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0006	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0009	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0009	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0010	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0010	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0011	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0011	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0012	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0012	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0019	87-A10-231-090	1H	CAP,E 3300-80	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0019	87-A10-231-090	1H	CAP,E 3300-80	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0020	87-A10-231-090	1H	CAP,E 3300-80	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0020	87-A10-231-090	1H	CAP,E 3300-80	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0021	87-A10-520-000	1B	CAP,E 3300-35 M SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0021	87-A10-520-000	1B	CAP,E 3300-35 M SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0022	87-A10-520-000	1B	CAP,E 3300-35 M SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0022	87-A10-520-000	1B	CAP,E 3300-35 M SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0025	87-010-247-080	0E	CAP,E 100-50 M SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0025	87-010-247-080	0E	CAP,E 100-50 M SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0026	87-010-247-080	0E	CAP,E 100-50 M SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0026	87-010-247-080	0E	CAP,E 100-50 M SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0027	87-010-247-080	0E	CAP,E 100-50 M SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0027	87-010-247-080	0E	CAP,E 100-50 M SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0028	87-010-247-080	0E	CAP,E 100-50 M SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0028	87-010-247-080	0E	CAP,E 100-50 M SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0030	87-010-430-080	0E	CAP,E 100-63	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0030	87-010-430-080	0E	CAP,E 100-63	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0031	87-A12-062-080	0E	CAP,E 100-10 SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0031	87-A12-062-080	0E	CAP,E 100-10 SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0032	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0032	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0033	87-A12-062-080	0E	CAP,E 100-10 SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0033	87-A12-062-080	0E	CAP,E 100-10 SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0034	87-010-247-080	0E	CAP,E 100-50 M SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0034	87-010-247-080	0E	CAP,E 100-50 M SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0035	87-A12-066-080	0E	CAP,E 47-16 SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0035	87-A12-066-080	0E	CAP,E 47-16 SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0036	87-010-381-080	0E	CAP,E 330-16 M SME	USM	CX-ZL720

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	P-SUPPLY/PWB/FAN	C 0036	87-010-381-080	0E	CAP,E 330-16 M SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0038	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0038	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0060	87-A12-089-080	0E	CAP,E 3.3-50 SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0060	87-A12-089-080	0E	CAP,E 3.3-50 SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0061	87-A12-071-080	0E	CAP,E 47-25 SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0061	87-A12-071-080	0E	CAP,E 47-25 SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0083	87-A12-074-080	0E	CAP,E 470-25 SMG	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0083	87-A12-074-080	0E	CAP,E 470-25 SMG	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0097	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0097	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0191	87-A10-812-080	0E	C-CAP,S 220P-200 J CH	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0191	87-A10-812-080	0E	C-CAP,S 220P-200 J CH	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0192	87-A10-812-080	0E	C-CAP,S 220P-200 J CH	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0192	87-A10-812-080	0E	C-CAP,S 220P-200 J CH	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0501	87-010-401-080	0E	CAP,E 1-50 M 11L SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0501	87-010-401-080	0E	CAP,E 1-50 M 11L SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0502	87-010-374-080	0E	CAP,E 47-10 M 11L SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0502	87-010-374-080	0E	CAP,E 47-10 M 11L SME	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	C 0503	87-010-380-080	0E	CAP,E 47-16 M 11L SME	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	C 0503	87-010-380-080	0E	CAP,E 47-16 M 11L SME	LHSM	CX-ZL820
!	O P-SUPPLY/PWB/FAN	CN 0501	87-099-564-010	0E	CONN,4P V TUC-P4P-B1	USM	CX-ZL720
!	O P-SUPPLY/PWB/FAN	CN 0501	87-099-564-010	0E	CONN,4P V TUC-P4P-B1	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	CN 0502	87-A60-688-010	0E	CONN,4P H GRY TUC-P04X-C1	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	CN 0502	87-A60-688-010	0E	CONN,4P H GRY TUC-P04X-C1	LHSM	CX-ZL820
O	P-SUPPLY/PWB/FAN	CN 0503	87-A60-619-010	0E	CONN,2P V 2MM JMT	USM	CX-ZL720
O	P-SUPPLY/PWB/FAN	CN 0503	87-A60-619-010	0E	CONN,2P V 2MM JMT	LHSM	CX-ZL820
!	O P-SUPPLY/PWB/FAN	CNA0001	8A-NF8-653-010	1B	CONN ASSY,9P TID-A(480)	USM	CX-ZL720
!	O P-SUPPLY/PWB/FAN	CNA0001	8A-NF8-653-010	1B	CONN ASSY,9P TID-A(480)	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0009	87-017-447-010	1B	DIODE,GBU4DL-6419	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0009	87-017-447-010	1B	DIODE,GBU4DL-6419	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0010	87-A40-224-010	1E	DIODE,GBU8DL	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0010	87-A40-224-010	1E	DIODE,GBU8DL	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0025	87-A40-553-080	0E	DIODE,1N4003 LES	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0025	87-A40-553-080	0E	DIODE,1N4003 LES	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0026	87-A40-553-080	0E	DIODE,1N4003 LES	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0026	87-A40-553-080	0E	DIODE,1N4003 LES	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0027	87-A40-553-080	0E	DIODE,1N4003 LES	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0027	87-A40-553-080	0E	DIODE,1N4003 LES	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0028	87-A40-553-080	0E	DIODE,1N4003 LES	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0028	87-A40-553-080	0E	DIODE,1N4003 LES	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0029	87-A40-780-080	0E	ZENER,UZ33BSD	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0029	87-A40-780-080	0E	ZENER,UZ33BSD	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0030	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0030	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0031	87-A40-764-080	0E	ZENER,UZ10BSC	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0031	87-A40-764-080	0E	ZENER,UZ10BSC	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0033	87-A40-553-080	0E	DIODE,1N4003 LES	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0033	87-A40-553-080	0E	DIODE,1N4003 LES	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0034	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0034	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0035	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0035	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0041	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0041	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0042	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0042	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0060	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0060	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0062	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0062	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0063	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0063	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0064	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0064	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0065	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0065	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0071	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0071	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0072	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	P-SUPPLY/PWB/FAN	D 0072	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0076	87-A40-269-080	0E	C-DIODE,MC2836	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0076	87-A40-269-080	0E	C-DIODE,MC2836	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0077	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0077	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	D 0501	87-A40-270-080	0E	C-DIODE,MC2838	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	D 0501	87-A40-270-080	0E	C-DIODE,MC2838	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0001	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0001	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0003	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0003	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0004	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0004	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0005	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0005	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0006	88-129-000-080	0E	C-JUMPER, 3216	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0006	88-129-000-080	0E	C-JUMPER, 3216	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0023	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0023	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0024	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0024	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	JR 0502	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	JR 0502	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0001	87-A30-515-080	0E	TR,2SA19790/Y	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0001	87-A30-515-080	0E	TR,2SA19790/Y	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0002	87-A30-515-080	0E	TR,2SA19790/Y	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0002	87-A30-515-080	0E	TR,2SA19790/Y	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0003	87-A30-559-010	1A	TR,CSB1370EF	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0003	87-A30-559-010	1A	TR,CSB1370EF	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0005	87-A30-492-080	0E	TR,2SC5343G	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0005	87-A30-492-080	0E	TR,2SC5343G	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0006	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0006	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0007	87-A30-075-080	0E	C-TR,2SA1235F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0008	87-A30-075-080	0E	C-TR,2SA1235F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0008	87-A30-075-080	0E	C-TR,2SA1235F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0009	87-A30-515-080	0E	TR,2SA19790/Y	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0009	87-A30-515-080	0E	TR,2SA19790/Y	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0010	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0010	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0059	87-A30-107-070	0E	C-TR,CMBT5401	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0059	87-A30-107-070	0E	C-TR,CMBT5401	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0060	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0060	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0061	87-A30-075-080	0E	C-TR,2SA1235F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0061	87-A30-075-080	0E	C-TR,2SA1235F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0062	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0062	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0063	87-A30-075-080	0E	C-TR,2SA1235F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0063	87-A30-075-080	0E	C-TR,2SA1235F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0064	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0064	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0065	87-A30-484-080	0E	C-TR,KRA102S	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0065	87-A30-484-080	0E	C-TR,KRA102S	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0501	87-A30-076-080	0E	C-TR,2SC3052F	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0501	87-A30-076-080	0E	C-TR,2SC3052F	LHSM	CX-ZL820
S	P-SUPPLY/PWB/FAN	Q 0503	87-A30-218-080	0E	TR,2SB1237Q	USM	CX-ZL720
S	P-SUPPLY/PWB/FAN	Q 0503	87-A30-218-080	0E	TR,2SB1237Q	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0001	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0001	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0005	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0005	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0009	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0009	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0010	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0010	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0011	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0011	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0012	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0012	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	P-SUPPLY/PWB/FAN	R 0013	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0013	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0014	88-108-100-080	0E	C-RES,U 10-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0014	88-108-100-080	0E	C-RES,U 10-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0015	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0015	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0016	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0016	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0017	88-130-271-080	0E	RES,270-1/4W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0017	88-130-271-080	0E	RES,270-1/4W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0018	88-108-221-080	0E	C-RES,U 220-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0018	88-108-221-080	0E	C-RES,U 220-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0019	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0019	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0020	88-121-680-080	0E	RES,68-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0020	88-121-680-080	0E	RES,68-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0021	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0021	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0022	88-108-221-080	0E	C-RES,U 220-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0022	88-108-221-080	0E	C-RES,U 220-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0023	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0023	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0024	88-108-109-080	0E	C-RES,U 1-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0026	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0027	88-108-471-080	0E	C-RES,U 470-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0027	88-108-471-080	0E	C-RES,U 470-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0028	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0028	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0029	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0029	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0030	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0030	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0031	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0031	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0032	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0032	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0033	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0033	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0034	88-108-394-080	0E	C-RES,U 390K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0034	88-108-394-080	0E	C-RES,U 390K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0037	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0037	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0038	88-130-271-080	0E	RES,270-1/4W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0038	88-130-271-080	0E	RES,270-1/4W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0039	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0039	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0040	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0040	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0042	88-130-271-080	0E	RES,270-1/4W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0042	88-130-271-080	0E	RES,270-1/4W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0043	88-130-271-080	0E	RES,270-1/4W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0043	88-130-271-080	0E	RES,270-1/4W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0044	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0044	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0045	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0045	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0046	88-130-271-080	0E	RES,270-1/4W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0046	88-130-271-080	0E	RES,270-1/4W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0047	88-130-271-080	0E	RES,270-1/4W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0047	88-130-271-080	0E	RES,270-1/4W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0048	88-121-153-080	0E	RES,15K-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0048	88-121-153-080	0E	RES,15K-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0050	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0050	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0051	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0051	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0052	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0052	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0054	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0054	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	P-SUPPLY/PWB/FAN	R 0055	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0055	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0056	88-108-822-080	0E	C-RES,U 8.2K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0056	88-108-822-080	0E	C-RES,U 8.2K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0057	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0057	88-108-272-080	0E	C-RES,U 2.7K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0058	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0058	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0059	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0059	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0060	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0060	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0061	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0061	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0062	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0062	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0063	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0063	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0064	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0064	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0065	88-108-123-080	0E	C-RES,U 12K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0065	88-108-123-080	0E	C-RES,U 12K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0066	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0066	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0067	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0067	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0068	88-108-224-080	0E	C-RES,U 220K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0068	88-108-224-080	0E	C-RES,U 220K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0069	88-108-224-080	0E	C-RES,U 220K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0069	88-108-224-080	0E	C-RES,U 220K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0070	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0070	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0071	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0071	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0072	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0072	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0073	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0073	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0074	88-128-121-080	0E	C-RES, 120-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0074	88-128-121-080	0E	C-RES, 120-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0076	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0076	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0078	88-108-393-080	0E	C-RES,U 39K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0078	88-108-393-080	0E	C-RES,U 39K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0079	88-108-153-080	0E	C-RES,U 15K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0079	88-108-153-080	0E	C-RES,U 15K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0080	88-121-153-080	0E	RES,15K-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0080	88-121-153-080	0E	RES,15K-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0081	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0081	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0085	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0085	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0087	88-121-153-080	0E	RES,15K-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0087	88-121-153-080	0E	RES,15K-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0093	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0093	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0094	88-108-393-080	0E	C-RES,U 39K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0094	88-108-393-080	0E	C-RES,U 39K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0095	88-108-153-080	0E	C-RES,U 15K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0095	88-108-153-080	0E	C-RES,U 15K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0096	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0096	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0098	88-128-129-080	0E	C-RES, 1.2-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0099	88-128-129-080	0E	C-RES, 1.2-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0501	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0501	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0502	88-108-474-080	0E	C-RES,U 470K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0502	88-108-474-080	0E	C-RES,U 470K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0503	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0503	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	P-SUPPLY/PWB/FAN	R 0504	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0504	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0505	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0505	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0506	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0506	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0507	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0507	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0511	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0511	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	P-SUPPLY/PWB/FAN	R 0512	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	P-SUPPLY/PWB/FAN	R 0512	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
! O	P-SUPPLY/PWB/FAN	WH 0001	87-A90-510-010	0E	HLD, WIRE 2.5-9P	USM	CX-ZL720
! O	P-SUPPLY/PWB/FAN	WH 0001	87-A90-510-010	0E	HLD, WIRE 2.5-9P	LHSM	CX-ZL820
X	PACKING DU		87-B40-016-010	0E	BAG, PP (BAR-CODE)	USM	CX-ZL720
X	PACKING DU		87-B40-034-010	1B	LBL, USA 1-800	USM	CX-ZL720
X	PACKING DU		87-B40-269-010	1A	BAG, PV 0.04-800-900 PL	USM	CX-ZL720
X	PACKING DU		87-B40-269-010	1A	BAG, PV 0.04-800-900 PL	LHSM	CX-ZL820
X	PACKING DU		87-B40-281-010	0E	LBL, BAR-CODE A 35X8	LHSM	CX-ZL820
X	PACKING DU		87-B40-287-010	0E	LBL, BAR-CODE EU 35X8	USM	CX-ZL720
X	PACKING DU		8A-NF8-972-010	0E	LBL, POP ENG	USM	CX-ZL720
X	PACKING DU		8B-MA3-851-010	--	CUSHION, FRONT M	USM	CX-ZL720
X	PACKING DU		8B-MA3-852-010	--	CUSHION, REAR M	USM	CX-ZL720
X	PACKING DU		8B-MA3-853-010	--	CUSHION, FRONT LHM	LHSM	CX-ZL820
X	PACKING DU		8B-MA3-854-010	--	CUSHION, REAR LHM	LHSM	CX-ZL820
X	PACKING DU		8B-MA3-855-010	--	CTN, PRINTED LHSM	LHSM	CX-ZL820
X	PACKING DU		8B-MA3-856-010	--	CTN, PRINTED USM	USM	CX-ZL720
X	PACKING DU		8B-MA3-970-010	--	LBL, POP UL	USM	CX-ZL720
X	PACKING DU		8B-MA3-971-010	--	LBL, POP UR	USM	CX-ZL720
X	PACKING DU		8B-MA3-974-010	--	LBL, POP LHL	LHSM	CX-ZL820
X	PACKING DU		8B-MA3-975-010	--	LBL, POP LHR	LHSM	CX-ZL820
X	PACKING DU		93-704-337-010	1A	SH, FOAMED-MAT 0.31-800-500	USM	CX-ZL720
X	PACKING DU		93-704-337-010	1A	SH, FOAMED-MAT 0.31-800-500	LHSM	CX-ZL820
O	PLATE		81-532-080-010	1A	LBL, CASS-COMPT	USM	CX-ZL720
O	PLATE		81-532-080-010	1A	LBL, CASS-COMPT	LHSM	CX-ZL820
X	PLATE		84-711-909-010	1A	LBL DATE CODE	USM	CX-ZL720
! X	PLATE		87-057-961-010	0E	LBL, CAUTION TRIANGLE	LHSM	CX-ZL820
! X	PLATE		87-057-995-010	0E	LBL, CAUTION EFSD	LHSM	CX-ZL820
O	PLATE		8A-MA3-057-010	1B	WINDOW, TOP	LHSM	CX-ZL820
O	PLATE		8A-MA3-058-010	1B	WINDOW, TOP U	USM	CX-ZL720
O	PLATE		8B-MA3-030-010	--	PANEL, TRAY A3	USM	CX-ZL720
O	PLATE		8B-MA3-030-010	--	PANEL, TRAY A3	LHSM	CX-ZL820
O	PLATE		8B-MA3-031-010	--	PANEL, GEQ A3	USM	CX-ZL720
O	PLATE		8B-MA3-031-010	--	PANEL, GEQ A3	LHSM	CX-ZL820
O	PLATE		8B-MA3-050-010	--	WINDOW, DISP A3	LHSM	CX-ZL820
O	PLATE		8B-MA3-051-010	--	WINDOW, DISP U A3	USM	CX-ZL720
O	PLATE		8B-MA3-055-010	--	WINDOW, CASS L A3	USM	CX-ZL720
O	PLATE		8B-MA3-055-010	--	WINDOW, CASS L A3	LHSM	CX-ZL820
O	PLATE		8B-MA3-056-010	--	WINDOW, CASS R A3	USM	CX-ZL720
O	PLATE		8B-MA3-056-010	--	WINDOW, CASS R A3	LHSM	CX-ZL820
X	PLATE		8B-MA3-110-010	--	LBL, SPEC USM A3	USM	CX-ZL720
X	PLATE		8B-MA3-111-010	--	LBL, SPEC LHSM A3	LHSM	CX-ZL820
X	PRINTED DU		87-B40-086-010	0E	BAG, PV 0.04-230-400 PL	USM	CX-ZL720
X	PRINTED DU		87-B40-086-010	0E	BAG, PV 0.04-230-400 PL	LHSM	CX-ZL820
X	PRINTED DU		87-B50-053-010	0E	WARR-CARD, USA CUST/AV, VISUAL	USM	CX-ZL720
X	PRINTED DU		87-B50-056-010	0E	SH, CAUTION AC VOLTAGE	LHSM	CX-ZL820
X	PRINTED DU		87-B50-079-010	0E	LIST, FACILITY (B)-0007	LHSM	CX-ZL820
O	PRINTED DU		8B-MA3-902-010	--	IB, LH (ESP) M	LHSM	CX-ZL820
O	PRINTED DU		8B-MA3-903-010	--	IB, U (ESF) M	USM	CX-ZL720
X	PT		8B-MA5-621-010	1B	PWB, COMB PT BMA5	USM	CX-ZL720
X	PT		8B-MA5-621-010	1B	PWB, COMB PT BMA5	LHSM	CX-ZL820
! O	PT	CN 0101	87-A61-110-010	0E	CONN, 9P V TID-A	USM	CX-ZL720
! O	PT	CN 0101	87-A61-110-010	0E	CONN, 9P V TID-A	LHSM	CX-ZL820
S	PT	D 0101	87-020-465-080	0E	DIODE, 1SS133	USM	CX-ZL720
S	PT	D 0101	87-020-465-080	0E	DIODE, 1SS133	LHSM	CX-ZL820
S	PT	D 0102	87-020-465-080	0E	DIODE, 1SS133	USM	CX-ZL720
S	PT	D 0102	87-020-465-080	0E	DIODE, 1SS133	LHSM	CX-ZL820
S	PT	D 0103	87-020-465-080	0E	DIODE, 1SS133	USM	CX-ZL720
S	PT	D 0103	87-020-465-080	0E	DIODE, 1SS133	LHSM	CX-ZL820
S	PT	D 0104	87-020-465-080	0E	DIODE, 1SS133	USM	CX-ZL720

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME	
S	PT	D 0104	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820	
O	PT	FC 0001	87-033-213-080	0E	FUSE CLAMP,PFC5000	USM	CX-ZL720	
O	PT	FC 0001	87-033-213-080	0E	FUSE CLAMP,PFC5000	LHSM	CX-ZL820	
O	PT	FC 0002	87-033-213-080	0E	FUSE CLAMP,PFC5000	USM	CX-ZL720	
O	PT	FC 0002	87-033-213-080	0E	FUSE CLAMP,PFC5000	LHSM	CX-ZL820	
X	PT	PR 0101	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720	
X	PT	PR 0101	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820	
X	PT	PR 0102	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720	
X	PT	PR 0102	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820	
X	PT	PR 0103	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720	
X	PT	PR 0103	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820	
X	PT	PR 0104	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720	
X	PT	PR 0104	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820	
X	PT	PR 0105	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720	
O	PT	PT 0002	8B-MA6-671-010	--	PT,SUB BMA U (VRK)	USM	CX-ZL720	
!	O	PT	PT 0002	--	PT,SUB BMA H (VRK)	LHSM	CX-ZL820	
X	PT	R 0101	88-140-225-080	0E	RES,2.2M-1/2W J	USM	CX-ZL720	
!	O	PT	RY 0101	87-A91-300-010	1B	RELAY,AC 12V-ALA2PF12	LHSM	CX-ZL820
!	O	PT	RY 0102	87-A91-418-010	1B	RELAY,AC12V G5PA-1-M	USM	CX-ZL720
!	O	PT	S 0101	87-A90-165-010	1A	SW,SL 1-2-3 SWS2301	LHSM	CX-ZL820
O	PT	T 0001	87-A60-317-010	0E	TERMINAL, 1P MSC	USM	CX-ZL720	
O	PT	T 0001	87-A60-317-010	0E	TERMINAL, 1P MSC	LHSM	CX-ZL820	
O	PT	T 0002	87-A60-317-010	0E	TERMINAL, 1P MSC	USM	CX-ZL720	
O	PT	T 0002	87-A60-317-010	0E	TERMINAL, 1P MSC	LHSM	CX-ZL820	
O	SCREW		81-MK1-210-010	0E	S-SCREW,BFT2+3-16	USM	CX-ZL720	
O	SCREW		81-MK1-210-010	0E	S-SCREW,BFT2+3-16	LHSM	CX-ZL820	
O	SCREW		87-067-641-010	0E	UTT2+3-8 W/O SLOT BLK	USM	CX-ZL720	
O	SCREW		87-067-641-010	0E	UTT2+3-8 W/O SLOT BLK	LHSM	CX-ZL820	
O	SCREW		87-067-689-010	0E	BVTT+3-8	USM	CX-ZL720	
O	SCREW		87-067-689-010	0E	BVTT+3-8	LHSM	CX-ZL820	
O	SCREW		87-067-703-010	0E	BVT2+3-10 W/O SLOT	USM	CX-ZL720	
O	SCREW		87-067-703-010	0E	BVT2+3-10 W/O SLOT	LHSM	CX-ZL820	
O	SCREW		87-067-758-010	0E	BVT2+3-12 W/O SLOT	USM	CX-ZL720	
O	SCREW		87-067-758-010	0E	BVT2+3-12 W/O SLOT	LHSM	CX-ZL820	
O	SCREW		87-078-060-010	0E	BVIT3B+3-10	USM	CX-ZL720	
O	SCREW		87-078-060-010	0E	BVIT3B+3-10	LHSM	CX-ZL820	
O	SCREW		87-078-200-010	0E	S-SCREW,ITC+4-8 R	USM	CX-ZL720	
O	SCREW		87-078-200-010	0E	S-SCREW,ITC+4-8 R	LHSM	CX-ZL820	
O	SCREW		87-591-095-410	0E	QIT+3-8	USM	CX-ZL720	
O	SCREW		87-591-095-410	0E	QIT+3-8	LHSM	CX-ZL820	
O	SCREW		87-B10-315-010	0E	BVIT3B+3-8 R W/O	USM	CX-ZL720	
O	SCREW		87-B10-315-010	0E	BVIT3B+3-8 R W/O	LHSM	CX-ZL820	
O	SCREW		87-NF4-224-010	0E	S-SCREW,IT3B+3-8 CU	USM	CX-ZL720	
O	SCREW		87-NF4-224-010	0E	S-SCREW,IT3B+3-8 CU	LHSM	CX-ZL820	
O	SPEANA	C 0301	87-012-358-080	0E	C-CAP,S 0.47-10 Z F CM/CB	USM	CX-ZL720	
O	SPEANA	C 0301	87-012-358-080	0E	C-CAP,S 0.47-10 Z F CM/CB	LHSM	CX-ZL820	
O	SPEANA	C 0302	87-012-335-080	0E	C-CAP,U 270P-50 J SL	USM	CX-ZL720	
O	SPEANA	C 0302	87-012-335-080	0E	C-CAP,U 270P-50 J SL	LHSM	CX-ZL820	
O	SPEANA	C 0303	87-012-358-080	0E	C-CAP,S 0.47-10 Z F CM/CB	USM	CX-ZL720	
O	SPEANA	C 0303	87-012-358-080	0E	C-CAP,S 0.47-10 Z F CM/CB	LHSM	CX-ZL820	
O	SPEANA	C 0304	87-012-358-080	0E	C-CAP,S 0.47-10 Z F CM/CB	USM	CX-ZL720	
O	SPEANA	C 0304	87-012-358-080	0E	C-CAP,S 0.47-10 Z F CM/CB	LHSM	CX-ZL820	
O	SPEANA	C 0305	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720	
O	SPEANA	C 0305	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820	
O	SPEANA	C 0306	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720	
O	SPEANA	C 0306	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820	
O	SPEANA	C 0310	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720	
O	SPEANA	C 0310	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820	
O	SPEANA	C 0311	87-010-405-040	0E	CAP,E 10-50 M 11L SME	USM	CX-ZL720	
O	SPEANA	C 0311	87-010-405-040	0E	CAP,E 10-50 M 11L SME	LHSM	CX-ZL820	
S	SPEANA	D 0301	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720	
S	SPEANA	D 0301	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820	
S	SPEANA	D 0302	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720	
S	SPEANA	D 0302	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820	
S	SPEANA	D 0303	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720	
S	SPEANA	D 0303	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820	
S	SPEANA	D 0304	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720	
S	SPEANA	D 0304	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820	
S	SPEANA	D 0311	87-A40-234-080	0E	ZENER,MTZJ5.6A	USM	CX-ZL720	
S	SPEANA	D 0311	87-A40-234-080	0E	ZENER,MTZJ5.6A	LHSM	CX-ZL820	

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	SPEANA	IC 0380	87-A21-577-040	1C	C-IC,M61506FP	USM	CX-ZL720
S	SPEANA	IC 0380	87-A21-577-040	1C	C-IC,M61506FP	LHSM	CX-ZL820
X	SPEANA	R 0302	88-108-224-080	0E	C-RES,U 220K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0302	88-108-224-080	0E	C-RES,U 220K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0303	88-121-273-080	0E	RES,27K-1/8W J	USM	CX-ZL720
X	SPEANA	R 0303	88-121-273-080	0E	RES,27K-1/8W J	LHSM	CX-ZL820
X	SPEANA	R 0304	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0304	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0305	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0305	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0306	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0306	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0307	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0307	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0311	88-118-471-080	0E	C-RES,S 470-1/10W J	USM	CX-ZL720
X	SPEANA	R 0311	88-118-471-080	0E	C-RES,S 470-1/10W J	LHSM	CX-ZL820
X	SPEANA	R 0321	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	SPEANA	R 0321	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0322	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0322	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0323	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0323	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0324	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	SPEANA	R 0324	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	SPEANA	R 0330	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0330	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0331	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0331	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0332	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0332	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0333	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0333	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0334	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0334	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	SPEANA	R 0335	88-108-273-080	0E	C-RES,U 27K-1/16W J	USM	CX-ZL720
X	SPEANA	R 0335	88-108-273-080	0E	C-RES,U 27K-1/16W J	LHSM	CX-ZL820
!	X TAPE		M8-ZZM-392-030	--	ZZM-3 PR1NM	USM	CX-ZL720
!	X TAPE		M8-ZZM-392-030	--	ZZM-3 PR1NM	LHSM	CX-ZL820
O	TAPE DECK	C 0301	87-012-274-080	0E	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0301	87-012-274-080	0E	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0302	87-012-274-080	0E	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0302	87-012-274-080	0E	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0303	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	USM	CX-ZL720
O	TAPE DECK	C 0303	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0304	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	USM	CX-ZL720
O	TAPE DECK	C 0304	87-012-275-080	0E	C-CAP,U 1200P-50 K B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0307	87-A12-062-080	0E	CAP,E 100-10 SMG	USM	CX-ZL720
O	TAPE DECK	C 0307	87-A12-062-080	0E	CAP,E 100-10 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0308	87-A12-062-080	0E	CAP,E 100-10 SMG	USM	CX-ZL720
O	TAPE DECK	C 0308	87-A12-062-080	0E	CAP,E 100-10 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0309	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TAPE DECK	C 0309	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	TAPE DECK	C 0310	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TAPE DECK	C 0310	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	TAPE DECK	C 0313	87-012-284-080	0E	C-CAP,U 6800P-50 K B GRM	USM	CX-ZL720
O	TAPE DECK	C 0313	87-012-284-080	0E	C-CAP,U 6800P-50 K B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0314	87-012-284-080	0E	C-CAP,U 6800P-50 K B GRM	USM	CX-ZL720
O	TAPE DECK	C 0314	87-012-284-080	0E	C-CAP,U 6800P-50 K B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0315	87-A12-062-080	0E	CAP,E 100-10 SMG	USM	CX-ZL720
O	TAPE DECK	C 0315	87-A12-062-080	0E	CAP,E 100-10 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0317	87-A12-085-080	0E	CAP,E 0.33-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0317	87-A12-085-080	0E	CAP,E 0.33-50 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0318	87-A12-085-080	0E	CAP,E 0.33-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0318	87-A12-085-080	0E	CAP,E 0.33-50 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0326	87-016-118-080	0E	C-CAP,U 0.022-25 J B GRM	USM	CX-ZL720
O	TAPE DECK	C 0326	87-016-118-080	0E	C-CAP,U 0.022-25 J B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0327	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	USM	CX-ZL720
O	TAPE DECK	C 0327	87-A12-317-080	0E	C-CAP,U 0.1-50 Z F	LHSM	CX-ZL820
O	TAPE DECK	C 0360	87-A12-087-080	0E	CAP,E 1-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0360	87-A12-087-080	0E	CAP,E 1-50 SMG	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	TAPE DECK	C 0365	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	TAPE DECK	C 0365	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	TAPE DECK	C 0399	87-012-270-080	0E	C-CAP,U 470P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0399	87-012-270-080	0E	C-CAP,U 470P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0401	87-A12-083-080	0E	CAP,E 0.1-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0401	87-A12-083-080	0E	CAP,E 0.1-50 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0402	87-A12-083-080	0E	CAP,E 0.1-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0402	87-A12-083-080	0E	CAP,E 0.1-50 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0403	87-012-193-080	0E	C-CAP,U 82P-50 J CH	USM	CX-ZL720
O	TAPE DECK	C 0403	87-012-193-080	0E	C-CAP,U 82P-50 J CH	LHSM	CX-ZL820
O	TAPE DECK	C 0404	87-012-193-080	0E	C-CAP,U 82P-50 J CH	USM	CX-ZL720
O	TAPE DECK	C 0404	87-012-193-080	0E	C-CAP,U 82P-50 J CH	LHSM	CX-ZL820
O	TAPE DECK	C 0405	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TAPE DECK	C 0405	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0406	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TAPE DECK	C 0406	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0407	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TAPE DECK	C 0407	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0408	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TAPE DECK	C 0408	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0409	87-012-278-080	0E	C-CAP,U 2200P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0409	87-012-278-080	0E	C-CAP,U 2200P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0410	87-012-278-080	0E	C-CAP,U 2200P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0410	87-012-278-080	0E	C-CAP,U 2200P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0411	87-A12-091-080	0E	CAP,E 10-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0411	87-A12-091-080	0E	CAP,E 10-50 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0412	87-A12-091-080	0E	CAP,E 10-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0412	87-A12-091-080	0E	CAP,E 10-50 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0452	87-A12-092-080	0E	CAP,E 22-50 SMG	USM	CX-ZL720
O	TAPE DECK	C 0452	87-A12-092-080	0E	CAP,E 22-50 SMG	LHSM	CX-ZL820
O	TAPE DECK	C 0453	87-012-279-080	0E	C-CAP,U 2700P-50 K B GRM	USM	CX-ZL720
O	TAPE DECK	C 0453	87-012-279-080	0E	C-CAP,U 2700P-50 K B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0454	87-012-279-080	0E	C-CAP,U 2700P-50 K B GRM	USM	CX-ZL720
O	TAPE DECK	C 0454	87-012-279-080	0E	C-CAP,U 2700P-50 K B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0455	87-012-279-080	0E	C-CAP,U 2700P-50 K B GRM	USM	CX-ZL720
O	TAPE DECK	C 0455	87-012-279-080	0E	C-CAP,U 2700P-50 K B GRM	LHSM	CX-ZL820
O	TAPE DECK	C 0456	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TAPE DECK	C 0456	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0457	87-A12-361-080	0E	CAP,M 5600P-100 J CP	USM	CX-ZL720
O	TAPE DECK	C 0457	87-A12-361-080	0E	CAP,M 5600P-100 J CP	LHSM	CX-ZL820
O	TAPE DECK	C 0458	87-012-274-080	0E	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0458	87-012-274-080	0E	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0459	87-012-271-080	0E	C-CAP,U 560P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0459	87-012-271-080	0E	C-CAP,U 560P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0460	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	USM	CX-ZL720
O	TAPE DECK	C 0460	87-010-759-080	0E	C-CAP,U 0.1-25 Z F	LHSM	CX-ZL820
O	TAPE DECK	C 0461	87-012-269-080	0E	C-CAP,U 390P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0461	87-012-269-080	0E	C-CAP,U 390P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0462	87-012-269-080	0E	C-CAP,U 390P-50 K B	USM	CX-ZL720
O	TAPE DECK	C 0462	87-012-269-080	0E	C-CAP,U 390P-50 K B	LHSM	CX-ZL820
O	TAPE DECK	C 0470	87-018-127-080	0E	CAP,TC U 470P-50 K B UP050	USM	CX-ZL720
O	TAPE DECK	C 0470	87-018-127-080	0E	CAP,TC U 470P-50 K B UP050	LHSM	CX-ZL820
X	TAPE DECK	CLP0302	87-A60-884-010	0E	PIN,DIAL COATING-SHS	USM	CX-ZL720
X	TAPE DECK	CLP0302	87-A60-884-010	0E	PIN,DIAL COATING-SHS	LHSM	CX-ZL820
X	TAPE DECK	CLP0601	8B-MA6-646-010	--	WIRE ASSY,LUG	USM	CX-ZL720
X	TAPE DECK	CLP0601	8B-MA6-646-010	--	WIRE ASSY,LUG	LHSM	CX-ZL820
O	TAPE DECK	CN 0301	87-A60-620-010	0E	CONN,3P V 2MM JMT	USM	CX-ZL720
O	TAPE DECK	CN 0301	87-A60-620-010	0E	CONN,3P V 2MM JMT	LHSM	CX-ZL820
O	TAPE DECK	CN 0351	87-A60-625-010	0E	CONN,8P V 2MM JMT	USM	CX-ZL720
O	TAPE DECK	CN 0351	87-A60-625-010	0E	CONN,8P V 2MM JMT	LHSM	CX-ZL820
S	TAPE DECK	D 0401	87-020-465-080	0E	DIODE,1SS133	USM	CX-ZL720
S	TAPE DECK	D 0401	87-020-465-080	0E	DIODE,1SS133	LHSM	CX-ZL820
X	TAPE DECK	FB 0301	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	TAPE DECK	FB 0301	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
X	TAPE DECK	FB 0302	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TAPE DECK	FB 0302	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
S	TAPE DECK	IC 0301	87-A21-419-040	0E	C-IC,NJM14558MD-TE2	USM	CX-ZL720
S	TAPE DECK	IC 0301	87-A21-419-040	0E	C-IC,NJM14558MD-TE2	LHSM	CX-ZL820
S	TAPE DECK	IC 0401	87-A21-893-040	1A	C-IC,NJM14558V-TE2	USM	CX-ZL720
S	TAPE DECK	IC 0401	87-A21-893-040	1A	C-IC,NJM14558V-TE2	LHSM	CX-ZL820

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	TAPE DECK	JR 0302	88-129-000-080	0E	C-JUMPER, 3216	USM	CX-ZL720
X	TAPE DECK	JR 0302	88-129-000-080	0E	C-JUMPER, 3216	LHSM	CX-ZL820
X	TAPE DECK	JR 0305	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	TAPE DECK	JR 0305	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	TAPE DECK	JR 0306	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	TAPE DECK	JR 0306	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	TAPE DECK	JR 0307	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	TAPE DECK	JR 0307	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	TAPE DECK	JR 0401	88-129-000-080	0E	C-JUMPER, 3216	USM	CX-ZL720
X	TAPE DECK	JR 0401	88-129-000-080	0E	C-JUMPER, 3216	LHSM	CX-ZL820
X	TAPE DECK	JR 0402	88-108-000-080	0E	C-JUMPER, U	USM	CX-ZL720
X	TAPE DECK	JR 0402	88-108-000-080	0E	C-JUMPER, U	LHSM	CX-ZL820
X	TAPE DECK	JR 0403	88-129-000-080	0E	C-JUMPER, 3216	USM	CX-ZL720
X	TAPE DECK	JR 0403	88-129-000-080	0E	C-JUMPER, 3216	LHSM	CX-ZL820
X	TAPE DECK	JR 0404	88-128-150-080	0E	C-RES, 15-1/8W J	USM	CX-ZL720
X	TAPE DECK	JR 0404	88-128-150-080	0E	C-RES, 15-1/8W J	LHSM	CX-ZL820
O	TAPE DECK	L 0451	87-007-342-010	0E	COIL, OSC 85KHZ BIAS	USM	CX-ZL720
O	TAPE DECK	L 0451	87-007-342-010	0E	COIL, OSC 85KHZ BIAS	LHSM	CX-ZL820
S	TAPE DECK	Q 0301	87-A30-091-080	1E	FET, 2SJ460	USM	CX-ZL720
S	TAPE DECK	Q 0301	87-A30-091-080	1E	FET, 2SJ460	LHSM	CX-ZL820
S	TAPE DECK	Q 0302	87-A30-091-080	1E	FET, 2SJ460	USM	CX-ZL720
S	TAPE DECK	Q 0302	87-A30-091-080	1E	FET, 2SJ460	LHSM	CX-ZL820
S	TAPE DECK	Q 0303	87-A30-090-080	0E	FET, 2SK2541	USM	CX-ZL720
S	TAPE DECK	Q 0303	87-A30-090-080	0E	FET, 2SK2541	LHSM	CX-ZL820
S	TAPE DECK	Q 0304	87-A30-090-080	0E	FET, 2SK2541	USM	CX-ZL720
S	TAPE DECK	Q 0304	87-A30-090-080	0E	FET, 2SK2541	LHSM	CX-ZL820
S	TAPE DECK	Q 0305	87-A30-091-080	1E	FET, 2SJ460	USM	CX-ZL720
S	TAPE DECK	Q 0305	87-A30-091-080	1E	FET, 2SJ460	LHSM	CX-ZL820
S	TAPE DECK	Q 0306	87-A30-062-080	0E	C-TR, KRC104S	USM	CX-ZL720
S	TAPE DECK	Q 0306	87-A30-062-080	0E	C-TR, KRC104S	LHSM	CX-ZL820
S	TAPE DECK	Q 0307	87-A30-091-080	1E	FET, 2SJ460	USM	CX-ZL720
S	TAPE DECK	Q 0307	87-A30-091-080	1E	FET, 2SJ460	LHSM	CX-ZL820
S	TAPE DECK	Q 0308	87-A30-091-080	1E	FET, 2SJ460	USM	CX-ZL720
S	TAPE DECK	Q 0308	87-A30-091-080	1E	FET, 2SJ460	LHSM	CX-ZL820
S	TAPE DECK	Q 0309	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	TAPE DECK	Q 0309	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
S	TAPE DECK	Q 0310	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	TAPE DECK	Q 0310	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
S	TAPE DECK	Q 0443	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	TAPE DECK	Q 0443	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
S	TAPE DECK	Q 0444	87-A30-075-080	0E	C-TR, 2SA1235F	USM	CX-ZL720
S	TAPE DECK	Q 0444	87-A30-075-080	0E	C-TR, 2SA1235F	LHSM	CX-ZL820
S	TAPE DECK	Q 0451	87-A30-495-080	0E	TR, 2SA1981Y	USM	CX-ZL720
S	TAPE DECK	Q 0451	87-A30-495-080	0E	TR, 2SA1981Y	LHSM	CX-ZL820
S	TAPE DECK	Q 0453	87-A30-492-080	0E	TR, 2SC5343G	USM	CX-ZL720
S	TAPE DECK	Q 0453	87-A30-492-080	0E	TR, 2SC5343G	LHSM	CX-ZL820
S	TAPE DECK	Q 0454	87-A30-492-080	0E	TR, 2SC5343G	USM	CX-ZL720
S	TAPE DECK	Q 0454	87-A30-492-080	0E	TR, 2SC5343G	LHSM	CX-ZL820
X	TAPE DECK	R 0301	88-108-393-080	0E	C-RES, U 39K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0301	88-108-393-080	0E	C-RES, U 39K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0302	88-108-393-080	0E	C-RES, U 39K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0302	88-108-393-080	0E	C-RES, U 39K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0303	88-108-104-080	0E	C-RES, U 100K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0303	88-108-104-080	0E	C-RES, U 100K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0304	88-108-104-080	0E	C-RES, U 100K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0304	88-108-104-080	0E	C-RES, U 100K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0305	88-108-224-080	0E	C-RES, U 220K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0305	88-108-224-080	0E	C-RES, U 220K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0306	88-108-682-080	0E	C-RES, U 6.8K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0306	88-108-682-080	0E	C-RES, U 6.8K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0307	88-108-471-080	0E	C-RES, U 470-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0307	88-108-471-080	0E	C-RES, U 470-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0308	88-108-471-080	0E	C-RES, U 470-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0308	88-108-471-080	0E	C-RES, U 470-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0309	88-108-680-080	0E	C-RES, U 68-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0309	88-108-680-080	0E	C-RES, U 68-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0310	88-108-680-080	0E	C-RES, U 68-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0310	88-108-680-080	0E	C-RES, U 68-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0313	88-108-183-080	0E	C-RES, U 18K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0313	88-108-183-080	0E	C-RES, U 18K-1/16W J	LHSM	CX-ZL820

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	TAPE DECK	R 0314	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0314	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0315	88-108-394-080	0E	C-RES,U 390K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0315	88-108-394-080	0E	C-RES,U 390K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0316	88-108-394-080	0E	C-RES,U 390K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0316	88-108-394-080	0E	C-RES,U 390K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0317	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0317	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0318	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0318	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0319	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0319	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0321	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TAPE DECK	R 0321	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TAPE DECK	R 0322	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TAPE DECK	R 0322	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TAPE DECK	R 0375	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0375	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0376	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0376	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0377	88-121-101-080	0E	RES,100-1/8W J	USM	CX-ZL720
X	TAPE DECK	R 0377	88-121-101-080	0E	RES,100-1/8W J	LHSM	CX-ZL820
X	TAPE DECK	R 0399	88-108-105-080	0E	C-RES,U 1M-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0399	88-108-105-080	0E	C-RES,U 1M-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0401	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0401	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0402	88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0402	88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0403	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0403	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0404	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0404	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0405	88-108-823-080	0E	C-RES,U 82K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0405	88-108-823-080	0E	C-RES,U 82K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0406	88-108-823-080	0E	C-RES,U 82K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0406	88-108-823-080	0E	C-RES,U 82K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0407	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0407	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0408	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0408	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0409	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0409	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0410	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0410	88-108-122-080	0E	C-RES,U 1.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0411	88-108-153-080	0E	C-RES,U 15K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0411	88-108-153-080	0E	C-RES,U 15K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0412	88-108-153-080	0E	C-RES,U 15K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0412	88-108-153-080	0E	C-RES,U 15K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0413	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0413	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0414	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0414	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0415	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0415	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0416	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0416	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0417	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0417	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0418	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0418	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0419	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0419	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0420	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0420	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0421	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0421	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0422	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0422	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0423	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0423	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	TAPE DECK	R 0424	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0424	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0453	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0453	88-108-152-080	0E	C-RES,U 1.5K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0454	88-128-829-080	0E	C-RES, 8.2-1/8W J	USM	CX-ZL720
X	TAPE DECK	R 0454	88-128-829-080	0E	C-RES, 8.2-1/8W J	LHSM	CX-ZL820
X	TAPE DECK	R 0455	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0455	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0456	88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	TAPE DECK	R 0456	88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	TAPE DECK	R 0457	88-130-100-080	0E	RES,10-1/4W J	USM	CX-ZL720
X	TAPE DECK	R 0457	88-130-100-080	0E	RES,10-1/4W J	LHSM	CX-ZL820
X	TAPE DECK	R 0458	88-121-104-080	0E	RES,100K-1/8W J	USM	CX-ZL720
X	TAPE DECK	R 0458	88-121-104-080	0E	RES,100K-1/8W J	LHSM	CX-ZL820
X	TAPE DECK	R 0459	88-128-100-080	0E	C-RES, 10-1/8W J	USM	CX-ZL720
X	TAPE DECK	R 0459	88-128-100-080	0E	C-RES, 10-1/8W J	LHSM	CX-ZL820
X	TAPE DECK	R 0460	88-130-150-080	0E	RES,15-1/4W J	USM	CX-ZL720
X	TAPE DECK	R 0460	88-130-150-080	0E	RES,15-1/4W J	LHSM	CX-ZL820
O	TAPE DECK	SFR0451	87-024-435-080	0E	SFR,33K H RH063MC	USM	CX-ZL720
O	TAPE DECK	SFR0451	87-024-435-080	0E	SFR,33K H RH063MC	LHSM	CX-ZL820
O	TAPE DECK	SFR0452	87-024-435-080	0E	SFR,33K H RH063MC	USM	CX-ZL720
O	TAPE DECK	SFR0452	87-024-435-080	0E	SFR,33K H RH063MC	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0901	87-018-145-080	0E	CAP,TC U 6.8P-50 K CH UP050	USM	CX-ZL720
O	TUNER(FM FE)	C 0901	87-018-145-080	0E	CAP,TC U 6.8P-50 K CH UP050	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0904	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(FM FE)	C 0904	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0905	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(FM FE)	C 0905	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0907	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(FM FE)	C 0907	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0908	87-A10-915-080	0E	C-CAP,U 1000P-25 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0908	87-A10-915-080	0E	C-CAP,U 1000P-25 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0909	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(FM FE)	C 0909	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0910	87-012-174-080	0E	C-CAP,U 12P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0910	87-012-174-080	0E	C-CAP,U 12P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0911	87-012-170-080	0E	C-CAP,U 8P-50 D CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0911	87-012-170-080	0E	C-CAP,U 8P-50 D CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0912	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0912	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0913	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(FM FE)	C 0913	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0914	87-012-166-080	0E	C-CAP,U 4P-50 C CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0914	87-012-166-080	0E	C-CAP,U 4P-50 C CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0915	87-012-174-080	0E	C-CAP,U 12P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0915	87-012-174-080	0E	C-CAP,U 12P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0916	87-012-180-080	0E	C-CAP,U 22P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0916	87-012-180-080	0E	C-CAP,U 22P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0917	87-012-186-080	0E	C-CAP,U 39P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0917	87-012-186-080	0E	C-CAP,U 39P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0918	87-A10-039-080	0E	C-CAP,U 470P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0918	87-A10-039-080	0E	C-CAP,U 470P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0921	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0921	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	C 0922	87-012-174-080	0E	C-CAP,U 12P-50 J CH	USM	CX-ZL720
O	TUNER(FM FE)	C 0922	87-012-174-080	0E	C-CAP,U 12P-50 J CH	LHSM	CX-ZL820
O	TUNER(FM FE)	D 0902	87-A40-128-080	0E	C-VARI-CAP,HVU202A	USM	CX-ZL720
O	TUNER(FM FE)	D 0902	87-A40-128-080	0E	C-VARI-CAP,HVU202A	LHSM	CX-ZL820
O	TUNER(FM FE)	D 0903	87-A40-128-080	0E	C-VARI-CAP,HVU202A	USM	CX-ZL720
O	TUNER(FM FE)	D 0903	87-A40-128-080	0E	C-VARI-CAP,HVU202A	LHSM	CX-ZL820
O	TUNER(FM FE)	L 0902	88-ZA1-602-110	0E	COIL,FM-RF-U2 2G	USM	CX-ZL720
O	TUNER(FM FE)	L 0902	88-ZA1-602-110	0E	COIL,FM-RF-U2 2G	LHSM	CX-ZL820
O	TUNER(FM FE)	L 0903	88-ZA1-601-010	0E	COIL,FM-RF-U1 2G	USM	CX-ZL720
O	TUNER(FM FE)	L 0903	88-ZA1-601-010	0E	COIL,FM-RF-U1 2G	LHSM	CX-ZL820
O	TUNER(FM FE)	L 0904	87-005-847-080	0E	COIL,2.2UH K CECS	USM	CX-ZL720
O	TUNER(FM FE)	L 0904	87-005-847-080	0E	COIL,2.2UH K CECS	LHSM	CX-ZL820
O	TUNER(FM FE)	L 0905	88-ZA1-624-010	0E	COIL,FM IFT 7-6.2 (COILS)	USM	CX-ZL720
O	TUNER(FM FE)	L 0905	88-ZA1-624-010	0E	COIL,FM IFT 7-6.2 (COILS)	LHSM	CX-ZL820
O	TUNER(FM FE)	L 0906	88-ZA1-603-010	0E	COIL,FM-OSC-U 2G	USM	CX-ZL720
O	TUNER(FM FE)	L 0906	88-ZA1-603-010	0E	COIL,FM-OSC-U 2G	LHSM	CX-ZL820

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	TUNER(FM FE)	Q 0901	89-503-602-080	1A	C-FET,2SK360E	USM	CX-ZL720
S	TUNER(FM FE)	Q 0901	89-503-602-080	1A	C-FET,2SK360E	LHSM	CX-ZL820
S	TUNER(FM FE)	Q 0902	87-A30-521-080	0E	C-TR,2SC5345S(O)	USM	CX-ZL720
S	TUNER(FM FE)	Q 0902	87-A30-521-080	0E	C-TR,2SC5345S(O)	LHSM	CX-ZL820
S	TUNER(FM FE)	Q 0903	87-A30-521-080	0E	C-TR,2SC5345S(O)	USM	CX-ZL720
S	TUNER(FM FE)	Q 0903	87-A30-521-080	0E	C-TR,2SC5345S(O)	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0903	88-108-471-080	0E	C-RES,U 470-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0903	88-108-471-080	0E	C-RES,U 470-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0904	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0904	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0905	88-108-564-080	0E	C-RES,U 560K-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0905	88-108-564-080	0E	C-RES,U 560K-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0907	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0907	88-108-472-080	0E	C-RES,U 4.7K-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0908	88-108-121-080	0E	C-RES,U 120-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0908	88-108-121-080	0E	C-RES,U 120-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0909	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0909	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0910	88-108-822-080	0E	C-RES,U 8.2K-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0910	88-108-822-080	0E	C-RES,U 8.2K-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	R 0911	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	TUNER(FM FE)	R 0911	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	TUNER(FM FE)	SH 0901	88-ZA1-605-010	--	SHLD-CASE,IFT CAP-CASE	USM	CX-ZL720
X	TUNER(FM FE)	SH 0901	88-ZA1-605-010	--	SHLD-CASE,IFT CAP-CASE	LHSM	CX-ZL820
O	TUNER(IF)	C 0771	87-A12-062-080	0E	CAP,E 100-10 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0771	87-A12-062-080	0E	CAP,E 100-10 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0772	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0772	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
X	TUNER(IF)	C 0781	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	C 0781	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	TUNER(IF)	C 0782	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0782	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0783	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0783	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0784	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0784	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0785	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0785	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0786	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0786	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0788	87-012-167-080	0E	C-CAP,U 5P-50 C CH	USM	CX-ZL720
O	TUNER(IF)	C 0788	87-012-167-080	0E	C-CAP,U 5P-50 C CH	LHSM	CX-ZL820
O	TUNER(IF)	C 0789	87-A12-052-080	0E	C-CAP,S 0.033-25 J B	USM	CX-ZL720
O	TUNER(IF)	C 0789	87-A12-052-080	0E	C-CAP,S 0.033-25 J B	LHSM	CX-ZL820
O	TUNER(IF)	C 0790	87-A12-052-080	0E	C-CAP,S 0.033-25 J B	USM	CX-ZL720
O	TUNER(IF)	C 0790	87-A12-052-080	0E	C-CAP,S 0.033-25 J B	LHSM	CX-ZL820
O	TUNER(IF)	C 0791	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	USM	CX-ZL720
O	TUNER(IF)	C 0791	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	LHSM	CX-ZL820
O	TUNER(IF)	C 0792	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0792	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0793	87-A12-090-080	0E	CAP,E 4.7-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0793	87-A12-090-080	0E	CAP,E 4.7-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0795	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0795	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0796	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0796	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0797	87-A12-091-080	0E	CAP,E 10-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0797	87-A12-091-080	0E	CAP,E 10-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0798	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0798	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0799	87-A12-093-080	0E	CAP,E 33-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0799	87-A12-093-080	0E	CAP,E 33-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0800	87-010-829-080	0E	C-CAP,U 0.047-16 Z F	USM	CX-ZL720
O	TUNER(IF)	C 0800	87-010-829-080	0E	C-CAP,U 0.047-16 Z F	LHSM	CX-ZL820
O	TUNER(IF)	C 0801	87-A12-089-080	0E	CAP,E 3.3-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0801	87-A12-089-080	0E	CAP,E 3.3-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0802	87-010-829-080	0E	C-CAP,U 0.047-16 Z F	USM	CX-ZL720
O	TUNER(IF)	C 0802	87-010-829-080	0E	C-CAP,U 0.047-16 Z F	LHSM	CX-ZL820
O	TUNER(IF)	C 0803	87-010-787-080	0E	C-CAP,U 0.022-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0803	87-010-787-080	0E	C-CAP,U 0.022-25 K B	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	TUNER(IF)	C 0804	87-A12-062-080	0E	CAP,E 100-10 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0804	87-A12-062-080	0E	CAP,E 100-10 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0807	87-A12-086-080	0E	CAP,E 0.47-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0807	87-A12-086-080	0E	CAP,E 0.47-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0808	87-A12-087-080	0E	CAP,E 1-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0808	87-A12-087-080	0E	CAP,E 1-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0809	87-A12-087-080	0E	CAP,E 1-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0809	87-A12-087-080	0E	CAP,E 1-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0810	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	USM	CX-ZL720
O	TUNER(IF)	C 0810	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	LHSM	CX-ZL820
O	TUNER(IF)	C 0814	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	C 0814	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER(IF)	C 0815	87-A12-086-080	0E	CAP,E 0.47-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0815	87-A12-086-080	0E	CAP,E 0.47-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0816	87-A12-086-080	0E	CAP,E 0.47-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0816	87-A12-086-080	0E	CAP,E 0.47-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0821	87-A12-091-080	0E	CAP,E 10-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0821	87-A12-091-080	0E	CAP,E 10-50 SMG	LHSM	CX-ZL820
X	TUNER(IF)	C 0822	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	C 0822	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	TUNER(IF)	C 0823	87-010-986-080	0E	C-CAP,S 820P-50 J CH	USM	CX-ZL720
O	TUNER(IF)	C 0823	87-010-986-080	0E	C-CAP,S 820P-50 J CH	LHSM	CX-ZL820
O	TUNER(IF)	C 0824	87-A12-090-080	0E	CAP,E 4.7-50 SMG	USM	CX-ZL720
O	TUNER(IF)	C 0824	87-A12-090-080	0E	CAP,E 4.7-50 SMG	LHSM	CX-ZL820
O	TUNER(IF)	C 0825	87-010-829-080	0E	C-CAP,U 0.047-16 Z F	USM	CX-ZL720
O	TUNER(IF)	C 0825	87-010-829-080	0E	C-CAP,U 0.047-16 Z F	LHSM	CX-ZL820
X	TUNER(IF)	D 0801	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	TUNER(IF)	D 0801	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
S	TUNER(IF)	D 0803	87-A40-291-080	0E	DIODE,1N4148M (CPT)	USM	CX-ZL720
S	TUNER(IF)	D 0803	87-A40-291-080	0E	DIODE,1N4148M (CPT)	LHSM	CX-ZL820
S	TUNER(IF)	IC 0801	87-A21-695-010	1C	IC,LA1845L	USM	CX-ZL720
S	TUNER(IF)	IC 0801	87-A21-695-010	1C	IC,LA1845L	LHSM	CX-ZL820
X	TUNER(IF)	JR 0781	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	TUNER(IF)	JR 0781	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	TUNER(IF)	JR 0785	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	JR 0785	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	JR 0786	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	JR 0786	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	JR 0792	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	JR 0792	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	JR 0795	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	TUNER(IF)	JR 0795	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	TUNER(IF)	JR 0797	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	JR 0797	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	JR 0801	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	JR 0801	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	TUNER(IF)	L 0801	87-A50-608-010	0E	COIL,FM DET-N(TOK)	USM	CX-ZL720
O	TUNER(IF)	L 0801	87-A50-608-010	0E	COIL,FM DET-N(TOK)	LHSM	CX-ZL820
O	TUNER(IF)	L 0802	87-A91-551-010	1A	FLTR,PCFJZH-450 L(TOK)	USM	CX-ZL720
O	TUNER(IF)	L 0802	87-A91-551-010	1A	FLTR,PCFJZH-450 L(TOK)	LHSM	CX-ZL820
O	TUNER(IF)	L 0811	87-005-847-080	0E	COIL,2.2UH K CECS	USM	CX-ZL720
O	TUNER(IF)	L 0811	87-005-847-080	0E	COIL,2.2UH K CECS	LHSM	CX-ZL820
O	TUNER(IF)	R 0790	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER(IF)	R 0790	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
X	TUNER(IF)	R 0791	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	R 0791	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	R 0793	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	R 0793	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	R 0795	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	R 0795	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	R 0801	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER(IF)	R 0801	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TUNER(IF)	R 0802	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	TUNER(IF)	R 0802	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
X	TUNER(IF)	R 0803	88-128-183-080	0E	C-RES, 18K-1/8W J	USM	CX-ZL720
X	TUNER(IF)	R 0803	88-128-183-080	0E	C-RES, 18K-1/8W J	LHSM	CX-ZL820
X	TUNER(IF)	R 0804	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(IF)	R 0804	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(IF)	R 0805	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	USM	CX-ZL720
X	TUNER(IF)	R 0805	88-108-332-080	0E	C-RES,U 3.3K-1/16W J	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	TUNER (IF)	R 0806	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0806	88-108-682-080	0E	C-RES,U 6.8K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0809	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0809	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0810	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0810	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0811	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (IF)	R 0811	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (IF)	R 0812	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (IF)	R 0812	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (IF)	R 0813	88-108-224-080	0E	C-RES,U 220K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0813	88-108-224-080	0E	C-RES,U 220K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0814	88-108-105-080	0E	C-RES,U 1M-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0814	88-108-105-080	0E	C-RES,U 1M-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0815	88-121-682-080	0E	RES,6.8K-1/8W J	USM	CX-ZL720
X	TUNER (IF)	R 0815	88-121-682-080	0E	RES,6.8K-1/8W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0818	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0818	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0821	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (IF)	R 0821	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (IF)	R 0823	88-108-333-080	0E	C-RES,U 33K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0823	88-108-333-080	0E	C-RES,U 33K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0824	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0824	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0825	88-108-473-080	0E	C-RES,U 47K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0825	88-108-473-080	0E	C-RES,U 47K-1/16W J	LHSM	CX-ZL820
X	TUNER (IF)	R 0826	88-108-223-080	0E	C-RES,U 22K-1/16W J	USM	CX-ZL720
X	TUNER (IF)	R 0826	88-108-223-080	0E	C-RES,U 22K-1/16W J	LHSM	CX-ZL820
O	TUNER (PLL)	C 0971	87-A12-067-080	0E	CAP,E 330-16 SMG	USM	CX-ZL720
O	TUNER (PLL)	C 0971	87-A12-067-080	0E	CAP,E 330-16 SMG	LHSM	CX-ZL820
O	TUNER (PLL)	C 0972	87-A12-090-080	0E	CAP,E 4.7-50 SMG	USM	CX-ZL720
O	TUNER (PLL)	C 0972	87-A12-090-080	0E	CAP,E 4.7-50 SMG	LHSM	CX-ZL820
O	TUNER (PLL)	C 0973	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (PLL)	C 0973	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (PLL)	C 0974	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (PLL)	C 0974	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (PLL)	C 0979	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TUNER (PLL)	C 0979	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
O	TUNER (PLL)	C 0981	87-A12-071-080	0E	CAP,E 47-25 SMG	USM	CX-ZL720
O	TUNER (PLL)	C 0981	87-A12-071-080	0E	CAP,E 47-25 SMG	LHSM	CX-ZL820
O	TUNER (PLL)	C 0982	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	USM	CX-ZL720
O	TUNER (PLL)	C 0982	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	LHSM	CX-ZL820
O	TUNER (PLL)	C 0983	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (PLL)	C 0983	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (PLL)	C 0984	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (PLL)	C 0984	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (PLL)	C 0987	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (PLL)	C 0987	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (PLL)	C 0991	87-012-176-080	0E	C-CAP,U 15P-50 J CH	USM	CX-ZL720
O	TUNER (PLL)	C 0991	87-012-176-080	0E	C-CAP,U 15P-50 J CH	LHSM	CX-ZL820
O	TUNER (PLL)	C 0992	87-012-176-080	0E	C-CAP,U 15P-50 J CH	USM	CX-ZL720
O	TUNER (PLL)	C 0992	87-012-176-080	0E	C-CAP,U 15P-50 J CH	LHSM	CX-ZL820
O	TUNER (PLL)	C 0993	87-012-274-080	0E	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	TUNER (PLL)	C 0993	87-012-274-080	0E	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	TUNER (PLL)	C 0995	87-012-274-080	0E	C-CAP,U 1000P-50 K B	USM	CX-ZL720
O	TUNER (PLL)	C 0995	87-012-274-080	0E	C-CAP,U 1000P-50 K B	LHSM	CX-ZL820
O	TUNER (PLL)	C 0997	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	USM	CX-ZL720
O	TUNER (PLL)	C 0997	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	LHSM	CX-ZL820
O	TUNER (PLL)	C 0998	87-A12-071-080	0E	CAP,E 47-25 SMG	USM	CX-ZL720
O	TUNER (PLL)	C 0998	87-A12-071-080	0E	CAP,E 47-25 SMG	LHSM	CX-ZL820
O	TUNER (PLL)	C 0999	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	USM	CX-ZL720
O	TUNER (PLL)	C 0999	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	LHSM	CX-ZL820
S	TUNER (PLL)	D 0991	87-017-149-080	0E	ZENER,HZS6A2L	USM	CX-ZL720
S	TUNER (PLL)	D 0991	87-017-149-080	0E	ZENER,HZS6A2L	LHSM	CX-ZL820
S	TUNER (PLL)	D 0994	87-A40-291-080	0E	DIODE,1N4148M (CPT)	USM	CX-ZL720
S	TUNER (PLL)	D 0994	87-A40-291-080	0E	DIODE,1N4148M (CPT)	LHSM	CX-ZL820
S	TUNER (PLL)	IC 0991	87-A21-928-010	1C	IC,LC72131D-N	USM	CX-ZL720
S	TUNER (PLL)	IC 0991	87-A21-928-010	1C	IC,LC72131D-N	LHSM	CX-ZL820
X	TUNER (PLL)	JR 0971	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	TUNER (PLL)	JR 0971	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use Japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
X	TUNER (PLL)	JR 0972	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (PLL)	JR 0972	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (PLL)	JR 0973	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	TUNER (PLL)	JR 0973	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	TUNER (PLL)	JR 0974	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (PLL)	JR 0974	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (PLL)	JR 0976	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (PLL)	JR 0976	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (PLL)	JR 0977	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (PLL)	JR 0977	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (PLL)	JR 0988	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (PLL)	JR 0988	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (PLL)	JR 0991	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (PLL)	JR 0991	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
S	TUNER (PLL)	Q 0981	87-A30-234-080	0E	TR,CSC4115BC	USM	CX-ZL720
S	TUNER (PLL)	Q 0981	87-A30-234-080	0E	TR,CSC4115BC	LHSM	CX-ZL820
X	TUNER (PLL)	R 0975	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0975	88-108-562-080	0E	C-RES,U 5.6K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0976	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0976	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0977	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0977	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0978	88-108-681-080	0E	C-RES,U 680-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0978	88-108-681-080	0E	C-RES,U 680-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0980	88-108-684-080	0E	C-RES,U 680K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0980	88-108-684-080	0E	C-RES,U 680K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0981	88-121-471-080	0E	RES,470-1/8W J	USM	CX-ZL720
X	TUNER (PLL)	R 0981	88-121-471-080	0E	RES,470-1/8W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0982	88-108-153-080	0E	C-RES,U 15K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0982	88-108-153-080	0E	C-RES,U 15K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0983	88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0983	88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0984	88-121-181-080	0E	RES,180-1/8W J	USM	CX-ZL720
X	TUNER (PLL)	R 0984	88-121-181-080	0E	RES,180-1/8W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0985	88-121-471-080	0E	RES,470-1/8W J	USM	CX-ZL720
X	TUNER (PLL)	R 0985	88-121-471-080	0E	RES,470-1/8W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0986	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0986	88-108-222-080	0E	C-RES,U 2.2K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0987	88-121-472-080	0E	RES,4.7K-1/8W J	USM	CX-ZL720
X	TUNER (PLL)	R 0987	88-121-472-080	0E	RES,4.7K-1/8W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0988	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0988	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0989	88-121-102-080	0E	RES,1K-1/8W J	USM	CX-ZL720
X	TUNER (PLL)	R 0989	88-121-102-080	0E	RES,1K-1/8W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0990	88-108-563-080	0E	C-RES,U 56K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0990	88-108-563-080	0E	C-RES,U 56K-1/16W J	LHSM	CX-ZL820
O	TUNER (PLL)	R 0991	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TUNER (PLL)	R 0991	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
X	TUNER (PLL)	R 0992	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0992	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
O	TUNER (PLL)	R 0993	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TUNER (PLL)	R 0993	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
X	TUNER (PLL)	R 0994	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0994	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
O	TUNER (PLL)	R 0995	87-012-195-080	0E	C-CAP,U 100P-50 J CH	USM	CX-ZL720
O	TUNER (PLL)	R 0995	87-012-195-080	0E	C-CAP,U 100P-50 J CH	LHSM	CX-ZL820
X	TUNER (PLL)	R 0996	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0996	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0997	88-108-154-080	0E	C-RES,U 150K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0997	88-108-154-080	0E	C-RES,U 150K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0998	88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0998	88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER (PLL)	R 0999	88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER (PLL)	R 0999	88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
O	TUNER (PLL)	X 0992	87-A70-306-010	1A	VIB,XTAL 4.500MHZ CSA-309ST	USM	CX-ZL720
O	TUNER (PLL)	X 0992	87-A70-306-010	1A	VIB,XTAL 4.500MHZ CSA-309ST	LHSM	CX-ZL820
X	TUNER (RDS)	JR 0871	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RDS)	JR 0871	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RDS)	JR 0873	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RDS)	JR 0873	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820

PARTS LIST

! = Δ SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.

Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.

K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
O	TUNER (RF)	C 0842	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (RF)	C 0842	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
X	TUNER (RF)	C 0843	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	C 0843	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	TUNER (RF)	C 0844	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (RF)	C 0844	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
X	TUNER (RF)	C 0845	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	C 0845	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	C 0846	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	C 0846	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	C 0847	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	C 0847	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	C 0848	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	C 0848	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	C 0849	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	C 0849	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	TUNER (RF)	C 0850	87-A12-071-080	0E	CAP,E 47-25 SMG	USM	CX-ZL720
O	TUNER (RF)	C 0850	87-A12-071-080	0E	CAP,E 47-25 SMG	LHSM	CX-ZL820
O	TUNER (RF)	C 0851	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (RF)	C 0851	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (RF)	C 0852	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (RF)	C 0852	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (RF)	C 0853	87-012-286-080	0E	C-CAP,U 0.01-25 K B	USM	CX-ZL720
O	TUNER (RF)	C 0853	87-012-286-080	0E	C-CAP,U 0.01-25 K B	LHSM	CX-ZL820
O	TUNER (RF)	C 0858	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	USM	CX-ZL720
O	TUNER (RF)	C 0858	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	LHSM	CX-ZL820
X	TUNER (RF)	C 0940	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	C 0940	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
O	TUNER (RF)	C 0959	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	USM	CX-ZL720
O	TUNER (RF)	C 0959	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	LHSM	CX-ZL820
O	TUNER (RF)	C 0960	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	USM	CX-ZL720
O	TUNER (RF)	C 0960	87-010-831-080	0E	C-CAP,U 0.1-16 Z F	LHSM	CX-ZL820
O	TUNER (RF)	C 0961	87-012-167-080	0E	C-CAP,U 5P-50 C CH	USM	CX-ZL720
O	TUNER (RF)	C 0961	87-012-167-080	0E	C-CAP,U 5P-50 C CH	LHSM	CX-ZL820
O	TUNER (RF)	C 0963	87-015-785-080	0E	C-CAP, 0.1-25 Z F C3216	USM	CX-ZL720
O	TUNER (RF)	C 0963	87-015-785-080	0E	C-CAP, 0.1-25 Z F C3216	LHSM	CX-ZL820
O	TUNER (RF)	CF 0831	87-008-261-010	1A	FLTR,CF SFE10.7MA5	USM	CX-ZL720
O	TUNER (RF)	CF 0831	87-008-261-010	1A	FLTR,CF SFE10.7MA5	LHSM	CX-ZL820
O	TUNER (RF)	CF 0832	87-008-261-010	1A	FLTR,CF SFE10.7MA5	USM	CX-ZL720
O	TUNER (RF)	CF 0832	87-008-261-010	1A	FLTR,CF SFE10.7MA5	LHSM	CX-ZL820
X	TUNER (RF)	D 0944	88-100-000-010	0E	PLATING-JW, 0.58 SN95	USM	CX-ZL720
X	TUNER (RF)	D 0944	88-100-000-010	0E	PLATING-JW, 0.58 SN95	LHSM	CX-ZL820
!	O TUNER (RF)	J 0831	87-A60-202-010	1A	TERMINAL,ANT 4P MSP-154V-02	USM	CX-ZL720
!	O TUNER (RF)	J 0831	87-A60-202-010	1A	TERMINAL,ANT 4P MSP-154V-02	LHSM	CX-ZL820
X	TUNER (RF)	JR 0834	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	JR 0834	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	JR 0835	88-108-561-080	0E	C-RES,U 560-1/16W J	USM	CX-ZL720
X	TUNER (RF)	JR 0835	88-108-561-080	0E	C-RES,U 560-1/16W J	LHSM	CX-ZL820
X	TUNER (RF)	JR 0851	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	TUNER (RF)	JR 0851	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
X	TUNER (RF)	JR 0943	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	JR 0943	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	JR 0946	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	JR 0946	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	JR 0951	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	JR 0951	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	JR 0952	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	JR 0952	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	JR 0954	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	JR 0954	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	JR 0955	88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER (RF)	JR 0955	88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER (RF)	JR 0964	88-129-000-080	0E	C-JUMPER,3216	USM	CX-ZL720
X	TUNER (RF)	JR 0964	88-129-000-080	0E	C-JUMPER,3216	LHSM	CX-ZL820
O	TUNER (RF)	L 0832	87-005-847-080	0E	COIL,2.2UH K CECS	USM	CX-ZL720
O	TUNER (RF)	L 0832	87-005-847-080	0E	COIL,2.2UH K CECS	LHSM	CX-ZL820
O	TUNER (RF)	L 0951	8A-NF8-667-010	1C	COIL,AM PACK 4 (TOK)	USM	CX-ZL720
O	TUNER (RF)	L 0951	8A-NF8-667-010	1C	COIL,AM PACK 4 (TOK)	LHSM	CX-ZL820
S	TUNER (RF)	Q 0835	89-327-143-080	0E	C-TR,2SC27140	USM	CX-ZL720
S	TUNER (RF)	Q 0835	89-327-143-080	0E	C-TR,2SC27140	LHSM	CX-ZL820

PARTS LIST

! =  SAFTY PARTS
C = Components marked

All components used on this model at the production line are shown in this service manual.

However, please note that not all components will be available as spare parts for after-sales service.


Components marked S and O are designated as spare parts for service and will be stocked at the spare parts centers.

Components marked X and R are not designated as spare parts for after sales service, and will not be stocked at the spare parts centers.


K NO. = Only use japanese.

! C	UNIT NAME	REF NO.	PARTS CODE	K NO.	DESCRIPTION	SUFFIX	MODEL NAME
S	TUNER(RF)	Q	0836 87-A30-489-080	0E	C-TR, KRA107S	USM	CX-ZL720
S	TUNER(RF)	Q	0836 87-A30-489-080	0E	C-TR, KRA107S	LHSM	CX-ZL820
X	TUNER(RF)	R	0832 88-108-391-080	0E	C-RES,U 390-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0832 88-108-391-080	0E	C-RES,U 390-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0836 88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0836 88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0840 88-108-221-080	0E	C-RES,U 220-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0840 88-108-221-080	0E	C-RES,U 220-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0850 88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0850 88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0851 88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(RF)	R	0851 88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(RF)	R	0852 88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0852 88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0853 88-108-102-080	0E	C-RES,U 1K-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0853 88-108-102-080	0E	C-RES,U 1K-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0854 88-108-331-080	0E	C-RES,U 330-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0854 88-108-331-080	0E	C-RES,U 330-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0855 88-108-183-080	0E	C-RES,U 18K-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0855 88-108-183-080	0E	C-RES,U 18K-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0856 88-108-103-080	0E	C-RES,U 10K-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0856 88-108-103-080	0E	C-RES,U 10K-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0857 88-108-181-080	0E	C-RES,U 180-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0857 88-108-181-080	0E	C-RES,U 180-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0858 88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0858 88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0860 88-108-101-080	0E	C-RES,U 100-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0860 88-108-101-080	0E	C-RES,U 100-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0921 88-108-000-080	0E	C-JUMPER,U	USM	CX-ZL720
X	TUNER(RF)	R	0921 88-108-000-080	0E	C-JUMPER,U	LHSM	CX-ZL820
X	TUNER(RF)	R	0945 88-108-104-080	0E	C-RES,U 100K-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0945 88-108-104-080	0E	C-RES,U 100K-1/16W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0962 88-121-221-080	0E	RES,220-1/8W J	USM	CX-ZL720
X	TUNER(RF)	R	0962 88-121-221-080	0E	RES,220-1/8W J	LHSM	CX-ZL820
X	TUNER(RF)	R	0963 88-108-330-080	0E	C-RES,U 33-1/16W J	USM	CX-ZL720
X	TUNER(RF)	R	0963 88-108-330-080	0E	C-RES,U 33-1/16W J	LHSM	CX-ZL820

SCHEMATIC DIAGRAM – 1 (MAIN)

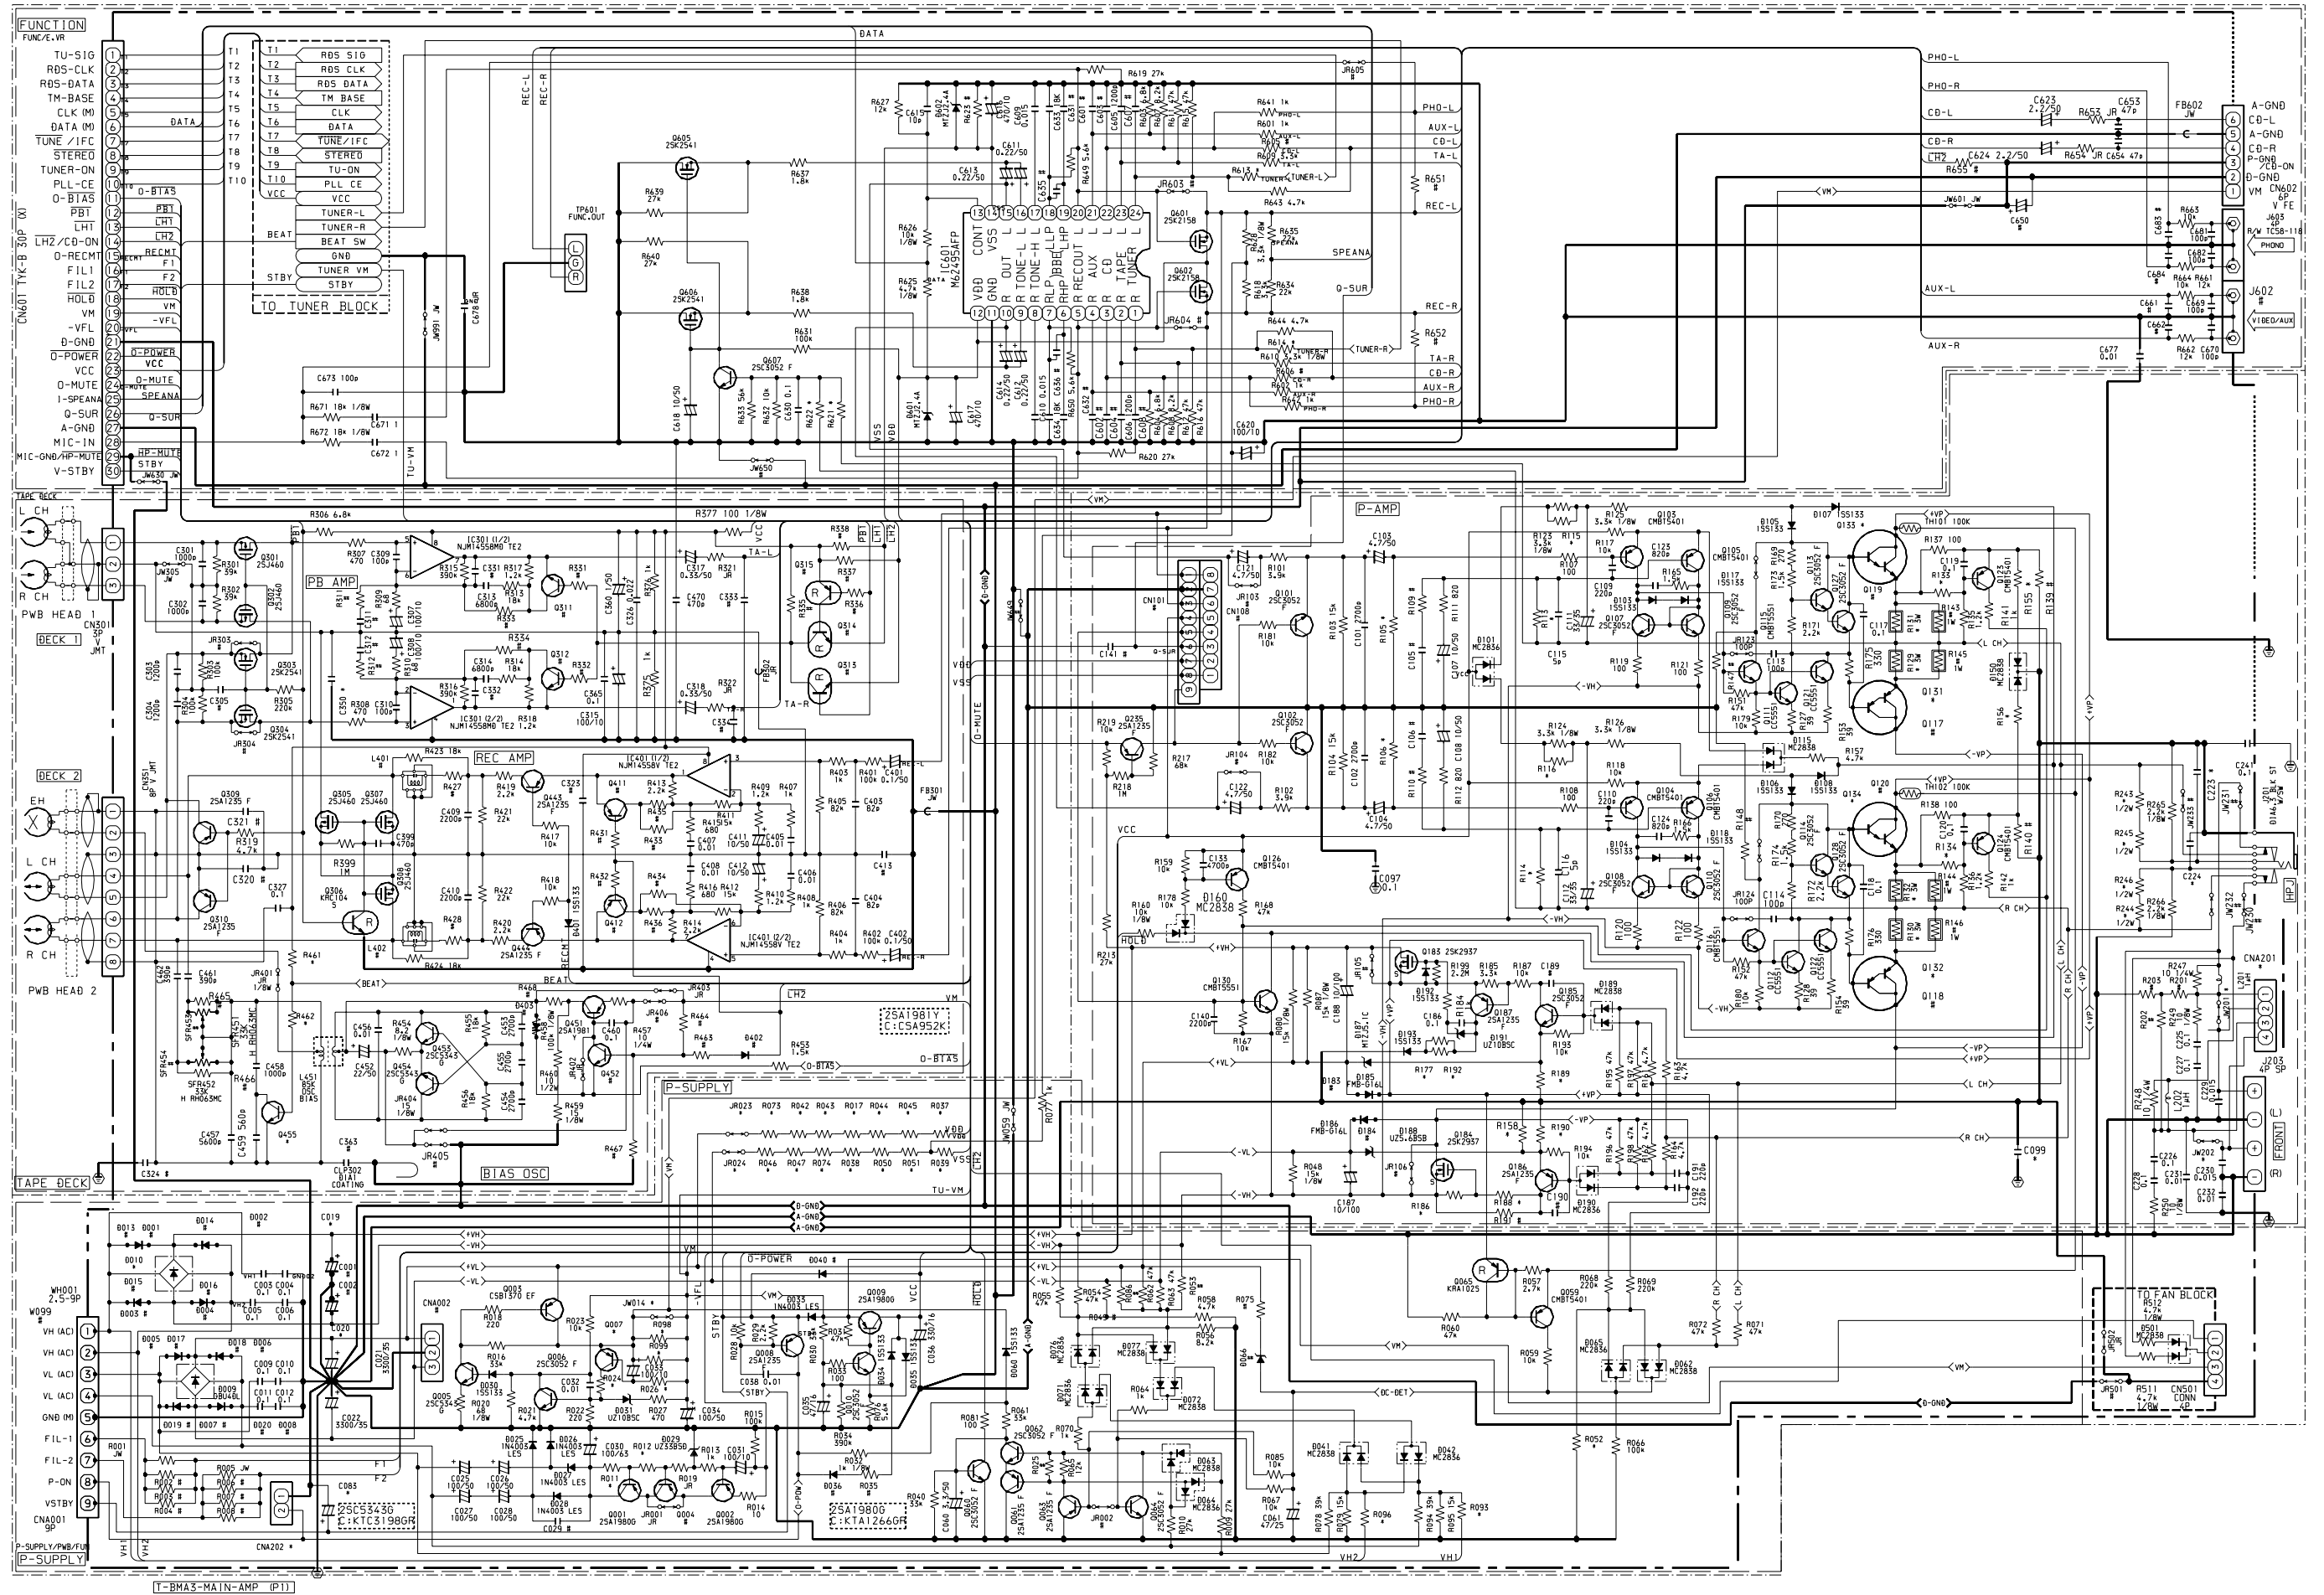

SCHEMATIC DIAGRAM – 2 (FRONT)

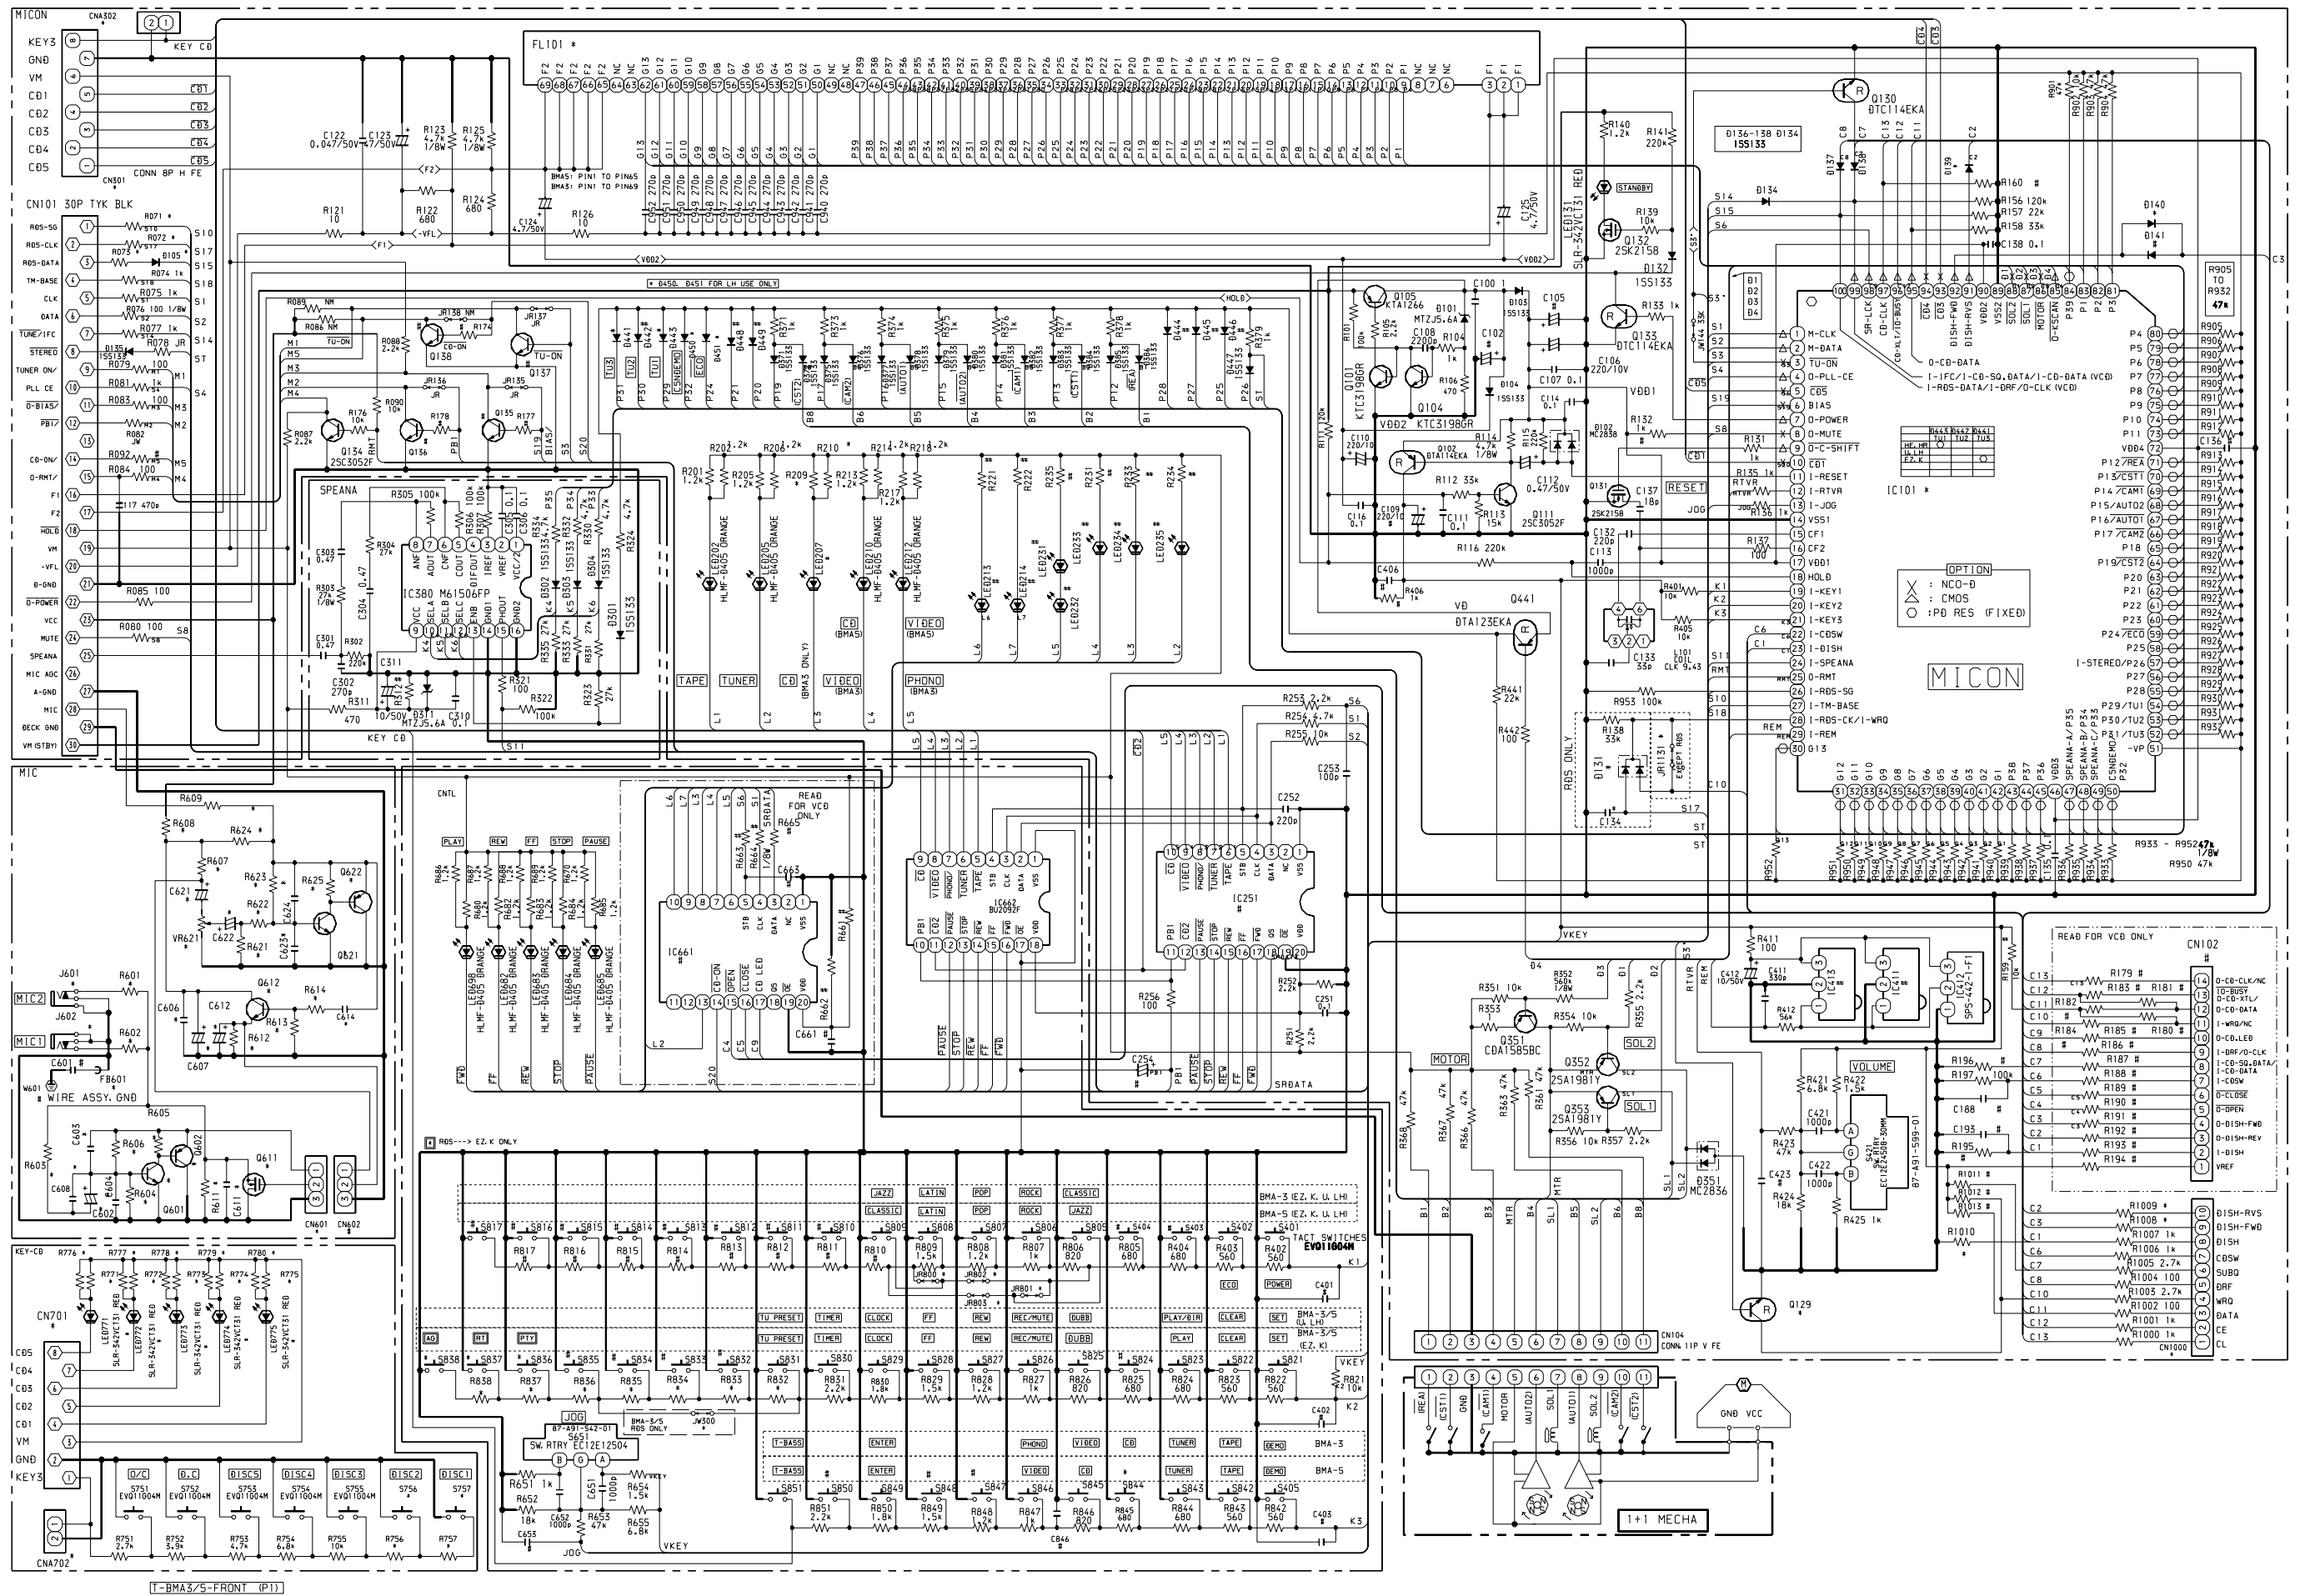

SCHEMATIC DIAGRAM – 3 (TUNER)

DIFFERENCE LIST

1) BMA3/5-LH/U	(2) BMA6-LH/U
3	1k
5k	8.2k

IFT COIL

	PARTS NO./ PARTS CODE		
	U/LH, EZ, K, G, V, HS	HE/HR/HC	Ø/HØ
1ST	87-A91-551-01 FLTR. PCFJ2H-450 L (TOK)	87-A91-552-01 FLTR. CFMT-450AL (TOK)	87-A91-553-01 FLTR. PCFMT-060L (TOK)
2ND			
3RD			



AM PACK

	PARTS NO./ PARTS CODE	
	U/LH, Ø/HØ, V, HS	EZ, K, G
1ST	8A-NF8-667-01 COIL. AM PACK4 (TOK)	8A-NF8-668-01 COIL. AM PACK (TOK)
2ND		
3RD		


*EXCEPT SW BAND MODEL (4E/HR/HC)

* LA1843 USING...
L801 FM DET (TOK) & R802 4.7K MUST USE.
LA1844 USING...
L801 FM DET-N (TOK) & R802 22K MUST USE.

PLL BLOCK

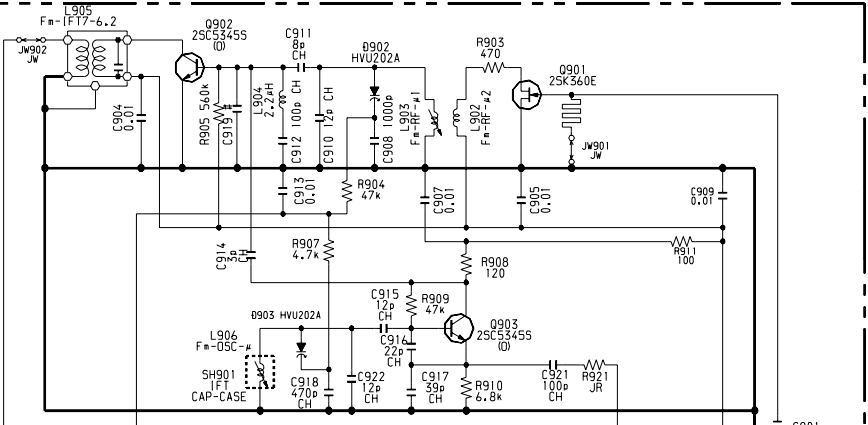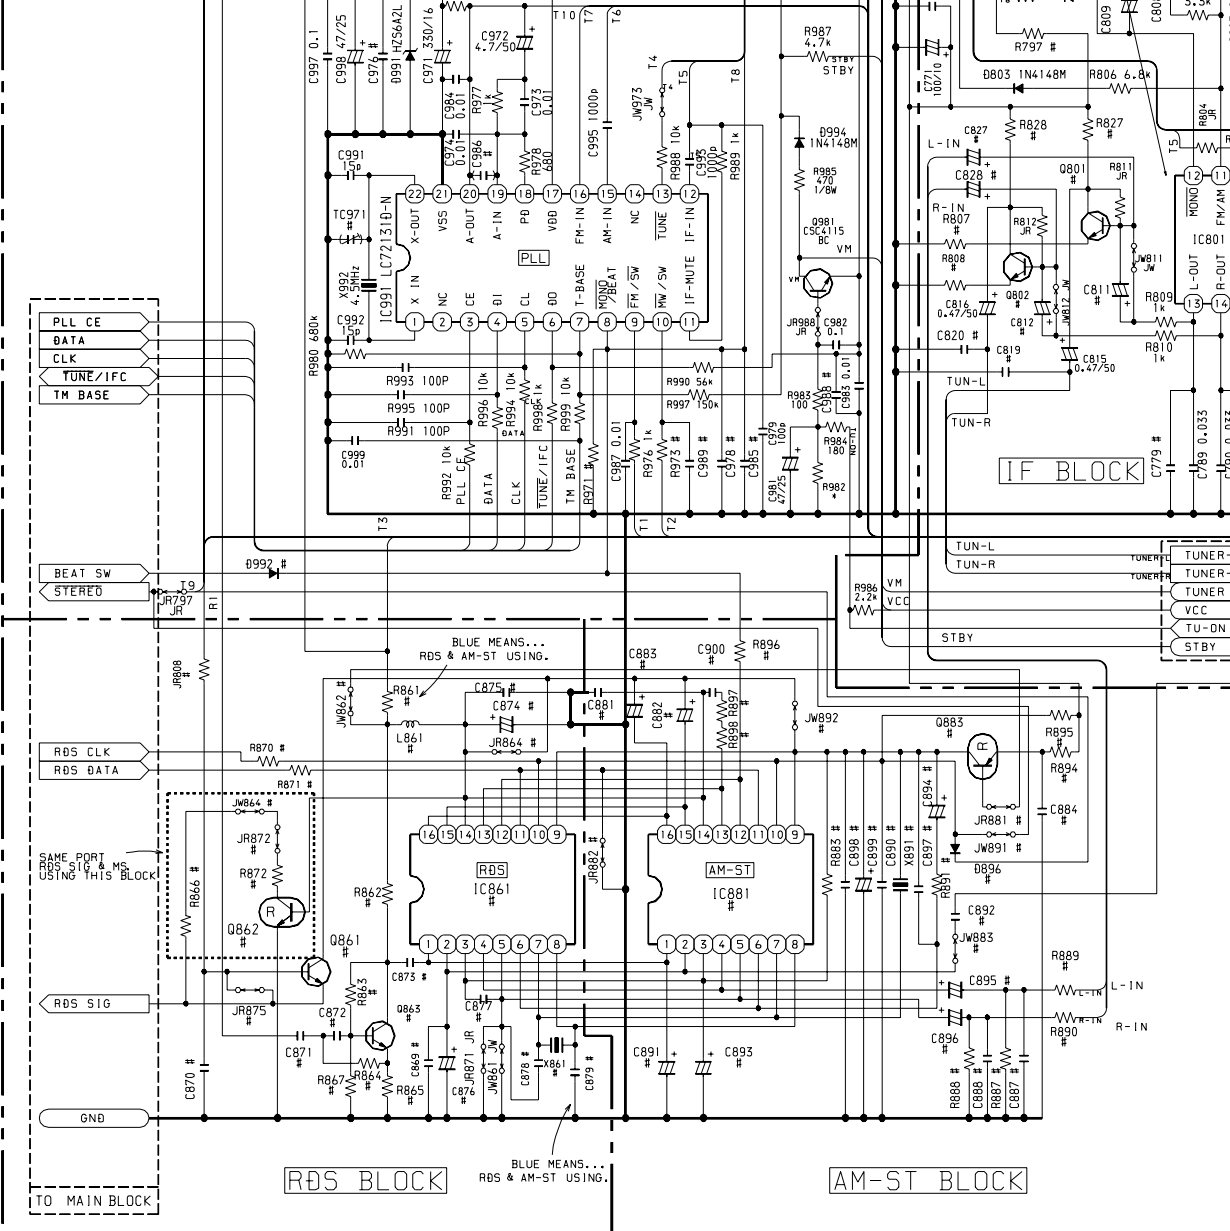

TUNER FM FRONT END BLOCK

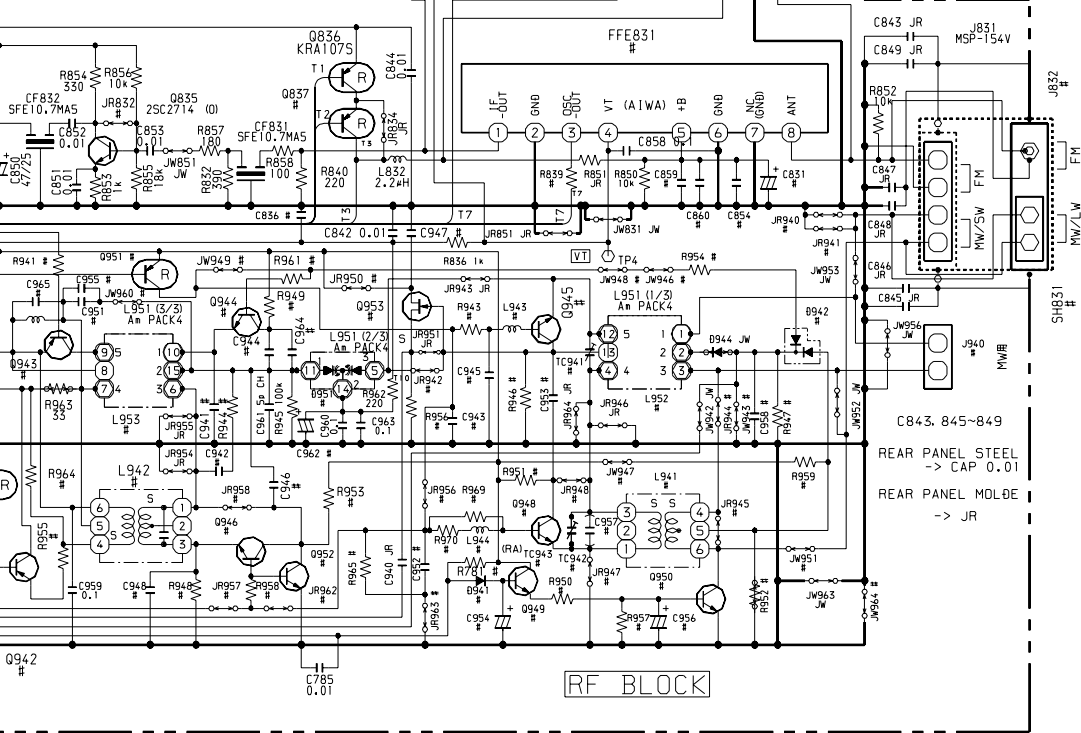


RF BLOCK

AM PACK


OSC COIL

ANT COIL


EZ, K, V, G
(MINI, MID, MICRO)




HE/HR/HC
(MINI)




HE/HR/HC
(MID, MICRO)




LH/U, HS Ø, HØ
(MINI, MID, MICRO)




SW




LW





SW




LW



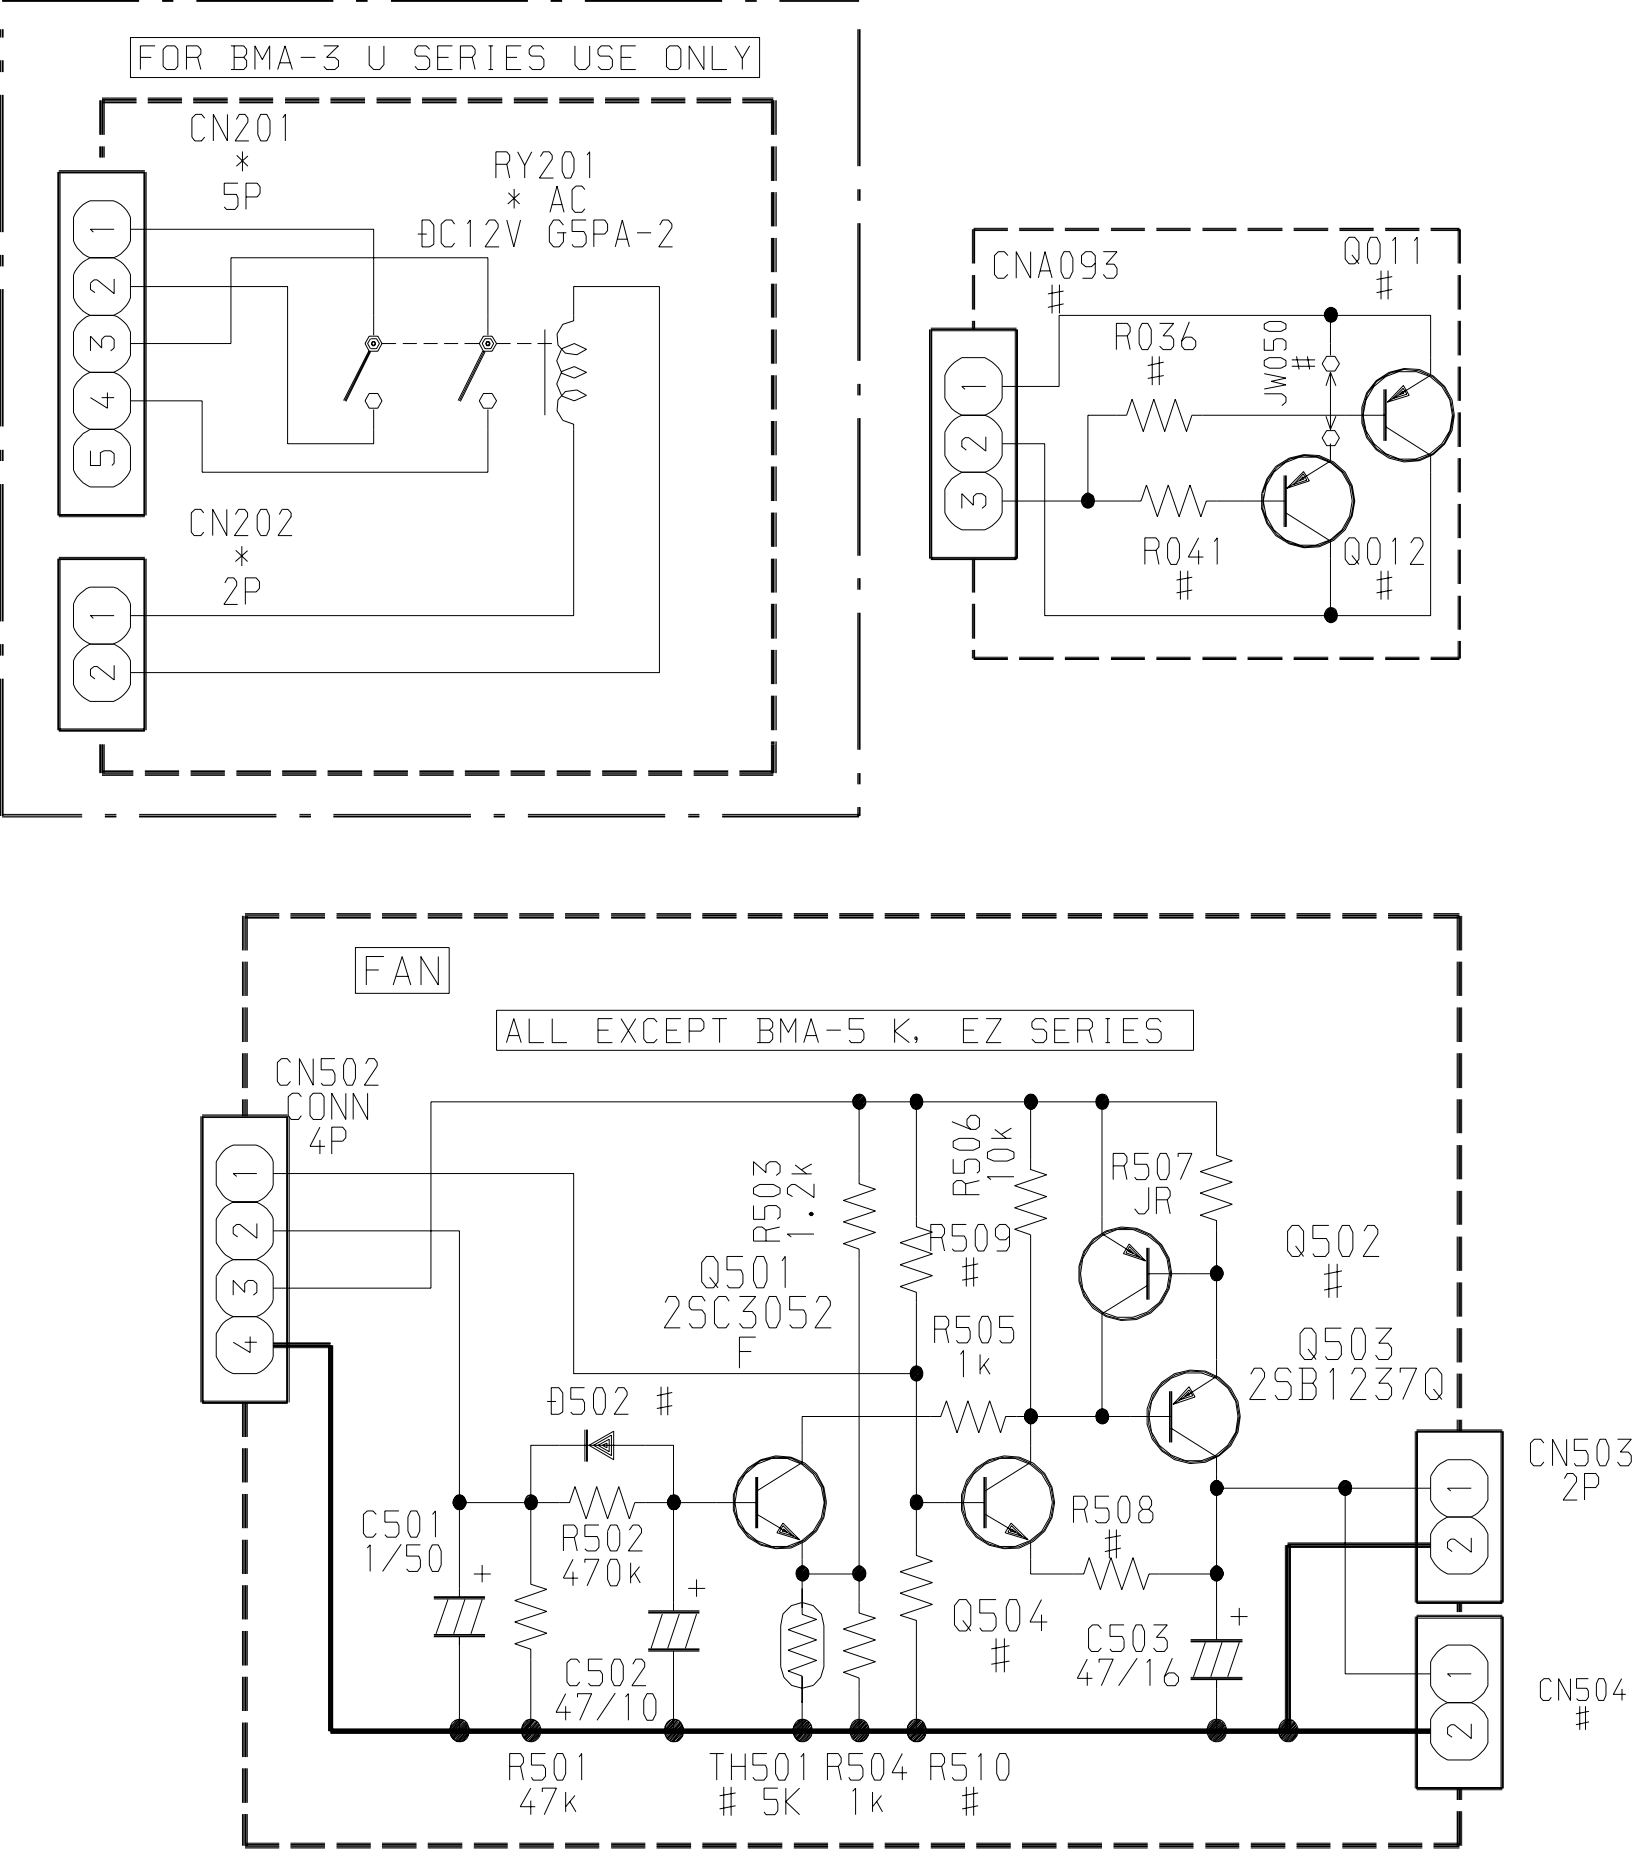

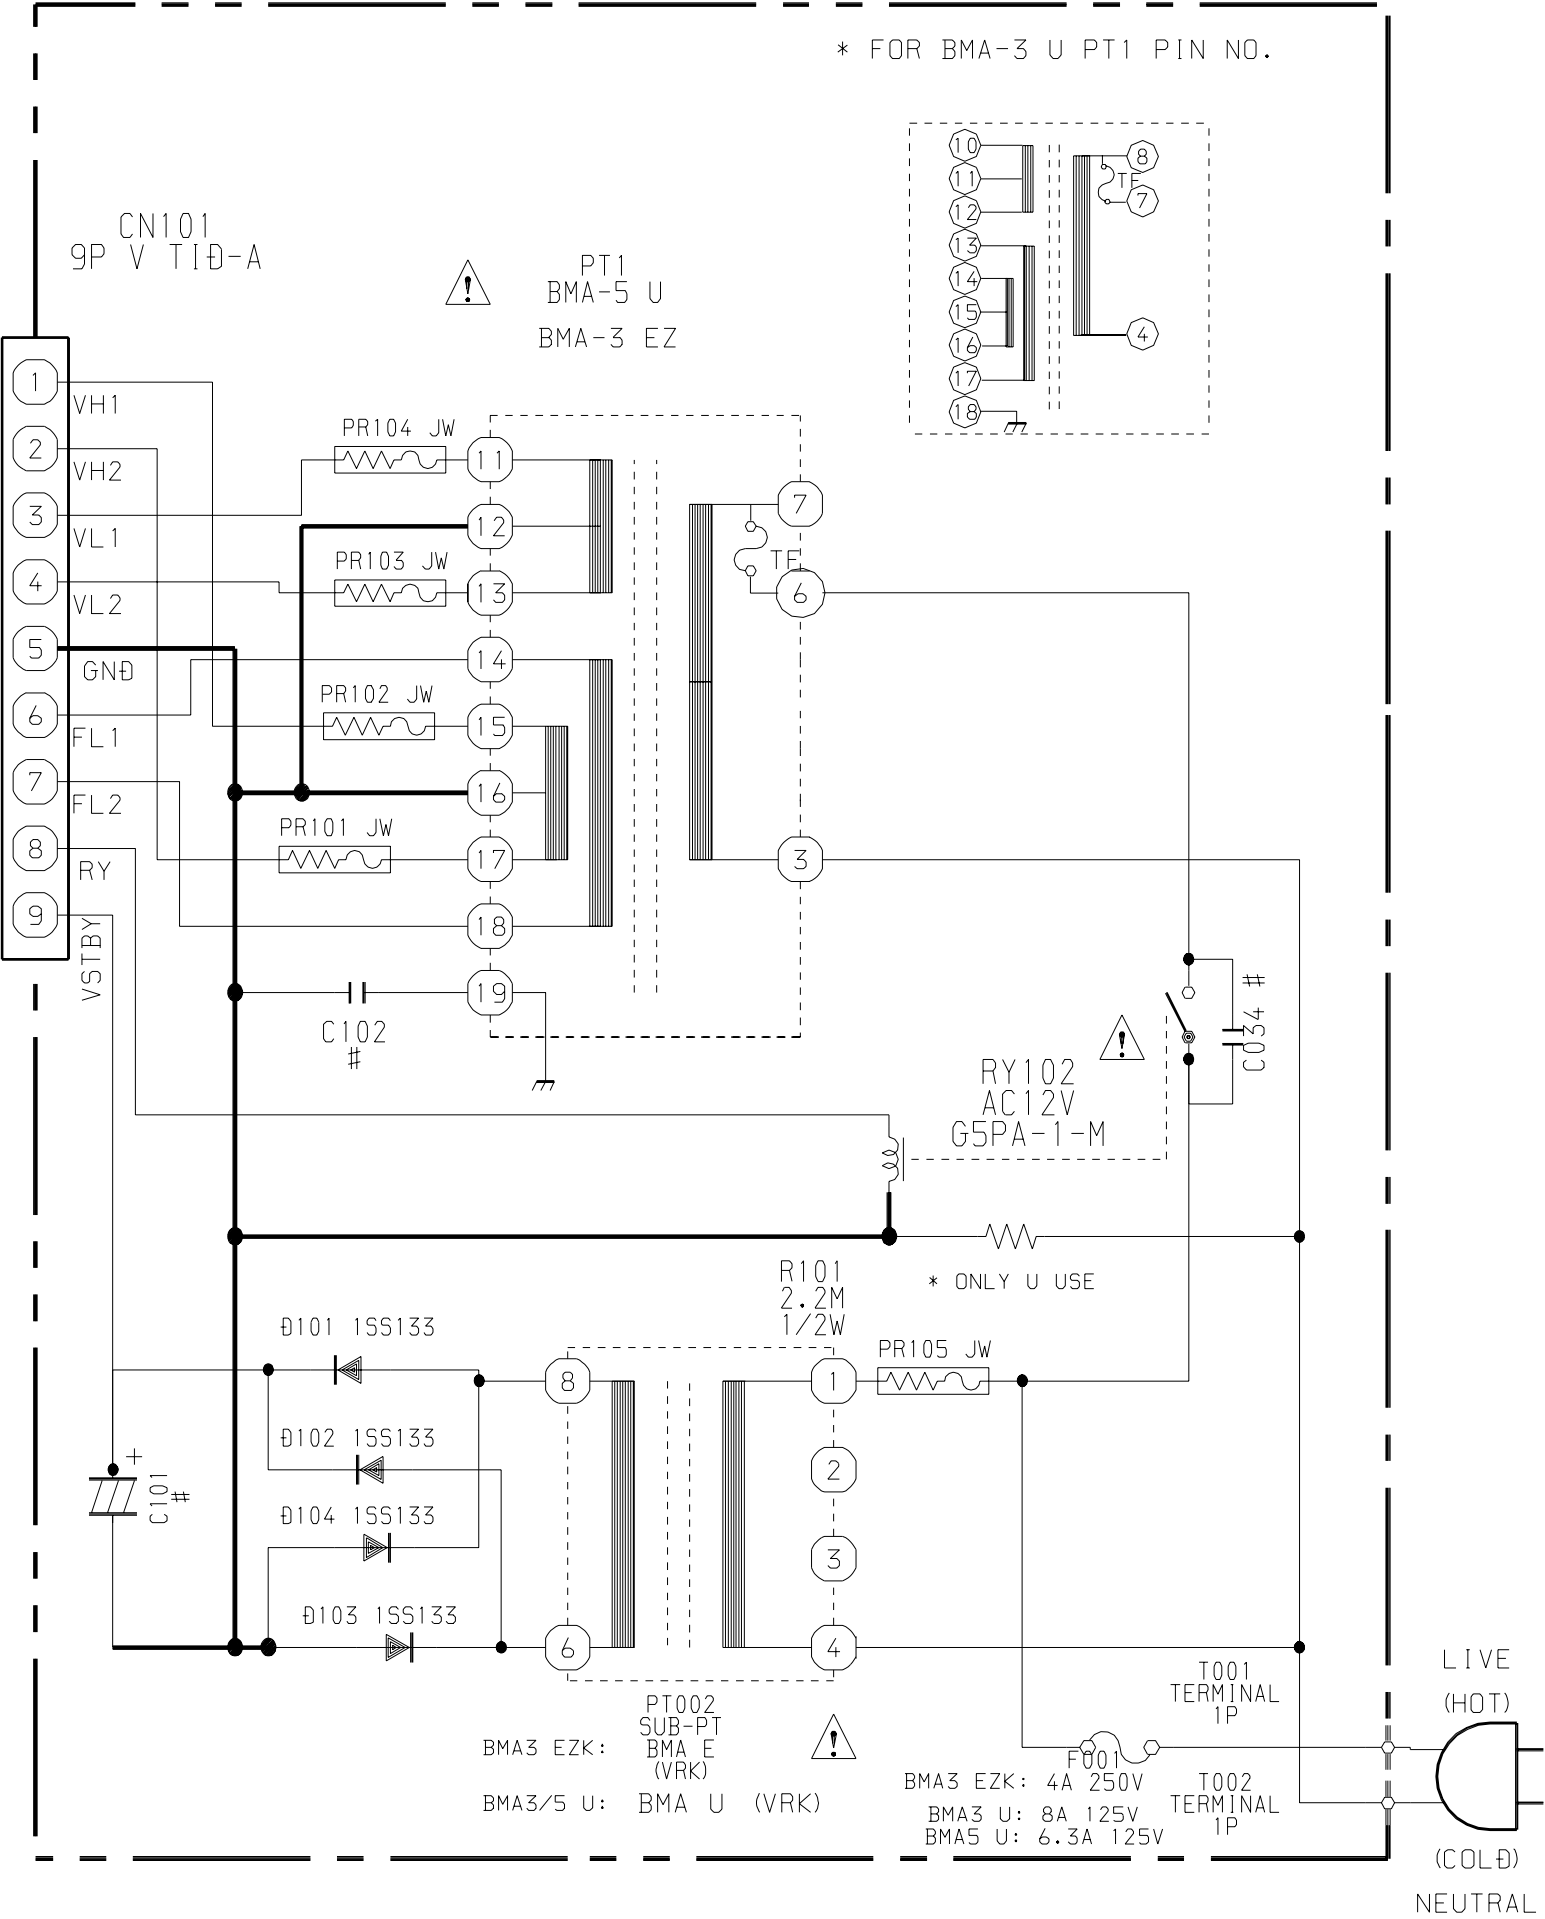

SCHEMATIC DIAGRAM – 6 (PT : LH)

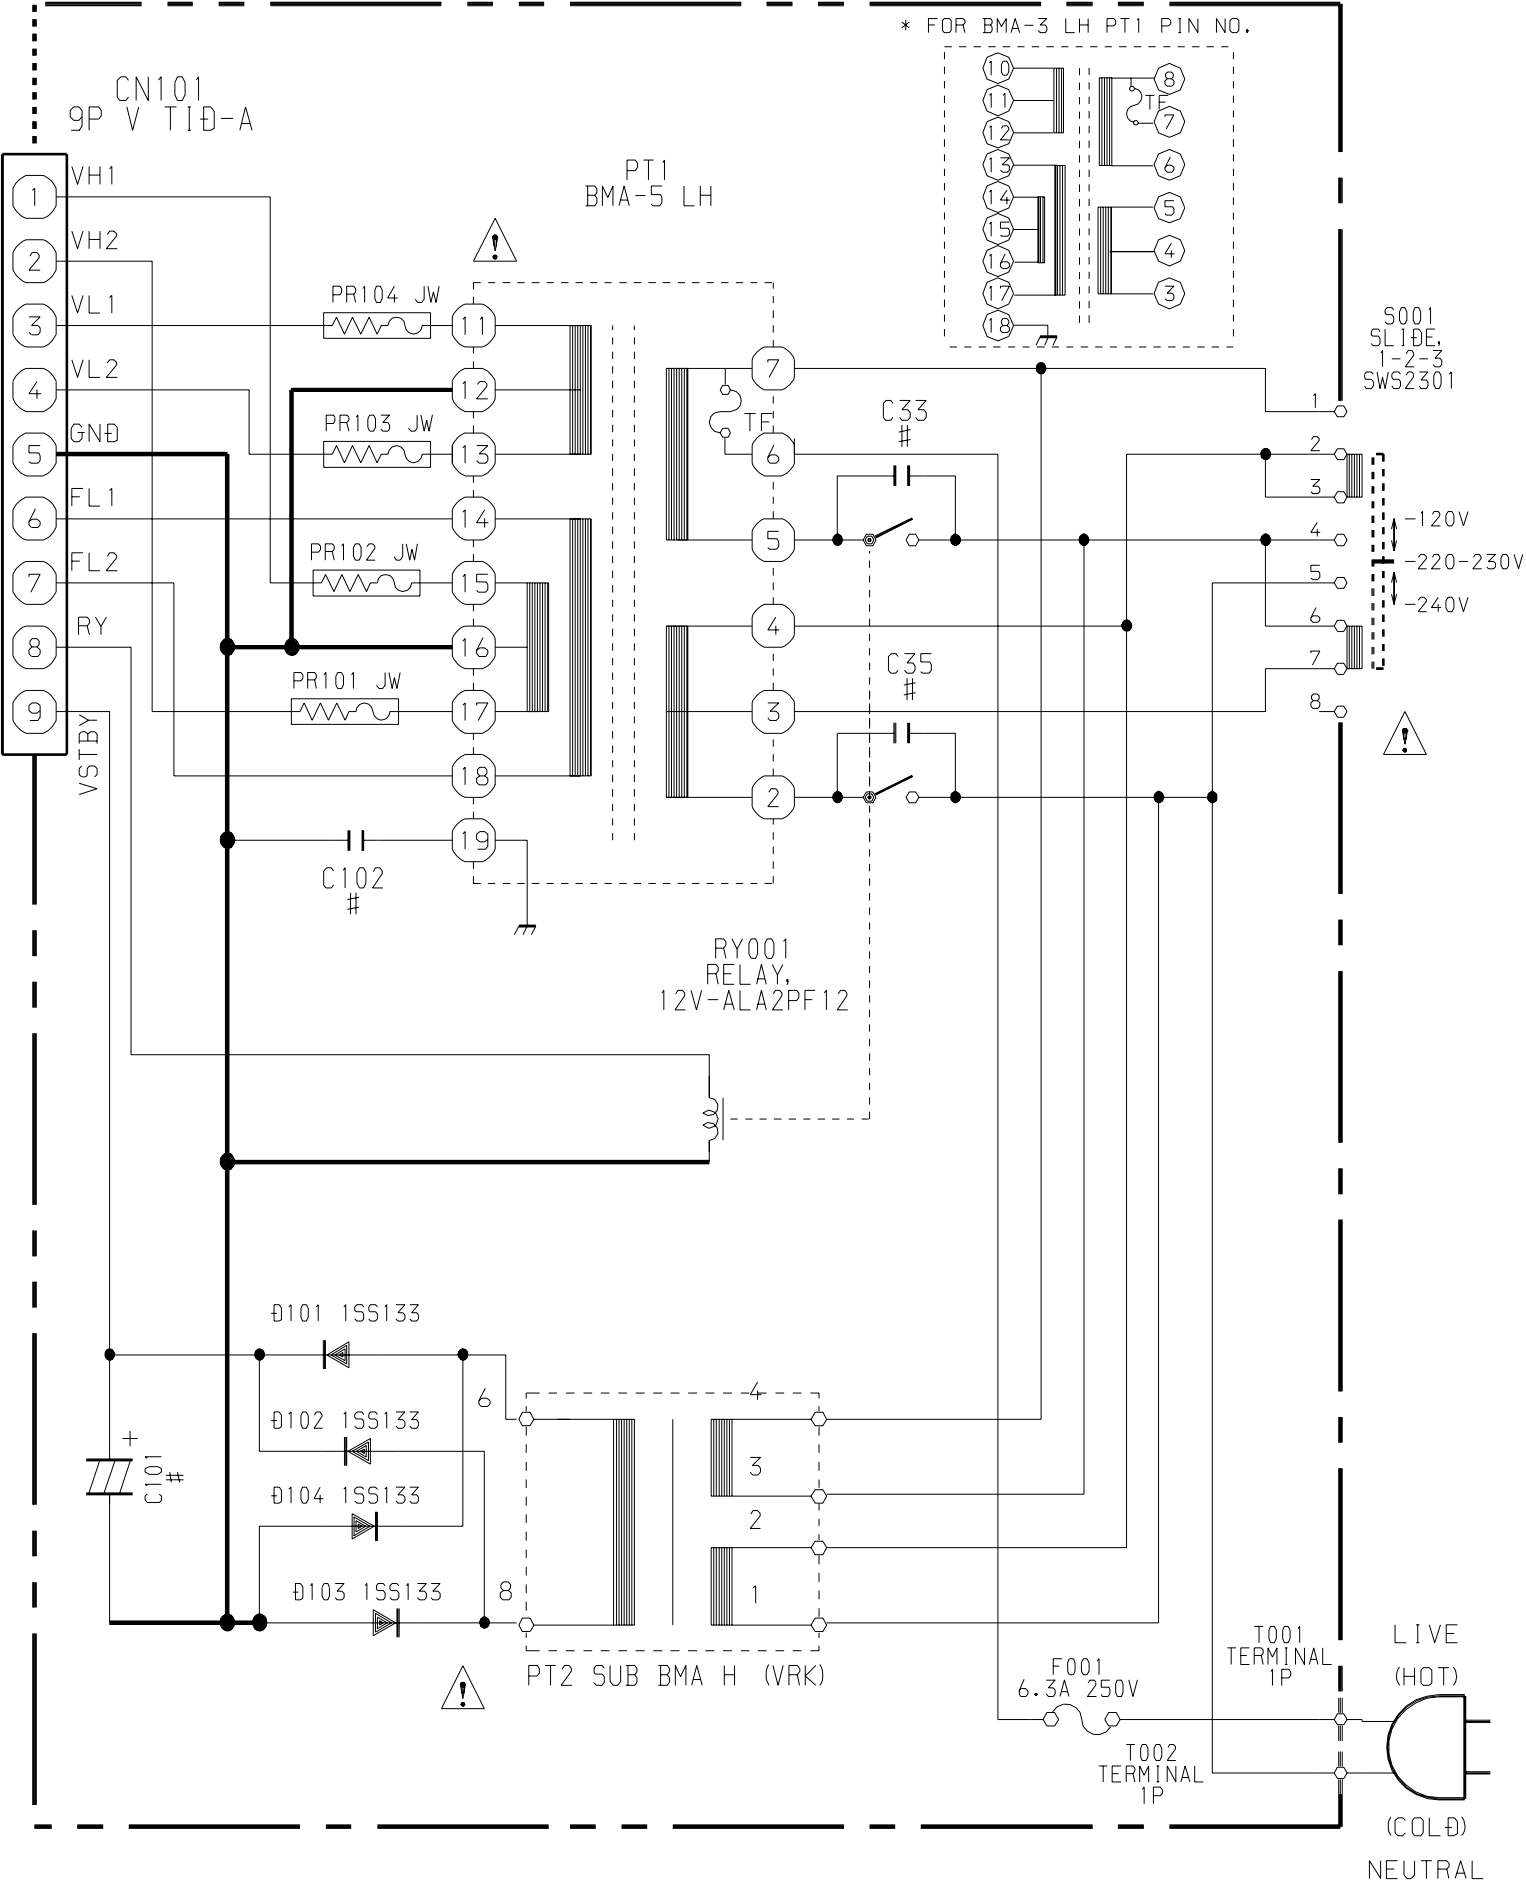

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111