


## REMOVAL

1. **COIL SUSPENSION:**  
**REMOVE FRONT SHOCK ABSORBER (See page SA-20)**
2. **AIR SUSPENSION:**  
**REMOVE FRONT PNEUMATIC CYLINDER (See page SA-27)**
3. **REMOVE UPPER SUSPENSION ARM**
  - (a) Remove the bolt and disconnect the ABS speed sensor wire harness from the upper suspension arm.

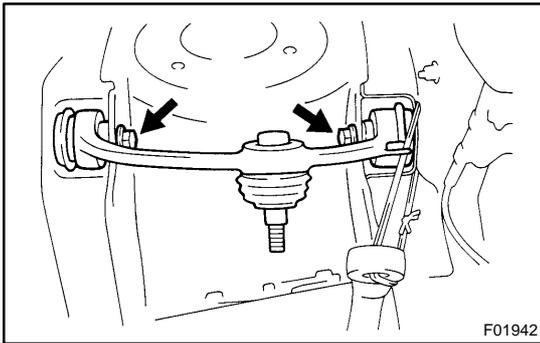

- (b) Remove the 2 bolts and the upper suspension arm.  
**Torque: 113 N·m (1,150 kgf·cm, 83 ft·lbf)**