
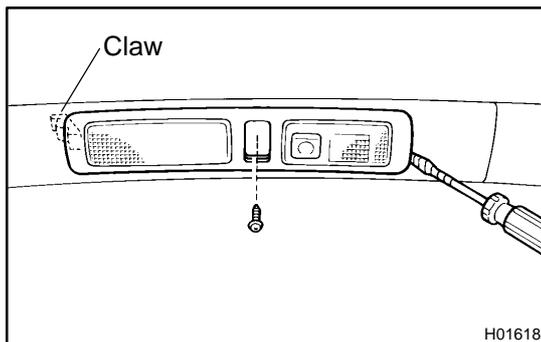


REMOVAL

1. REMOVE REAR SEAT CUSHION
2. REMOVE REAR SEAT BELT FLOOR ANCHORS
3. REMOVE REAR SEATBACK
4. REMOVE REAR DOOR SCUFF PLATE
5. REMOVE REAR SEAT SIDE GARNISHES
6. REMOVE SPEAKER GRILLE
7. REMOVE HIGH-MOUNTED STOP LIGHT
8. CANADA:
REMOVE CRS TETHER ANCHOR COVERS AND TETHER ANCHOR BRACKETS
9. REMOVE PACKAGE TRAY TRIM
10. REMOVE ASSIST GRIPS

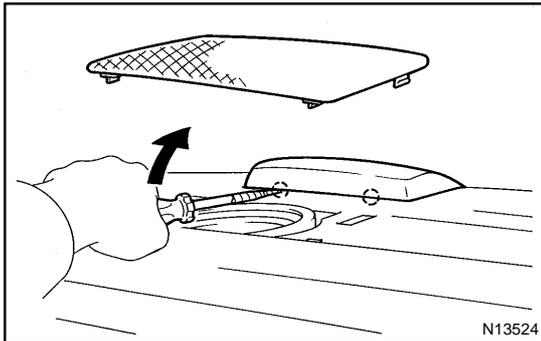


11. REMOVE REAR PERSONAL LIGHT
 - (a) Remove the screw.
 - (b) Using a screwdriver, remove the light as shown in the illustration.

HINT:

Tape the screwdriver tip before use.

- (c) Disconnect the connector.
- (d) Employ the same manner described above to the other side.

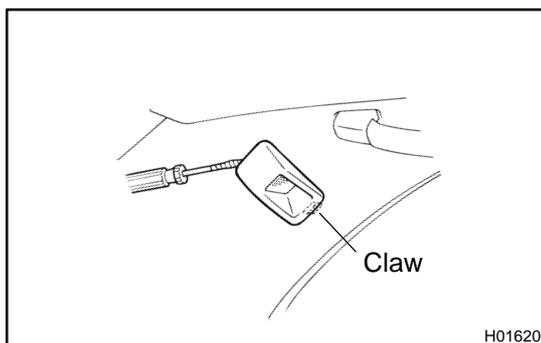


12. REMOVE SPOT LIGHT

- (a) Using a screwdriver, remove the light as shown in the illustration.

HINT:

Tape the screwdriver tip before use.

- (b) Disconnect the connector.
- (c) Employ the same manner described above to the other side.

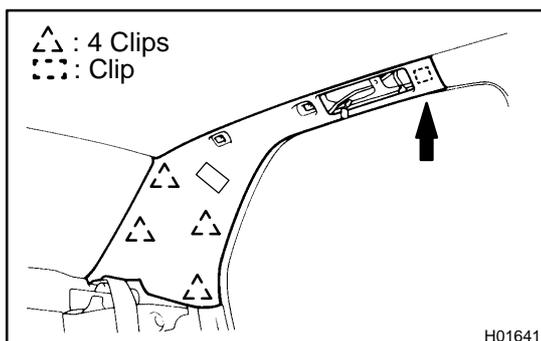

13. REMOVE ROOF SIDE INNER GARNISH

- (a) Remove the roof side inner garnish.


NOTICE:

Paying enough attention remove the clip on the roof side inner garnish shown in the illustration. Otherwise, the roof side inner garnish or the front pillar garnish might be broken.

- (b) Employ the same manner described above to the other side.

14. REMOVE ROOF HEADLINING

Remove the rear side of roof headlining.

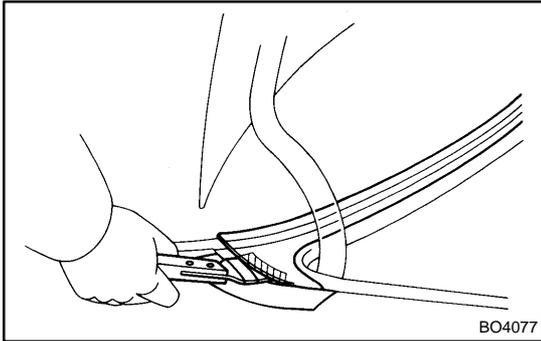


15. REMOVE LOWER MOULDING


(a) Using a scraper, cut loose the double-sided tape on both sides of the moulding as shown.

HINT:

Tape the scraper tip before use.

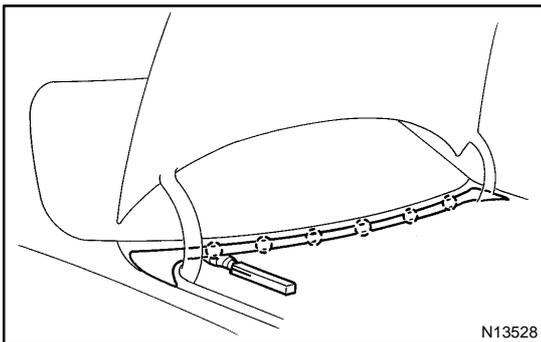

(b) Using a scraper, pry off the moulding from the 6 clips and remove the moulding.

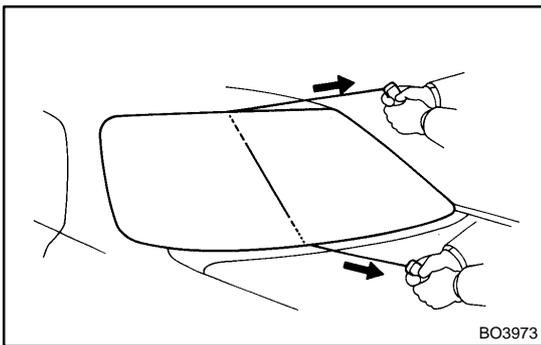

16. REMOVE BACK WINDOW GLASS

(a) Disconnect the connectors.


(b) Push the piano wire through between the body and glass from the interior.

(c) Tie both wire ends to a wooden block.

HINT:

Apply adhesive tape to the outer surface to keep the surface from being scratched.

(d) Cut the adhesive by pulling the piano wire around it.

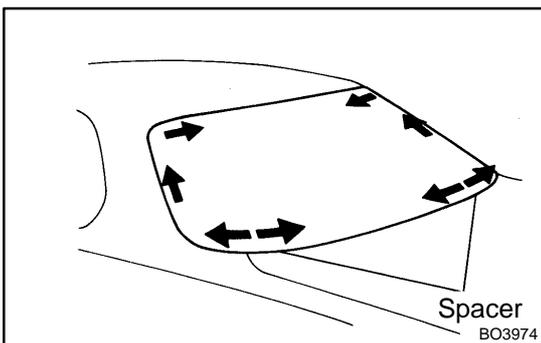

NOTICE:

Do not damage the 2 spacers with the wire.

(e) Remove the glass.

17. REMOVE BACK WINDOW MOULDING