

## CROWN MUSTANG

MOD: CT-1405R-PLL



 $\Delta$ 

- REPLACEMENT OF COMPONENTS MARKED MUST BE USED WITH THE SAME TYPE SPECIFIED BY MANUFACTURER.
- THE AREA ENCLOSED BY THIS LINE ( ) IS DIRECTLY CONNECTED WITH AC MAIN VOLTAGE WHEN SERVICING THE AREA, CONNECT AN ISOLATING TRANSFORMER BETWEEN THE RECEIVER AND AC LINE TO ELIMINATE HAZARD OF ELECTRIC SHOCK.



# C 1405 (PLL) CHANNEL CIRCUIT

## A MAIN CIRCUIT

TOSHIBA  
1476

1	VOL	VCC 42
2	CONT.	DATA 41
3	DR.	CCL 40
4	COL.	INT 39
5	TIME	NP 38
6	SHARP	NP 37
7	AVO	VIDEO 36
8	AV1	SYNC 35
9	ON TIMER	STOP 34
10	ENABLE	RESET 33
11	DATA	ROUT 32
12	CLOCK	*IN 31
13	AVC	TEST 30
14	0	OSC 29
15	1	OSC 28
16	2	V SYNC 27
17	3	V SYNC 26
18	SICR	F 25
19	POWER	BLUE 24
20	V. MUTE	GREEN 23
21	0	RED 22


## HAIN CIRCUIT

## D DRIVE CIRCUIT

B  
+PNCB  
+SPUN  
+CIRCUIT




# 1405 DRIVE CIRCUIT

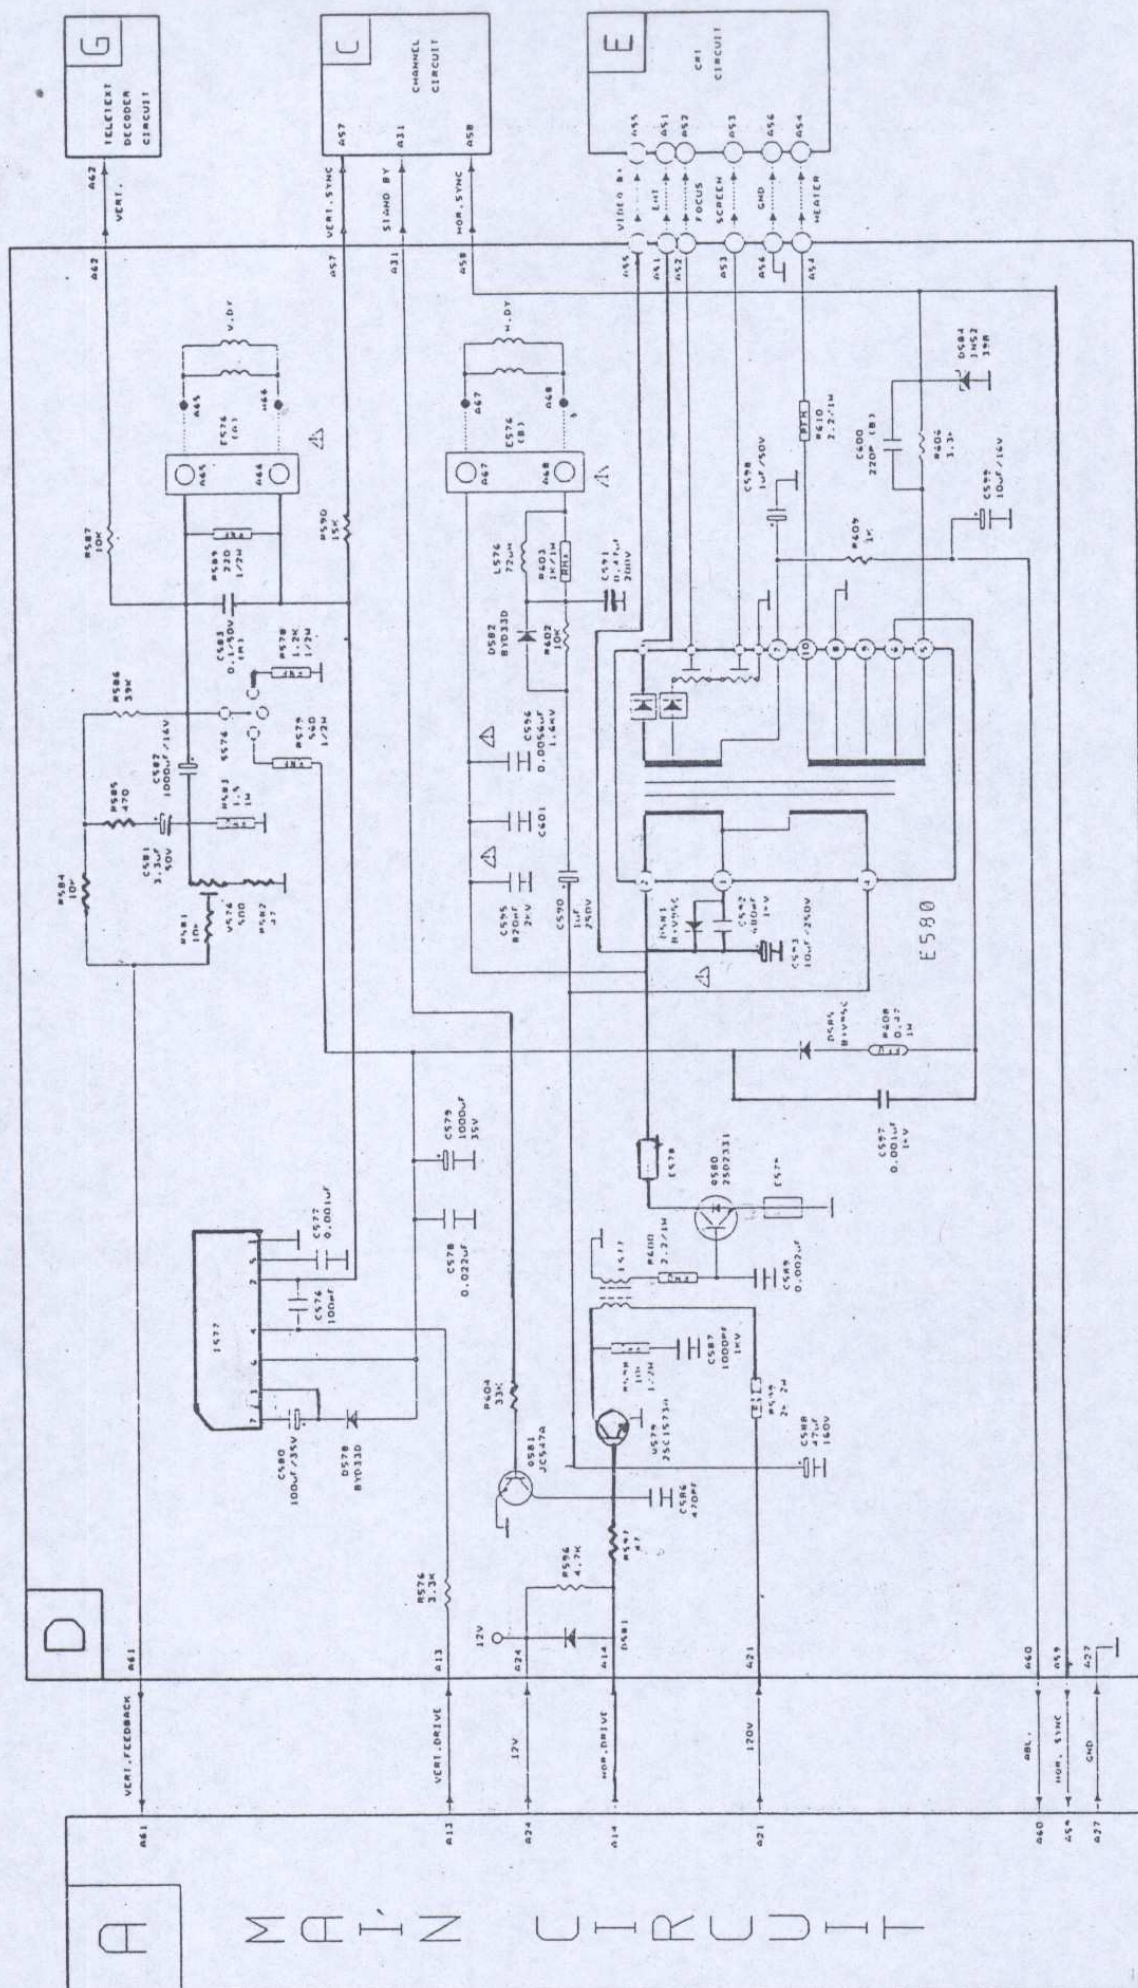



14" ( 1405 )

CRT CIRCUIT

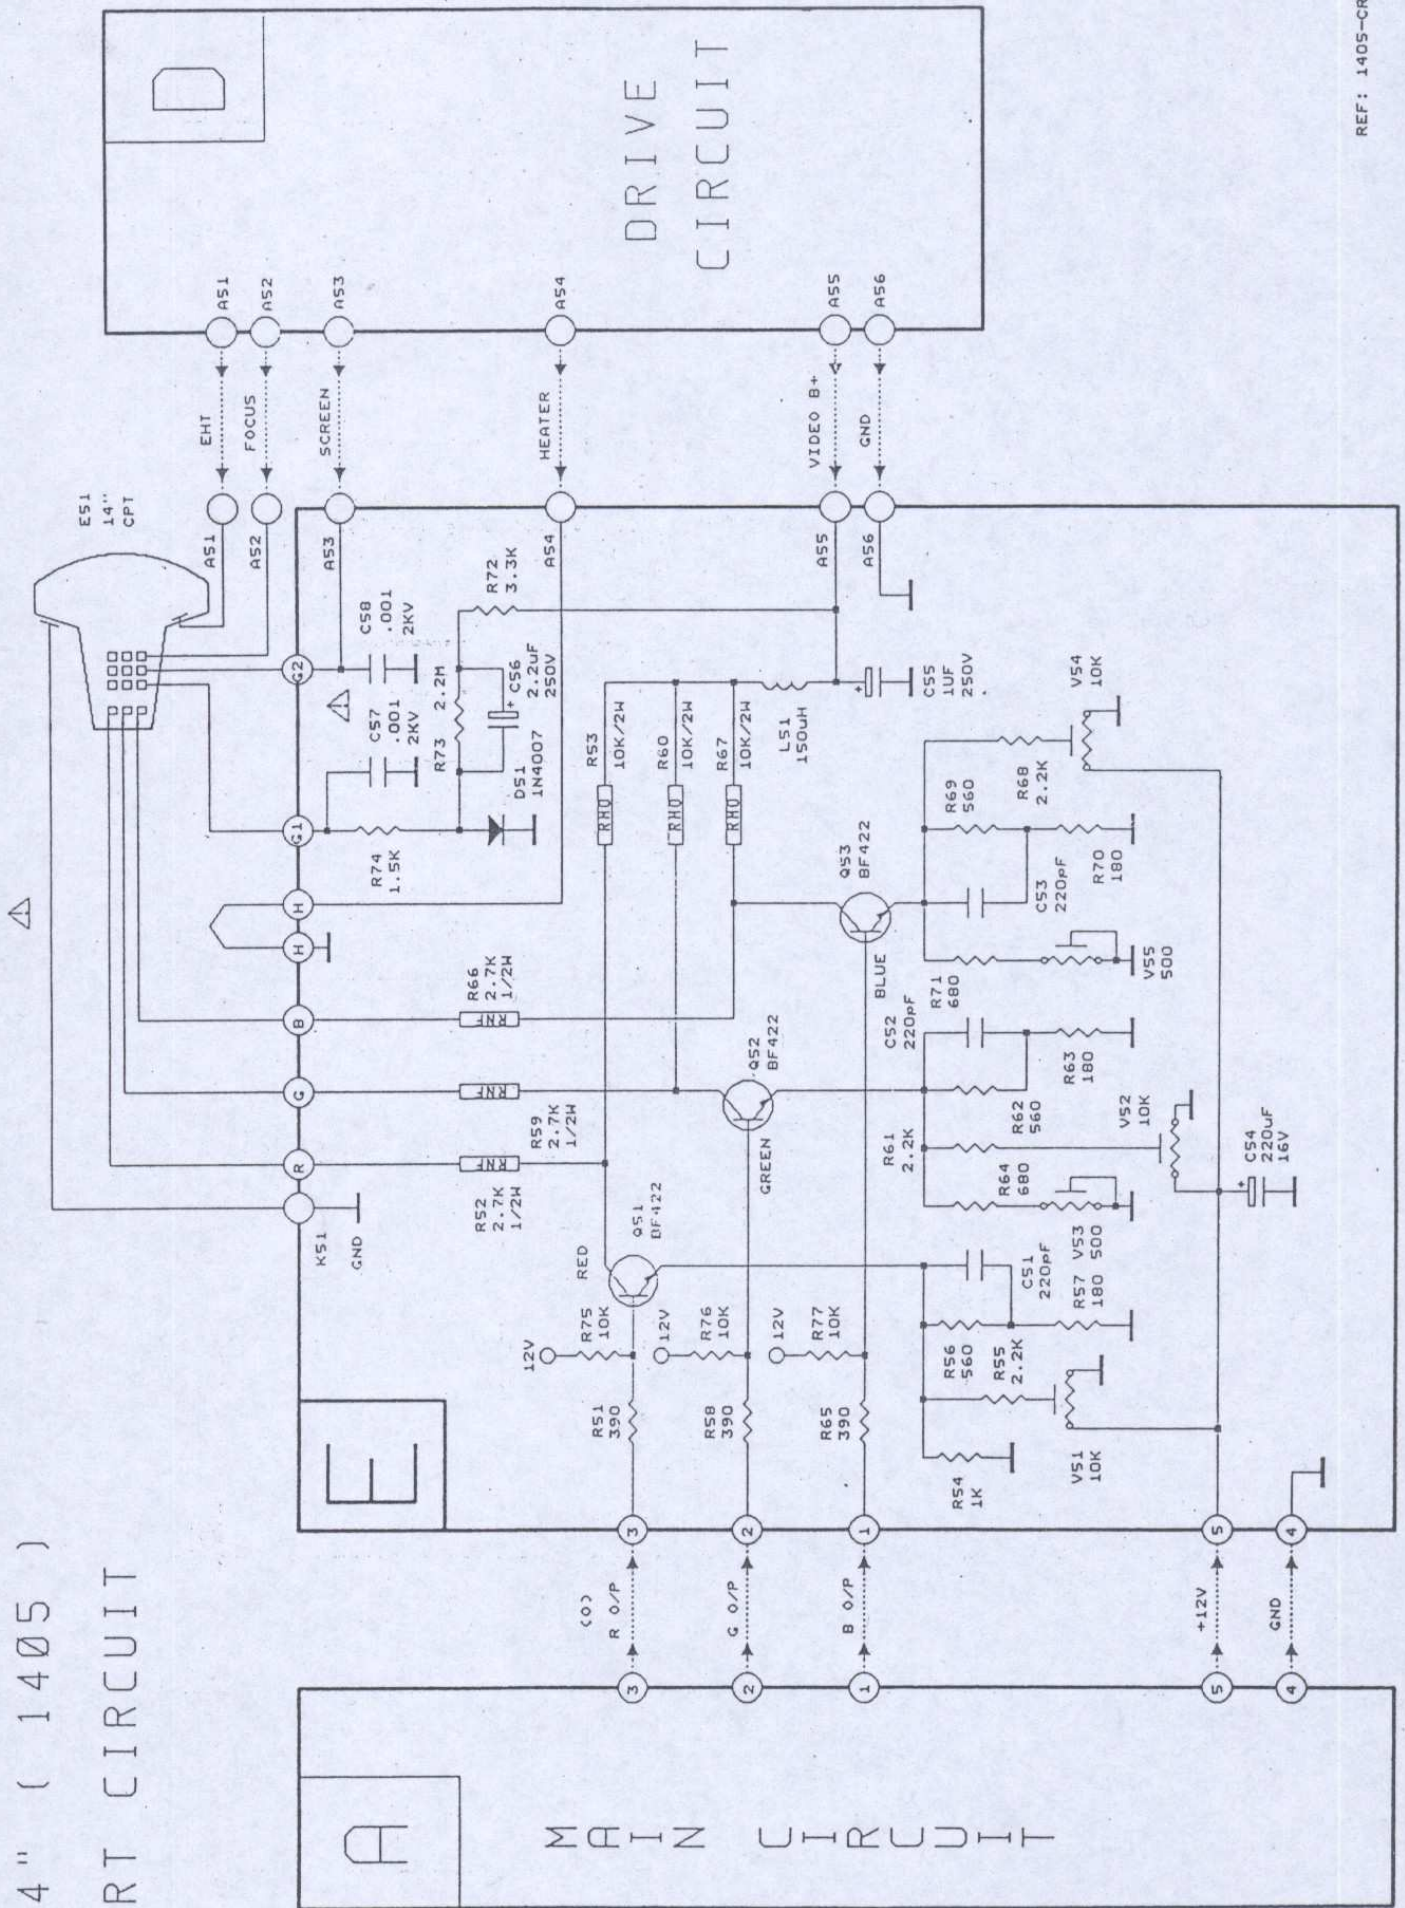



# CROWN MUSTANG

MOD: CT-1405R-PLL

