




**ECC82/12AU7**

## Dimensions and connections

Base: Noval

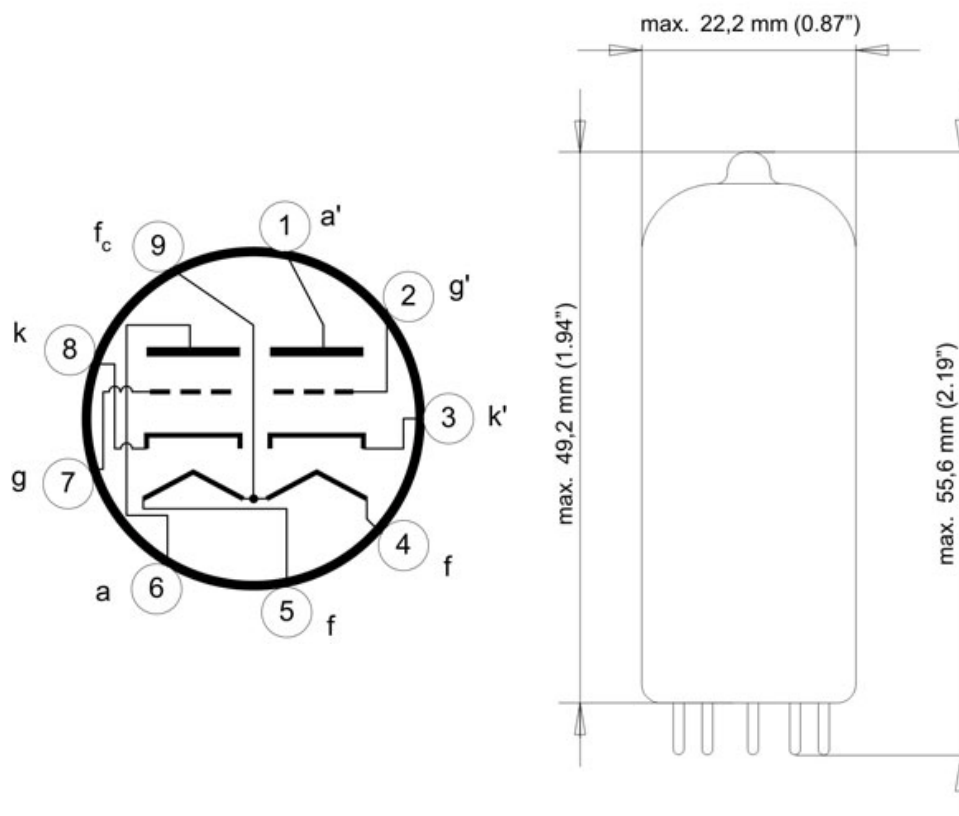

## Typical characteristics and operating conditions

Anode voltage	$V_a$	100	250	(V)
Grid voltage	$V_g$	0	-8,5	(V)
Anode current	$I_a$	11,8	10,5	(mA)
Transconductance	$S$	3,1	2,2	(mA/V)
Amplification	$\mu$	19,5	17	
Internal resistance	$R_i$	6,25	7,7	(k $\Omega$ )

Telephone: +381 18 550 741

FAX: +381 18 550 806

Postal address: Bul. Sv. Cara Konstantina 80-86, 18000 Nis, Yugoslavia

Electronic mail: [eirc@eierc.com](mailto:eirc@eierc.com)

Web site: <http://www.eierc.com/rc/default.htm>