

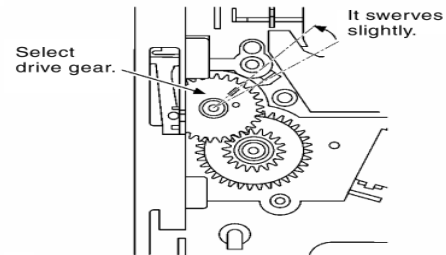
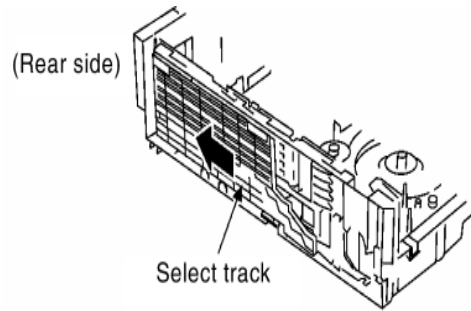


2.

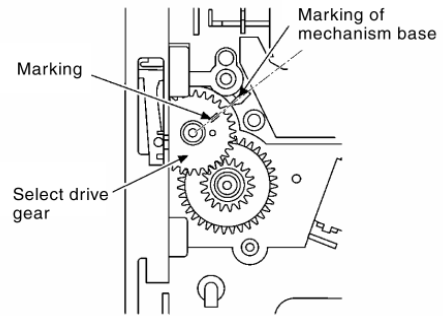



Note:
When a select track is fit and drawn up to the end of the rear side, a marking position of a select drive gear swerves slightly.

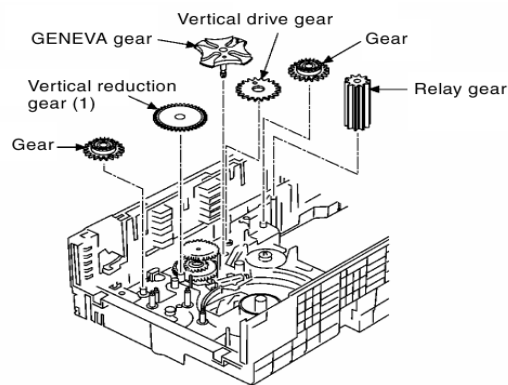


Note:
Please make sure that the catch is latched when GENEVA gear is fixed.

1.



2.

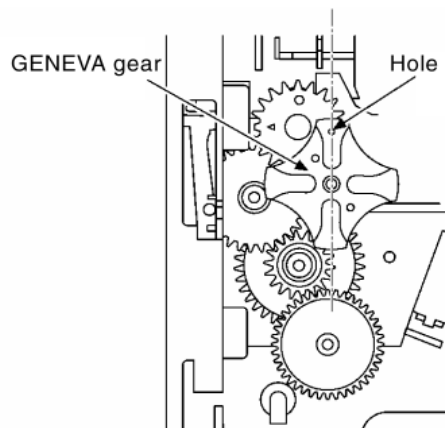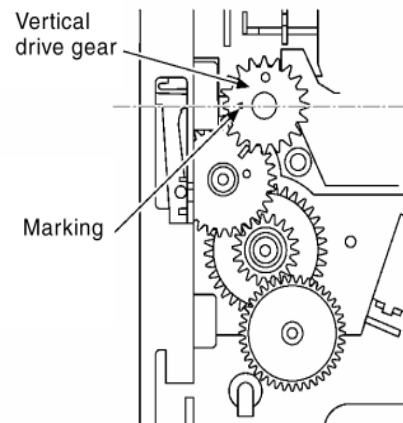


3.

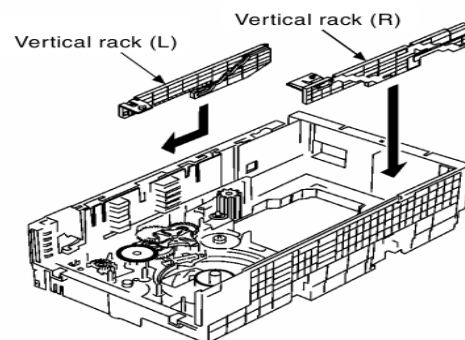



1.

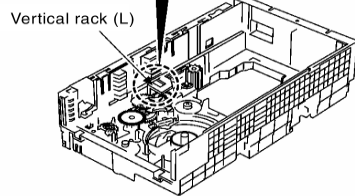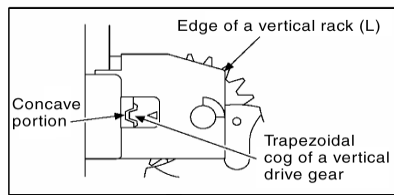


2.

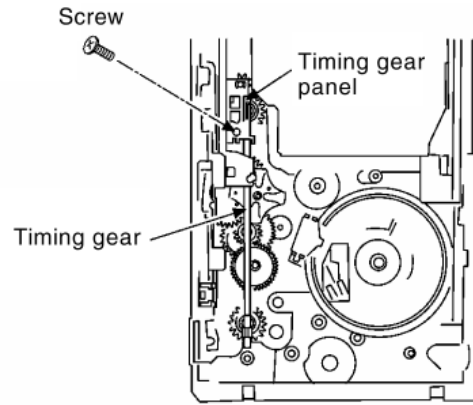


3.

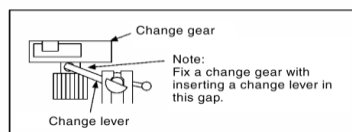

1.

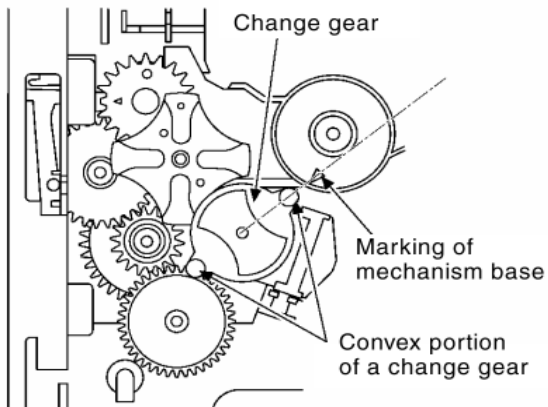


2.

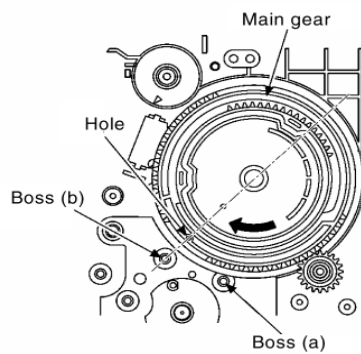



3.

4. Draw up a select rack to the far front part.

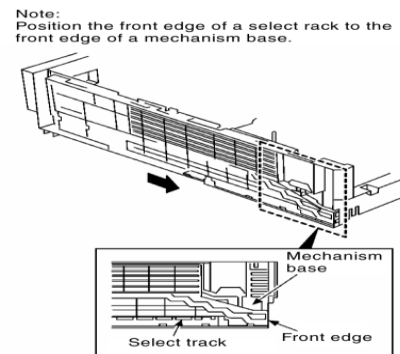


1.

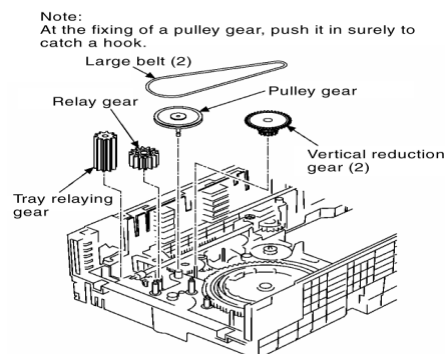


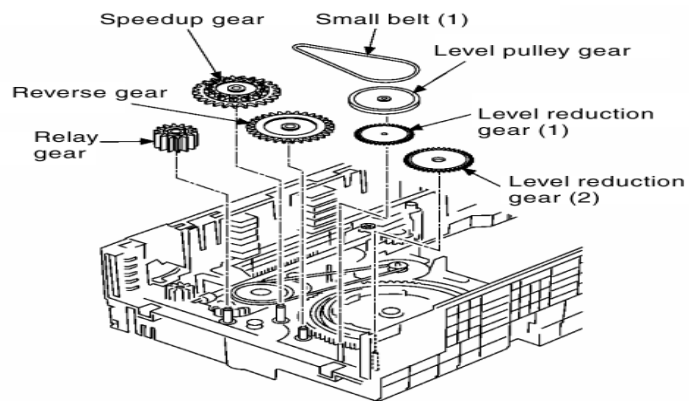

2.

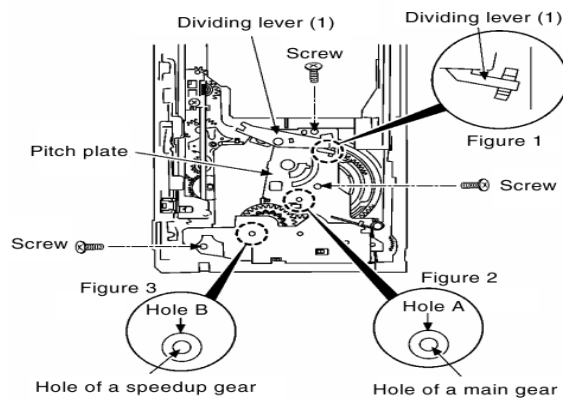


3.

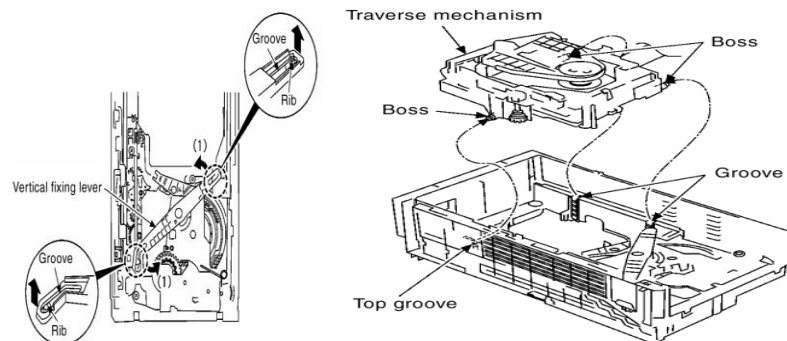


1.

2.

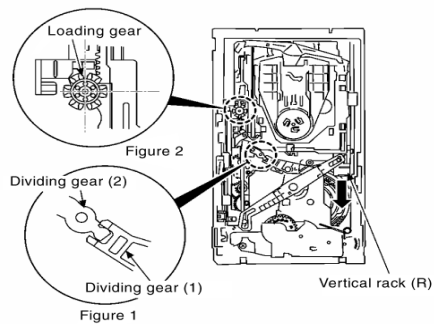


3.

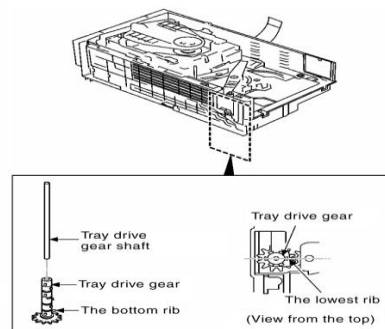


1.

2.

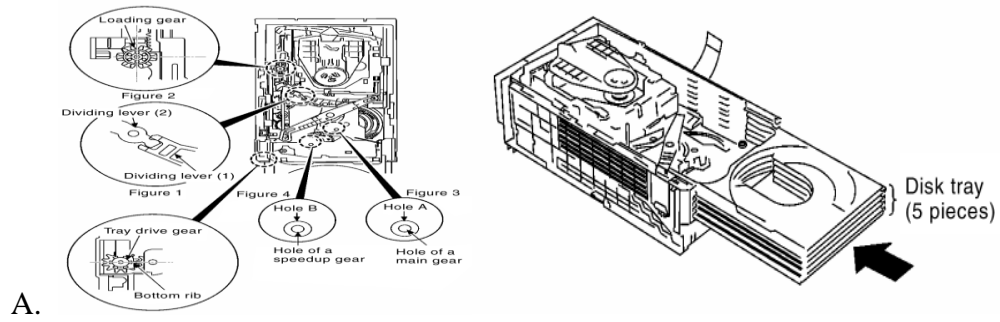


1.

Note:
Fit speedup gear cogs and the tip of a
speedup lock, and put in.




2.

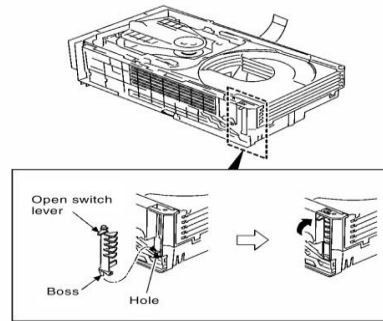

3.

Note: Catch should be latched surely.

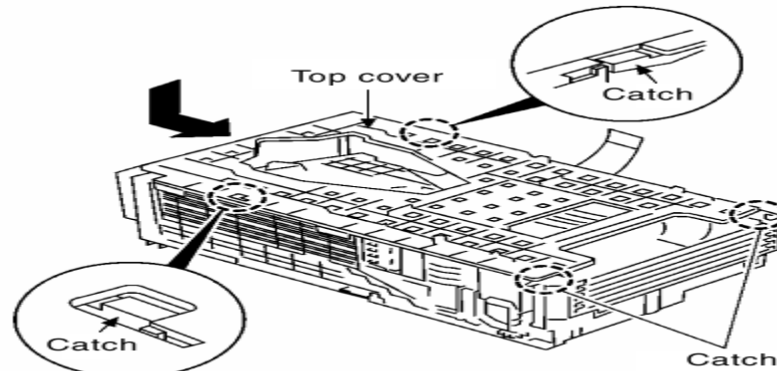

When all CD loading section are fixed, check
manually an hoisting of a traverse unit, opening
and closure of a disk tray and so on, using the
jig gear.

4.