

JVC

SCHEMATIC DIAGRAMS

FLAT COLOUR TELEVISION

AV-2155VE, AV-2185ME

CD-ROM No.SML200507

BASIC CHASSIS


CW2




[AV-2155VE]



[AV-2185ME]

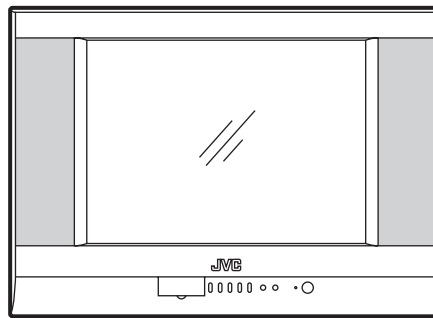

[AV-2155VE]

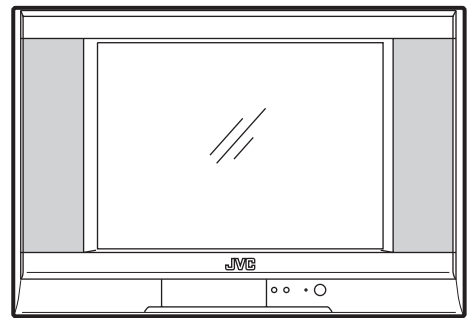

[AV-2185ME]

AV-2155VE, AV-2185ME

STANDARD CIRCUIT DIAGRAM

■ NOTE ON USING CIRCUIT DIAGRAMS

1.SAFETY

The components identified by the \triangle symbol and shading are critical for safety. For continued safety replace safety critical components only with manufactures recommended parts.

2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1)Input signal : Colour bar signal
- (2)Setting positions of each knob/button and variable resistor : Original setting position when shipped
- (3)Internal resistance of tester : DC 20k Ω /V
- (4)Oscilloscope sweeping time : H \Rightarrow 20 μ s / div
: V \Rightarrow 5ms / div
: Others \Rightarrow Sweeping time is specified
- (5)Voltage values : All DC voltage values

* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3.INDICATION OF PARTS SYMBOL [EXAMPLE]

- In the PW board : R209 \rightarrow R209

4.INDICATIONS ON THE CIRCUIT DIAGRAM

(1)Resistors

● Resistance value

- No unit : [Ω]
- K : [k Ω]
- M : [M Ω]

● Rated allowable power

- No indication : 1/16 [W]
- Others : As specified

● Type

- No indication : Carbon resistor
- OMR : Oxide metal film resistor
- MFR : Metal film resistor
- MPR : Metal plate resistor
- UNFR : Uninflamable resistor
- FR : Fusible resistor

* Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2)Capacitors

● Capacitance value

- 1 or higher : [pF]
- less than 1 : [μ F]

● Withstand voltage

- No indication : DC50[V]
- Others : DC withstand voltage [V]
- AC indicated : AC withstand voltage [V]

* Electrolytic Capacitors

47/50[Example]: Capacitance value [μ F]/withstand voltage[V]

●Type

- No indication : Ceramic capacitor
- MM : Metalized mylar capacitor
- PP : Polypropylene capacitor
- MPP : Metalized polypropylene capacitor
- MF : Metalized film capacitor
- TF : Thin film capacitor
- BP : Bipolar electrolytic capacitor
- TAN : Tantalum capacitor

(3)Coils

- No unit : [μ H]
- Others : As specified

(4)Power Supply




-  : B1
-  : B2 (12V)
-  : 9V
-  : 5V

* Respective voltage values are indicated





(5)Test point

-  : Test point
-  : Only test point display

(6)Connecting method

-  : Connector
-  : Wrapping or soldering
-  : Receptacle

(7)Ground symbol

-  : LIVE side ground
-  : ISOLATED(NEUTRAL) side ground
-  : EARTH ground
-  : DIGITAL ground

5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (\perp) side GND and the ISOLATED(NEUTRAL) : (⏏) side GND. Therefore, care must be taken for the following points.

- (1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. if the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.
- (2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected, a fuse or any parts will be broken.

◆ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

NOTE

◆ Due improvement in performance, some part numbers show in the circuit diagram may not agree with those indicated in the part list.

When ordering parts, please use the numbers that appear in the Parts List.

CONTENTS

SEMICONDUCTOR SHAPES2-2

USING P.W.BOARD2-2

BLOCK DIAGRAM2-3

CIRCUIT DIAGRAMS

MAIN PWB CIRCUIT DIAGRAM [AV-2155VE] (1/3)2-5

MAIN PWB CIRCUIT DIAGRAM [AV-2155VE] (2/3), (3/3)2-7

MAIN PWB CIRCUIT DIAGRAM [AV-2185ME] (1/4), (2/4)2-9

MAIN PWB CIRCUIT DIAGRAM [AV-2185ME] (3/4), (4/4)2-11

PATTERN DIAGRAMS

MAIN PWB PATTERN [AV-2155VE]2-13







MAIN PWB PATTERN [AV-2185ME]2-15

VOLTAGE CHARTS2-17






WAVEFORMS2-18

SEMICONDUCTOR SHAPES



TRANSISTOR

BOTTOM VIEW	FRONT VIEW				TOP VIEW
					CHIP TR 

IC

BOTTOM VIEW	FRONT VIEW			TOP VIEW
				


CHIP IC

TOP VIEW		
		

USING P.W.BOARD

P.W. BOARD ASS'Y NAME	AV-2155VE	AV-2185ME
MAIN P.W. BOARD	SCW-1752A-H2	SCW-1747A-H2

BLOCK DIAGRAM

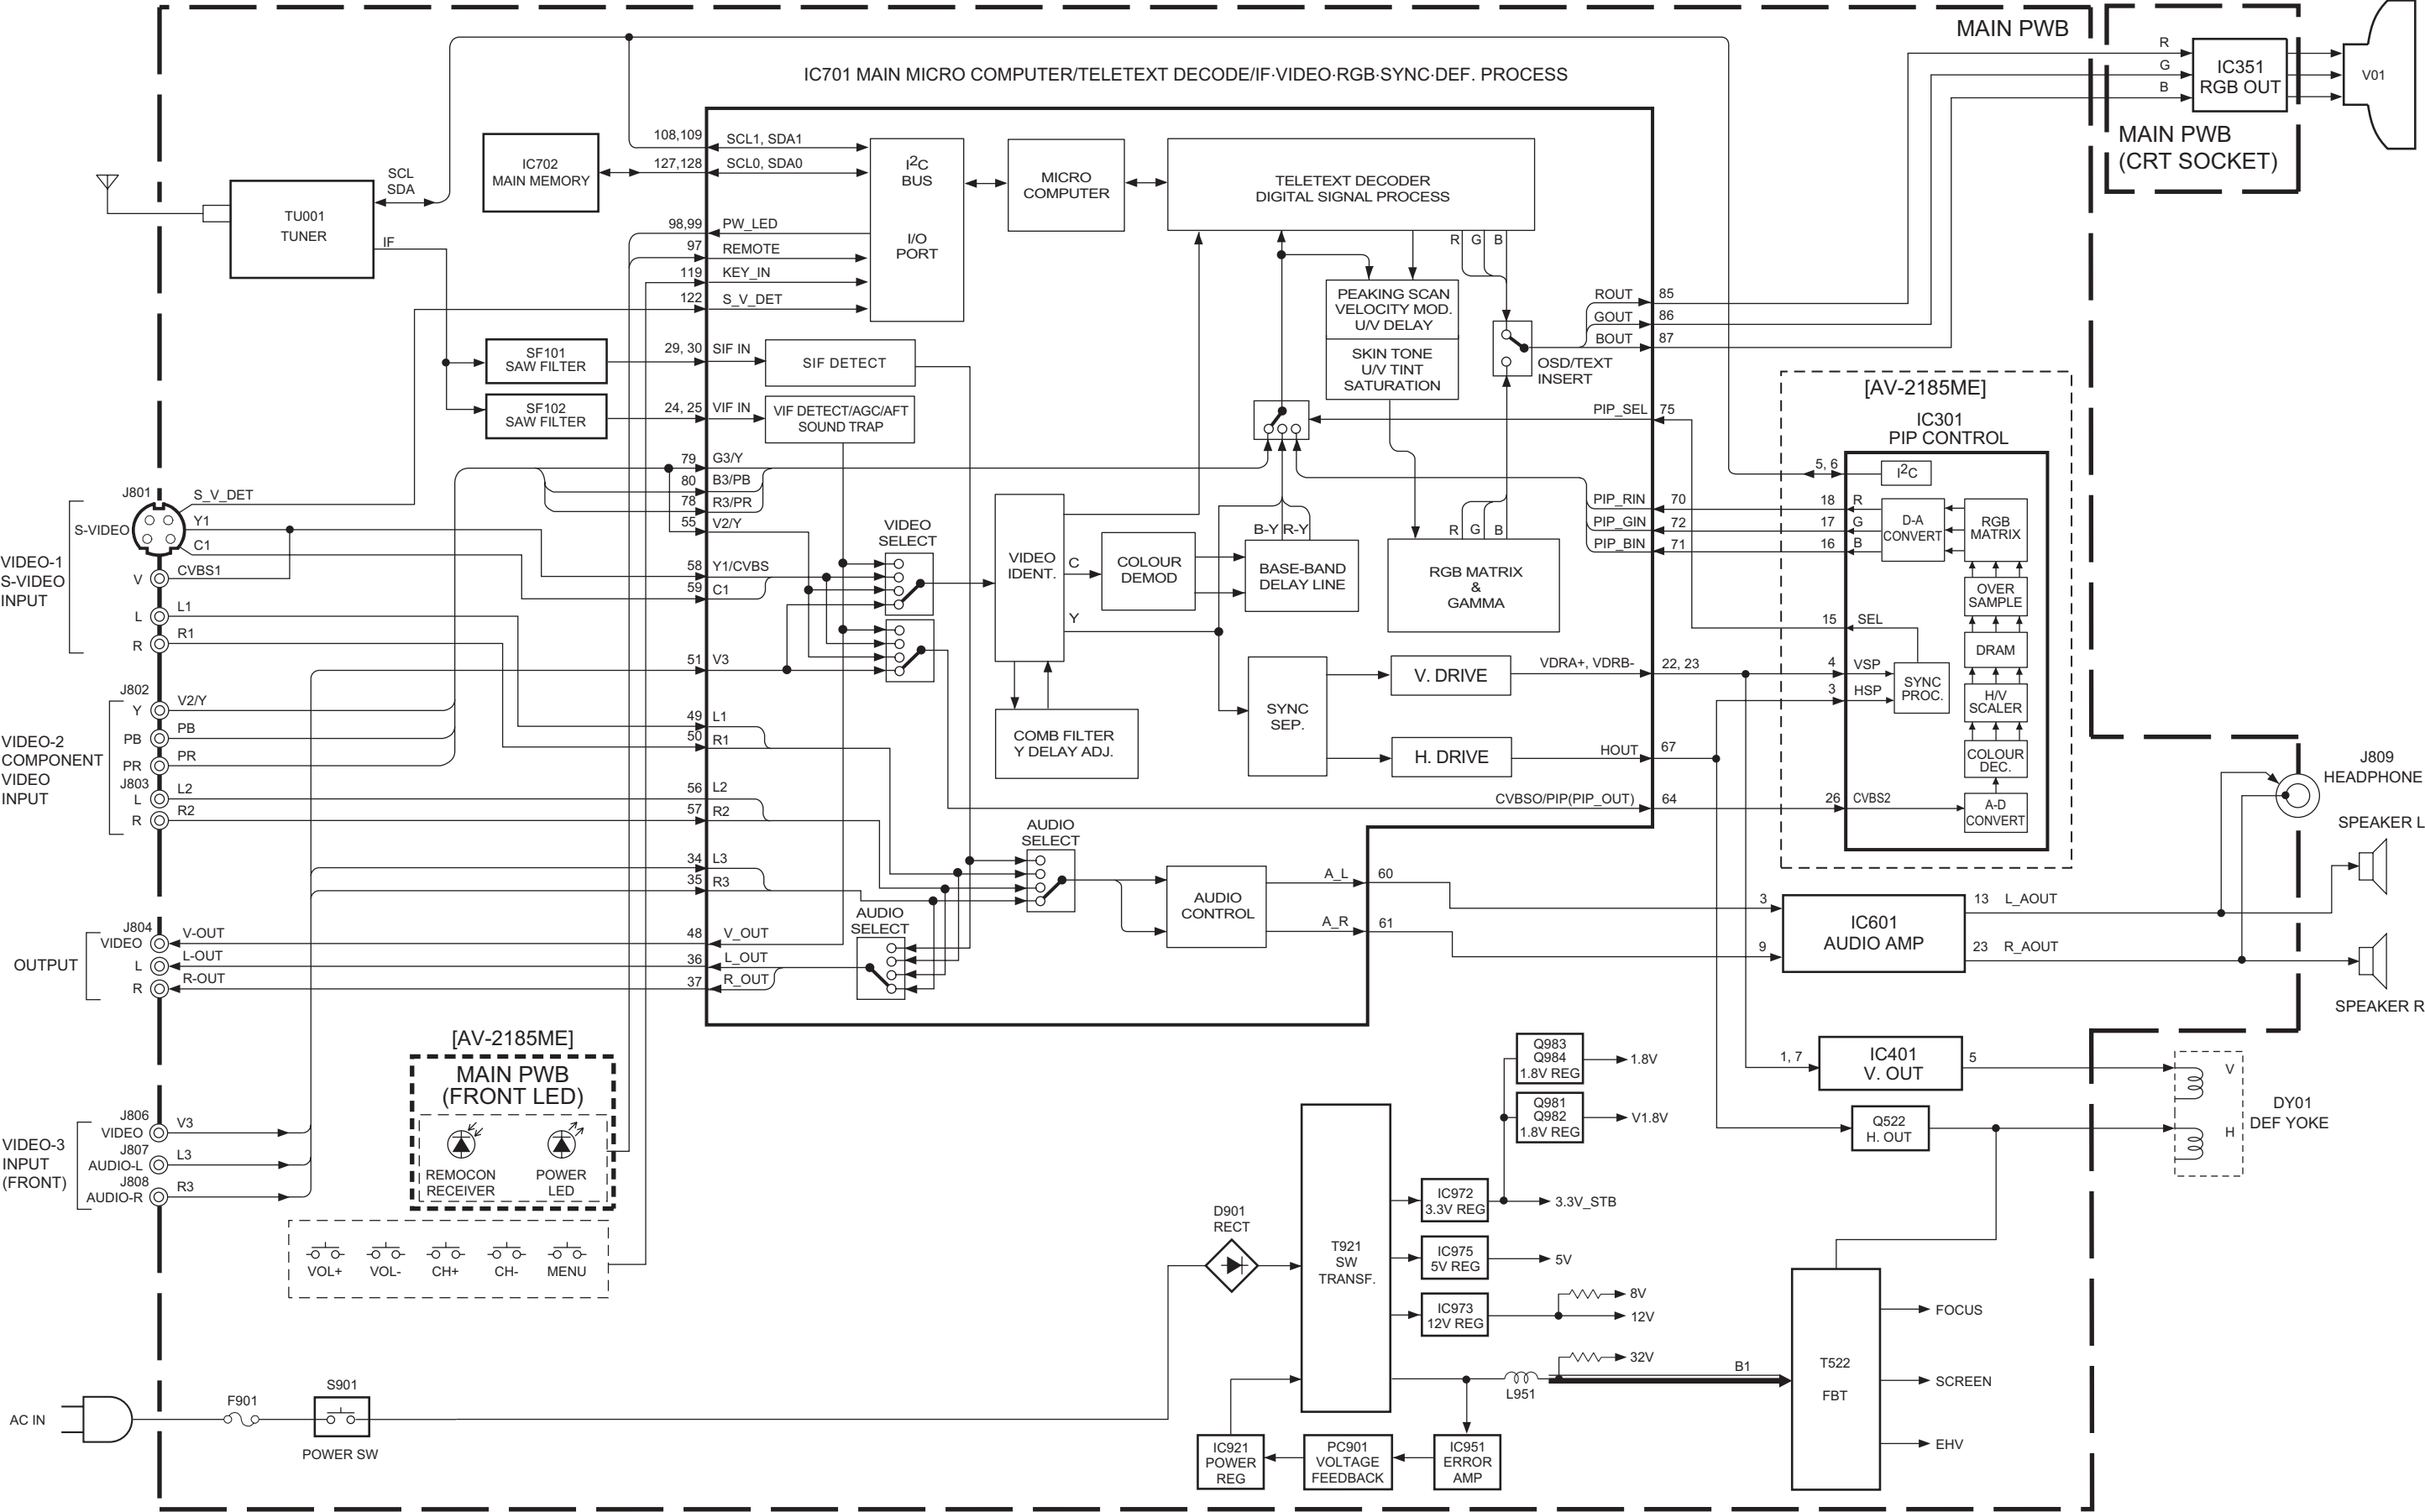


MAIN PWB CIRCUIT DIAGRAM [AV-2155VE] (1/3)




CS21162

MAIN PWB CIRCUIT DIAGRAM [AV-2155VE] (2/3), (3/3)

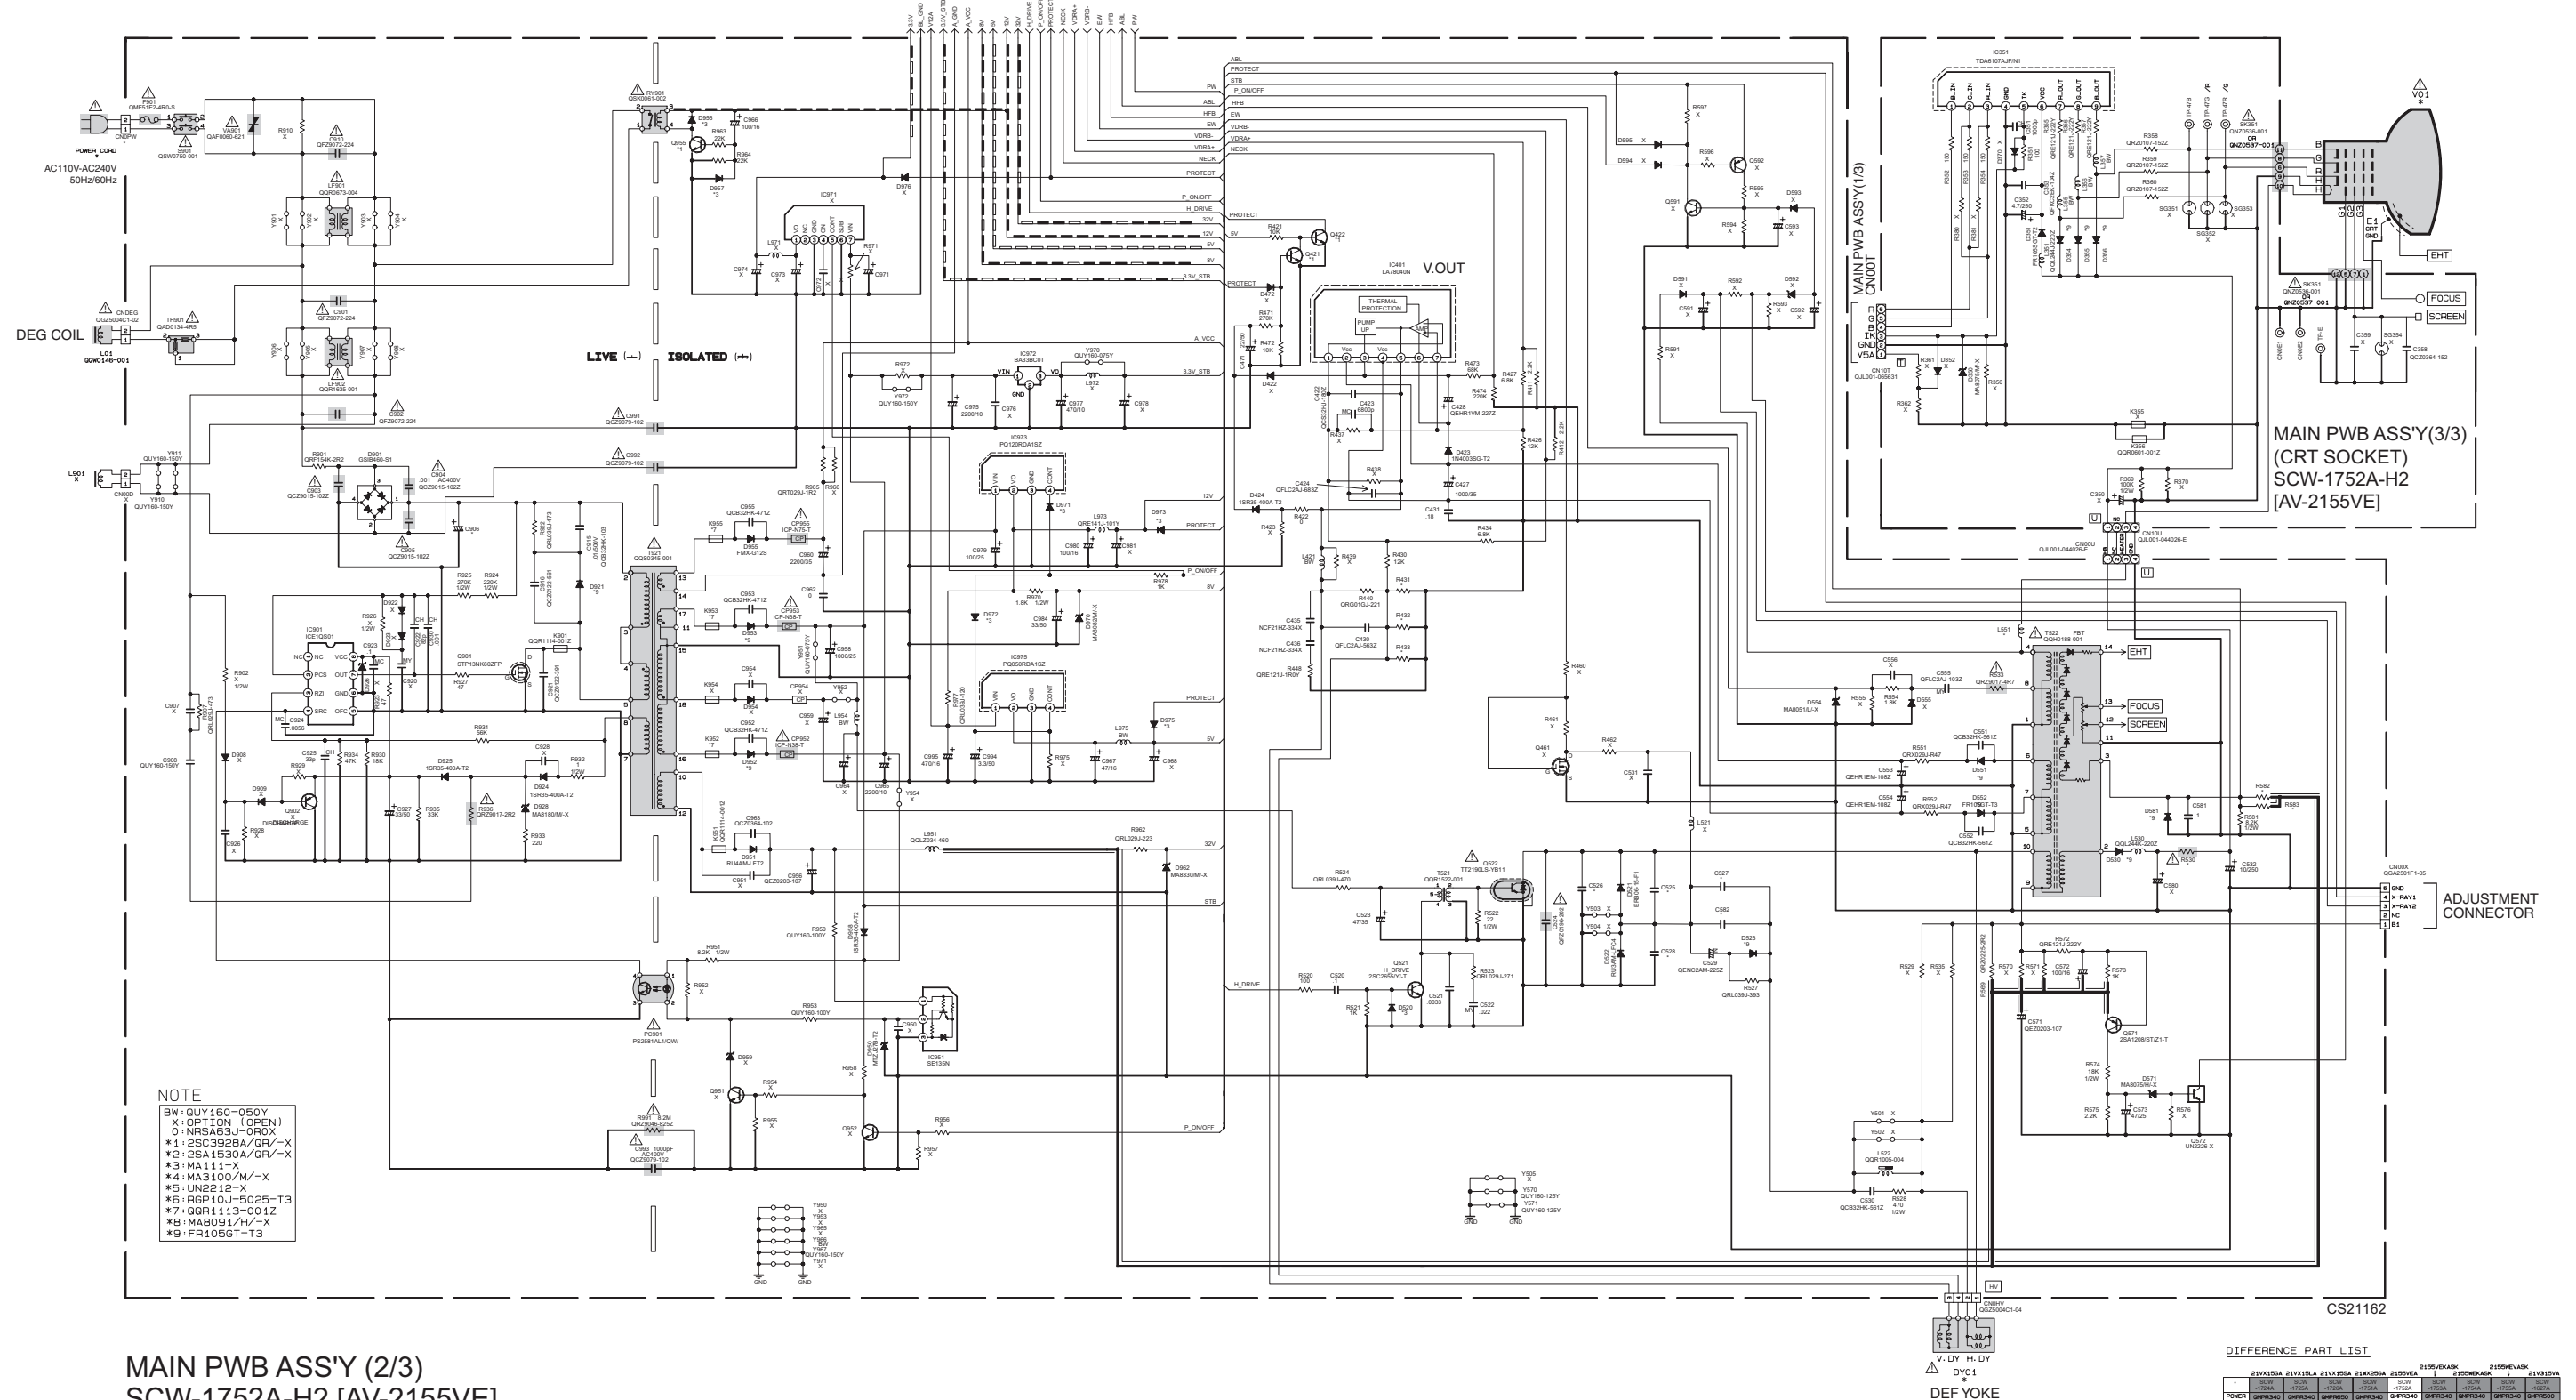
[illegible]

MAIN PWB ASS'Y (2/3)
SCW-1752A-H2 [AV-2155VE]

NOTE) 1.Refer to page 2-17 for voltages of this circuit diagram.
2.Refer to page 2-18 for waveforms of this circuit diagram.

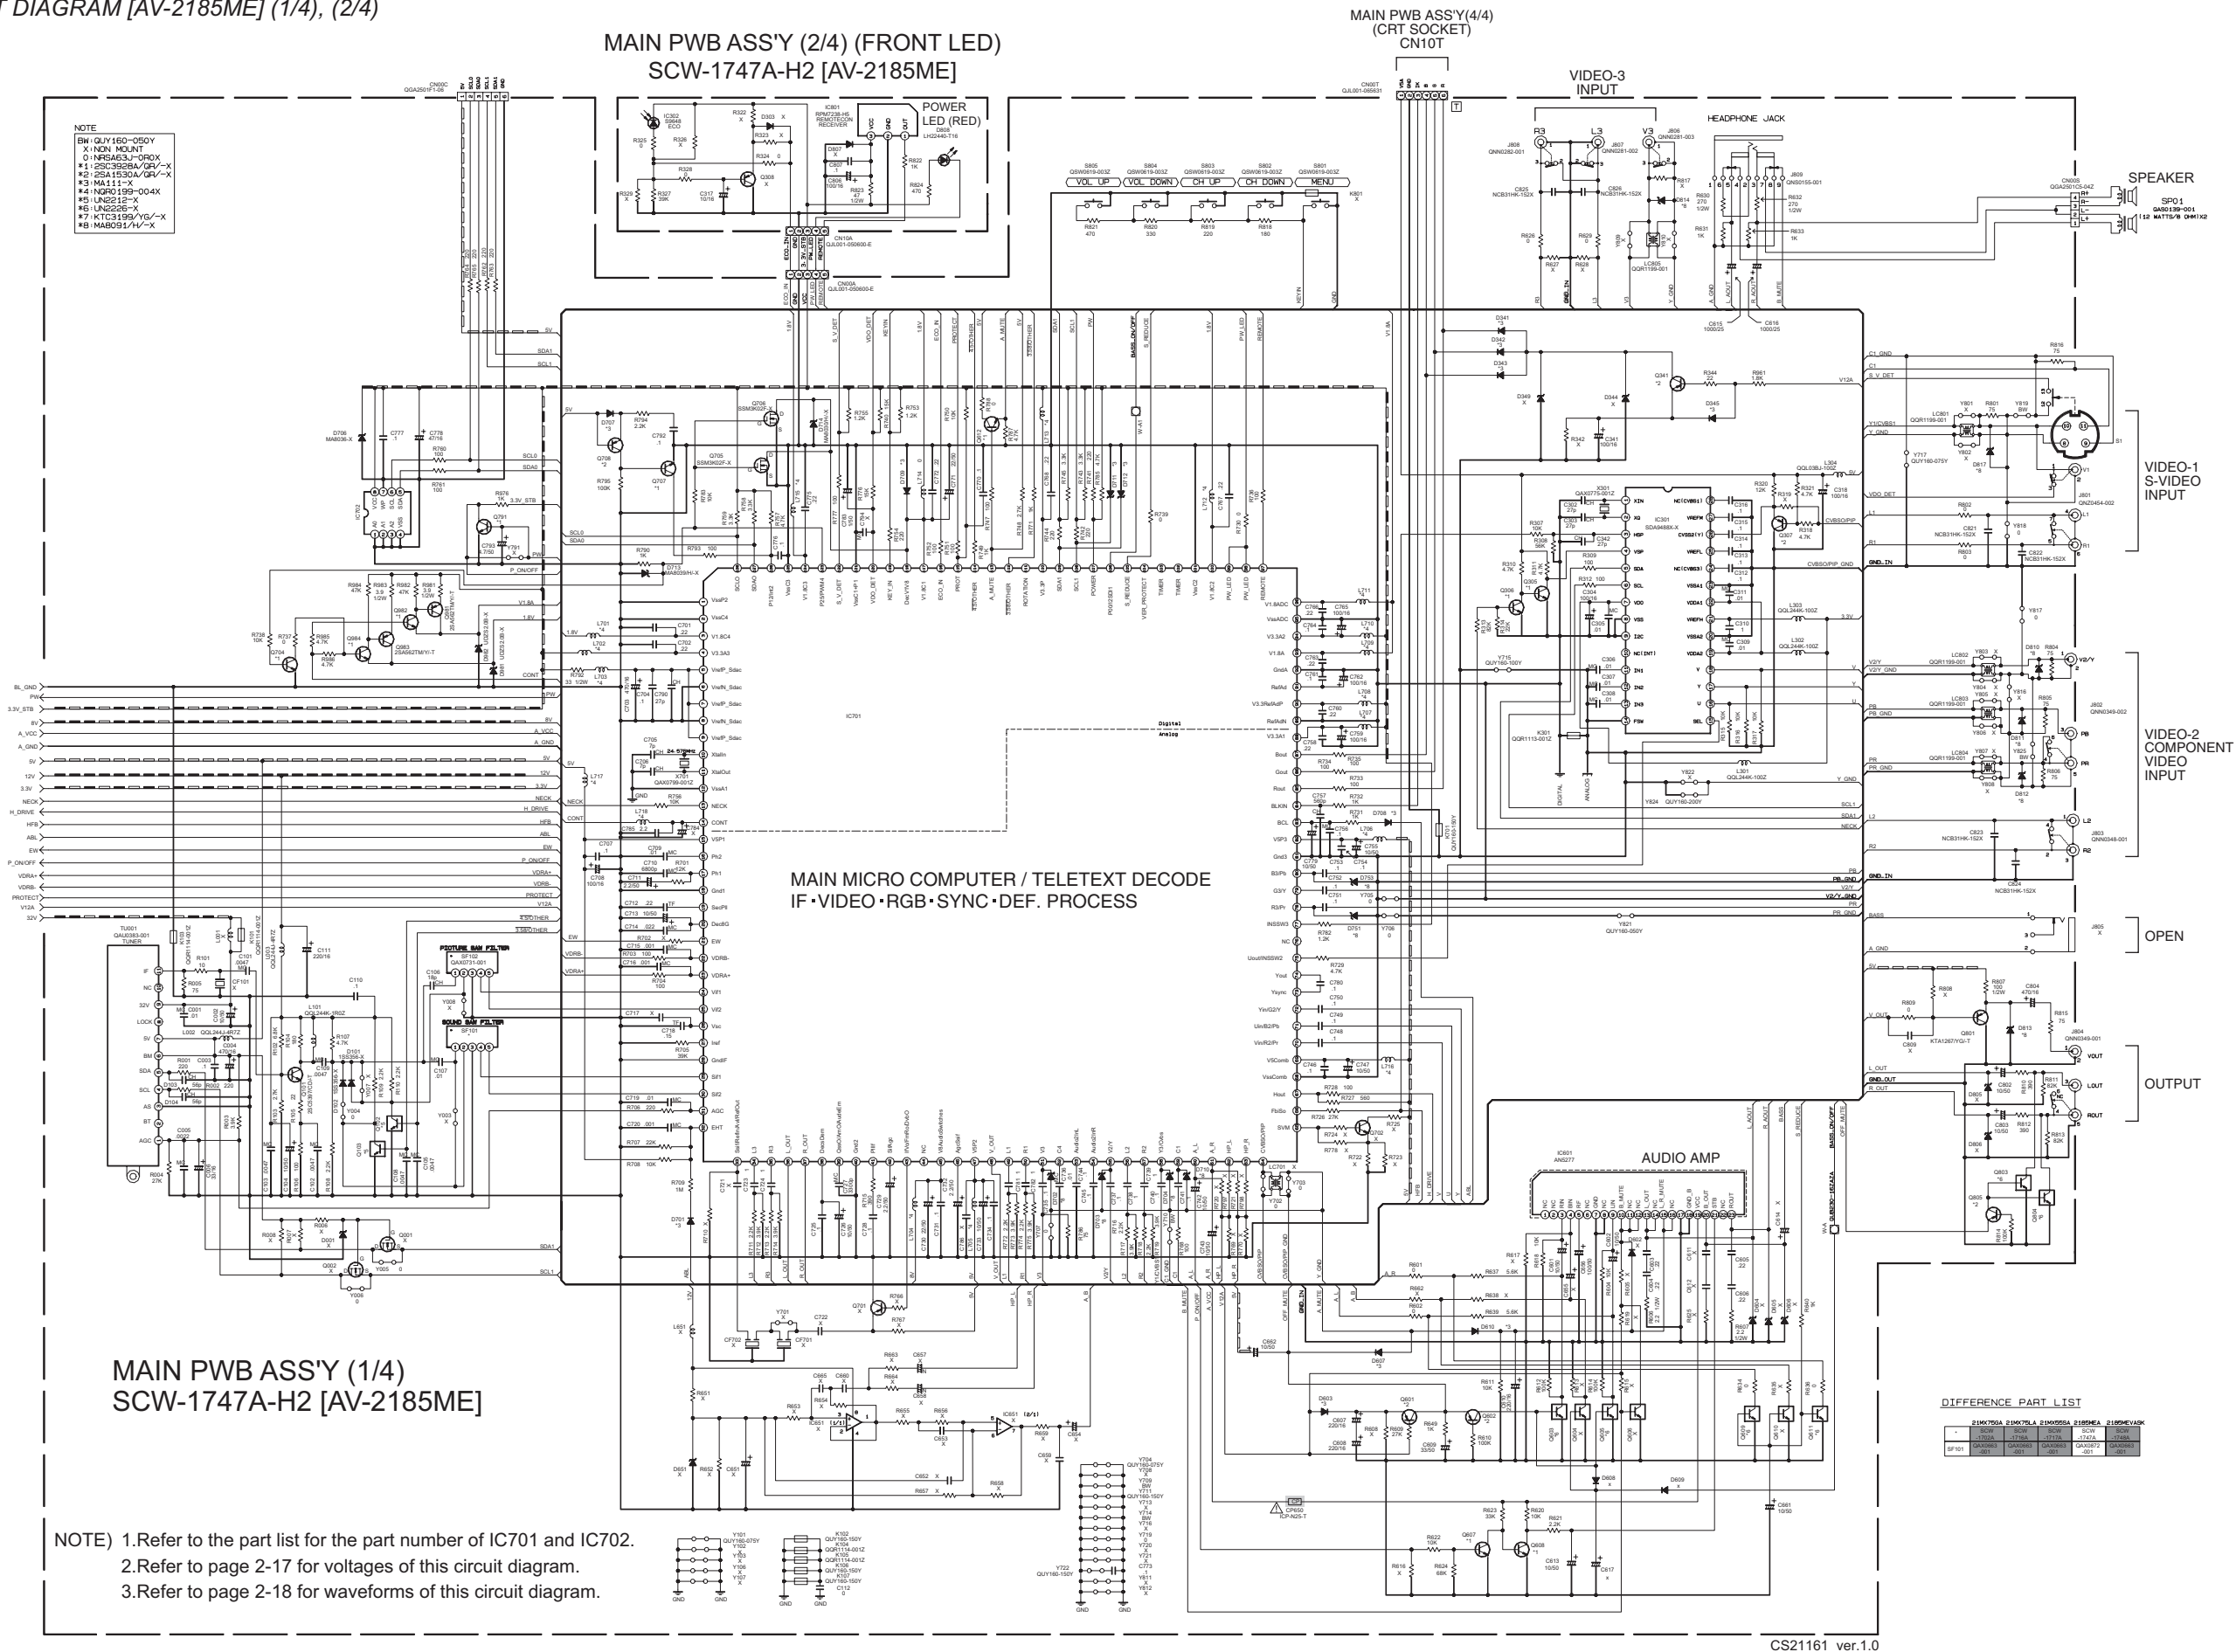

MAIN PWB CIRCUIT DIAGRAM [AV-2185ME] (3/4), (4/4)

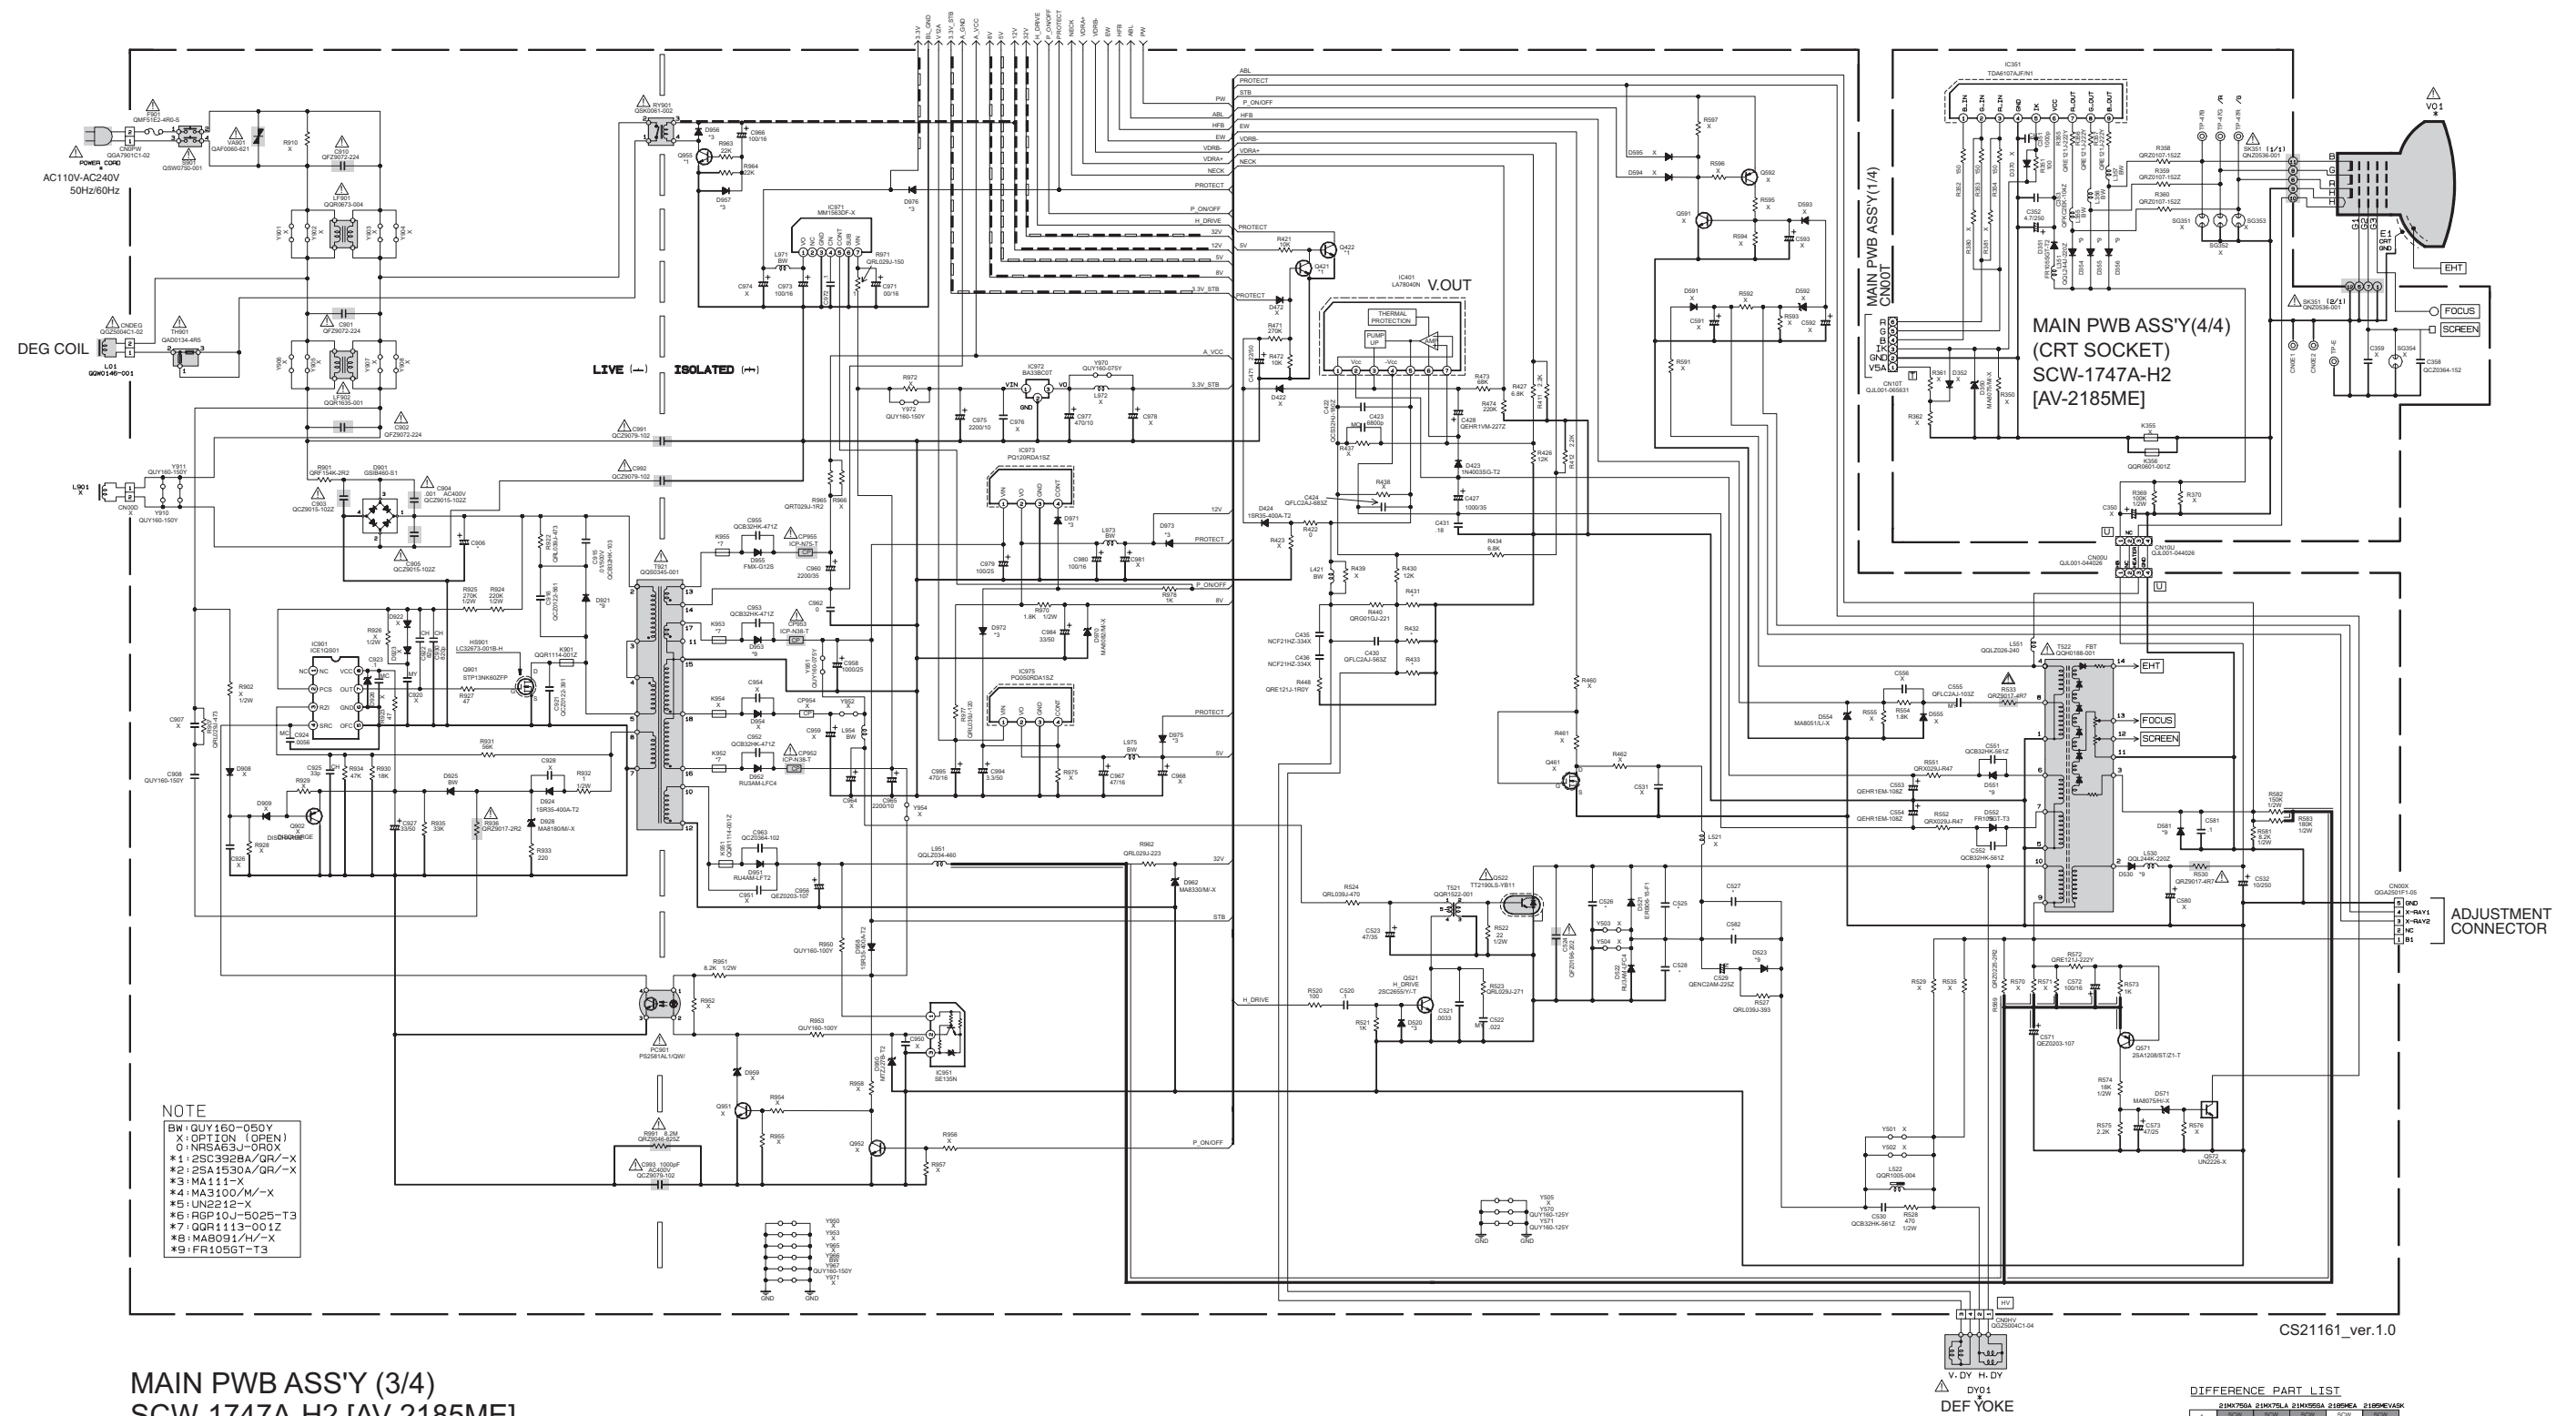

MAIN PWB ASS'Y (3/4)
SCW-1747A-H2 [AV-2185ME]


NOTE) 1.Refer to page 2-17 for voltages of this circuit diagram.
2.Refer to page 2-18 for waveforms of this circuit diagram.

[illegible]

MAIN PWB PATTERN [AV-2155VE]



FRONT

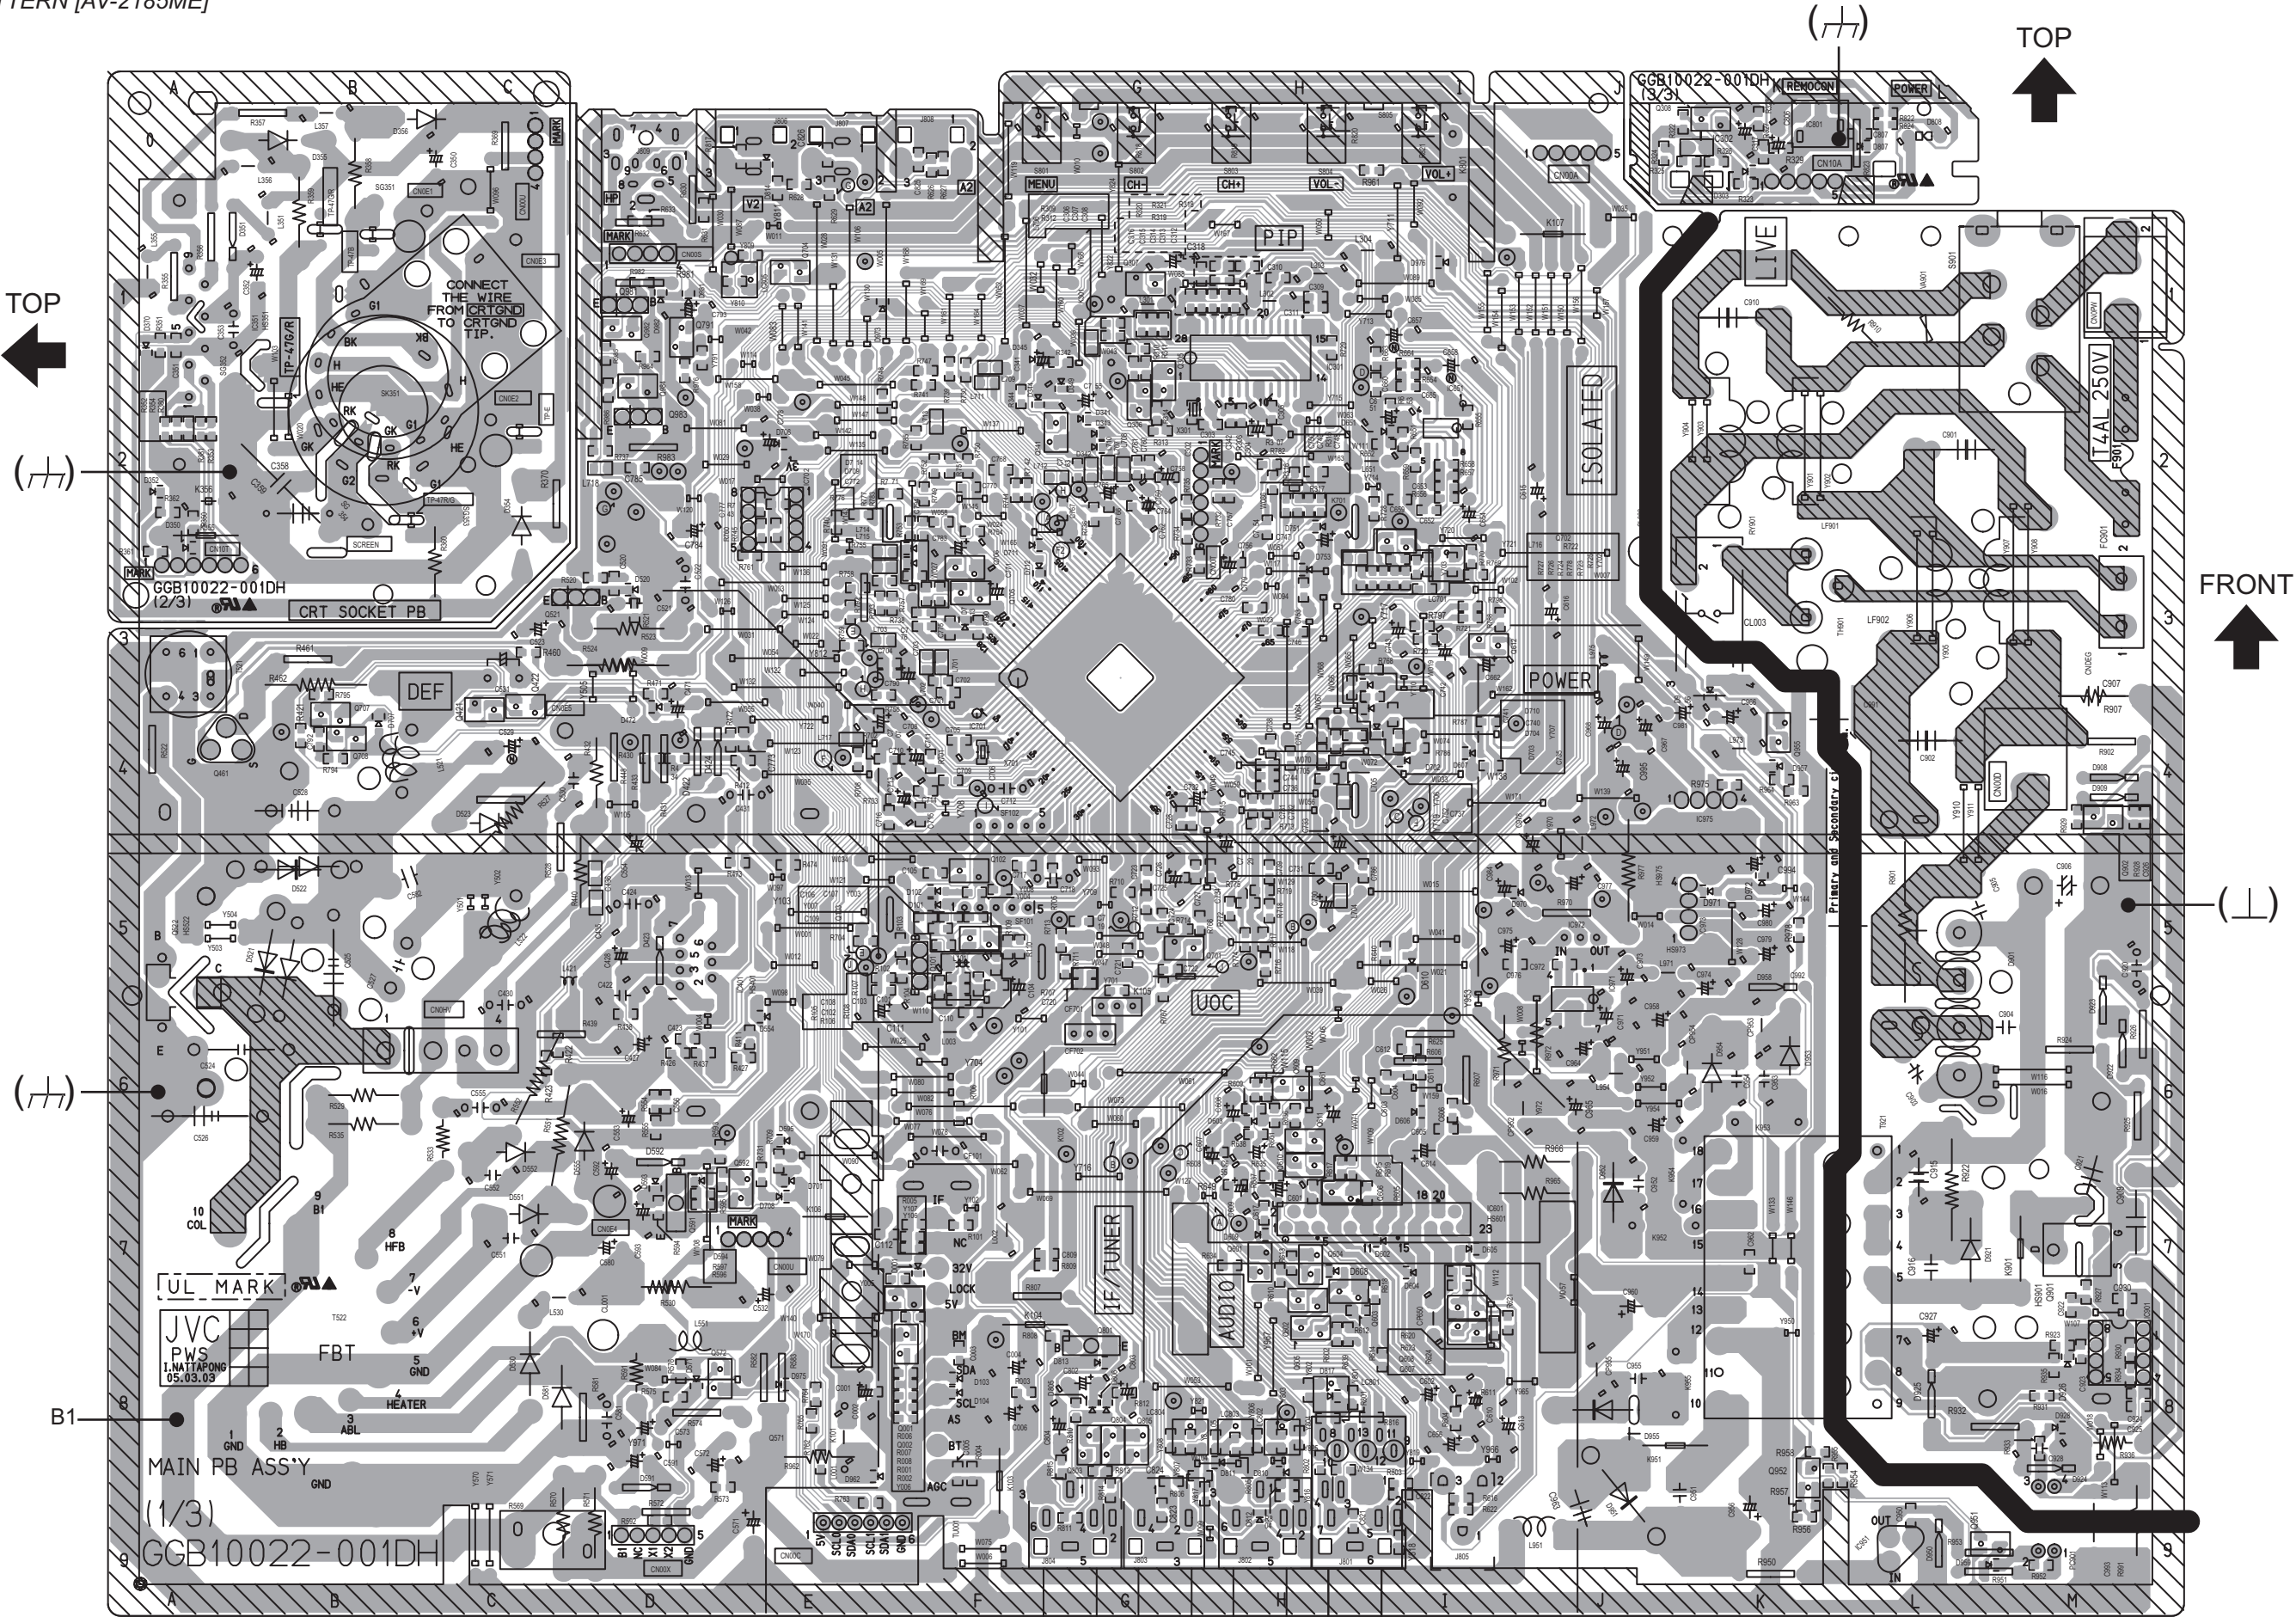


VOLTAGE CHARTS

<MAIN PWB>			<MAIN PWB (CRT SOCKET)>		
MODE PIN NO.	DC (V)		MODE PIN NO.	DC (V)	
IC401			Q102		
1	0.6		E	0	
2	13.3		C	0	
3	-11.4		B	3.1	
4	-13.3		Q103		
5	0.2		E	0	
6	13.5		C	0	
7	0.5		B	3.1	
IC601			Q341		
1	0.4		E	7.9	
2	0		C	1.8	
3	29.2		B	8.0	
4	0		Q521		
5	0		E	0	
6	0.4		C	10.6	
7	14.6		B	0	
8	0.7		Q522		
9	0		E	0	
10	30.6		C	150.0	
11	17.9		B	-0.1	
12	14.6		Q571		
IC701			E	134.1	
1	0		C	0	
2	0		B	133.9	
3	1.8		Q572		
4	3.1		E	0.1	
5	3.1		C	2.8	
6	0		B	0	
7	3.1		Q601		
8	0		E	8.1	
9	3.1		C	0.3	
10	0.5		B	8.0	
11	1.3		Q602		
12	0		E	0	
13	0		C	-2.8	
14	2.5		B	0	
15	4.9		Q603		
16	1.9		E	-1.7	
17	2.3		C	0	
18	0.2		B	0	
19	2.3		Q605		
20	2.3		E	-1.7	
21	0		C	0	
22	0.8		B	0	
23	0.9		Q607		
24	1.9		E	0	
25	1.8		C	0	
26	2.4		B	0.6	
27	1.7		Q608		
28	0		E	0	
29	1.9		C	20.3	
30	1.9		B	0	
31	1.5		Q612		
32	3.4		E	0.2	
33	1.8		C	5.0	
34	2.2		B	0	
35	2.2		Q704		
36	3.6		E	0	
37	3.7		C	2.5	
38	2.3		B	0	
39	2.4		Q705		
40	0		S	0	
41	1.9		G	0	
42	1.6		D	1.8	
43	2.2		Q706		
44	3.0		S	0	
45	8.4		G	0	
46	2.1		D	1.8	
47	4.9		Q707		
48	1.4		E	0.1	
49	2.2		C	3.2	
50	2.1		B	0.1	
51	1.3		Q708		
52	1.5		E	4.8	
53	2.2		C	0	
54	2.1		B	4.9	
55	1.4		Q791		
56	2.2		E	0	
57	2.2		C	2.9	
58	1.4		B	0	
59	1.6		Q801		
60	3.6		E	2.0	
61	3.6		C	0	
62	3.5		B	1.3	
63	3.5		Q803		
64	0.5		E	0	
65	0		C	0	
66	0.3		B	-1.1	
67	1.5		Q804		
68	0		E	0	
69	5.0		C	0	
70	1.2		B	-1.1	
71	1.3		Q805		
72	1.3		E	0.2	
73	1.9		C	-1.1	
74	1.7		B	0	
75	0.5				


MODE PIN NO.	DC (V)
Q901	
S	0
D	294.3
G	1.6
Q955	
E	0
C	11.9
B	0
Q981	
E	2.7
C	1.9
B	2.0
Q982	
E	1.8
C	2.0
B	2.4
Q983	
E	2.8
C	1.9
B	2.0
Q984	
E	1.9
C	2.1
B	2.3
TU001	
1	1.7
2	2.4
3	0
4	1.8
5	1.7
6	4.8
7	4.9
8	0.2
9	34.3
11	0

WAVEFORMS

-MAIN PWB-

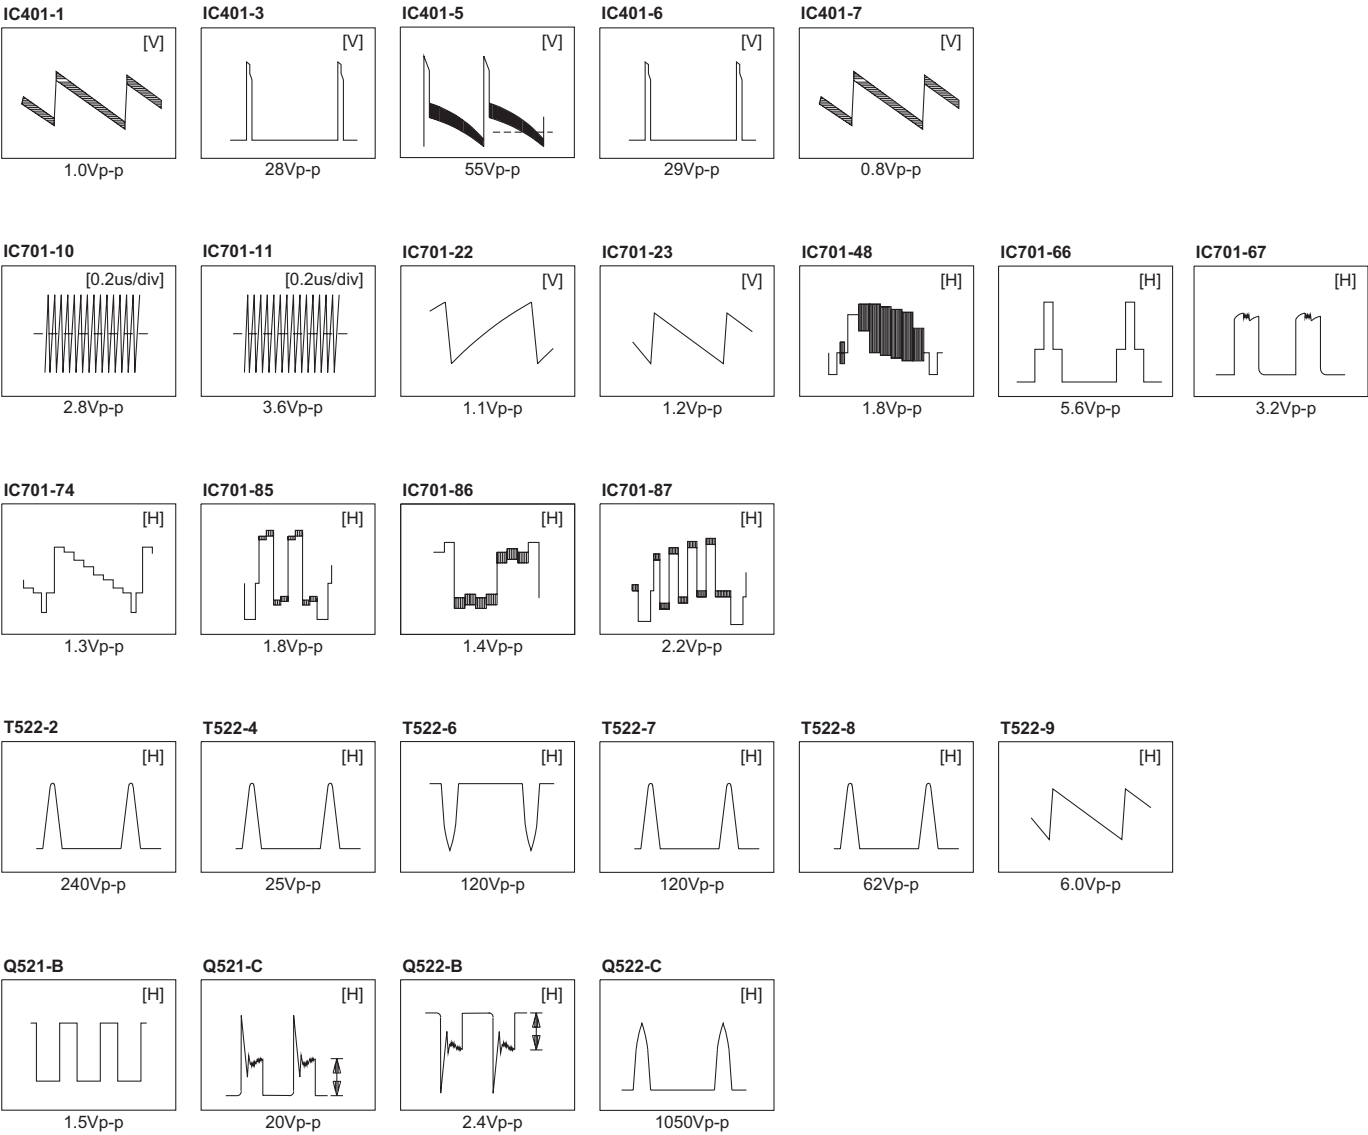

-CRT SOCKET PWB-

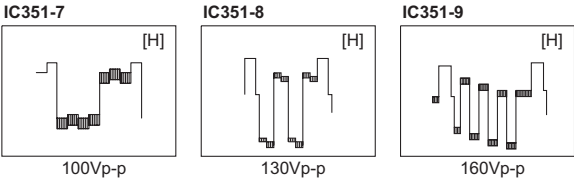



Victor Company of Japan, Limited
AV & MULTIMEDIA COMPANY DISPLAY CATEGORY 12, 3-chome, Moriya-cho, Kanagawa-ku, Yokohama-city, Kanagawa-prefecture, 221-8528, Japan

(No.YA271)



Printed in Japan
VPT