


SERVICE MANUAL

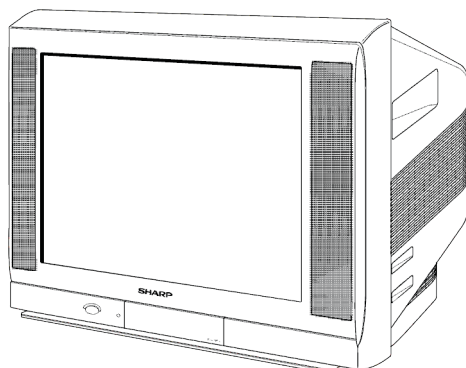

COLOR TELEVISION

Chassis No. GA-4

MODELS

W21FL

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified should be used.

CONTENTS

	Page
● ELECTRICAL SPECIFICATIONS	1
● IMPORTANT SERVICE SAFETY PRECAUTION	2
● LOCATION OF USER'S CONTROL	4
● INSTALLATION AND SERVICE INSTRUCTIONS	5
● SERVICE MODE	6
● ADJUSTMENT METHOD	7
● CHASSIS LAYOUT	14
● BLOCK DIAGRAM	15
● DESCRIPTION OF SCHEMATIC DIAGRAM	19
● SCHEMATIC DIAGRAMS.....	20
● PRINTED WIRING BOARD ASSEMBLIES.....	24
● REPLACEMENT PARTS LIST.....	28
● PACKING OF THE SET	34

ELECTRICAL SPECIFICATIONS

POWER INPUT	AC 110-220V, 60 Hz
POWER RATING	90W
PICTURE SIZE	1,239 cm ² (192sq inch)
CONVERGENCE	Magnetic
SWEEP DEFLECTION	Magnetic
FOCUS	Uni-Bi
INTERMEDIATE FREQUENCIES	
Picture IF Carrier Frequency	45.75 MHz
Sound IF Carrier Frequency	41.25 MHz
Color Sub-Carrier Frequency	42.17 MHz
	(Nominal)
AUDIO POWER	
OUTPUT RATING	4 W(RMS) x 2pcs

SPEAKER
 SIZE 5 x 12 cm, 2pcs
 VOICE COIL IMPEDANCE 16 ohm at 400 Hz

ANTENNA INPUT IMPEDANCE
 VHF/UHF 75 ohm Unbalanced

TUNING RANGES
 VHF-Channels 2 thru 13
 UHF-Channels 14 thru 69
 CATV Channels 1 thru 125

(EIA, Channel Plan U.S.A.)

Specifications are subject to change without prior notice.

SHARP CORPORATION


This document has been published to be used for after sales service only.
The contents are subject to change without notice.

IMPORTANT SERVICE SAFETY PRECAUTION

■ Service work should be performed only by qualified service technicians who are thoroughly familiar with all safety checks and the servicing guidelines which follow:

WARNING

1. For continued safety, no modification of any circuit should be attempted.
2. Disconnect AC power before servicing.
3. Semiconductor heat sinks are potential shock hazards when the chassis is operating.
4. The chassis in this receiver has two ground systems which are separated by insulating material. The non-isolated (hot) ground system is for the B+ voltage regulator circuit and the horizontal output circuit. The isolated ground system is for the low B+ DC voltages and the secondary circuit of the high voltage transformer.
To prevent electrical shock use an isolation transformer between the line cord and power receptacle, when servicing this chassis.

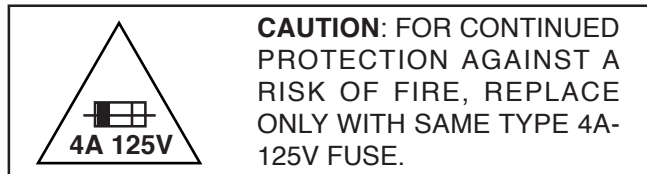

SERVICING OF HIGH VOLTAGE SYSTEM AND PICTURE TUBE

When servicing the high voltage system, remove the static charge by connecting a 10k ohm resistor in series with an insulated wire (such as a test probe) between the picture tube ground and the anode lead. (AC line cord should be disconnected from AC outlet.)

1. Picture tube in this receiver employs integral implosion protection.
2. Replace with tube of the same type number for continued safety.
3. Do not lift picture tube by the neck.
4. Handle the picture tube only when wearing shatterproof goggles and after discharging the high voltage anode completely.

X-RADIATION AND HIGH VOLTAGE LIMITS

1. Be sure all service personnel are aware of the procedures and instructions covering X-radiation. The only potential source of X-ray in current solid state TV receivers is the picture tube. However, the picture tube does not emit measurable X-Ray radiation, if the high voltage is as specified in the "High Voltage Check" instructions.
It is only when high voltage is excessive that X-radiation is capable of penetrating the shell of the picture tube including the lead in the glass material. The important precaution is to keep the high voltage below the maximum level specified.
2. It is essential that servicemen have available at all times an accurate high voltage meter.
The calibration of this meter should be checked periodically.
3. High voltage should always be kept at the rated value –no higher. Operation at higher voltages may cause a failure of the picture tube or high voltage circuitry and;also, under certain conditions, may produce radiation in exceeding of desirable levels.
4. When the high voltage regulator is operating properly there is no possibility of an X-radiation problem. Every time a color chassis is serviced, the brightness should be tested while monitoring the high voltage with a meter to be certain that the high voltage does not exceed the specified value and that it is regulating correctly.
5. Do not use a picture tube other than that specified or make unrecommended circuit modifications to the high voltage circuitry.
6. When trouble shooting and taking test measurements on a receiver with excessive high voltage, avoid being unnecessarily close to the receiver.
Do not operate the receiver longer than is necessary to locate the cause of excessive voltage.

IMPORTANT SERVICE SAFETY PRECAUTION

(Continued)

BEFORE RETURNING THE RECEIVER

(Fire & Shock Hazard)


Before returning the receiver to the user, perform the following safety checks.

1. Inspect all lead dress to make certain that leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the receiver.
2. Inspect all protective devices such as non-metallic control knobs, insulating materials, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacity networks, mechanical insulators, etc.
3. To be sure that no shock hazard exists, check for leakage current in the following manner.
 - Plug the AC cord directly into a 120 volt AC outlet, (Do not use an isolation transformer for this test).
 - Using two clip leads, connect a 1.5k ohm, 10 watt resistor paralleled by a 0.15 μ F capacitor in series with all exposed metal cabinet parts and a known earth ground, such as electrical conduit or electrical ground connected to earth ground.
 - Use an AC voltmeter having with 5000 ohm per volt, or higher, sensitivity to measure the AC voltage drop across the resistor.

- Connect the resistor connection to all exposed metal parts having a return to the chassis (antenna, metal cabinet, screw heads, knobs and control shafts, escutcheon, etc.) and measure the AC voltage drop across the resistor.

All checks must be repeated with the AC line cord plug connection reversed. (If necessary, a non-polarized adapter plug must be used only for the purpose of completing these check.)

Any current measured must not exceed 0.5 milliamp. Any measurements not within the limits outlined above indicate of a potential shock hazard and corrective action must be taken before returning the instrument to the customer.

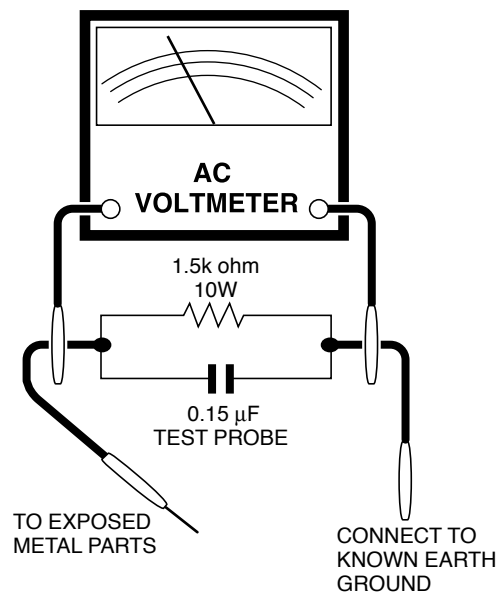

SAFETY NOTICE

Many electrical and mechanical parts in television receivers have special safety-related characteristics. These characteristics are often not evident from visual inspection, nor can protection afforded by them be necessarily increased by using replacement components rated for higher voltage, wattage, etc.

Replacement parts which have these special safety characteristics are identified in this manual; electrical components having such features are identified by " \triangle " and shaded areas in the Replacement Parts Lists and Schematic Diagrams.

For continued protection, replacement parts must be identical to those used in the original circuit. The use of substitute replacement parts which do not have the same safety characteristics as the factory recommended replacement parts shown in this service manual, may create shock, fire, X-radiation or other hazards.

LOCATION OF USER'S CONTROL

Front Panel

POWER

Press → On.
Press again → Off.

SENSOR AREA FOR
REMOTE CONTROL

MENU

Press → Accesses MAIN MENU.
Press again → Exits MAIN MENU.

VOLUME UP/DOWN

(+) Increases sound.
(-) Decreases sound.


VIDEO **IN 2** L-AUDIO-R

(INSIDE DOOR)

CHANNEL UP/DOWN

(▲) Selects next higher channel.
(▼) Selects next lower channel.

Basic Remote Control Functions

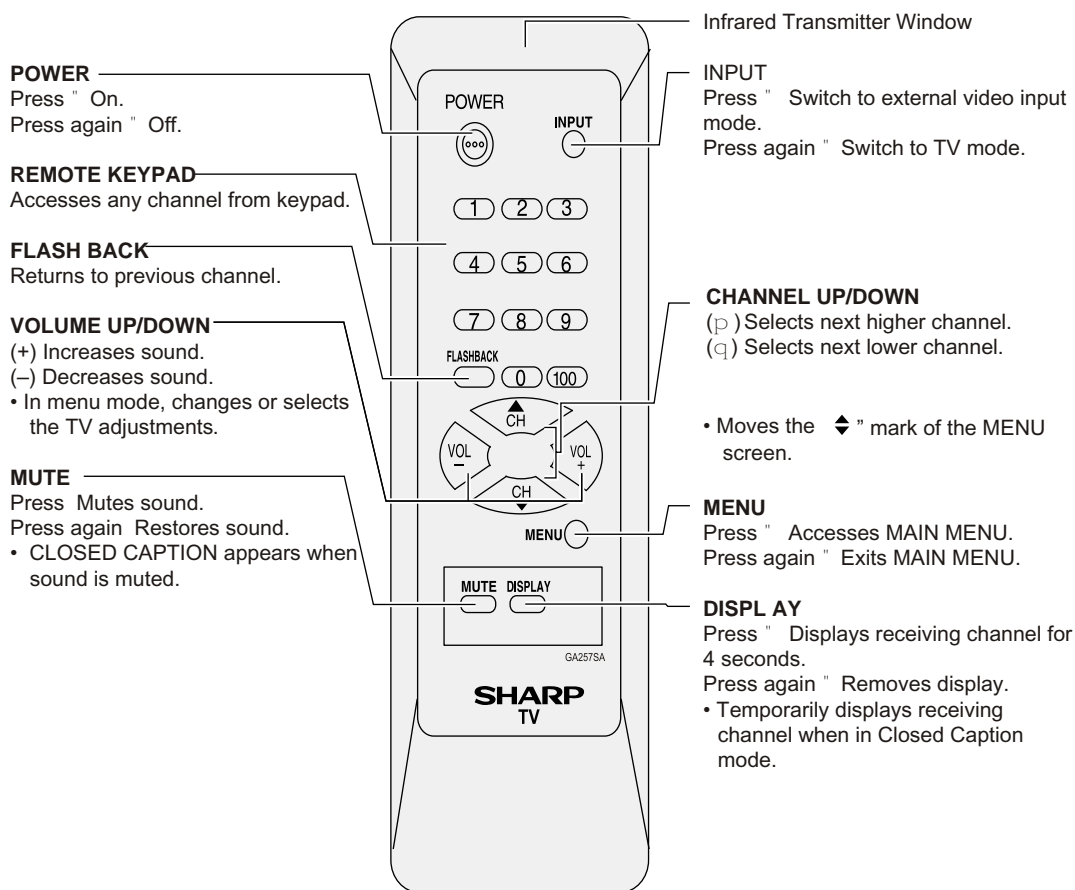

Note:

- The above shaded buttons on the Remote Control glow in the dark. To use the glow-in-the-dark display on the remote control, place it under a fluorescent light or other lighting.
- The phosphorescent material contains no radioactive or toxic material, so it is safe to use.
- The degree of illumination will vary depending on the strength of lighting used.
- The degree of illumination will decrease with time and depending on the temperature.
- The time needed to charge the phosphorescent display will vary depending on the surrounding lighting.
- Sunlight and fluorescent lighting are the most effective when charging the display.

INSTALLATION AND SERVICE INSTRUCTIONS

- Note:** (1) When performing any adjustments to resistor controls and transformers use non-metallic screwdrivers or TV alignment tools.
 (2) Before performing adjustments, the TV set must be on at least 15 minutes.

CIRCUIT PROTECTION

The receiver is protected by a 4.0A fuse (F701), mounted on PWB-A, wired into one side of the AC line input.

X-RADIATION PROTECTOR CIRCUIT TEST

After service has been performed on the horizontal deflection system, high voltage system, B+ system, test the X-Radiation protection circuit to ascertain proper operation as follows:

1. Apply 120V AC using a variac transformer for accurate input voltage.
2. Allow for warm up and adjust all customer controls for normal picture and sound.
3. Receive a good local channel.
4. Connect a digital voltmeter to P603 Pin3 and make sure that the voltmeter reads $18.9 \pm 1.1V$.
5. Apply external 24.5V DC at P603 Pin3 by using an external DC supply, TV must be shut off.
6. To reset the protector, unplug the AC cord at least 4 second before plugging in again. Now make sure that normal picture appears on the screen.
7. If the operation of the horizontal oscillator does not stop in step 5, the circuit must be repaired before the set is returned to the customer.

HIGH VOLTAGE CHECK


High voltage is not adjustable but must be checked to verify that the receiver is operating within safe and efficient design limitations as specified checks should be as follows:

1. Connect an accurate high voltage meter between ground and anode of picture tube.
2. Operate receiver for at least 15 minutes at 120V AC line voltage, with a strong air signal or a properly tuned in test signal.
3. Enter the service mode and set Y-mute ON by using Service R/C.
4. The voltage should be approximately 28.6kV (at zero beam).
 If a correct reading cannot be obtained, check circuitry for malfunctioning components. After the voltage test, make Y-mute off to the normal mode.

SERVICE MODE

Service Mode Overview

1. Service mode is entered by SERVICE key input or CH-UP +VOL-DOWN input during reset.
2. Service mode is cleared by entering SERVICE key or CH-UP +VOL-DOWN key command during service mode.
3. If key input port (SERVICE) input is LOW, then it is in service mode.
4. During key input port (SERVICE) input is LOW, clearing service mode by key input SERVICE or CH-UP + VOL-DOWN is disabled.
5. Service mode can be switched to 4 modes as follows by key input MENU;

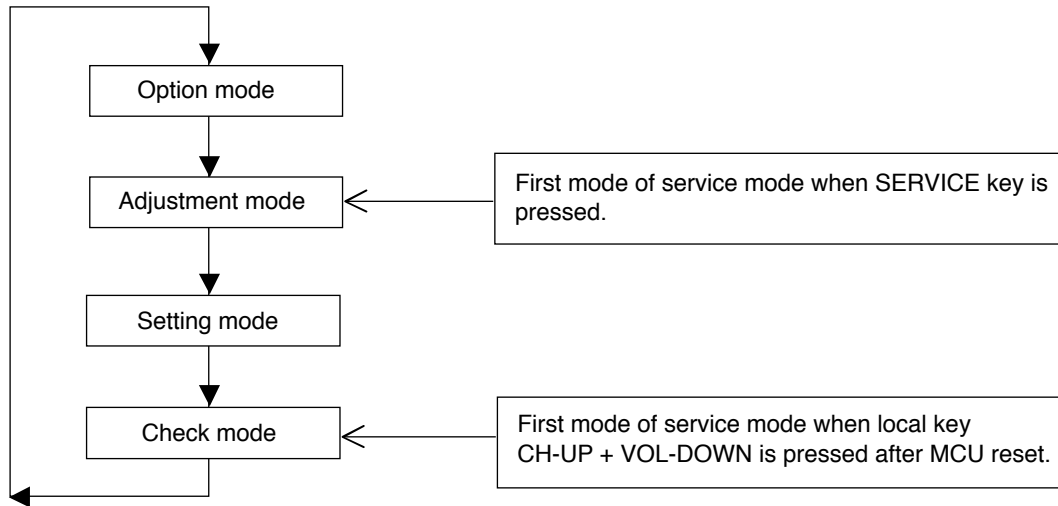

6. AFT processing is disabled during service mode. PLL setting data is set to fo data.
7. All user data are set to default during service mode. FAO and SPEAKER user settings are off and on respectively in service mode. Energy Save is off.
8. Sleep timer, View timer and Off timer are inactivated in Service mode.
9. Sound is muting in service mode except at Adjustment Items V20, M01, M02, M03, M04, M05, and M06.

Adjustment Mode Items

ADJUSTMENT METHOD

Caution: to get into the service mode, one of the ways is press direct key for service items. the other ways is short the main chassis JA309 and JA402

There is three stage of Service Mode data

First stage data from V01 ~ M06

to go into second stage of service mode data, press MENU key

Second stage data from F01 ~ F51

to go into third stage of service mode data, press MENU key

Third stage data from 001 ~ 020

Below is the contents of these data

First Stage

No.	Item Name	IC	Register	Range	Default
V01	SUB-PICTURE	1 Chip	CONTRAST	0~127	127
V02	SUB-TINT	1 Chip	TINT	0~127	64
V03	SUB-COLOR	1 Chip	COLOR	0~127	64
V04	SUB-BRIGHT	1 Chip	BRIGHT	0~255	128
V05	SUB-SHARP	1 Chip	VIDEO-TONE	0~63	32
V06	V-SHIFT	1 Chip	V-SHIFT	0~7	7
V07	H-SHIFT	1 Chip	H-PHASE	0~31	16
V08	RF-AGC	1 Chip	RF-Delay	0~127	127
V09	V-SIZE	1 Chip	V-SIZE	0~63	32
V10	PIF-VCO	1 Chip	VIF-VCO	0~63	32
V11	R-CUTOFF	1 Chip	R-CUTOFF	0~255	64
V12	G-CUTOFF	1 Chip	G-CUTOFF	0~255	64
V13	B-CUTOFF	1 Chip	B-CUTOFF	0~255	64
V14	R-DRIVE	1 Chip	R-DRIVE	0~127	64
V15	B-DRIVE	1 Chip	B-DRIVE	0~127	64
V16	SUB-COLOR(YUV)	1 Chip	COLOR	0~127	64
V17	SUB-TINT(YUV)	1 Chip	BASEBAND-TINT	0~127	64
V18	CC-POS	Micron		0~255	32
V19	(Vertical mode)	1 Chip	V-MUTE,SERVICE	0, 1, 2	0
V20	SUB-VOL	1 Chip	A-ATT	0~127	127
V21	H-VCO	1 Chip	H-VCO	0~7	4
M01	MTS-ATT	MTS	ATT	0~15	16
M02	MTS-VCO	MTS	VCO	0~63	32
M03	MTS-FILTER	MTS	FILTER	0~63	28
M04	MTS-WIDEBAND	MTS	WIDEBAND	0~63	27
M05	MTS-SPECTRAL	MTS	SPECTRAL	0~63	32
M06	SUB-VOL	MTS	VOL	0~63	63

Auto Adjustment Item

1. H-VCO (Currently need manual adj)
2. RF-AGC
3. PIF-VCO
4. MTS-FILTER

■ SELF ADJUSTMENT

H-VCO

1. When there is H-VCO self-adjustment key input for adjustment item H-VCO, self-adjustment is performed.
2. H-FREE(1chip) is set to 1.
3. H-OUT is set by intelligent monitor output.
4. IM input is set as TIM input.
5. H-VCO(1chip) data is changed so that the number of input pulse is 125 inside 8ms interval.
6. When adjustment completed, OSD display and H-VCO self-adjustment status data of EEPROM are updated.
7. H-FREE(1chip), intelligent monitor output and IM input mode are recovered.

RF-AGC

1. When there is RF-AGC self-adjustment key input for adjustment item RF-AGC, self-adjustment is performed.
2. AGC-OUT is set by intelligent monitor output.
3. IM input is set as AD input.
4. By decreasing RF-AGC (1chip) data from current RF-AGC adjustment value to 0, AFT input voltage becomes the maximum setting value.
5. Increase RF-AGC(1chip) data, when AFT input voltage is at (max. 0.3V) point, adjustment is completed.
6. When adjustment completed, OSD display and RF-AGC self-adjustment status data of EEPROM are updated.
7. Intelligent monitor output and IM input mode are recovered.

PIF-VCO

1. When there is PIF-VCO self-adjustment key input for adjustment item PIF-VCO, self-adjustment is performed.
2. VIF-DEF(1chip) is set to 1.
3. AFC is set by intelligent monitor output.
4. IM input is set as AD input.
5. VIF-VCO(1chip) data is changed so that input voltage becomes 2.5V.
6. When adjustment completed, OSD display and PIF-VCO self-adjustment status data of EEPROM are updated.
7. VIF-DEF(1chip), intelligent monitor output and IM input mode are recovered.

MTS-FILTER

Adjustment is performed in the center of the range when FILTER status is OK.

1. If data is changed from 0 to 63, point where NG → OK is A and point where OK → NG is B.
2. If data is changed from 63 to 0, point where NG → OK is C and point where OK → NG is D.
3. $(A+B+C+D)/4$ is the adjustment point.

Setting Mode Items

Second Stage

No.	Item Name	IC	Register	Range	Default
F01	VideoTone-Gain (TV)	1chip	V-TONE	0 / 1	0
F02	VideoTone-Gain (AV)	1chip	V-TONE	0 / 1	0
F03	VideoTone-Gain(YUV)	1chip	V-TONE	0 / 1	0
F04	ABCL	1chip	ABCL	0 / 1	0
F05	BS	1chip	BS-OFF	0 / 1	0
F06	ABCL-G	1chip	ABCL-G	0 / 1	0
F07	SHP-AV	OFFSET	VIDEO-TONE(OFFSET)	-16~+16	0
F08	SHP-YUV	OFFSET	VIDEO-TONE(OFFSET)	-16~+16	0
F09	RGB-CLIP	1chip	ExtRGB-Clip	0 / 1	0
F10	E-SAVE	OFFSET	CONTRAST(OFFSET)	0~63	30
F11	FAO-VOL	1chip	A-ATT	0~127	120
F12	PIF-G	1chip	VIF-GAIN	0~7	4
F13	Y-DELAY(TV)	1chip	Y-Delay	0~7	0
F14	Y-DELAY(AV)	1chip	Y-Delay	0~7	0
F15	Y-DELAY(YUV)	1chip	Y-Delay	0~7	0
F16	TINT-AV	OFFSET	TINT(OFFSET)	-32~+32	0
F17	COL-AV	OFFSET	COLOR(OFFSET)	-32~+32	0
F18	R-DRI(R2)	OFFSET	R-DRI(OFFSET)	-32~+32	0
F19	R-DRI(R)	OFFSET	R-DRI(OFFSET)	-32~+32	0
F20	R-DRI(B)	OFFSET	R-DRI(OFFSET)	-32 ~+32	0
F21	B-DRI(R2)	OFFSET	B-DRI(OFFSET)	-32~+32	0
F22	B-DRI(R)	OFFSET	B-DRI(OFFSET)	-32~+32	0
F23	B-DRI(B)	OFFSET	B-DRI(OFFSET)	-32~+32	0
F24	V-FREE	1chip	V-FREE	0 / 1	0
F25	GAMMA	1chip	GAMMA	0~3	0
F26	TRAP(TV)	1chip	TRAP-FINE	0~3	2
F27	TRAP(AV)	1chip	TRAP-FINE	0~3	2
F28	H-FREE	1chip	H-FREE	0 / 1	0
F29	1W(TV)	1chip	V.Window	0 / 1	0
F30	1W(AV)	1chip	V.Window	0 / 1	0
F31	YLPF	1chip	YSW-LPF	0 / 1	1
F32	BS-D	1chip	BS-DISCHARGE	0~3	0
F33	BS-C	1chip	BS-CHARGE	0~3	0
F34	SL(TV)	1chip	S-SLICE DOWN	0~3	0
F35	SL(AV)	1chip	S-SLICE DOWN	0~3	0
F36	SL(YUV)	1chip	S-SLICE DOWN	0~3	0
F37	AFC2	1chip	AFC2-G	0 / 1	0
F38	VD(TV)	1chip	Vsync-Det	0 / 1	0
F39	VD(AV)	1chip	Vsync-Det	0 / 1	0
F40	AS(TV)	1chip	Auto-Slice	0 / 1	0
F41	AS(AV)	1chip	Auto-Slice	0 / 1	0
F42	AS(YUV)	1chip	Auto-Slice	0 / 1	0
F43	FBP(TV)	1chip	FBP Vth	0 / 1	0
F44	FBP(AV)	1chip	FBP Vth	0 / 1	0
F45	FBP(YUV)	1chip	FBP Vth	0 / 1	0
F46	C.Clip Level	1chip	C.Clip Level	0 / 1	0
F47	PSW	MTS	PSW	0 / 1	0
F48	FAO-VOL	MTS	VOL	0~63	60
F49	CP	PLL	CP	0 / 1	0
F50	CC LEVEL	MICRON			0
F51	OSD POS	MICRON			0
F52	OFFSET-ADJ-COL	1 chip	COLOR	-32~32	0
F53	OFFSET-ADJ-TINT	1 chip	TINT	-32~32	0
F54	OFFSET-ADJ-TINT-YUV	1 chip	BASEBAND-TINT	-32~32	0

Option Mode Items

Third Stage

No	ITEM	0	1	DEFAULT
O01	DEMO	Without DEMO	With DEMO	1
O02	DOWNLOAD	Without V-CHIP OP	With V-CHIP OP	1
O03	V-CHIP	Without V-CHIP	With V-CHIP	1
O04	SPEAKER	Without SPEAKER	With SPEAKER	1
O05	FAO	Without FAO	With FAO	1
O06	P.PREF	Without P.PREF	With P.PREF	1
O07	UNIV+	Without UNIV+	With INIV+	1
O08	VIEW TIMER	Without VIEW TIMER	With VIEW TIMER	1
O09	EZ-SETUP	EZ-SETUP	AUTO PRESET	1
O10	PON-CH	Without POWER-ON	With POWER-ON	1
O11	FAV-COL	FAV-COL	COL-TEMP	1
O12	COMPONENT	Without COMPONENT	With COMPONENT	1
O13	AV	Without AV	With AV	1
O14	AV2	AV1 system	AV2 system	1
O15	MTS	Without MTS	With MTS	1
O16	TONE-CTRL	Without S-ADJ	With S-ADJ	1
O17	AUTO-OFF	Without AUTO-OFF	With AUTO-OFF	1
O18	INIT-LANG	ENGLISH	SPANISH	1
O19	SETUP-FLAG	NO SETUP	AUTO SETUP	1
O20	FR.AV (Front, Rear AV)	3: Display "FRONT A/V INPUTS" and "REAR A/V INPUTS" in DEMO mode. 2: Display "FRONT A/V INPUTS" only in DEMO mode. 1: Display "REAR A/V INPUTS" only in DEMO mode. 0: No display of above lines in DEMO mode.		3

Check Mode

Micron mask version, software version and ROM correction function status are displayed in check mode.

ADJUSTMENT METHOD

Caution: to get into the service mode, one of the ways is press direct key for service items. the other ways is short the main chassis JA309 and JA402

There is three stage of Service Mode data

First stage data from V01 ~ M06

to go into second stage of service mode data, press MENU key

Second stage data from F01 ~ F54

to go into third stage of service mode data, press MENU key twice

Third stage data from 001 ~ 020

Below is the contents of these data

First Stage

Data	Service Mode	Function	Range	Default Data
V01	SUB-PICTURE	CONTRAST	0~127	127
V02	SUB-TINT	TINT	0~127	64
V03	SUB-COLOR	COLOR	0~127	64
V04	SUB-BRIGHT	BRIGHT	0~255	128
V05	SUB-SHARP	VIDEO-TONE	0~63	32
V06	V-SHIFT	V-SHIFT	0~7	4
V07	H-SHIFT	H-PHASE	0~31	16
V08	RF-AGC	RF-DELAY	0~127	127
V09	V-SIZE	V-SIZE	0~63	32
V10	PIF-VCO	VIF-VCO	0~63	32
V11	R-CUTOFF	R-CUTOFF	0~255	127
V12	G-CUTOFF	G-CUTOFF	0~255	127
V13	B-CUTOFF	B-CUTOFF	0~255	127
V14	R-DRIVE	R-DRIVE	0~127	64
V15	B-DRIVE	B-DRIVE	0~127	64
V16	SUB-COLOR(YUV)	COLOR	0~127	64
V17	SUB-TINT(YUV)	BASEBAND-TINT	0~127	64
V18	CC-POS	CC-POSITION	0~255	32
V19	SCREEN CUT OFF	CUT OFF		0
V20	SUB-VOL	A-ATT	0~127	127
V21	H-VCO	H-VCO	0~7	4
M01	MTS-ATT	ATT (MTS)	0~15	10
M02	MTS-VCO	VCO (MTS)	0~63	32
M03	MTS-FILTER	FILTER (MTS)	0~63	28
M04	MTS-WIDEBAND	WIDEBAND (MTS)	0~63	27
M05	MTS-SPECTRAL	SPECTRAL (MTS)	0~63	32
M06	SUB-VOL	VOL (MTS)	0~63	63

Auto Adjustment Item

1. H-VCO (Currently need manual adj)
2. RF-AGC
3. PIF-VCO
4. MTS-FILTER

Second Stage


Data	Service Mode	Function	Range	Default Data
F01	VIDEO TONE -GAIN (TV)	V-TONE	0/1	0
F02	VIDEO TONE -GAIN (AV)	V-TONE	0/1	0
F03	VIDEO TONE -GAIN(YUV)	V-TONE	0/1	0
F04	ABCL	ABCL	0/1	0
F05	BS	BS-OFF	0/1	0
F06	ABCL-G	ABCL-G	0/1	0
F07	SHP-AV	VIDEO-TONE(OFFSET)	-16~+16	0
F08	SHP-YUV	VIDEO-TONE(OFFSET)	-16~+16	0
F09	SHP-CLIP	EXTRGB-CLIP	0/1	0
F10	E-SAVE	CONTRAST(OFFSET)	0~63	30
F11	FAO-VOL	A-ATT	0~127	120
F12	PIF-G	VIF-GAIN	0~7	4
F13	Y-DELAY(TV)	Y-DELAY	0~7	0
F14	Y-DELAY(AV)	Y-DELAY	0~7	0
F15	Y-DELAY(YUV)	Y-DELAY	0~7	0
F16	TINT-AV	TINT(OFFSET)	-32~+32	0
F17	COL-AV	COLOR(OFFSET)	-32~+32	0
F18	R-DRI(R2)	R-DRI(OFFSET)	-32~+32	0
F19	R-DRI(R)	R-DRI(OFFSET)	-32~+32	0
F20	R-DRI(B)	R-DRI(OFFSET)	-32~+32	0
F21	B-DRI(R2)	B-DRI(OFFSET)	-32~+32	0
F22	B-DRI(R)	B-DRI(OFFSET)	-32~+32	0
F23	B-DRI(B)	B-DRI(OFFSET)	-32~+32	0
F24	V-FREE	V-FREE	0/1	0
F25	GAMMA	GAMMA	0~3	0
F26	TRAP(TV)	TRAP-FINE	0~3	2
F27	TRAP(AV)	TRAP-FINE	0~3	2
F28	H-FREE	H-FREE	0/1	0
F29	1W(TV)	V.WINDOW	0/1	0
F30	1W(AV)	V.WINDOW	0/1	0
F31	YLPF	YSW-LPF	0/1	1
F32	BS-D	BS-DISCHARGE	0~3	0
F33	BS-C	BS-CHARGE	0~3	0
F34	SL(TV)	S-SLICE DOWN	0~3	0
F35	SL(AV)	S-SLICE DOWN	0~3	0
F36	SL(YUV)	S-SLICE DOWN	0~3	0
F37	AFC2	AFC2-G	0/1	0
F38	VD(TV)	VSYNC-DET	0/1	0
F39	VD(AV)	VSYNC-DET	0/1	0
F40	AS(TV)	AUTO-SLICE	0/1	0
F41	AS(AV)	AUTO-SLICE	0/1	0
F42	AS(YUV)	AUTO-SLICE	0/1	0
F43	FBP(TV)	FBP VTH	0/1	0
F44	FBP(AV)	FBP VTH	0/1	0
F45	FBP(YUV)	FBP VTH	0/1	0
F46	C.CLIP LEVEL	C.CLIP LEVEL	0/1	0
F47	PSW	PSW	0/1	0
F48	FAO-VOL	VOL	0~63	60
F49	CP	CHARGE PUMP	0/1	0
F50	CC LEVEL	CC LEVEL	0/1	0
F51	OSD POS	OSD POS	0/1	0
F52	COL OFFSET	(SUR → NOR)		0
F53	TINT OFFSET	(SUR → NOR)		0
F54	TING-YUV	TINT-YUV(OFFSET)		0

Third Stage


Data	Service Mode	DATA="0"	DATA="1"	Default Data
001	DEMO	DEMO DISABLE	ON	1
002	DOWNLOAD	V-CHIP OP DISABLE	ON	1
003	V-CHIP	V-CHIP DISABLE	ON	1
004	SPEAKER	SPEAKER DISABLE	ON	1
005	FAO	FAO DISABLE	ON	1
006	P.PREF	P.REF DISABLE	ON	1
007	UNIV+	UNIV+ DISABLE	ON	1
008	VIEW TIMER	VIEW TIMER DISABLE	ON	1
009	EZ-SETUP	EZ-SETUP	AUTO PRESET	1
010	*PON-CH	POWER-ON DISABLE	ON	1
011	FAV-COL	FAV-COL	COL-TEMP	1
012	COMPONENT	COMPONENT DISABLE	ON	1
013	AV	AV DISABLE	ON	1
014	AV2	AV2 DISABLE	ON	1
015	MTS	MTS DISABLE	ON	1
016	TONE-CTRL	S-ADJ DISABLE	ON	1
017	AUTO-OFF	AUTO-OFF DISABLE	ON	1
018	INIT-LANG	ENGLISH	SPANISH	0
019	SETUP-FLAG	NO SET UP	AUTO SET UP	1
020	AV-FR	"0"=NO AV "1"=REAR "2"=FRONT "3"=REAR & FRONT		2

*POWER ON BY CH-UP/CH-DOWN KEY


CRT BLOCK DIAGRAM

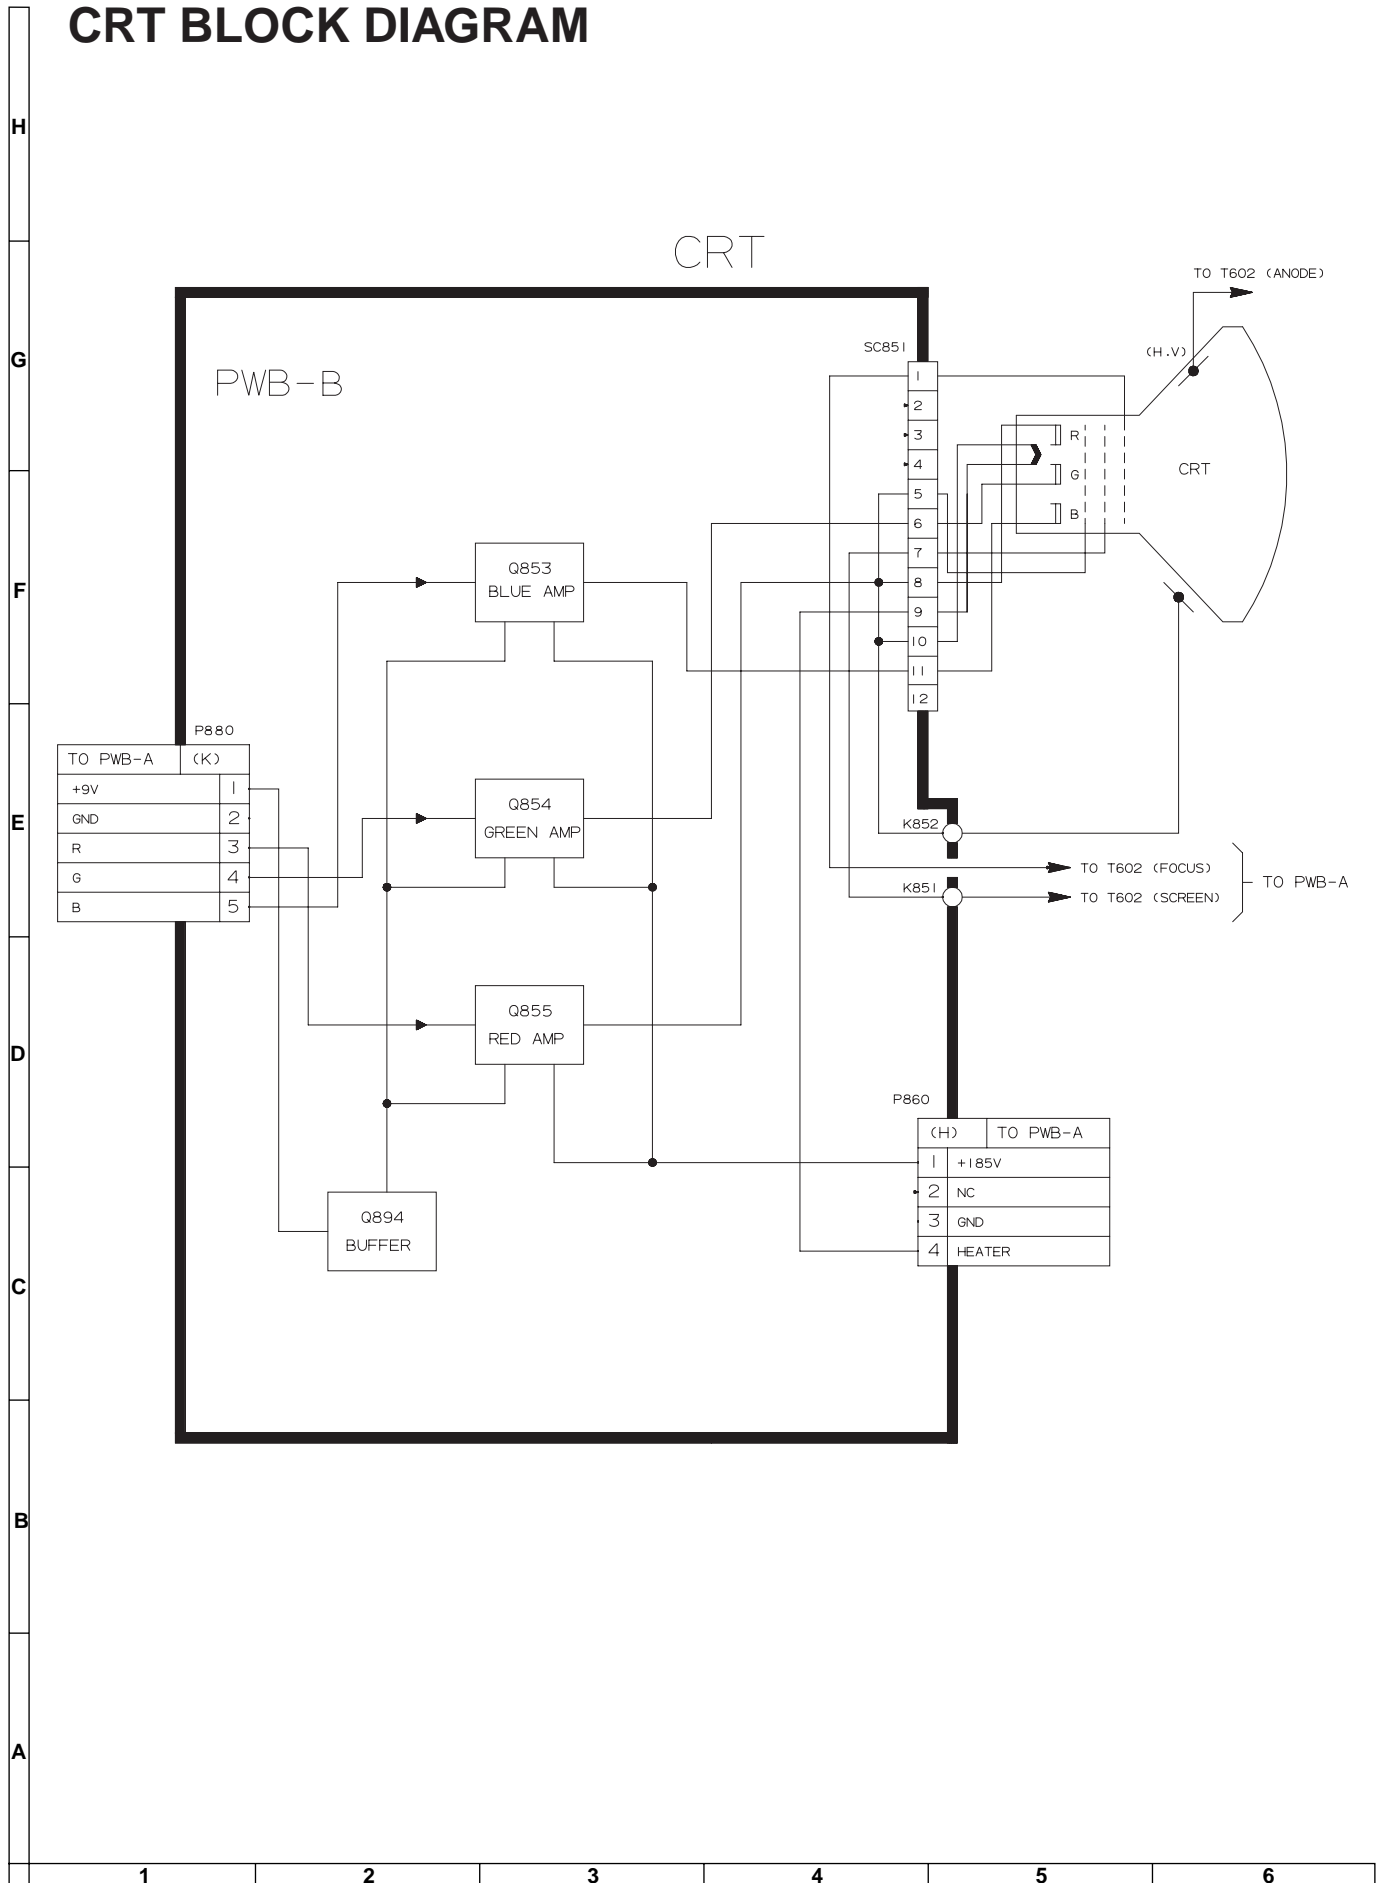


MTS BLOCK DIAGRAM

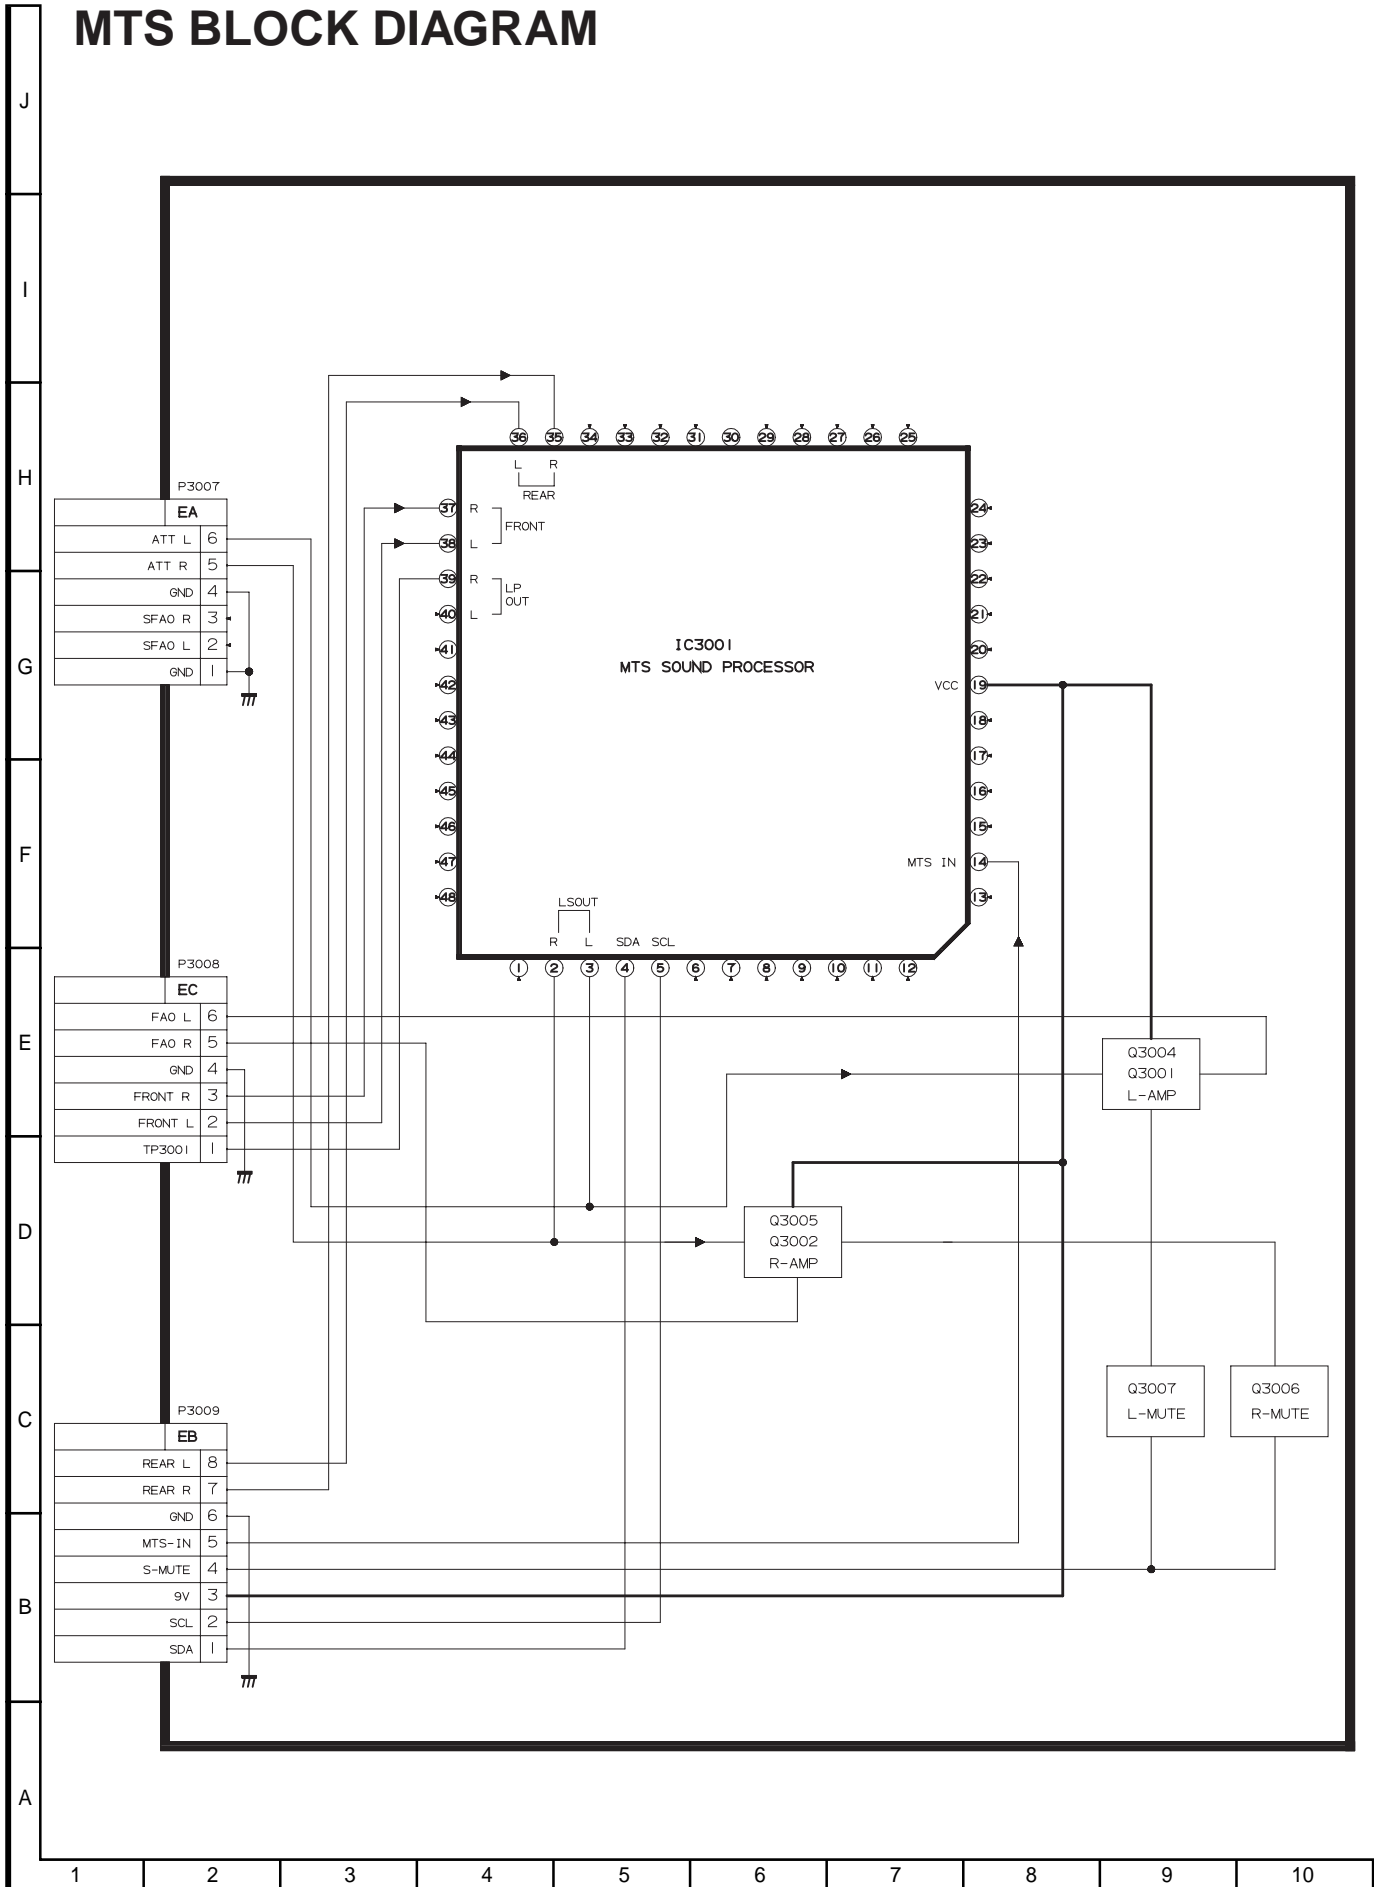

MAIN BLOCK DIAGRAM

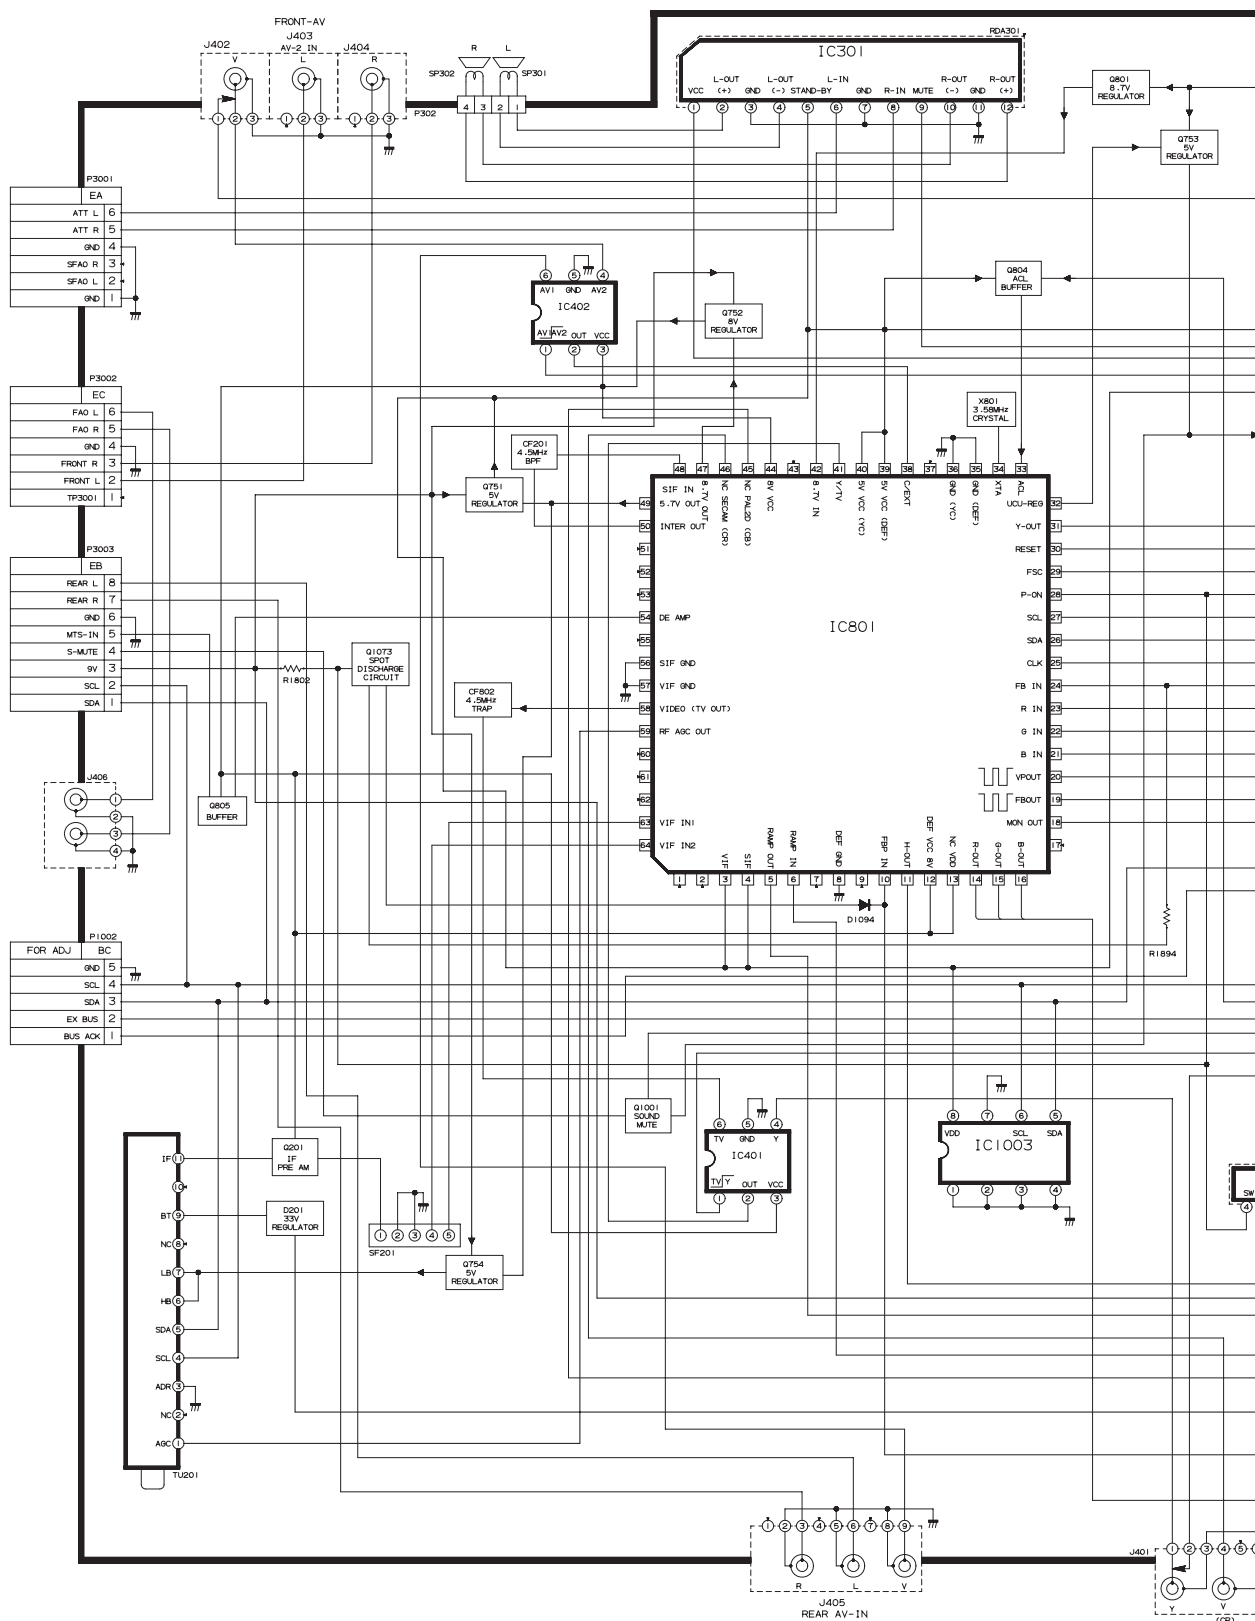



DESCRIPTION OF SCHEMATIC DIAGRAM

NOTES:

1. The unit of resistance "ohm" is omitted.
($K=k\Omega=1000\Omega$, $M=M\Omega$)
2. All resistors are 1/16 watt, unless otherwise noted.
3. All capacitors are μF , unless otherwise noted.
($P=pF=\mu\mu F$)
4. (G) indicates $\pm 2\%$ tolerance may be used.
5. $\overline{\text{---}}$ indicates line isolated ground.

VOLTAGE MEASUREMENT CONDITIONS:

1. All DC voltages are measured with DVM connected between points indicated and chassis ground, line voltage set at 120V AC and all controls set for normal picture unless otherwise indicated.
2. All voltages measured with 1000 μ V B & W or Color signal.

WAVEFORM MEASUREMENT CONDITIONS:

1. Photographs taken on a standard gated color bar signal, the tint setting adjusted for proper color. The wave shapes at the red, green and blue cathodes of the picture tube depend on the tint, color level and picture control.
2. \odot indicates waveform check points (See chart, waveforms are measured from point indicated to chassis ground.)


\triangle AND SHADED () COMPONENTS
= SAFETY RELATED PARTS.

\blacktriangle MARK= X-RAY RELATED PARTS.


DRGANNES MARQUES \triangle ET HACHRES () :
PIECES RELATIVES A LA SECURITE.
MARQUE \blacktriangle : PIECS RELATIVE AUX RAYONS X.

This circuit diagram is a standard one, printed circuits may be subject to change for product improvement without prior notice.


WAVEFORMS

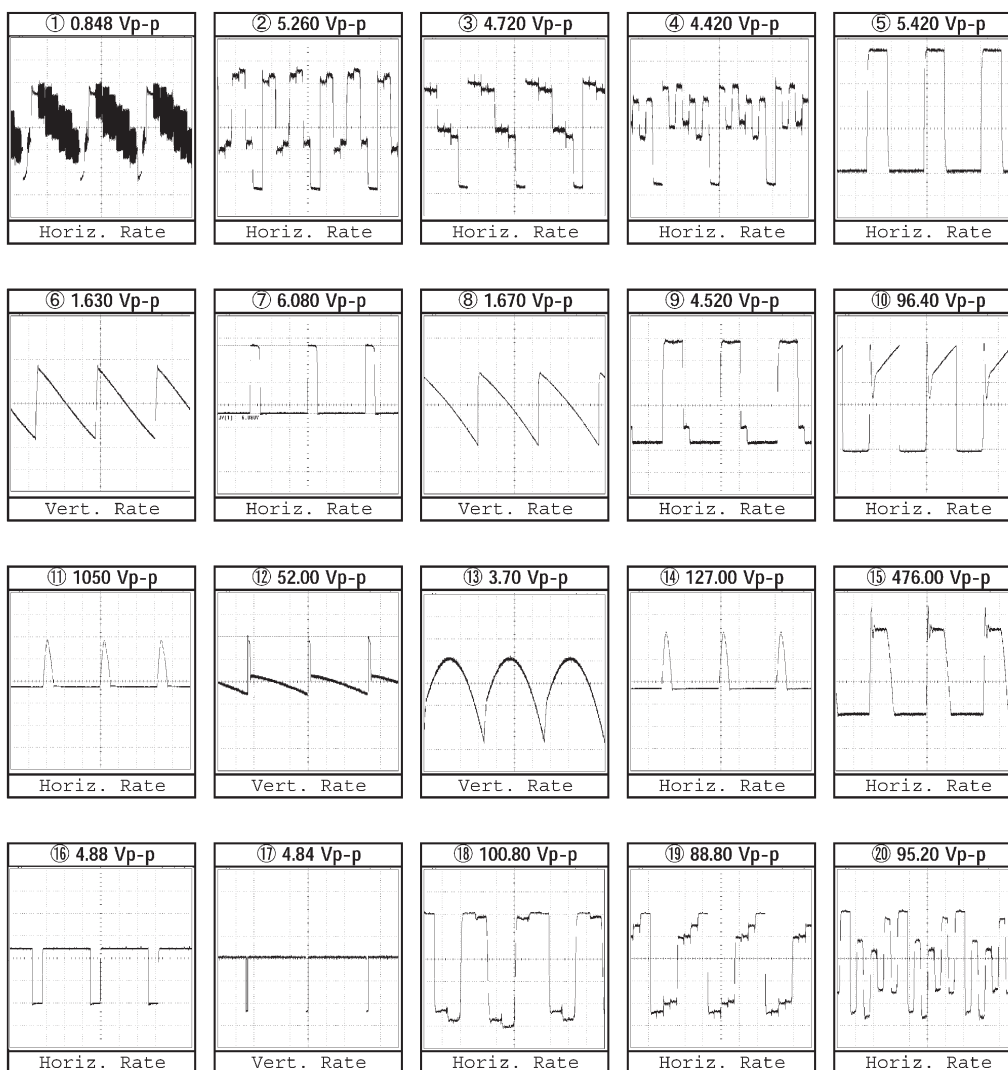

SCHEMATIC DIAGRAM: CRT Unit

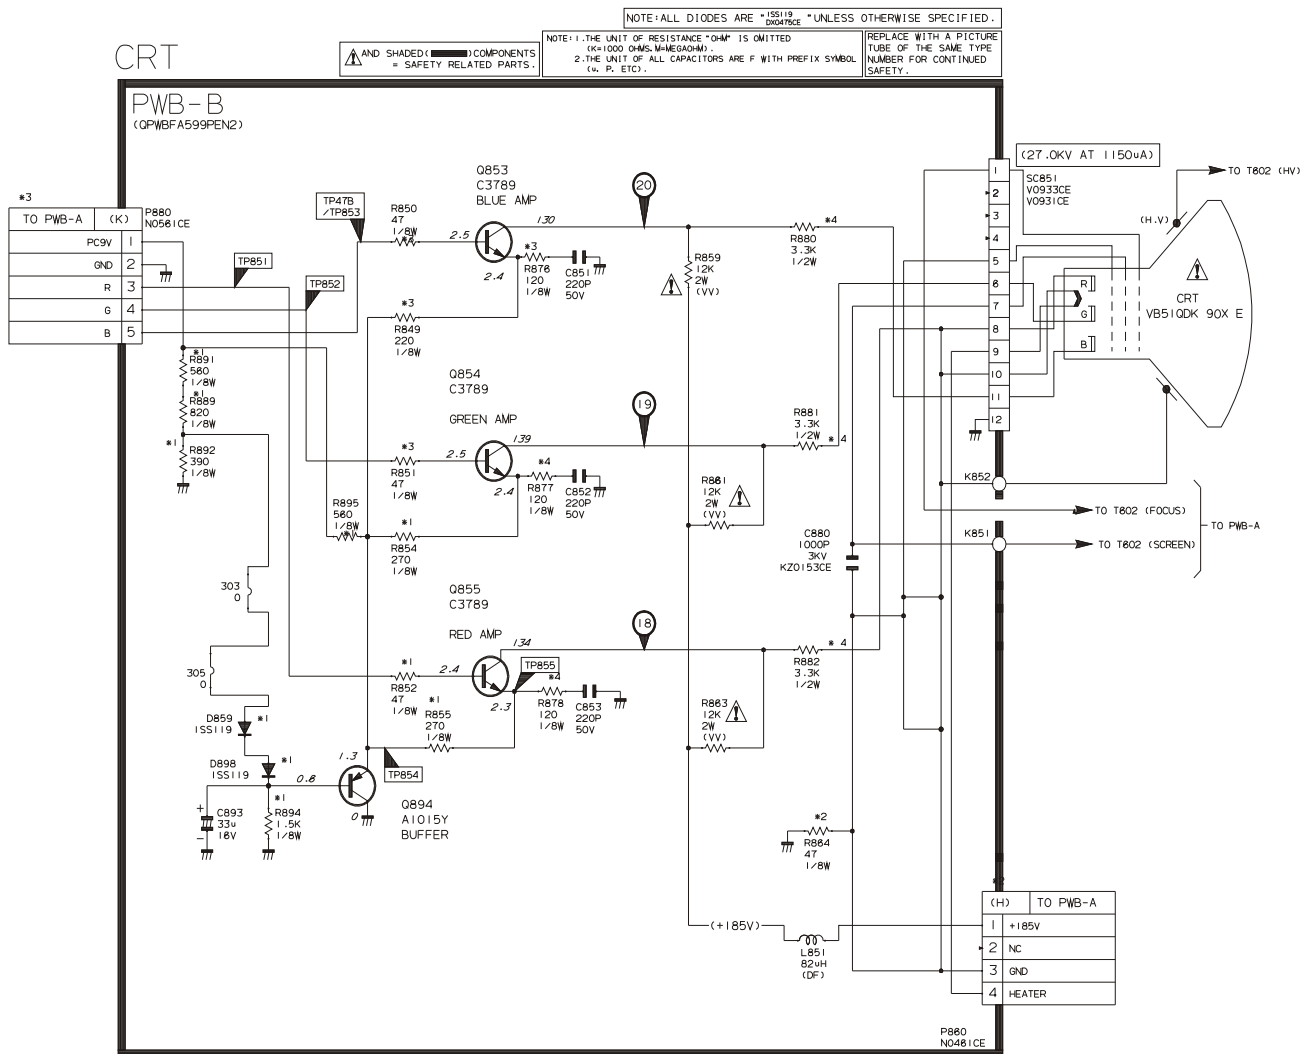


SCHEMATIC DIAGRAM: MAIN-1 Unit

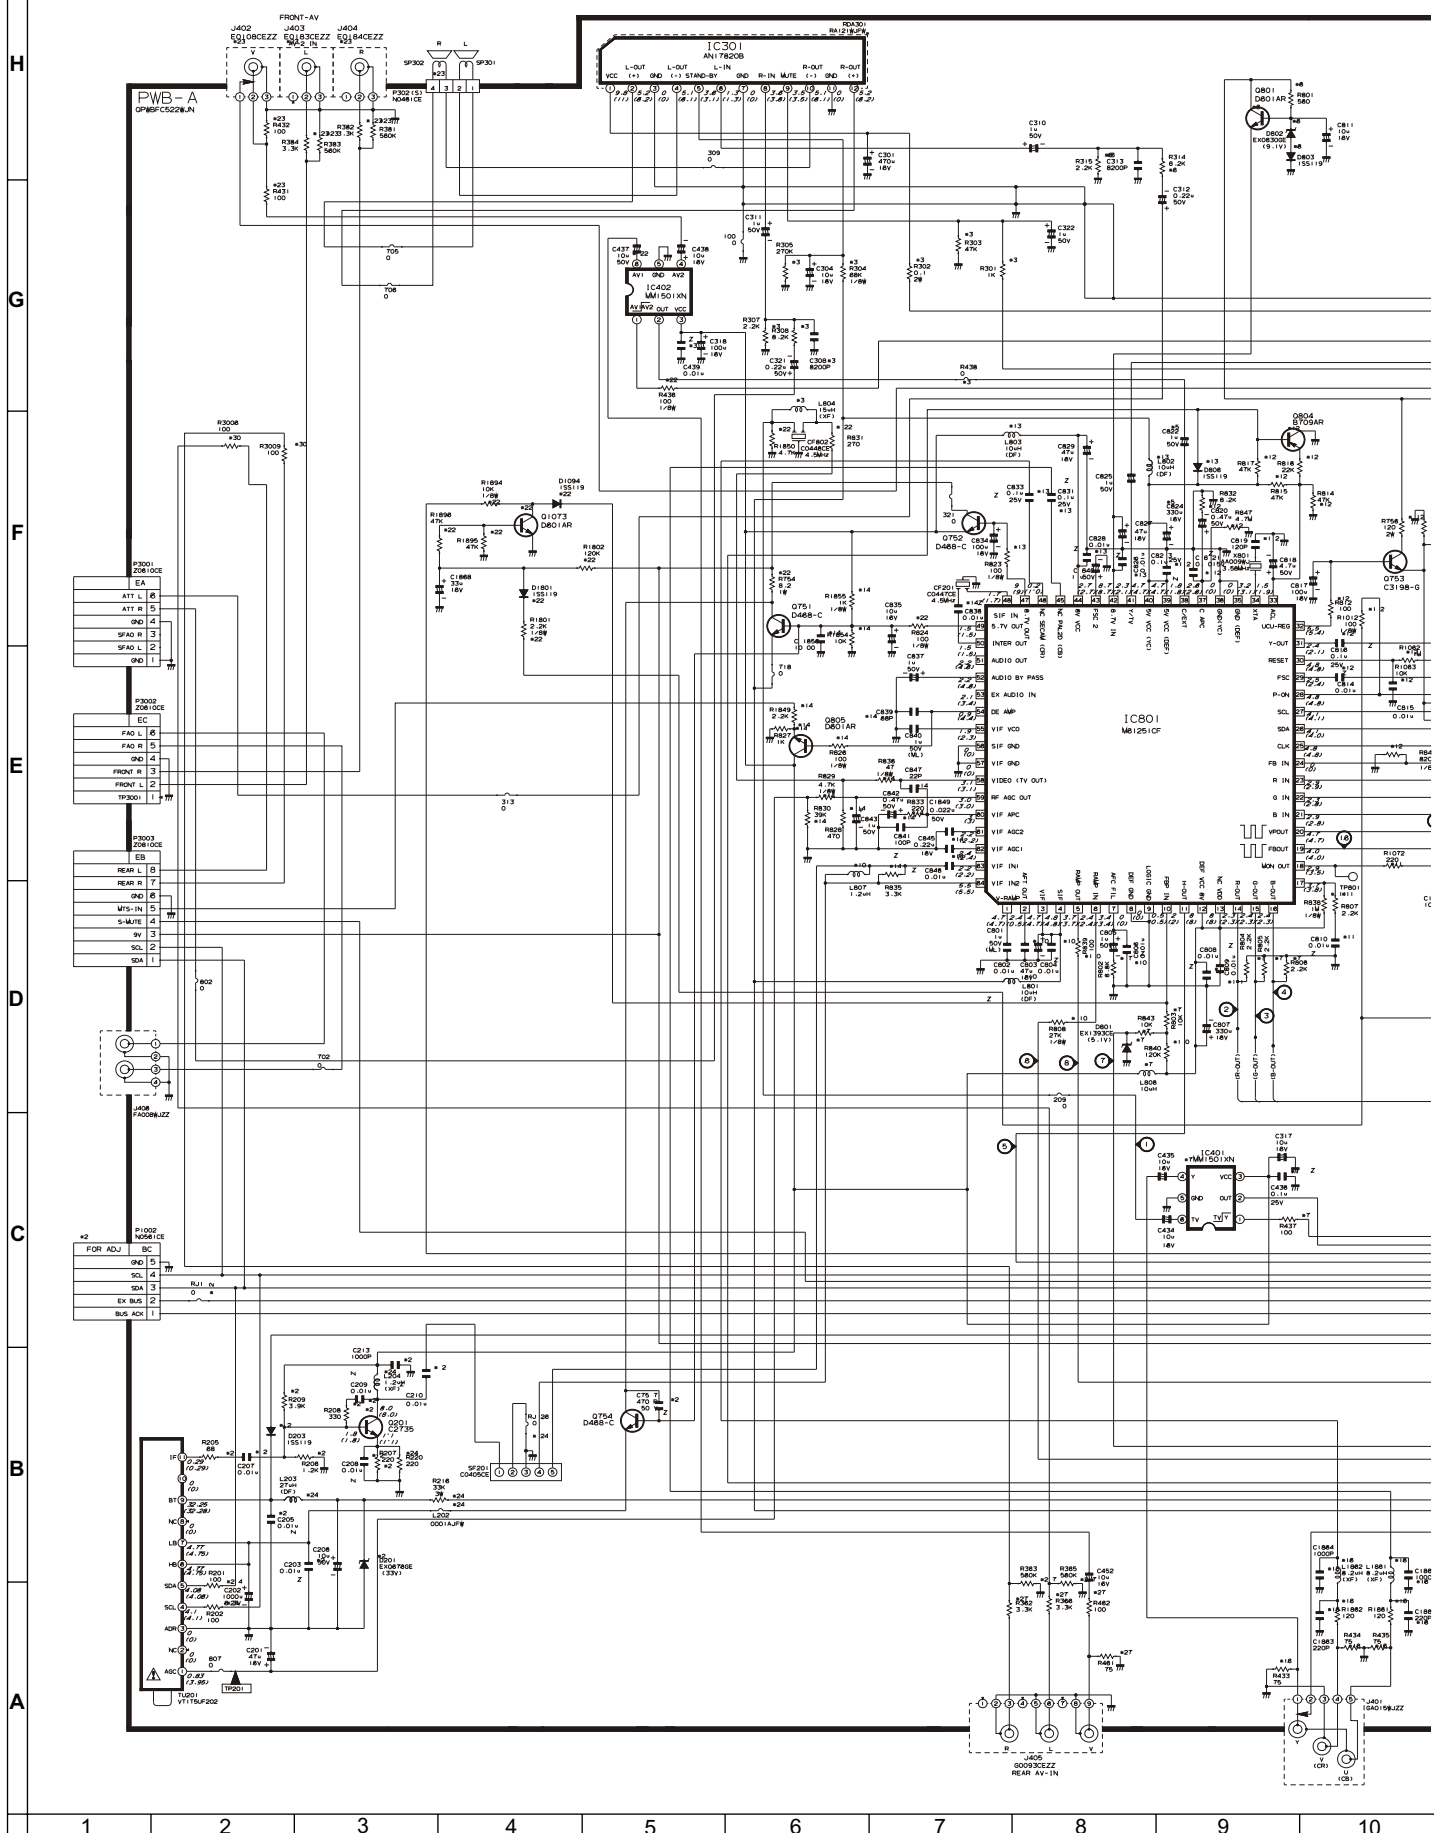

MAIN

▲ AND SHADED: SAFETY RELATED PARTS.
▲ MARK = X-RAY RELATED PARTS.

NOTE: 1. THE UNIT OF RESISTANCE "OHM" IS OMITTED.
(K=1000 OHMS, M=10000 OHMS)
2. ALL RESISTORS ARE 1/8WATT UNLESS OTHERWISE NOTED.
3. UNITS FOR ALL CAPACITORS ARE F WITH PREFIX SYMBOL.
(E.G. P, ETC.).

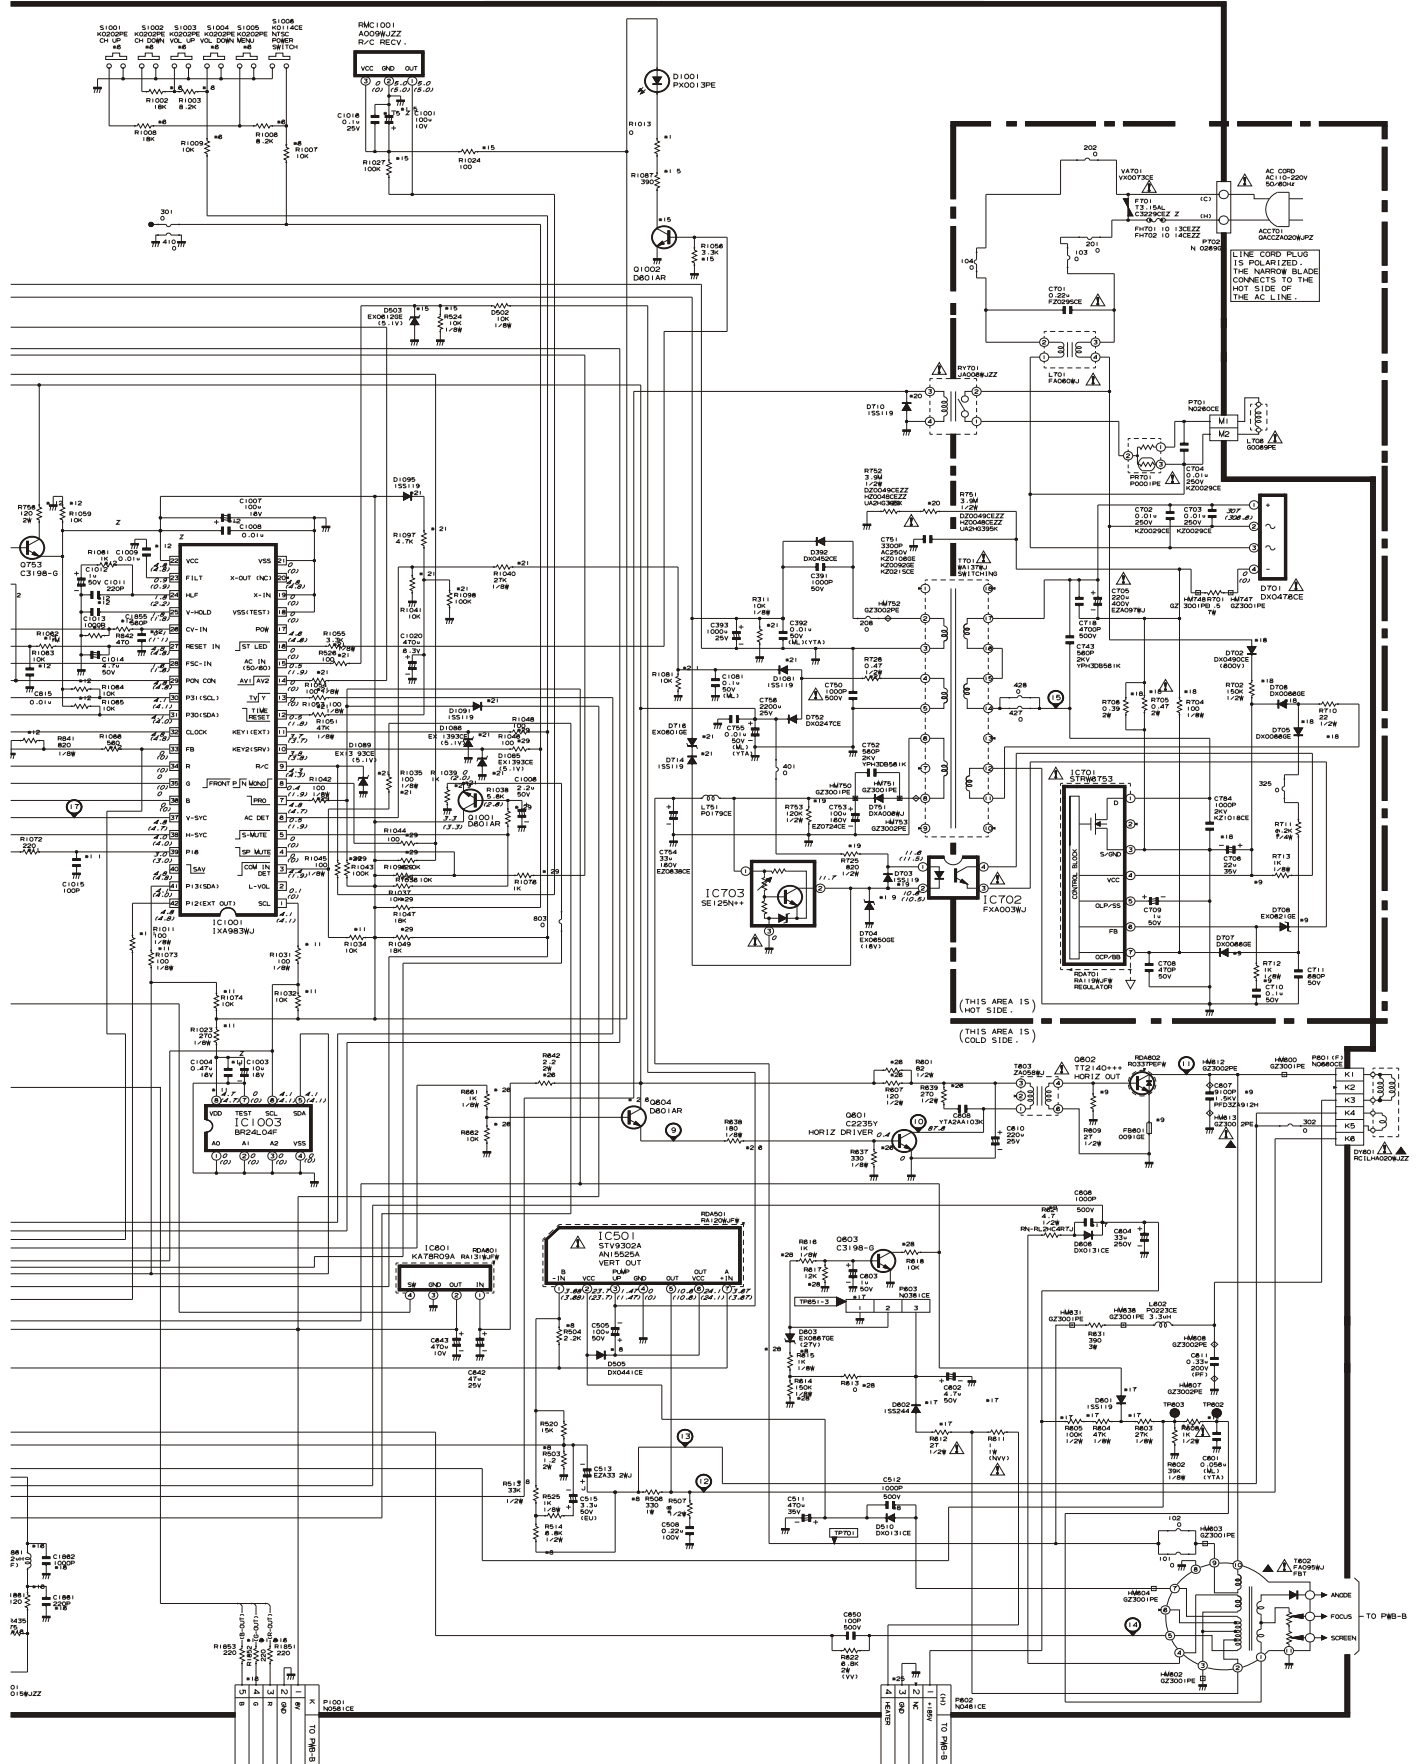

10

11

12

13

14

15

16


17

18


19

SCHEMATIC DIAGRAM : MTS Unit


MTS

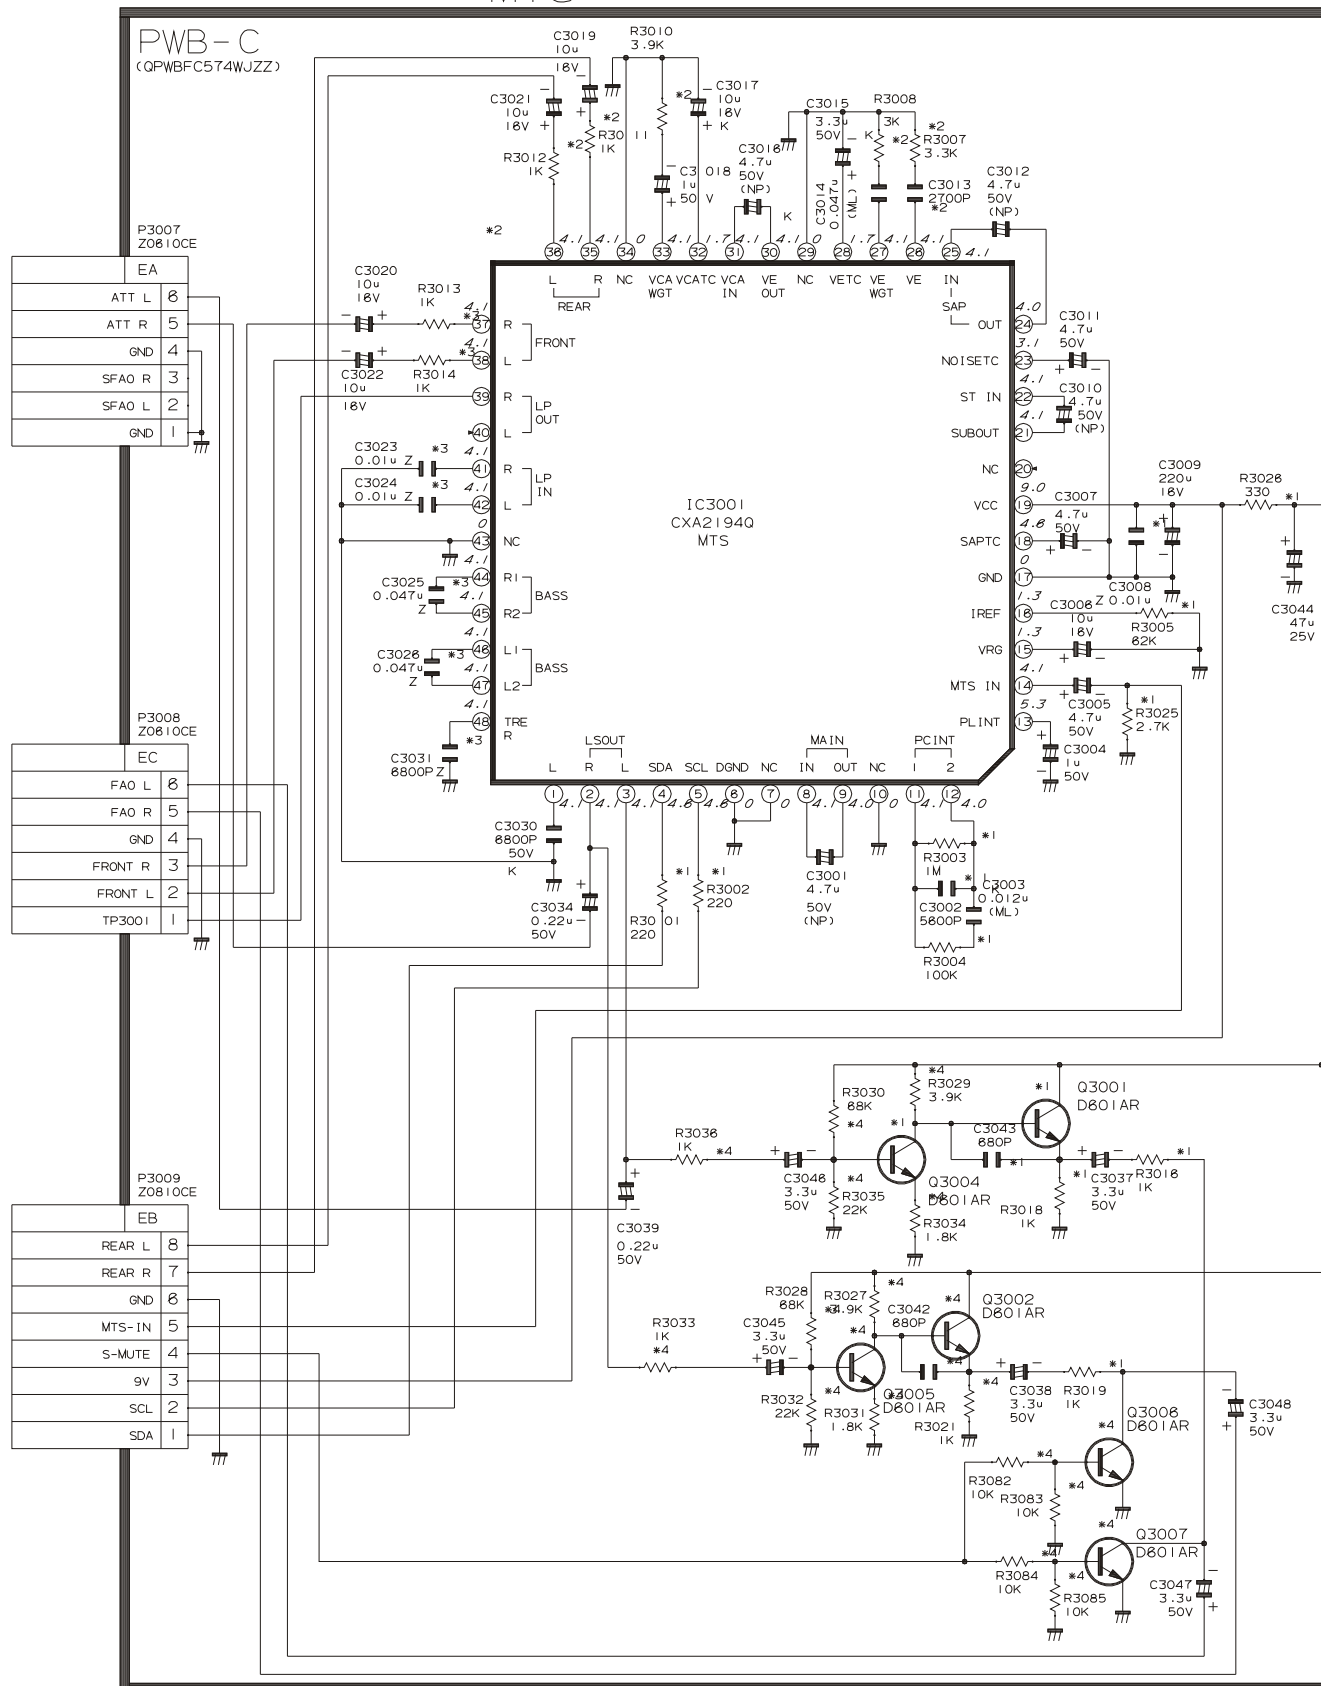

PRINTED WIRING BOARD ASSEMBLIES

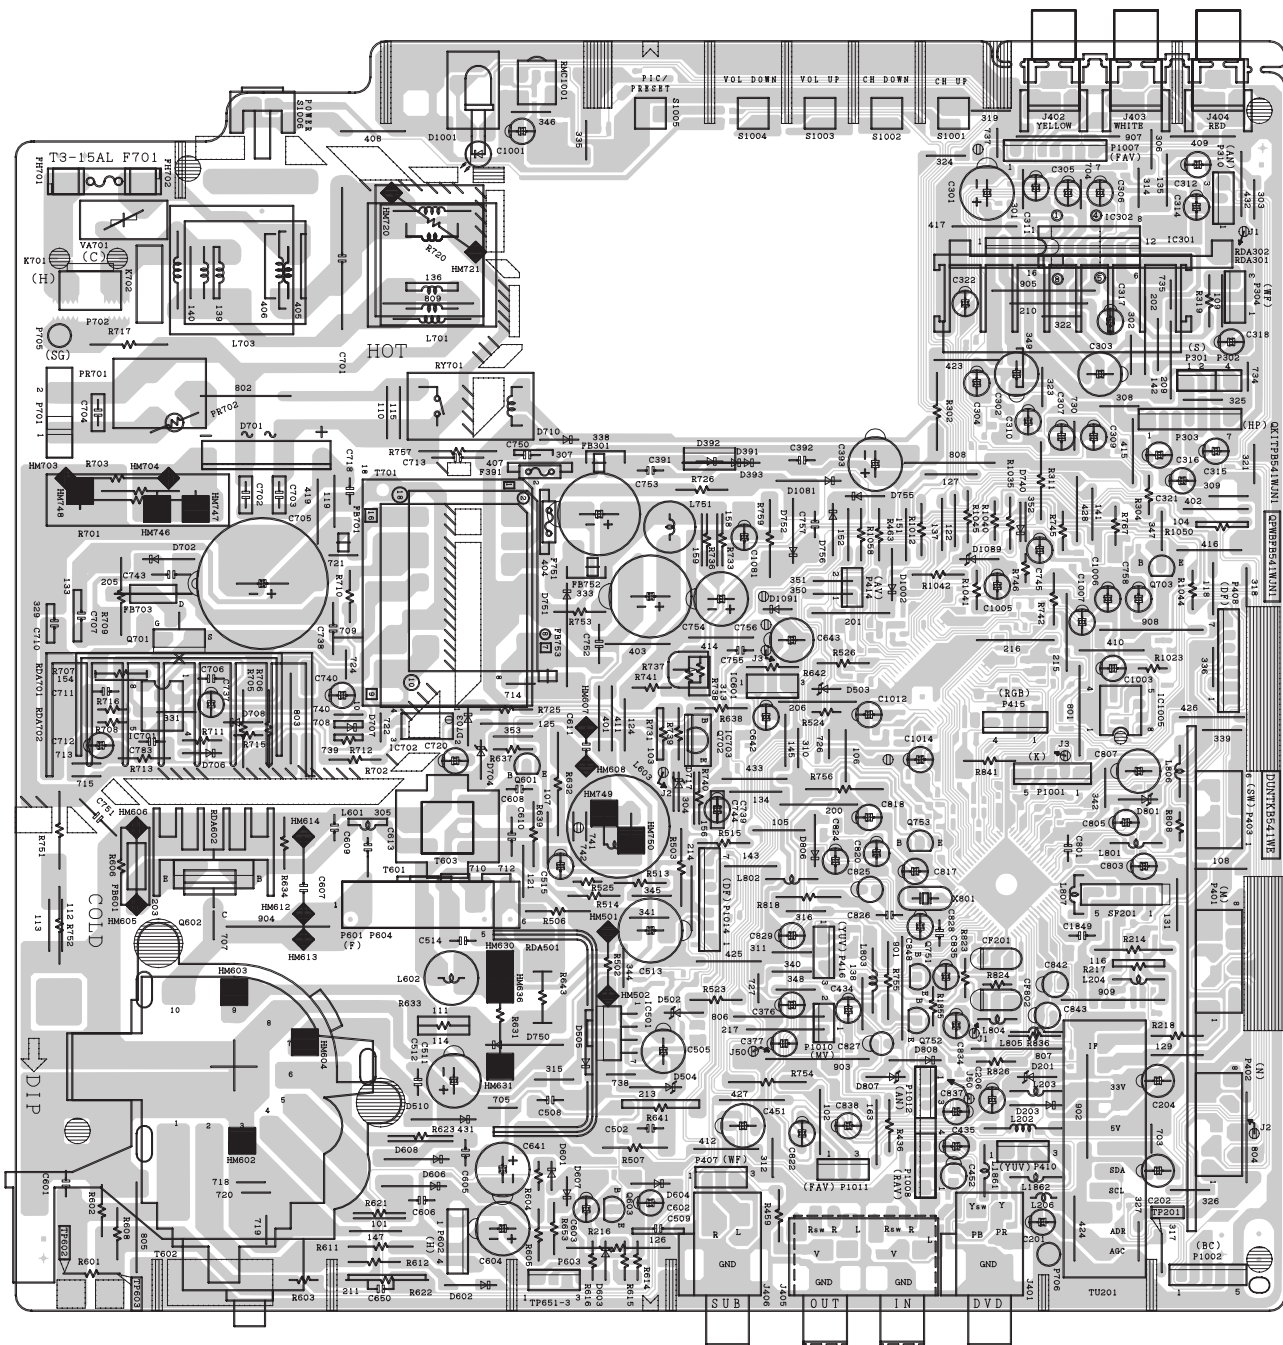

PWB-A: MAIN Unit (Wiring Side)

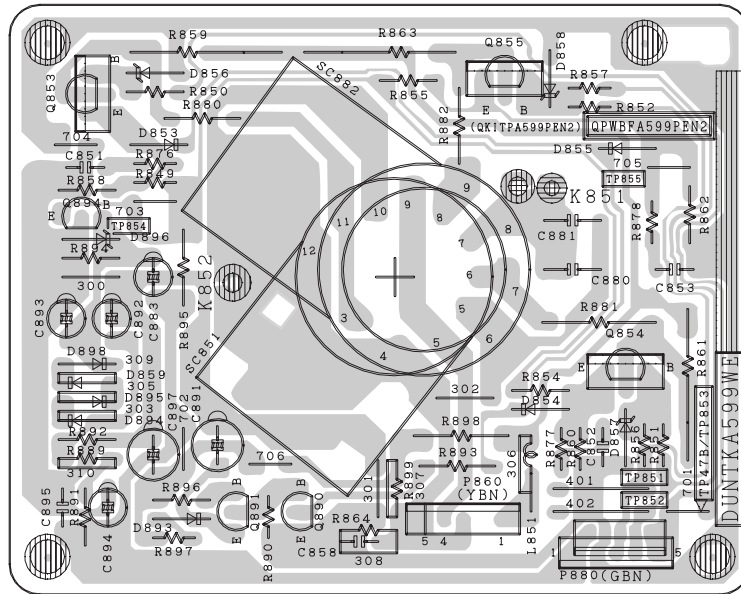

PWB-B: CRT Unit (Wiring Side)

H

G

F


E

D


C

B

A

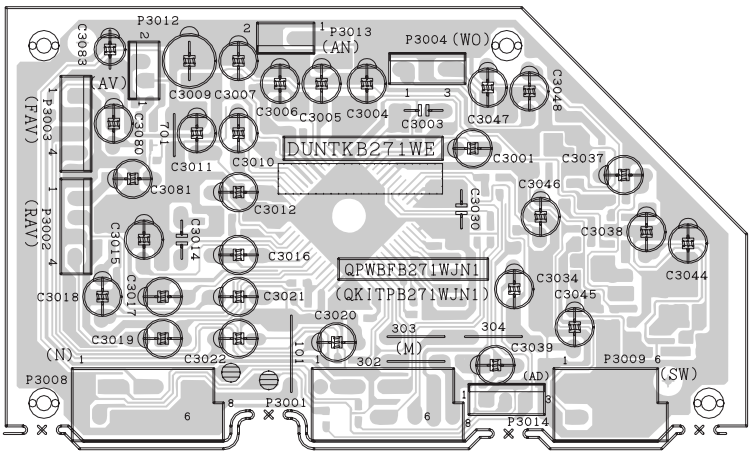

PWB-E: MTS MODULE Unit (Wiring Side)

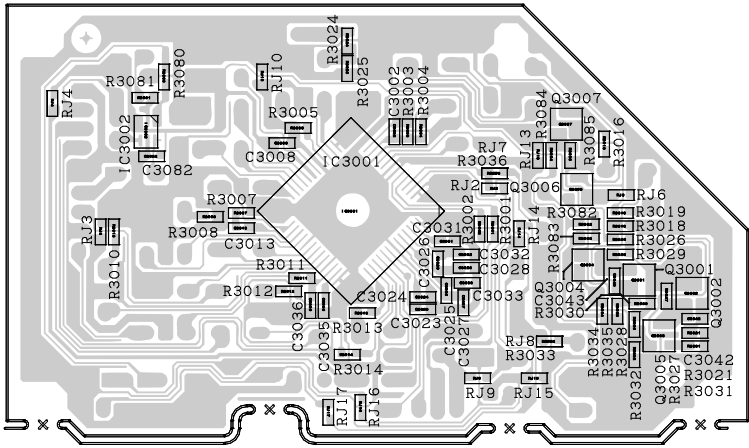

PWB-E: MTS MODULE Unit (Chip Parts Side)

1

2

3

4

5

6

PARTS LIST

PARTS REPLACEMENT

Replacement parts which have these special safety characteristics identified in this manual; electrical components having such features are identified by Δ and shaded areas in the Replacement Parts Lists and Schematic Diagrams. The use of a substitute replacement part which does not have the same safety characteristic as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

"HOW TO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

- | | |
|----------------|-------------|
| 1. REF. NO. | 2. PART NO. |
| 3. DESCRIPTION | 4. CODE |

in **USA**: Contact your nearest SHARP Parts Distributor to order.
For location of SHARP Parts Distributor, Please call Toll-Free; 1-800-BE-SHARP

« MARK: SPARE PARTS-DELIVERY SECTION

p MARK: X-RAY RELATED PARTS

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PICTURE TUBE

▲ Δ	V101	VB51QDK190X5E	X	Picture Tube	CB
Δ	L701	RCILG0069PEZZ	X	Degaussing Coil	AP
		QEARCA012WJZZ	X	Grounding Strap	AE

PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)

PWB-A	DUNTKC522WEA6	—	MAIN Unit	—
PWB-B	DUNTKA599WED5	—	CRT Unit	—
PWB-C	DUNTKC574WEA0	—	MTS Unit	—

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

PWB-A: DUNTKC522WEA6 MAIN UNIT

TUNER

NOTE: THE PARTS HERE SHOWN ARE SUPPLIED AS AN ASSEMBLY BUT NOT INDEPENDENTLY

Δ	TU201	VTUVT1T5UF202	X	Tuner	AS
INTEGRATED CIRCUITS					
	IC301	VHIAN17820B-1	X	AN17820B	AL
	IC401	VHIMM1501XN-1Y	X	MM1501XN	AD
	IC402	VHIMM1501XN-1Y	X	MM1501XN	AD
Δ	IC501	VHIAN15525A-1	X	AN15525A	AF
	IC601	VHIKA78R09AP1	X	KIA78R09API	AE
Δ	IC701	VHISTRW6753-1	X	STR-W6753	AL
Δ	IC702	RH-FXA003WJZZ	X	PC123Y82	AC
Δ	IC703	VHISE125N++-F	X	SE125N	AF
	IC801	VHIM61251CF1EQ	X	M61251CP	AR
	IC1001	RH-IXA983WJZZ	X	RU3AMLF-C4	AN
	IC1003	VHIBR24L04F-1Y	X	BR24L04F-WE2	AD

TRANSISTORS

	Q201	VS2SC2735//1EY	X	2SC2735	AB
	Q601	VS2SC2235Y/1E+	X	2SC2235-Y	AD
	Q602	VSTT2140+++F	X	TT2140LS	AF
	Q603	VS2SC3198-G-1+	X	2SC3198-G	AB
	Q604	VS2SD601AR/-1Y	X	2SD601AR	AB
	Q751	VS2SD468-C/-1+	X	2SD468ACTZ	AC
	Q752	VS2SD468-C/-1+	X	2SD468ACTZ	AC
	Q753	VS2SC3198-G-1+	X	2SC3198-G	AB
	Q754	VS2SD468-C/-1+	X	2SD468ACTZ	AC
	Q801	VS2SD601AR/-1Y	X	2SD601AR	AB
	Q804	VS2SB709AR/-1Y	X	2SB709AR	AB
	Q805	VS2SD601AR/-1Y	X	2SD601AR	AB
	Q1001	VS2SD601AR/-1Y	X	2SD601AR	AB
	Q1002	VS2SD601AR/-1Y	X	2SD601AR	AB
	Q1073	VS2SD601AR/-1Y	X	2SD601AR	AB

DIODES

	D201	RH-EX0676GEZZY	X	Zener	Diode 32V	AB
	D203	VHD1SS119//1Y	X	Diode		AA
	D392	RH-DX0452CEZZ	X	Diode		AF
	D502	VRD-RA2BE103JY	X	10k	1/8W Carbon	AA
	D503	RH-EX0612GEZZY	X	EX0612GE		AB
	D505	RH-DX0441CEZZY	X	Diode		AA
	D510	RH-DX0131CEZZY	X	Diode		AB
	D601	VHD1SS119//1Y	X	Diode		AA
	D602	VHD1SS244//1Y	X	Diode		AB
	D603	RH-EX0667GEZZY	X	Zener	Diode 27V	AB
	D606	RH-DX0131CEZZY	X	Diode		AB
Δ	D701	RH-DX0476CEZZ	X	Diode		AE
	D702	RH-DX0490CEZZY	X	Diode		AB
	D703	VHD1SS119//1Y	X	Diode		AA
	D704	RH-EX0650GEZZY	X	Zener	Diode 16V	AB
	D705	RH-DX0066GEZZY	X	Diode		AC
	D706	RH-DX0066GEZZY	X	Diode		AC
	D707	RH-DX0066GEZZY	X	Diode		AC
	D708	RH-EX0621GEZZY	X	Zener		AB
	D710	VHD1SS119//1Y	X	Diode		AA
	D714	VHD1SS119//1Y	X	Diode		AA
	D716	RH-EX0601GEZZY	X	Zener	Diode 3.7V	AB
	D751	RH-DXA006WJZZ	X	Diode		AD
	D752	RH-DX0247CEZZ	X	Diode		AD
	D801	RH-EX1393CEZZY	X	EX1393CE		AB
	D802	RH-EX0630GEZZY	X	Zener	Diode 9.1V	AB
	D803	VHD1SS119//1Y	X	Diode		AA
	D806	VHD1SS119//1Y	X	Diode		AA
	D1001	RH-PX0013PEZZ	X	LED, ON TIMER		AB
	D1081	VHD1SS119//1Y	X	Diode		AA
	D1085	RH-EX1393CEZZY	X	EX1393CE		AB
	D1086	RH-EX1393CEZZY	X	EX1393CE		AB

Ref. No.	Part No.	★	Description	Code
PWB-A: DUNTKC522WEA6				
MAIN UNIT				
DIODES				
D1089	RH-EX1393CEZZY	X	EX1393CE	AB
D1091	VHD1SS119//1Y	X	Diode	AA
D1094	VHD1SS119//1Y	X	Diode	AA
D1095	VHD1SS119//1Y	X	Diode	AA
D1801	VHD1SS119//1Y	X	Diode	AA
VA701	RH-VX0073CEZZ	X	Varistor	AC
PACKAGED CIRCUITS				
△ PR701	RMPTP0001PEZZ	X	Packaged Circuit	AG
△ R751	RR-DZ0049CEZZY	X	3.9M 1/2W Solid	AB
△ R752	RR-DZ0049CEZZY	X	3.9M 1/2W Solid	AB
X801	RCRSAA009WJZZ	X	Crystal,	AE
FILTERS				
CF201	RFILC0447CEZZ	X	Filter,FiLC0447CE	AC
CF802	RFILC0446CEZZ	X	Filter,FiLC0446CE	AC
SF201	RFILC0405CEZZ	X	Filter,(4.5MHZ)	AF
COILS				
L202	QJUM-0001AJFWY	X	Jumper Wire	AA
L203	VP-DF270K0000Y	X	Peaking,27mH	AB
L204	VP-XF1R2K0000Y	X	Peaking,1.2mH	AA
L602	RCILP0223CEZZ	X	Coil,	AC
△ L701	RCILFA060WJZZ	X	Coil Line Filter	AF
L751	RCILP0179CEZZ+	X	Coil	AC
L801	VP-DF100K0000Y	X	Peaking,10mH	AB
L802	VP-DF100K0000Y	X	Peaking,10mH	AB
L803	VP-DF100K0000Y	X	Peaking,10mH	AB
L804	VP-XF150K0000Y	X	Peaking,15mH	AA
L806	VP-DF100K0000Y	X	Peaking,10mH	AB
L807	VP-XF1R2K0000Y	X	Peaking,1.2mH	AA
L1861	VP-XF8R2K0000Y	X	Peaking,8.2mH	AA
L1862	VP-XF8R2K0000Y	X	Peaking,8.2mH	AA
TRANSFORMERS				
△ T602	RTRNFA095WJZZ	X	H-Volt Transformer	AW
△ T603	RTRNZA058WJZZ	X	Transformer	AD
△ T701	RTRNWA137WJZZ	X	Transformer	AK
CAPACITORS				
[EL... Electrolytic, M-Poly... Metalized Polypro Film]				
C201	VCEA0A1CW476M+	X	47 16V EL.	AA
C202	VCEA0A0JW108M+	X	1000 6.3V EL.	AB
C203	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C205	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C206	VCEA0A1HW106M+	X	10 50V EL.	AA
C207	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C208	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C209	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C210	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C213	VCKYCY1HB102KY	X	1000p 50V Ceramic	AA
C301	VCEA0A1CW477M+	X	470 16V EL.	AB
C304	VCEA0A1CW106M+	X	10 16V EL.	AA
C308	VCKYCY1HB822KY	X	8200p 50V Ceramic	AA
C310	VCEA0A1HW105M+	X	1 50V EL.	AA
C311	VCEA0A1HW105M+	X	1 50V EL.	AA
C312	VCEA0A1HW224M+	X	0.22 50V EL.	AA
C313	VCKYCY1HB822KY	X	8200p 50V Ceramic	AA
C317	VCE9GA1CW106M+	X	10 16V EL.	AB
C318	VCEA0A1CW107M+	X	100 16V EL.	AA
C321	VCEA0A1HW224M+	X	0.22 50V EL.	AA
C322	VCEA0A1HW105M+	X	1 50V EL.	AA
C391	VCKYPA1HB102K+	X	1000p 50V Ceramic	AA
C392	VCQYTA1HM103J+	X	0.01 50V Mylar	AA
C393	VCEA0A1EW108M+	X	1000 25V EL.	AC
C434	VCE9GA1CW106M+	X	10 16V EL.	AB
C435	VCE9GA1CW106M+	X	10 16V EL.	AB
C436	VCKYCY1EF104ZY	X	0.1 25V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
C437	VCE9GA1HW106M+	X	10 50V EL.	AC
C438	VCEA0A1CW106M+	X	10 16V EL.	AA
C439	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C452	VCE9GA1CW106M+	X	10 16V EL.	AB
C505	VCEA0A1HW107M+	X	100 50V EL.	AB
C508	VCFYAA2AA224J+	X	0.22 100V M-Poly.	AC
C511	VCEA0A1VW477M	X	470 35V EL.	AC
C512	VCKYPA2HB102K+	X	1000p 500V Ceramic	AA
C513	RC-EZA332WJZZ+	X	1000 35V EL.	AD
C515	VCEACA1HC335J+	X	3.3 50V EL.	AC
C601	VCQYTA1HM563J+	X	0.056 50V Mylar	AA
C602	VCEA0A1HW475M+	X	4.7 50V EL.	AA
C603	VCEA0A1HW105M+	X	1 50V EL.	AA
C604	VCEA0A2EW336M+	X	33 250V EL.	AD
C606	VCKYPA2HB102K+	X	1000p 500V Ceramic	AA
△ C607	VCFPVC3ZA912H	X	9100p 1800 V M.Poly.	AC
C608	VCQYTA2AA103K+	X	10000p 100V Mylar	AB
C610	VCEA0A1EW227M+	X	220 25V EL.	AB
C611	VCFPVC2DB334J	X	0.33 250V M-Poly.	AC
C642	VCEA0A1EW476M+	X	47 25V EL.	AA
C643	VCEA0A1AW477M+	X	470 10V EL.	AB
C650	VCKYPA2HB101K+	X	100p 500V Ceramic	AA
△ C701	RC-FZ029SCEZZ	X	0.22 250V Ceramic	AC
C702	RC-KZ0029CEZZ+	X	0.01 AC250V Ceramic	AB
C703	RC-KZ0029CEZZ+	X	0.01 AC250V Ceramic	AB
C704	RC-KZ0029CEZZ+	X	0.01 AC250V Ceramic	AB
△ C705	RC-EZA097WJZZ	X	220 400V EL.	AK
C706	VCEA0A1VW226M+	X	22 35V EL.	AA
C708	VCKYPA1HB471K+	X	470p 50V Ceramic	AA
C709	VCEA9M1HW105M+	X	1 50V EL.	AA
C710	VCFYFA1HA104J+	X	0.1 50V M-Poly.	AB
C711	VCKYPA1HB681K+	X	680p 50V Ceramic	AA
C718	VCKYPA2HB472K+	X	4700p 500V Ceramic	AB
C743	VCKYPH3DB561K	X	560p 2kV Ceramic	AC
C750	VCKYPA2HB102K+	X	1000p 500V Ceramic	AC
C751	RC-KZ0106GEZZ	X	3300p AC250V Ceramic	AC
C752	VCKYPH3DB561K	X	560p 2kV Ceramic	AC
C753	RC-EZ0724CEZZ	X	100 160V EL.	AE
C754	RC-EZ0638CEZZ	X	33 160V EL.	AD
C755	VCQYTA1HM103J+	X	0.01 50V Mylar	AA
C756	VCEA0A1EW228M+	X	2200 25V EL.	AD
C757	VCKYCY1HB471KY	X	470p 50V Ceramic	AA
C784	RC-KZ0341CEZZ	X	1000p 2kV Ceramic	AD
C801	VCFYFA1HA105J+	X	1 50V M-Poly.	AC
C802	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C803	VCEA9M1CW476M+	X	47 16V EL.	AA
C804	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C805	VCEA0A1HW105M+	X	1 50V EL.	AA
C806	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C807	VCEA0A1CW337M+	X	330 16V EL.	AB
C808	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C809	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C810	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C811	VCEA9M1CW106M+	X	10 16V EL.	AA
C814	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C815	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C816	VCKYCY1EF104ZY	X	0.1 25V Ceramic	AA
C817	VCEA9M1CW107M+	X	100 16 V EL.	AB
C818	VCEA9M1HW475M+	X	4.7 50V EL.	AA
C819	VCCCCY1HH121JY	X	120p 50 V Ceramic	AA
C820	VCEA9M1HW474M+	X	0.47 50V EL.	AA
C821	VCKYCY1HF153ZY	X	0.015 50V Ceramic	AA
C822	VCE9GA1HW105M+	X	1 50V EL.	AB
C823	VCKYCY1EF104ZY	X	0.1 25V Ceramic	AA
C824	VCEA0A1CW337M+	X	330 16V EL.	AB
C825	VCE9GA1HW105M+	X	1 50V EL.	AB
C826	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA
C827	VCEA0A1CW476M+	X	47 16V EL.	AA
C828	VCKYCY1HF103ZY	X	0.01 50V Ceramic	AA

Ref. No. Part No. ★ Description Code

PWB-A: DUNTKC522WEA6 MAIN UNIT

CAPACITORS

[EL... Electrolytic, M-Poly... Metalized Polypro Film]

C829	VCEA9M1CW476M+	X 47	16V	EL.	AA
C831	VCKYCY1EF104ZY	X 0.1	25V	Ceramic	AA
C833	VCKYCY1EF104ZY	X 0.1	25V	Ceramic	AA
C834	VCEA0A1CW107M+	X 100	16V	EL.	AA
C835	VCEA0A1CW106M+	X 10	16V	EL.	AA
C836	VCKYCY1HF103ZY	X 0.01	50V	Ceramic	AA
C837	VCEA9M1HW105M+	X 1	50V	EL.	AA
C839	VCCCCY1HH680JY	X 68p	50V	Ceramic	AA
C840	VCFYFA1HA105J+	X 1	50V	M-Poly.	AC
C841	VCCCCY1HH101JY	X 100p	50V	Ceramic	AA
C842	VCEA9M1HW474M+	X 0.47	50V	EL.	AA
C843	VCEA0A1HW105M+	X 1	50V	EL.	AA
C845	VCKYCY1CF224ZY	X 0.22	16V	Ceramic	AA
C846	VCKYCY1HF103ZY	X 0.01	50V	Ceramic	AA
C847	VCCCCY1HH220JY	X 22p	50V	Ceramic	AA
C848	VCEA9M1HW105M+	X 1	50V	EL.	AA
C1001	VCEA0A1AW107M+	X 100	10V	EL.	AA
C1003	VCEA0A1CW106M+	X 10	16V	EL.	AA
C1004	VCKYCY1CF474ZY	X 0.47	16V	Ceramic	AA
C1006	VCEA0A1HW225M+	X 2.2	50V	EL.	AA
C1007	VCEA0A1CW107M+	X 100	16V	EL.	AA
C1008	VCKYCY1HF103ZY	X 0.01	50V	Ceramic	AA
C1009	VCKYCY1HF103ZY	X 0.01	50V	Ceramic	AA
C1011	VCKYCY1HB221KY	X 220p	50V	Ceramic	AA
C1012	VCEA0A1HW105M+	X 1	50V	EL.	AA
C1013	VCKYCY1HB102KY	X 1000p	50V	Ceramic	AA
C1014	VCE9GA1HW475M+	X 4.7	50V	EL.	AB
C1015	VCCCCY1HH101JY	X 100p	50V	Ceramic	AA
C1016	VCKYCY1EF104ZY	X 0.1	25V	Ceramic	AA
C1020	VCEA0A0JW477M+	X 470	6.3V	EL.	AB
C1081	VCQYTA1HM104J+	X 0.1	50V	Mylar	AB
C1849	VCFYFA1HA223J+	X 0.022	50V	Mylar	AB
C1855	VCKYCY1HB561KY	X 560p	50V	Ceramic	AA
C1856	VCKYCY1HB102KY	X 1000p	50V	Ceramic	AA
C1861	VCCCCY1HH221JY	X 220p	50V	Ceramic	AA
C1862	VCKYCY1HB102KY	X 1000p	50V	Ceramic	AA
C1863	VCCCCY1HH221JY	X 220p	50V	Ceramic	AA
C1864	VCKYCY1HB102KY	X 1000p	50V	Ceramic	AA
C1868	VCEA9M1CW336M+	X 33	16V	EL.	AA
C3003	VCQYTA1HM123J+	X 0.012	50V	Mylar	AA

RESISTORS

[M-Ox... Metal Oxide, M-Film ... Metal Film]

RJ1	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ3	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ5	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ9	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ10	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ12	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ13	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ14	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ17	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ18	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ19	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ20	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ22	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ25	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ26	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ29	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
RJ30	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
R201	VRS-CY1JF101JY	X 100	1/16W	M-Ox.	AA
R202	VRS-CY1JF101JY	X 100	1/16W	M-Ox.	AA
R205	VRS-CY1JF680JY	X 68	1/16W	M-Ox.	AA

Ref. No. Part No. ★ Description Code

R206	VRS-CY1JF122JY	X 1.2k	1/16W	M-Ox.	AA
R207	VRS-CY1JF221JY	X 220	1/16W	M-Ox.	AA
R208	VRS-CY1JF331JY	X 330	1/16W	M-Ox.	AA
R209	VRS-CY1JF392JY	X 3.9k	1/16W	M-Ox.	AA
R216	VRS-RG3LB333J+	X 33k	3.0W	M-Ox.	AC
R220	VRS-CY1JF221JY	X 220	1/16W	M-Ox.	AA
R301	VRS-CY1JF102JY	X 1k	1/16W	M-Ox.	AA
R302	VRN-RL3DBR10J+	X 0.10	2W	M-Film	AB
R303	VRS-CY1JF473JY	X 47k	1/16W	M-Ox.	AA
R304	VRD-RA2BE683JY	X 68k	1/8W	Carbon	AA
R305	VRS-CY1JF274JY	X 270k	1/16W	M-Ox.	AA
R307	VRS-CY1JF222JY	X 2.2k	1/16W	M-Ox.	AA
R308	VRS-CY1JF822JY	X 8.2k	1/16W	M-Ox.	AA
R311	VRD-RA2BE103JY	X 10k	1/8W	Carbon	AA
R314	VRS-CY1JF822JY	X 8.2k	1/16W	M-Ox.	AA
R315	VRS-CY1JF222JY	X 2.2k	1/16W	M-Ox.	AA
R362	VRS-CY1JF332JY	X 3.3k	1/16W	M-Ox.	AA
R363	VRS-CY1JF564JY	X 560k	1/16W	M-Ox.	AA
R365	VRS-CY1JF564JY	X 560k	1/16W	M-Ox.	AA
R366	VRS-CY1JF332JY	X 3.3k	1/16W	M-Ox.	AA
R381	VRS-CY1JF564JY	X 560k	1/16W	M-Ox.	AA
R382	VRS-CY1JF332JY	X 3.3k	1/16W	M-Ox.	AA
R383	VRS-CY1JF564JY	X 560k	1/16W	M-Ox.	AA
R384	VRS-CY1JF332JY	X 3.3k	1/16W	M-Ox.	AA
R431	VRS-CY1JF101JY	X 100	1/16W	M-Ox.	AA
R432	VRS-CY1JF750JY	X 75	1/16W	M-Ox.	AA
R433	VRS-CY1JF750JY	X 75	1/16W	M-Ox.	AA
R434	VRS-CY1JF750JY	X 75	1/16W	M-Ox.	AA
R435	VRS-CY1JF750JY	X 75	1/16W	M-Ox.	AA
R436	VRD-RA2BE101JY	X 100	1/8W	Carbon	AA
R437	VRS-CY1JF101JY	X 100	1/16W	M-Ox.	AA
R438	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
R461	VRS-CY1JF750JY	X 75	1/16W	M-Ox.	AA
R462	VRS-CY1JF101JY	X 100	1/16W	M-Ox.	AA
R503	VRN-RL3DB1R2J+	X 1.2	2W	M-Film	AB
R504	VRS-CY1JF222JY	X 2.2k	1/16W	M-Ox.	AA
R506	VRS-RG3AB331J+	X 330	1W	M-Ox.	AB
R507	VRD-RM2HD1R0JY	X 1	1/2W	Carbon	AA
R513	VRD-RM2HD333JY	X 33k	1/2W	Carbon	AA
R514	VRD-RM2HD682JY	X 6.8k	1/2W	Carbon	AA
R520	VRS-CY1JF153JY	X 15k	1/16W	M-Ox.	AA
R524	VRD-RA2BE103JY	X 10k	1/8W	Carbon	AA
R525	VRD-RA2BE102JY	X 1k	1/8W	Carbon	AA
R526	VRD-RA2BE101JY	X 100	1/8W	Carbon	AA
R601	VRD-RM2HD820JY	X 82	1/2W	Carbon	AA
R602	VRD-RA2BE393JY	X 39k	1/8W	Carbon	AA
R603	VRD-RA2BE273JY	X 27k	1/8W	Carbon	AA
R604	VRD-RA2BE473JY	X 47k	1/8W	Carbon	AA
R605	VRD-RM2HD104JY	X 100k	1/2W	Carbon	AA
R607	VRD-RM2HD121JY	X 120	1/2W	Carbon	AA
△ R608	VRD-RM2HD102JY	X 1.0k	1/2W	Carbon	AA
R609	VRD-RM2HD270JY	X 27	1/2W	Carbon	AA
△ R611	VRN-RL3AB1R0J+	X 1.0	1W	M-Film	AB
△ R612	VRD-RM2HD270JY	X 27	1/2W	Carbon	AA
R613	VRS-CY1JF000JY	X 00	1/16W	M-Ox.	AA
R614	VRD-RA2BE154JY	X 150k	1/8W	Carbon	AA
R615	VRD-RA2BE102JY	X 1k	1/8W	Carbon	AA
R616	VRD-RA2BE102JY	X 1k	1/8W	Carbon	AA
R617	VRS-CY1JF123JY	X 12k	1/16W	M-Ox.	AA
R618	VRS-CY1JF103JY	X 10k	1/16W	M-Ox.	AA
R621	VRN-RL2HC4R7J+	X 4.7	1/2W	M-Film	AB
R622	VRS-VV3DB682J	X 6.8k	2W	M-Ox.	AA
R631	VRS-KT3LB391J	X 390	3W	M-Ox.	AD
R637	VRD-RA2BE331JY	X 330	1/8W	Carbon	AA
R638	VRD-RA2BE181JY	X 180	1/8W	Carbon	AA
R639	VRD-RM2HD271JY	X 270	1/2W	Carbon	AA
R642	VRN-RL3DB2R2J+	X 2.2	2W	M-Film	AB
R661	VRD-RA2BE102JY	X 1k	1/8W	Carbon	AA
R662	VRS-CY1JF103JY	X 10k	1/16W	M-Ox.	AA

Ref. No.	Part No.	★ Description	Code
----------	----------	---------------	------

PWB-A: DUNTKC522WEA6

MAIN UNIT

RESISTORS

[M-Ox... Metal Oxide, M-Film ... Metal Film]

R701	VRW-KQ3NC1R5K	X	1.5	7W	Cement	AC
R702	VRD-RM2HD154JY	X	150k	1/2W	Carbon	AA
R704	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R705	VRN-RL3DBR47J+	X	0.47	2W	M-Film	AB
R706	VRN-RL3DBR39J+	X	0.39	2W	M-Film	AB
R710	VRD-RM2HD220JY	X	22	1/2W	Carbon	AA
R711	VRD-RA2EE122JY	X	1.2k	1/4W	Carbon	AA
R712	VRD-RA2BE102JY	X	1k	1/8W	Carbon	AA
R713	VRD-RA2BE102JY	X	1k	1/8W	Carbon	AA
R725	VRD-RM2HD821JY	X	820	1/2W	Carbon	AA
R726	VRN-RL2HCR47J+	X	0.47	1/2W	M-Film	AB
R753	VRD-RM2HD124JY	X	120k	1/2W	Carbon	AA
R754	VRN-RL3AB8R2J+	X	8.2	1W	M-Film	AB
R756	VRS-RG3DB121J+	X	120	2W	M-Ox.	AB
R801	VRS-CY1JF561JY	X	560	1/16W	M-Ox.	AA
R802	VRS-CY1JF682JY	X	6.8k	1/16W	M-Ox.	AA
R803	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R804	VRS-CY1JF222JY	X	2.2k	1/16W	M-Ox.	AA
R805	VRS-CY1JF222JY	X	2.2k	1/16W	M-Ox.	AA
R806	VRS-CY1JF222JY	X	2.2k	1/16W	M-Ox.	AA
R807	VRS-CY1JF222JY	X	2.2k	1/16W	M-Ox.	AA
R808	VRD-RA2BE273JY	X	27k	1/8W	Carbon	AA
R812	VRS-CY1JF101JY	X	100	1/16W	M-Ox.	AA
R814	VRS-CY1JF473JY	X	47k	1/16W	M-Ox.	AA
R815	VRS-CY1JF473JY	X	47k	1/16W	M-Ox.	AA
R816	VRS-CY1JF223JY	X	22k	1/16W	M-Ox.	AA
R817	VRS-CY1JF473JY	X	47k	1/16W	M-Ox.	AA
R823	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R824	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R826	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R827	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R828	VRS-CY1JF471JY	X	470	1/16W	M-Ox.	AA
R829	VRD-RA2BE472JY	X	4.7k	1/8W	Carbon	AA
R830	VRS-CY1JF393JY	X	39k	1/16W	M-Ox.	AA
R831	VRS-CY1JF271JY	X	270	1/16W	M-Ox.	AA
R832	VRS-CY1JF822JY	X	8.2k	1/16W	M-Ox.	AA
R833	VRS-CY1JF221JY	X	220	1/16W	M-Ox.	AA
R835	VRS-CY1JF332JY	X	3.3k	1/16W	M-Ox.	AA
R836	VRD-RA2BE470JY	X	47	1/8W	Carbon	AA
R838	VRD-RA2BE105JY	X	1 M	1/8W	Carbon	AA
R839	VRS-CY1JF101JY	X	100	1/16W	M-Ox.	AA
R840	VRS-CY1JF124JY	X	120k	1/16W	M-Ox.	AA
R841	VRD-RA2BE821JY	X	820	1/8W	Carbon	AA
R842	VRS-CY1JF471JY	X	470	1/16W	M-Ox.	AA
R843	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R847	VRS-CY1JF475JY	X	4.7M	1/16W	M-Ox.	AA
R1002	VRS-CY1JF183JY	X	18k	1/16W	M-Ox.	AA
R1003	VRS-CY1JF822JY	X	8.2k	1/16W	M-Ox.	AA
R1006	VRS-CY1JF822JY	X	8.2k	1/16W	M-Ox.	AA
R1007	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1008	VRS-CY1JF183JY	X	18k	1/16W	M-Ox.	AA
R1009	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1011	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1012	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1013	QJUM-0001AJFWY	X	Jumper	Wire		AA
R1023	VRD-RA2BE271JY	X	270	1/8W	Carbon	AA
R1024	VRS-CY1JF101JY	X	100	1/16W	M-Ox.	AA
R1027	VRS-CY1JF104JY	X	100k	1/16W	M-Ox.	AA
R1031	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1032	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1034	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1035	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA

Ref. No.	Part No.	★ Description	Code
----------	----------	---------------	------

R1036	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1037	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1038	VRS-CY1JF562JY	X	5.6k	1/16W	M-Ox.	AA
R1039	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R1040	VRS-CY1JF273JY	X	27k	1/16W	M-Ox.	AA
R1041	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1042	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1043	VRS-CY1JF104JY	X	100k	1/16W	M-Ox.	AA
R1044	VRS-CY1JF101JY	X	100	1/16W	M-Ox.	AA
R1045	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1046	VRS-CY1JF101JY	X	100	1/16W	M-Ox.	AA
R1047	VRS-CY1JF183JY	X	18k	1/16W	M-Ox.	AA
R1048	VRS-CY1JF101JY	X	100	1/16W	M-Ox.	AA
R1049	VRS-CY1JF183JY	X	18k	1/16W	M-Ox.	AA
R1051	VRD-RA2BE473JY	X	47k	1/8W	Carbon	AA
R1053	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1054	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1055	VRS-CY1JF332JY	X	3.3k	1/16W	M-Ox.	AA
R1056	VRS-CY1JF332JY	X	3.3k	1/16W	M-Ox.	AA
R1059	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1061	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R1062	VRS-CY1JF105JY	X	1M	1/16W	M-Ox.	AA
R1063	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1064	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1065	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1066	VRS-CY1JF561JY	X	560	1/16W	M-Ox.	AA
R1072	VRS-CY1JF221JY	X	220	1/16W	M-Ox.	AA
R1073	VRD-RA2BE101JY	X	100	1/8W	Carbon	AA
R1074	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1076	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R1081	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1087	VRS-CY1JF391JY	X	390	1/16W	M-Ox.	AA
R1096	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1097	VRS-CY1JF472JY	X	4.7k	1/16W	M-Ox.	AA
R1098	VRS-CY1JF104JY	X	100k	1/16W	M-Ox.	AA
R1801	VRD-RA2BE222JY	X	2.2k	1/8W	Carbon	AA
R1802	VRS-CY1JF124JY	X	120k	1/16W	M-Ox.	AA
R1849	VRS-CY1JF222JY	X	2.2k	1/16W	M-Ox.	AA
R1850	VRS-CY1JF472JY	X	4.7k	1/16W	M-Ox.	AA
R1851	VRS-CY1JF221JY	X	220	1/16W	M-Ox.	AA
R1852	VRS-CY1JF221JY	X	220	1/16W	M-Ox.	AA
R1853	VRS-CY1JF221JY	X	220	1/16W	M-Ox.	AA
R1854	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R1855	VRD-RA2BE102JY	X	1k	1/8W	Carbon	AA
R1861	VRS-CY1JF121JY	X	120	1/16W	M-Ox.	AA
R1862	VRS-CY1JF121JY	X	120	1/16W	M-Ox.	AA
R1894	VRD-RA2BE103JY	X	10k	1/8W	Carbon	AA
R1895	VRS-CY1JF473JY	X	47k	1/16W	M-Ox.	AA
R1896	VRS-CY1JF473JY	X	47k	1/16W	M-Ox.	AA

FERRITE BEAD

FB601	RBLN-0091GEZZY	X	Ferrite Bead	AA
-------	----------------	---	--------------	----

SWITCHES

S1001	QSW-K0202PEZZ+	X	Switch,	AB
S1002	QSW-K0202PEZZ+	X	Switch,	AB
S1003	QSW-K0202PEZZ+	X	Switch,	AB
S1004	QSW-K0202PEZZ+	X	Switch,	AB
S1005	QSW-K0202PEZZ+	X	Switch,	AB
S1006	QSW-K0114CEZZ	X	Switch,	AE

MISCELLANEOUS PARTS

F701	QFS-C3229CEZZ	X	Fuse,T3.14AL	AC
FH701	QFSD1013CEZZ+	X	FUSE CLIP	AA
FH702	QFSD1014CEZZ+	X	FUSE CLIP	AA
J401	QJAKGA015WJZZ	X	Jack,9Pin	AF
J402	QJAKE0108CEZZ	X	Jack,3Pin	AD
J403	QJAKE0183CEZZ	X	Jack,3Pin	AD
J404	QJAKE0184CEZZ	X	Jack,3Pin	AD
J405	QJAKG0093CEZZ	X	Rear A/V Terminal Jack	AF
J406	QJAKFA008WJZZ	X	Jack	AE
P302	QPLGN0461CEZZA	X	plug,4pin(S1-4)	AB

Ref. No. Part No. ★ Description Code

PWB-A: DUNTKC522WEA0 MAIN UNIT

MISCELLANEOUS PARTS

P601	QPLGN0660CEZZ	X	plug (6 pins)	AC
P602	QPLGN0461CEZZA	X	plug, 4pin(S1-4)	AB
P603	QPLGN0361CEZZA	X	plug, 3pin (TP651-3)	AB
P701	QPLGN0260CEZZ	X	plug 2pin(M1-2)	AB
P702	QPLGN0269GEZZ	X	plug 2pin(P1-2)	AB
P1001	QPLGN0561CEZZA	X	plug 5Pin(KA)	AB
P1002	QPLGN0561CEZZ	X	plug (5 pins)	AB
RDA301	PRDARA121WJFW	X	Heat Sink	AC
RDA501	PRDARA120WJFW	X	Heat Sink	AD
RDA601	PRDARA131WJFW	X	Heat Sink	AE
RDA602	PRDAR0337PEFW	X	Heat Sink	AC
RDA701	PRDARA119WJFW	X	Heat Sink	AE
RMC1001	RRMCUA009WJZZ	X	R/C Receiver	AF
RY701	RRLYJA006WJZZ	X	Relay	AE

PWB-B: DUNTKA599WED5 CRT UNIT

TRANSISTORS

Q853	VS2SC3789//2E	X	2SC3789	AD
Q854	VS2SC3789//2E	X	2SC3789	AD
Q855	VS2SC3789//2E	X	2SC3789	AD
Q894	VS2SA1015Y/1E+	X	2SA1015Y	AB

DIODES

D859	VHD1SS119//1Y	X	Diode	AA
D898	VHD1SS119//1Y	X	Diode	AA

COILS

L851	VP-MK820K0000+	X	Peaking, 82mH	AB
------	----------------	---	---------------	----

CAPACITORS

[EL... Electrolytic, M-Poly... Metalized Polypro Film]

C851	VCKYPA1HB221K+	X	220p 50V	Ceramic AA
C852	VCKYPA1HB221K+	X	220p 50V	Ceramic AA
C853	VCKYPA1HB221K+	X	220p 50V	Ceramic AA
C880	RC-KZ0153CEZZ	X	1000p 3kV	Ceramic AB
C893	VCEA0A1CW336M+	X	33 16V	EL. AA

RESISTORS

[M-Ox... Metal Oxide, M-Film ... Metal Film]

R849	VRD-RA2BE221JY	X	220 1/8W	Carbon AA
R850	VRD-RA2BE470JY	X	47 1/8W	Carbon AA
R851	VRD-RA2BE470JY	X	47 1/8W	Carbon AA
R852	VRD-RA2BE470JY	X	47 1/8W	Carbon AA
R854	VRD-RA2BE271JY	X	270 1/8W	Carbon AA
R855	VRD-RA2BE271JY	X	270 1/8W	Carbon AA
R859	VRS-VV3DB123J	X	12k 2W	M-Ox. AA
R861	VRS-VV3DB123J	X	12k 2W	M-Ox. AA
R863	VRS-VV3DB123J	X	12k 2W	M-Ox. AA
R864	VRD-RA2BE470JY	X	47 1/8W	Carbon AA
R876	VRD-RA2BE121JY	X	120 1/8W	Carbon AA
R877	VRD-RA2BE121JY	X	120 1/8W	Carbon AA
R878	VRD-RA2BE121JY	X	120 1/8W	Carbon AA
R880	VRD-RM2HD332JY	X	3.3k 1/2W	Carbon AA
R881	VRD-RM2HD332JY	X	3.3k 1/2W	Carbon AA
R882	VRD-RM2HD332JY	X	3.3k 1/2W	Carbon AA
R889	VRD-RA2BE821JY	X	820 1/8W	Carbon AA
R891	VRD-RA2BE561JY	X	560 1/8W	Carbon AA
R892	VRD-RA2BE391JY	X	390 1/8W	Carbon AA
R894	VRD-RA2BE152JY	X	1.5k 1/8W	Carbon AA
R895	VRD-RA2BE561JY	X	560 1/8W	Carbon AA

MISCELLANEOUS PARTS

P860	QPLGN0461CEZZ	X	plug (4 PINS)	AA
P880	QPLGN0561CEZZ	X	plug (5 pins)	AB
SC851	QSOCV0933CEZZ	X	SOCKET (CRT)	AE

Ref. No. Part No. ★ Description Code

PWB-C: DUNTKC574WEA0 MTS UNIT

INTEGRATED CIRCUITS

IC3001	VHICXA2194Q-1Y	X	CXA2194Q	AS
--------	----------------	---	----------	----

TRANSISTORS

Q3001	VS2SD601AR/-1Y	X	2SD601AR	AB
Q3002	VS2SD601AR/-1Y	X	2SD601AR	AB
Q3004	VS2SD601AR/-1Y	X	2SD601AR	AB
Q3005	VS2SD601AR/-1Y	X	2SD601AR	AB
Q3006	VS2SD601AR/-1Y	X	2SD601AR	AB
Q3007	VS2SD601AR/-1Y	X	2SD601AR	AB

CAPACITORS

[EL... Electrolytic, M-Poly... Metalized Polypro Film]

C3001	VCE9GA1HW475M+	X	4.7 50V	EL. AB
C3002	VCKYCY1HB562KY	X	5600p 50V	Ceramic AA
C3004	VCEA0A1HW105M+	X	1 50V	EL. AA
C3005	VCEA0A1HW475M+	X	4.7 50V	EL. AA
C3006	VCEA0A1CW106M+	X	10 16V	EL. AA
C3007	VCEA0A1HW475M+	X	4.7 50V	EL. AA
C3008	VCKYCY1HF103ZY	X	0.01 50V	Ceramic AA
C3009	VCEA0A1CW227M+	X	220 16V	EL. AB
C3010	VCE9GA1HW475M+	X	4.7 50V	EL. AB
C3011	VCEA0A1HW475M+	X	4.7 50V	EL. AA
C3012	VCE9GA1HW475M+	X	4.7 50V	EL. AB
C3013	VCKYCY1HB272KY	X	2700p 50V	Ceramic AA
C3014	VCQYTA1HM473J+	X	0.047 50V	Mylar AA
C3015	VCEACA1HC335K+	X	3.3 50V	EL. AC
C3016	VCE9GA1HW475M+	X	4.7 50V	EL. AB
C3017	VCEACA1CC106K+	X	10 16V	EL. AC
C3018	VCEA0A1HW105M+	X	1 50V	EL. AA
C3019	VCEA0A1CW106M+	X	10 16V	EL. AA
C3020	VCEA0A1CW106M+	X	10 16V	EL. AA
C3021	VCEA0A1CW106M+	X	10 16V	EL. AA
C3022	VCEA0A1CW106M+	X	10 16V	EL. AA
C3023	VCKYCY1HF103ZY	X	0.01 50V	Ceramic AA
C3024	VCKYCY1HF103ZY	X	0.01 50V	Ceramic AA
C3025	VCKYCY1HF473ZY	X	0.047 50V	Ceramic AA
C3026	VCKYCY1HF473ZY	X	0.047 50V	Ceramic AA
C3030	VCQYTA1HM682J+	X	6800P 50V	Mylar AA
C3031	VCKYCY1HF682ZY	X	6800p 50V	Ceramic AA
C3034	VCEA0A1HW224M+	X	0.22 50V	EL. AA
C3037	VCEA0A1HW335M+	X	3.3 50V	EL. AA
C3038	VCEA0A1HW335M+	X	3.3 50V	EL. AA
C3039	VCEA0A1HW224M+	X	0.22 50V	EL. AA
C3042	VCKYCY1HB681KY	X	680p 50V	Ceramic AA
C3043	VCKYCY1HB681KY	X	680p 50V	Ceramic AA
C3044	VCEA0A1EW476M+	X	47 25V	EL. AA
C3045	VCEA0A1HW335M+	X	3.3 50V	EL. AA
C3046	VCEA0A1HW335M+	X	3.3 50V	EL. AA
C3047	VCEA0A1HW335M+	X	3.3 50V	EL. AA
C3048	VCEA0A1HW335M+	X	3.3 50V	EL. AA

RESISTORS

[M-Ox... Metal Oxide, M-Film ... Metal Film]

R3001	VRS-CY1JF221JY	X	220 1/16W	M-Ox. AA
R3002	VRS-CY1JF221JY	X	220 1/16W	M-Ox. AA
R3003	VRS-CY1JF105JY	X	1M 1/16W	M-Ox. AA
R3004	VRS-CY1JF104JY	X	100k 1/16W	M-Ox. AA
R3005	VRS-CY1JF623JY	X	62k 1/16W	M-Ox. AA
R3006	VRS-CY1JF101JY	X	100 1/16W	M-Ox. AA
R3007	VRS-CY1JF332JY	X	3.3k 1/16W	M-Ox. AA
R3008	VRS-CY1JF302JY	X	3k 1/16W	M-Ox. AA
R3009	VRS-CY1JF101JY	X	100 1/16W	M-Ox. AA
R3010	VRS-CY1JF392JY	X	3.9k 1/16W	M-Ox. AA
R3011	VRS-CY1JF102JY	X	1k 1/16W	M-Ox. AA
R3012	VRS-CY1JF102JY	X	1k 1/16W	M-Ox. AA
R3013	VRS-CY1JF102JY	X	1k 1/16W	M-Ox. AA

Ref. No.	Part No.	★ Description	Code
----------	----------	---------------	------

PWB-C: DUNTKC574WEA0 MTS UNIT

RESISTORS

[M-Ox. --- Metal Oxide, M-Film --- Metal Film]

R3014	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R3016	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R3018	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R3019	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R3021	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R3025	VRS-CY1JF272JY	X	2.7k	1/16W	M-Ox.	AA
R3026	VRS-CY1JF331JY	X	330	1/16W	M-Ox.	AA
R3027	VRS-CY1JF392JY	X	3.9k	1/16W	M-Ox.	AA
R3028	VRS-CY1JF683JY	X	68k	1/16W	M-Ox.	AA
R3029	VRS-CY1JF392JY	X	3.9k	1/16W	M-Ox.	AA
R3030	VRS-CY1JF683JY	X	68k	1/16W	M-Ox.	AA
R3031	VRS-CY1JF182JY	X	1.8k	1/16W	M-Ox.	AA
R3032	VRS-CY1JF223JY	X	22k	1/16W	M-Ox.	AA
R3033	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R3034	VRS-CY1JF182JY	X	1.8k	1/16W	M-Ox.	AA
R3035	VRS-CY1JF223JY	X	22k	1/16W	M-Ox.	AA
R3036	VRS-CY1JF102JY	X	1k	1/16W	M-Ox.	AA
R3082	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R3083	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R3084	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
R3085	VRS-CY1JF103JY	X	10k	1/16W	M-Ox.	AA
RJ101	VRS-CY1JF000JY	X	00	1/16W	M-Ox.	AA

MISCELLANEOUS PARTS

P3007	QPLGZ0610CEZZ	X	plug 6Pin	AC
P3008	QPLGZ0610CEZZ	X	plug 6Pin	AC
P3009	QPLGZ0810CEZZ	X	plug 32"	AD

MISCELLANEOUS PARTS

△ ACC701	QACCZA020WJPZ	X	AC CORD	AG
SP301	VSP1205PB09WA	X	SPEAKER	AN
SP302	VSP1205PB09WA	X	SPEAKER	AN
	LHLDK0014PEZZ	X	AC CORD HOLDER	AB
	LHLDW1047PEZZ	X	HOLDER	AB
	LHLDZ0133PEZZ	X	ANODE CLAMP	AB
	LHLDZA096WJZZ	X	Holder	AC
	LHLDZA107WJZZ	X	Holder	AC
	TCAUH3045GJZZ	X	CAUTION CARD	AB
	XTASD30P12000	X	SCREW (BTN)	AA
	XTASD40P16000	X	SCREW (CAB)	AA
	XTASD40P20000	X	SCREW (CAB)	AA
	QCNW-A871WJZZ	X	WIRE (H) 5 PIN	AD
	QCNW-A872WJZZ	X	WIRE (K) 4 PIN	AD
	QCNW-A873WJZZ	X	WIRE (SPEAKER)	AF

MISCELLANEOUS PARTS

TINS-B962WJZZ	X	OPERATION MANUAL	AE
RRMCGA257WJSA	X	R/C GUN	AN


Ref. No.	Part No.	★ Description	Code
----------	----------	---------------	------

PACKING PARTS


SPAKCC116WJZZ	X	PACKING CASE	AW
SPAKP0109GJZZ	X	LAMIFOAM	AF
SPAKXA145WJZZ	X	PACKING FOAM	AQ
SSAKA0101GJZZ	X	PLASTIC BAG	AB

CABINET PARTS

1	CCABAB110WEH0	X	Front Cabinet Ass'y	BF
1-1	Not Availale	—	Front Cabinet	—
1-2	HBDGB3155CESA	X	SHARP Badge	AF
1-3	HDECQA403WJSA	X	LED, R/C Cover	AW
1-4	JBTN-A070WJSB	X	Power Button	AF
1-5	MSPRC0005PEFW	X	Power Button Spring	AA
1-6	GDORFA015WJSB	X	Door	AG
1-7	MSPRPA012WJFW	X	Door Spring	AB
1-8	HINDPA194WJSA	X	Indication Plate	AE
1-9	GBFL-A007WJZZ	X	Speaker Bafter	AF
2	GCABBA088WJKA	X	Rear Cabinet	BC

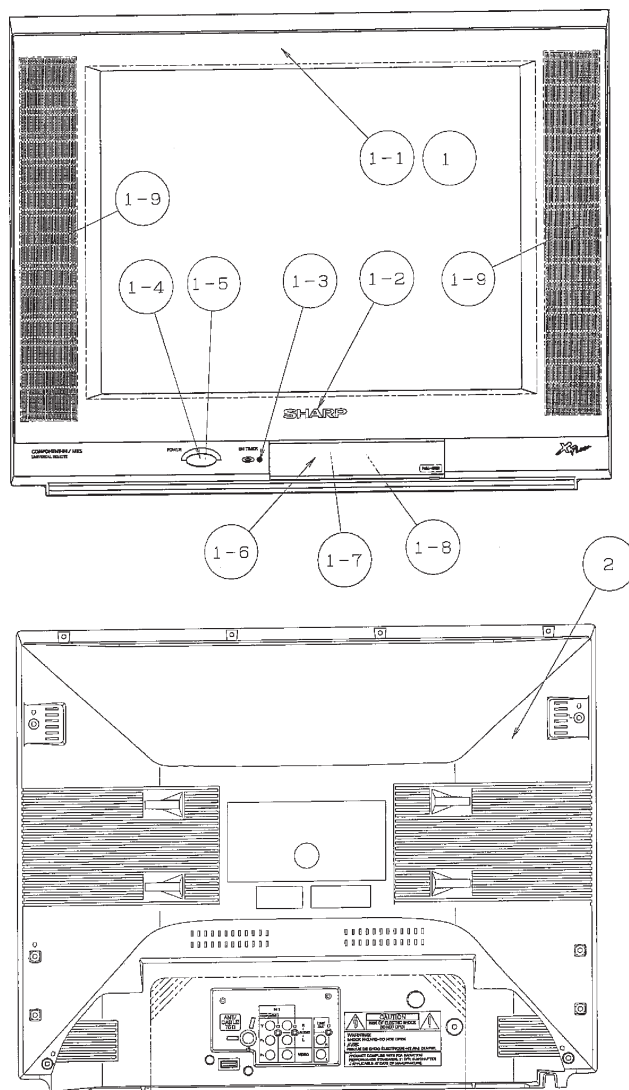

PACKING OF THE SET

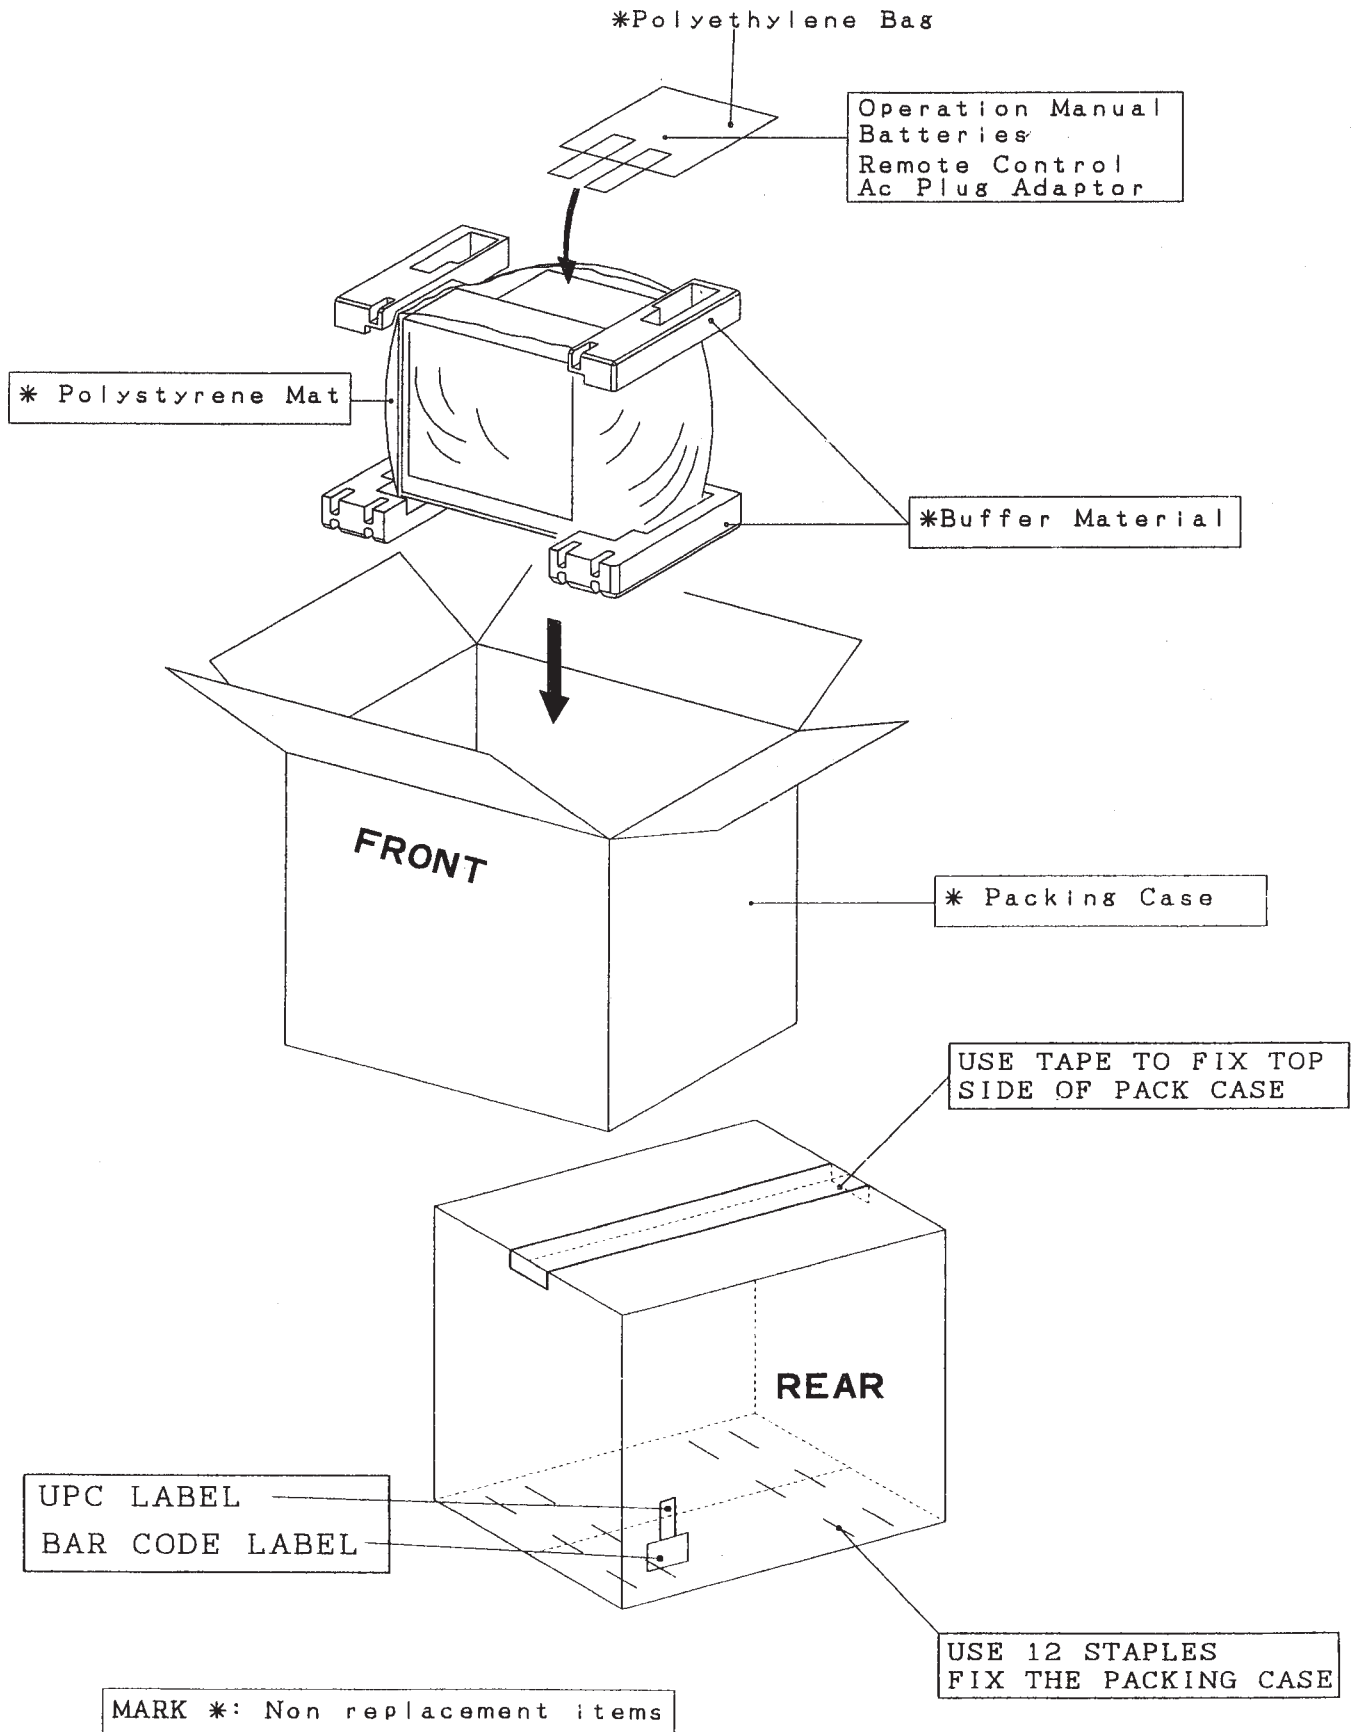

SHARP

COPYRIGHT © 2005 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted in
any form or by any means, electronic, mechanical,
photocopying, recording, or otherwise, without
prior written permission of the publisher.

QRC0026-U
July. 2005
Modify : SEMEX

Design and Production Information

Design base : JAPAN
Production : SEMEX

J B

SHARP ELECTRONICA MEXICO S. A. DE C. V.
Quality & Reliability Control Center
Blvd. SHARP No. 3510 Parque Industrial Rosarito
Playas de Rosarito, México B. C. 22710