


Step 4 Solder pins of the Rectifier Diode (D5803) on the solder side of the SMPS P.C.B..


Step 5 Solder pins of the Heatsink B.

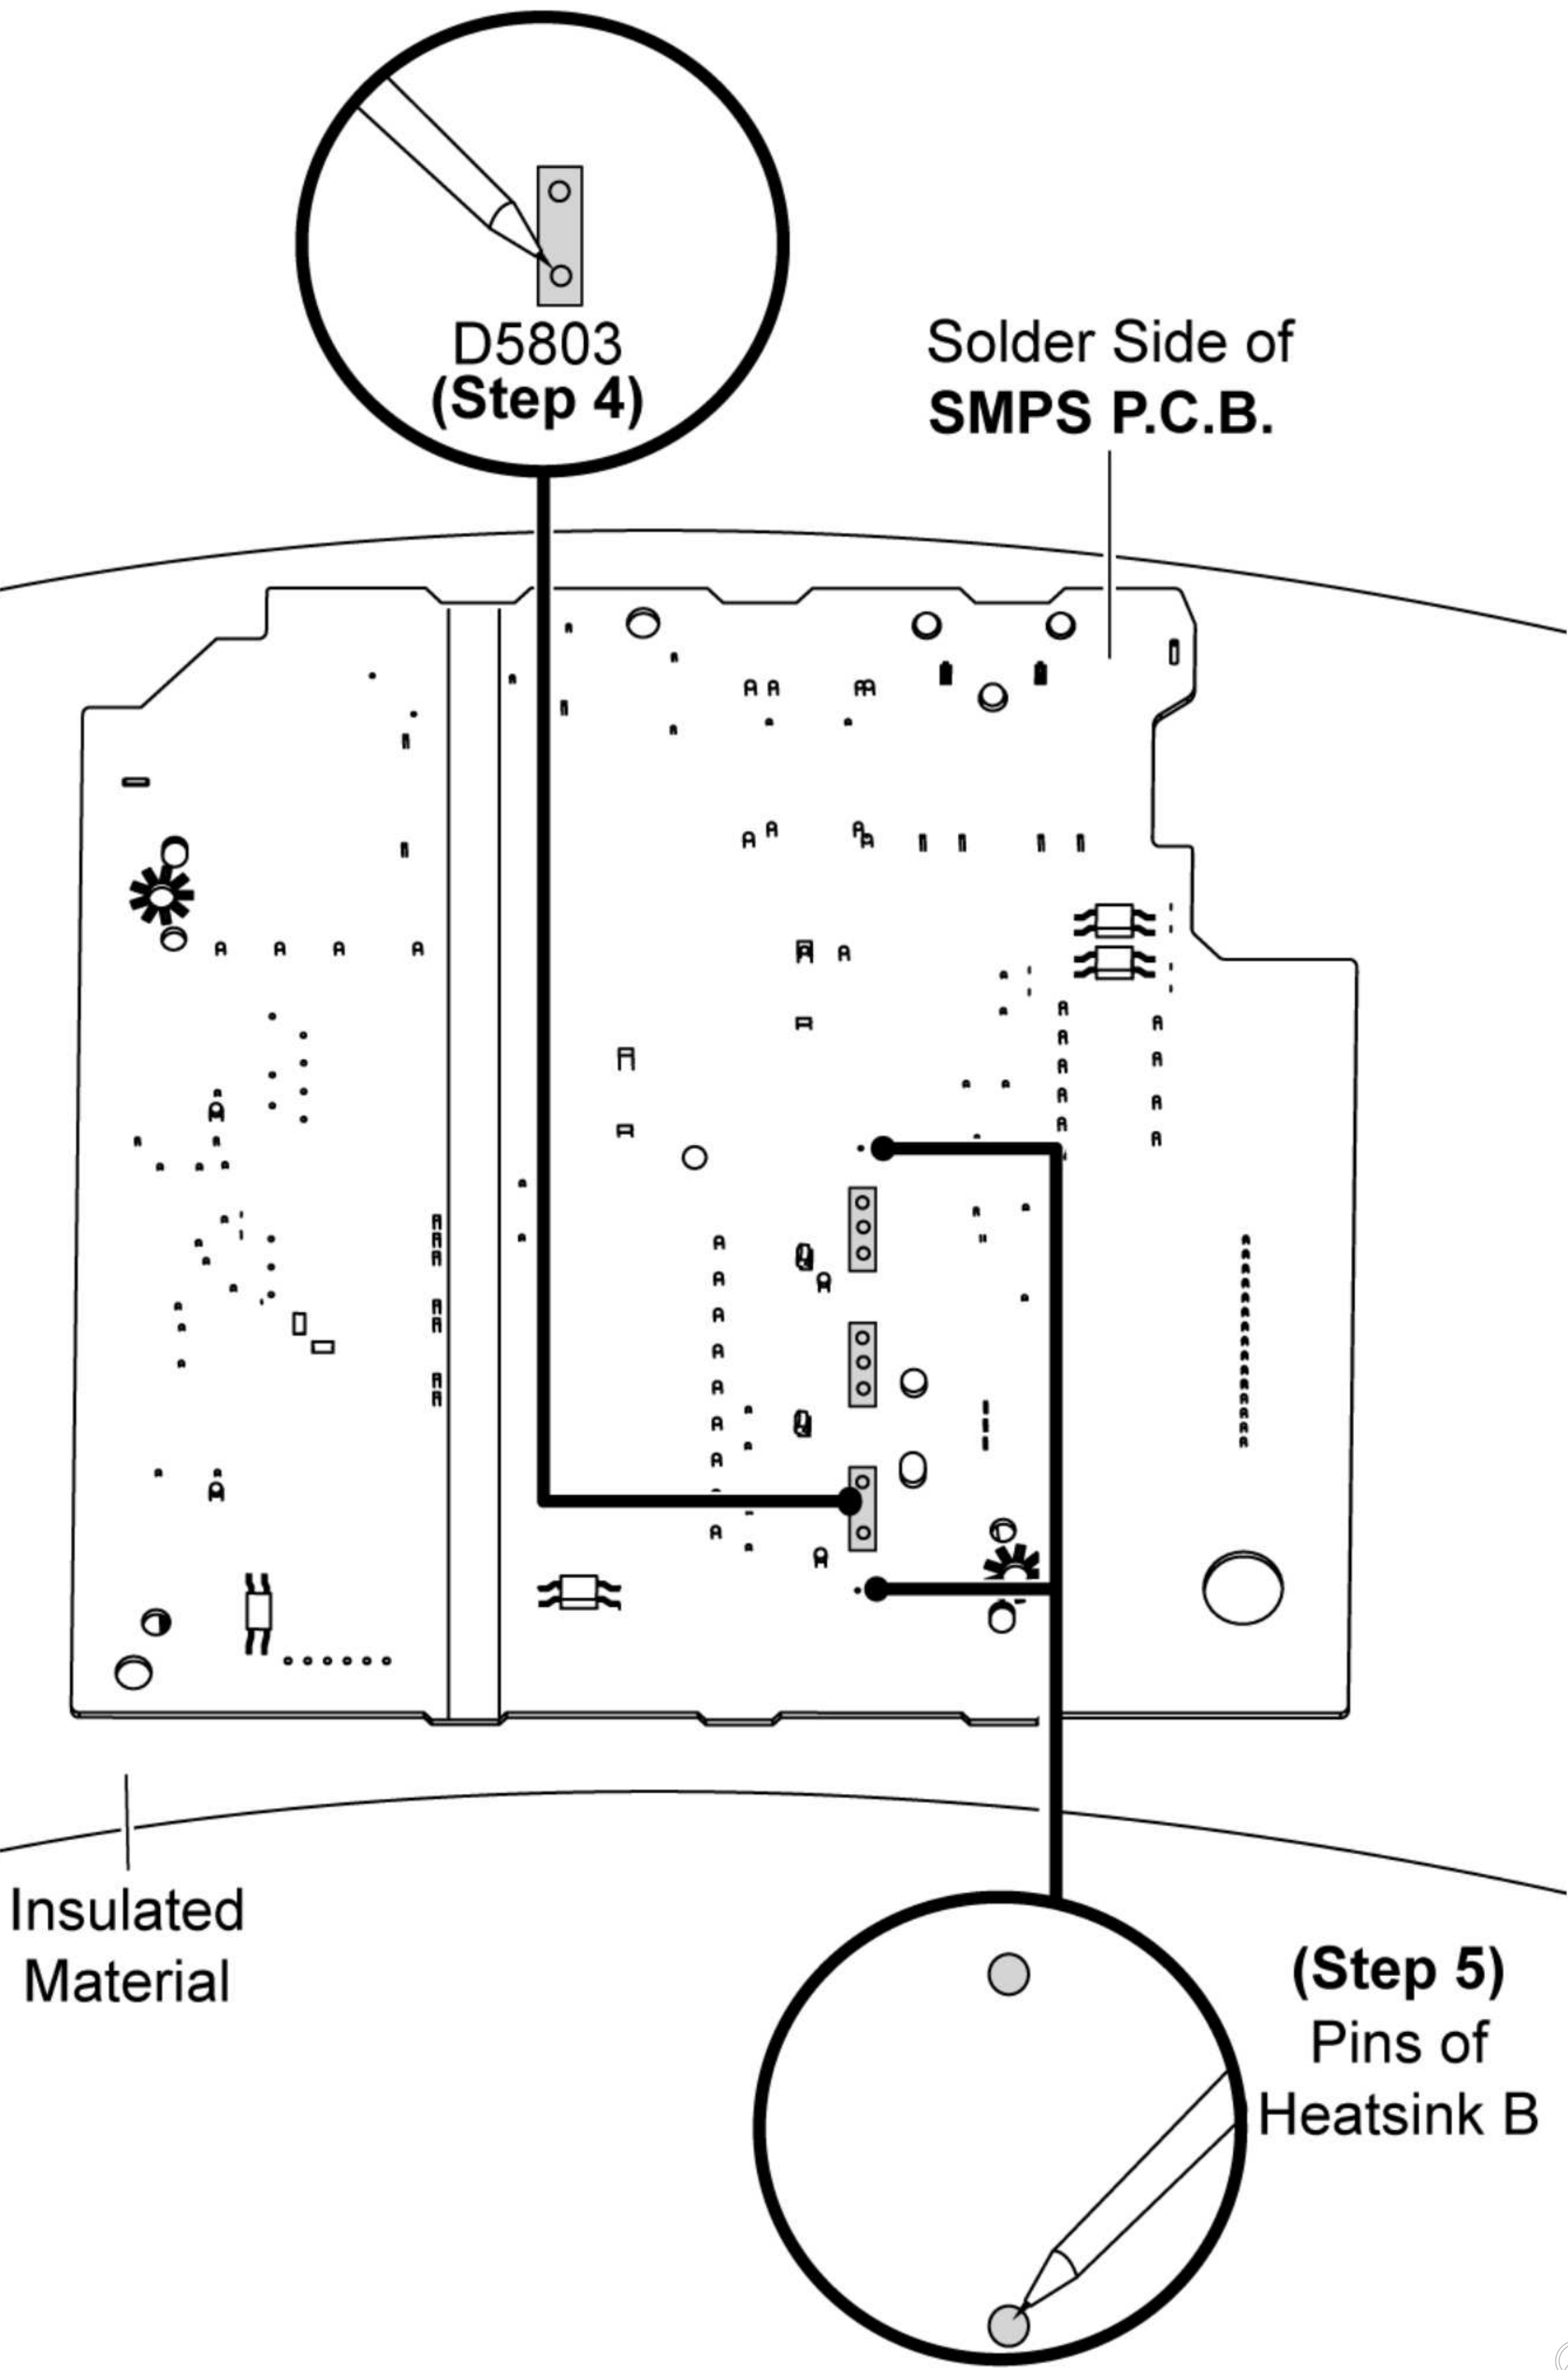

11.26. Disassembly of CD Mechanism Unit (BRS11C)

- Refer to “Disassembly of Top Cabinet”.
- Refer to “Disassembly of Front Panel Unit”.
- Refer to “Disassembly of D-Amp P.C.B.”.

Step 1 Detach 15P Cable Wire at the connector (CN5802) on SMPS P.C.B..

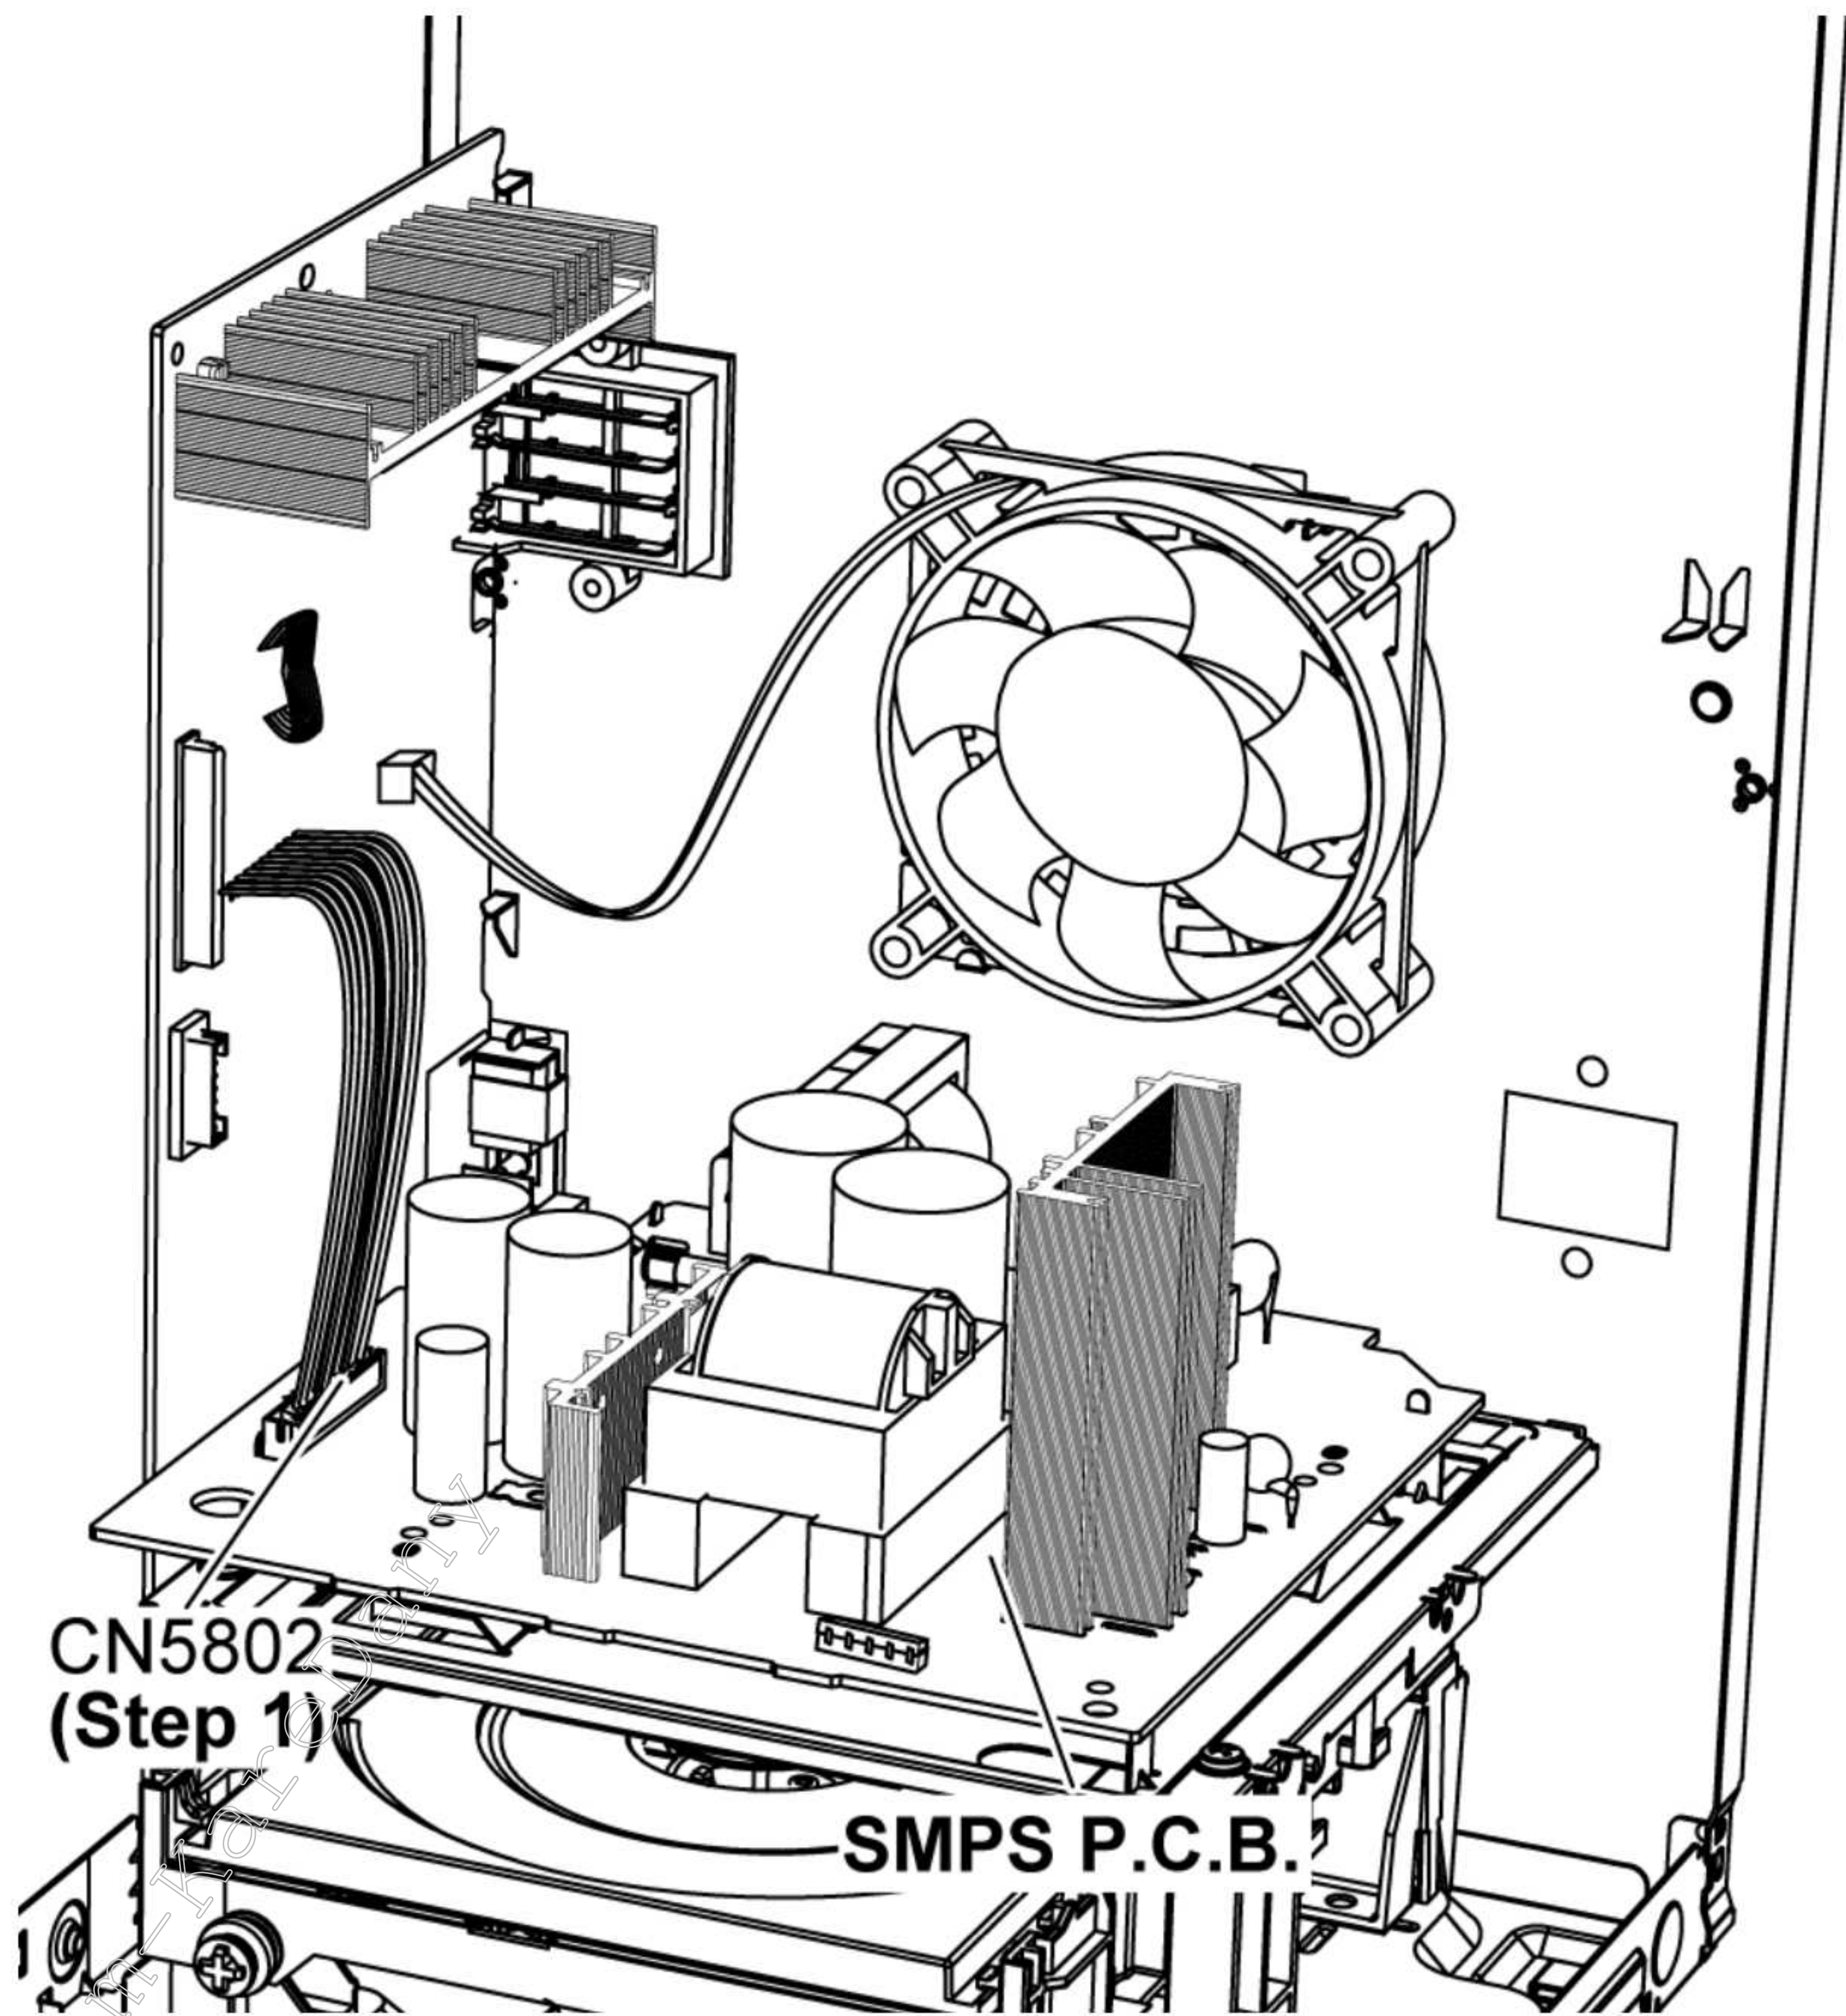

Step 2 Remove 2 screws.

